

SEACAR Coastal Wetlands Analysis: Species Richness

Last compiled on 10 October, 2024

Contents

Important Notes	1
Libraries and Settings	1
File Import	1
Data Filtering	2
Managed Area Statistics	3
Appendix I: Managed Area Species Richness	6
Coral Species Richness	10
Biscayne Bay-Cape Florida to Monroe County Line Aquatic Preserve	10
Biscayne Bay Aquatic Preserve	11
Coupon Bight Aquatic Preserve	11
Florida Keys National Marine Sanctuary	12
Jensen Beach to Jupiter Inlet Aquatic Preserve	13
Loxahatchee River-Lake Worth Creek Aquatic Preserve	13
Southeast Florida Coral Reef Ecosystem Conservation Area	14

Important Notes

The purpose of this script is to determine species richness by species of grazers and reef-dependent species, create managed area statistics, generate plots, and create reports in pdf form for Coral data.

These scripts were created by [J.E. Panzik \(jepanzik@usf.edu\)](mailto:jepanzik@usf.edu) for SEACAR. Updated by [T.G. Hill \(Tyler.Hill@FloridaDEP.gov\)](mailto:Tyler.Hill@FloridaDEP.gov).

All scripts and outputs can be found on the SEACAR GitHub repository:

https://github.com/FloridaSEACAR/SEACAR_Trend_Analyses

This markdown file is designed to be compiled by [Coral_SpeciesRichness_ReportRender.R](https://github.com/FloridaSEACAR/SEACAR_Trend_Analyses/blob/main/Coral/Coral_SpeciesRichness_ReportRender.R) (https://github.com/FloridaSEACAR/SEACAR_Trend_Analyses/blob/main/Coral/Coral_SpeciesRichness_ReportRender.R).

Libraries and Settings

Loads libraries used in the script. The inclusion of `scipen` option limits how frequently R defaults to scientific notation. Sets default settings for displaying warning and messages in created document, and sets figure dpi.

File Import

Imports file that is determined in the Coral_SpeciesRichness_ReportRender.R script.

The command `fread` is used because of its improved speed while handling large data files. Only columns that are used by the script are imported from the file, and are designated in the `select` input.

The script then gets the name of the parameter as it appears in the data file and units of the parameter.

The latest version of Coral data is available at: <https://usf.box.com/s/8hyj2ur5arothlifglisnq2gxisjzbdg>

The file being used for the analysis is: **All_CORAL_Parameters-2024-Sep-04.txt**

```
# Gets the files with the file names containing the desired parameter
file_in <- list.files(seacar_data_location, pattern="All_CORAL", full=TRUE)

# Reads in data file using fread
data <- fread(file_in, sep="|", header=TRUE, stringsAsFactors=FALSE,
              na.strings=c("NULL", "", "NA"))

cat(paste("The data file(s) used:", file_short, sep="\n"))
```

Data Filtering

The processing and filtering that is done to the data is as follows:

1. Only take data rows that are Presence/Absence measurements for SpeciesGroup1 values “Grazers and reef dependent species” and “Reef fish”
2. Set parameter names to Species Richness
3. Sets units
4. Removes rows that contains NA values in ManagedAreaName, GenusName, SpeciesName, Month, Year, SpeciesGroup1, and removes invasive species data
5. Sets ResultValue to be numeric values and removes rows where presence is 0
6. Removes duplicates (MADup==1)
7. Combines genus and species names
8. Corrects some managed area names to match what is being used with other habitats
9. Creates species richness data set
 - Grouped based on common ManagedAreaName, ProgramID, ProgramName, ProgramLocationID, and SampleDate
 - SpeciesRichness determined based on the number of unique species (`gensp`) in each group
10. Merges data with managed area data to determine correct AreaID
11. Writes to file with “_UsedData” file name to indicate what data was used for species richness.

```
# Only keep data for Presence of grazers and reef-dependent species
data <- data[ParameterName=="Presence/Absence" &
             SpeciesGroup1 %in% c("Grazers and reef dependent species",
                                  "Reef fish"), ]

# Create ParameterName Column
data$ParameterName <- "Species Richness"
parameter <- "Species Richness"
title_param <- "Species Richness - Grazers and Reef-Dependent Species"

# Sets units for species richness
unit <- "# of species"
data$ParameterUnits <- unit
```

```

# Remove rows with missing ManagedAreaName
data <- data[!is.na(data$ManagedAreaName),]
data <- data[data$ManagedAreaName!="NA",]
# Remove rows with missing GenusName
data <- data[!is.na(data$GenusName),]
# Remove rows with missing SpeciesName
data <- data[!is.na(data$SpeciesName),]
# Remove rows with missing Months
data <- data[!is.na(data$Month),]
# Remove rows with missing Years
data <- data[!is.na(data$Year),]
# Remove rows with missing SpeciesGroup1
data <- data[!is.na(data$SpeciesGroup1),]
# Set ResultValue to be a number value
data$ResultValue <- as.numeric(data$ResultValue)
# Remove rows where ResultValue is 0 and missing
data <- data[data$ResultValue!=0,]
data <- data[!is.na(data$ResultValue),]
# Remove duplicate rows
data <- data[data$MADup==1,]
# Create variable that combines the genus and species name
data$gensp <- paste(data$GenusName, data$SpeciesName, sep=" ")

# Create Species Richness values for groups of unique combinations of
# ManagedAreaName, ProgramID, ProgramName, ProgramLocationID, and SampleDate.
data <- data[data$ResultValue==1] %>%
  group_by(AreaID, ManagedAreaName, ProgramID, ProgramName, ProgramLocationID,
    SampleDate) %>%
  summarise(ParameterName=parameter,
    Year=unique(Year), Month=unique(Month),
    SpeciesRichness=length(unique(gensp)))
setDT(data)

# Writes this data that is used by the rest of the script to a text file
fwrite(data, paste0(out_dir, "/Coral_", param_file, "_UsedData.txt"),
  sep="|")

# Makes sure SampleDate is being stored as a Date object
data$SampleDate <- as.Date(data$SampleDate)

# Creates a variable with the names of all the managed areas that contain
# species observations
coral_sr_MA_Include <- unique(data$ManagedAreaName[!is.na(data$SpeciesRichness)])

# Puts the managed areas in alphabetical order
coral_sr_MA_Include <- coral_sr_MA_Include[order(coral_sr_MA_Include)]

# Determines the number of managed areas used
n <- length(coral_sr_MA_Include)

```

Managed Area Statistics

Gets summary statistics for each managed area. Uses piping from dplyr package to feed into subsequent steps. The following steps are performed:

1. Group data that have the same `ManagedAreaName`, `Year`, and `Month`.
 - Second summary statistics do not use the `Month` grouping and are only for `ManagedAreaName` and `Year`.
 - Third summary statistics do not use `Year` grouping and are only for `ManagedAreaName` and `Month`
 - Fourth summary statistics are only grouped based on `ManagedAreaName`
 - Determines the years that the minimum and maximum species richness occurred
2. For each group, provide the following information: Parameter Name (`ParameterName`), Number of Entries (`N_Data`), Lowest Value (`Min`), Largest Value (`Max`), Median, Mean, Standard Deviation, and a list of all Programs included in these measurements.
3. Sort the data in ascending (A to Z and 0 to 9) order based on `ManagedAreaName` then `Year` then `Month`
4. Write summary stats to a pipe-delimited .txt file in the output directory
 - [Coral Species Richness Output Files in SEACAR GitHub](https://github.com/FloridaSEACAR/SEACAR_Trend_Analyses/tree/main/Coral/output/SpeciesRichness) (https://github.com/FloridaSEACAR/SEACAR_Trend_Analyses/tree/main/Coral/output/SpeciesRichness)

```
# Create summary statistics for each managed area based on Year and Month
# intervals.
MA_YM_Stats <- data %>%
  group_by(AreaID, ManagedAreaName, Year, Month) %>%
  summarize(ParameterName=parameter,
             N_Data=length(na.omit(SpeciesRichness)),
             Min=min(SpeciesRichness),
             Max=max(SpeciesRichness),
             Median=median(SpeciesRichness),
             Mean=mean(SpeciesRichness),
             StandardDeviation=sd(SpeciesRichness),
             Programs=paste(sort(unique(ProgramName), decreasing=FALSE),
                             collapse=', '),
             ProgramIDs=paste(sort(unique(ProgramID), decreasing=FALSE),
                               collapse=', '),
             .groups = "keep")
# Puts the data in order based on ManagedAreaName, Year, then Month
MA_YM_Stats <- as.data.table(MA_YM_Stats[order(MA_YM_Stats$ManagedAreaName,
                                                MA_YM_Stats$Year,
                                                MA_YM_Stats$Month), ])

# Writes summary statistics to file
fwrite(MA_YM_Stats, paste0(out_dir, "/Coral_", param_file,
                             "_MA_MMY_Stats.txt"), sep="|")
# Removes variable storing data to improve computer memory
rm(MA_YM_Stats)

# Create summary statistics for each managed area based on Year intervals
MA_Y_Stats <- data %>%
  group_by(AreaID, ManagedAreaName, Year) %>%
  summarize(ParameterName=parameter,
             N_Data=length(na.omit(SpeciesRichness)),
             Min=min(SpeciesRichness),
             Max=max(SpeciesRichness),
             Median=median(SpeciesRichness),
             Mean=mean(SpeciesRichness),
             StandardDeviation=sd(SpeciesRichness),
```

```

        Programs=paste(sort(unique(ProgramName), decreasing=FALSE),
                        collapse=', '),
        ProgramIDs=paste(sort(unique(ProgramID), decreasing=FALSE),
                        collapse=', '),
        .groups = "keep")
# Puts the data in order based on ManagedAreaName then Year
MA_Y_Stats <- as.data.table(MA_Y_Stats[order(MA_Y_Stats$ManagedAreaName,
                                           MA_Y_Stats$Year), ])

# Writes summary statistics to file
fwrite(MA_Y_Stats, paste0(out_dir, "/Coral_", param_file,
                          "_MA_Yr_Stats.txt"), sep="|")

# Create summary statistics for each managed area based on Month intervals.
MA_M_Stats <- data %>%
  group_by(AreaID, ManagedAreaName, Month) %>%
  summarize(ParameterName=parameter,
            N_Data=length(na.omit(SpeciesRichness)),
            Min=min(SpeciesRichness),
            Max=max(SpeciesRichness),
            Median=median(SpeciesRichness),
            Mean=mean(SpeciesRichness),
            StandardDeviation=sd(SpeciesRichness),
            Programs=paste(sort(unique(ProgramName), decreasing=FALSE),
                          collapse=', '),
            ProgramIDs=paste(sort(unique(ProgramID), decreasing=FALSE),
                          collapse=', '),
            .groups = "keep")

# Puts the data in order based on ManagedAreaName then Month
MA_M_Stats <- as.data.table(MA_M_Stats[order(MA_M_Stats$ManagedAreaName,
                                           MA_M_Stats$Month), ])

# Writes summary statistics to file
fwrite(MA_M_Stats, paste0(out_dir, "/Coral_", param_file,
                          "_MA_Mo_Stats.txt"), sep="|")

# Removes variable storing data to improve computer memory
rm(MA_M_Stats)

# Create summary overall statistics for each managed area.
MA_Ov_Stats <- data %>%
  group_by(AreaID, ManagedAreaName) %>%
  summarize(ParameterName=parameter,
            N_Years=length(unique(na.omit(Year))),
            EarliestYear=min(Year),
            LatestYear=max(Year),
            N_Data=length(na.omit(SpeciesRichness)),
            Min=min(SpeciesRichness),
            Max=max(SpeciesRichness),
            Median=median(SpeciesRichness),
            Mean=mean(SpeciesRichness),
            StandardDeviation=sd(SpeciesRichness),
            Programs=paste(sort(unique(ProgramName), decreasing=FALSE),
                          collapse=', '),
            ProgramIDs=paste(sort(unique(ProgramID), decreasing=FALSE),
                          collapse=', '),

```

```

        .groups = "keep")
# Puts the data in order based on ManagedAreaName
MA_Ov_Stats <- as.data.table(MA_Ov_Stats[order(MA_Ov_Stats$ManagedAreaName), ])
# Creates Year_MinRichness and Year_MaxRichness columns
MA_Ov_Stats$Year_MinRichness <- NA
MA_Ov_Stats$Year_MaxRichness <- NA

# Loops through each ManagedAreaName.
# Determines what year the minimum and maximum species richness occurred
for(m in 1:nrow(MA_Ov_Stats)){
  # Stores ManagedAreaName for this row
  ma <- MA_Ov_Stats$ManagedAreaName[m]

  # Skips to next row if there are no data for this combination
  if(MA_Ov_Stats$N_Data[m]==0){
    next
  }
  # Gets subset of data from MA_Y_Stats (yearly summary stats) with this
  # ManagedAreaName
  ds <- MA_Y_Stats[ManagedAreaName==ma,]
  # Gets the minimum and maximum Mean (yearly averages)
  min <- min(ds$Mean)
  max <- max(ds$Mean)
  #Determines what years those minimum and maximum values occurred
  year_min <- ds[Mean==min, Year]
  year_max <- ds[Mean==max, Year]
  # Stores the occurrence years of the minimum and maximum into the overall
  # stats for this row
  MA_Ov_Stats$Year_MinRichness[m] <- year_min
  MA_Ov_Stats$Year_MaxRichness[m] <- year_max
}
# Replaces blank ProgramIDs with NA (missing values)
MA_Ov_Stats$ProgramIDs <- replace(MA_Ov_Stats$ProgramIDs,
                                  MA_Ov_Stats$ProgramIDs=="", NA)
MA_Ov_Stats$Programs <- replace(MA_Ov_Stats$Programs,
                                 MA_Ov_Stats$Programs=="", NA)
# Write overall statistics to file
fwrite(MA_Ov_Stats, paste0(out_dir,"/Coral_", param_file,
                            "_MA_Overall_Stats.txt"), sep="|")
# Removes entries from the overall statistics that do not have data.
# Based on presence or absence of EarliestYear
MA_Ov_Stats <- MA_Ov_Stats[!is.na(MA_Ov_Stats$EarliestYear), ]

```

Appendix I: Managed Area Species Richness

The plots shown here are the species richness for each managed area with a yearly average.

1. Set common plot theme.
2. Determine the earliest and latest year of the data to create x-axis scale and intervals
3. Determine the upper and lower limit of the plot for better y-axis labels
4. Add the plot line
5. Set the plot type as a point plot with the size of the points
6. Create the title, x-axis, y-axis

7. Set the y and x limits
8. Apply common plot theme
9. Add table with summary statistics below each figure
 - Numerical non-integer values are rounded to 2 decimal places
 - StandardDeviation is renamed StDev for space reasons
10. Create file name to save figure
11. Save figure as png file
 - Coral Species Richness Figures in SEACAR GitHub (https://github.com/FloridaSEACAR/SEACAR_Trend_Analyses/tree/main/Coral/output/SpeciesRichness/Figures)

```
# Defines standard plot theme: black and white, no major or minor grid lines,
# Arial font. Title is centered, size 12, and blue (hex coded). Subtitle is
# centered, size 10, and blue (hex coded). Legend title is size 10 and the
# legend is left-justified. X-axis title is size 10 and the margins are padded
# at the top and bottom to give more space for angled axis labels. Y-axis title
# is size 10 and margins are padded on the right side to give more space for
# axis labels. Axis labels are size 10 and the x-axis labels are rotated -45
# degrees with a horizontal justification that aligns them with the tick mark
plot_theme <- theme_bw() +
  theme(panel.grid.major = element_blank(),
        panel.grid.minor = element_blank(),
        text=element_text(family="Arial"),
        plot.title=element_text(hjust=0.5, size=12, color="#314963"),
        plot.subtitle=element_text(hjust=0.5, size=10, color="#314963"),
        legend.title=element_text(size=10),
        legend.text.align = 0,
        axis.title.x = element_text(size=10, margin = margin(t = 5, r = 0,
                                                              b = 10, l = 0)),
        axis.title.y = element_text(size=10, margin = margin(t = 0, r = 10,
                                                              b = 0, l = 0)),
        axis.text=element_text(size=10),
        axis.text.x=element_text(angle = -45, hjust = 0))

# Color palette for SEACAR
color_palette <- c("#005396", "#0088B1", "#00ADAE", "#65CCB3", "#AEE4C1",
                  "#FDEBA8", "#F8CD6D", "#F5A800", "#F17B00")

# Loop that cycles through each managed area with data
if(n==0){
  # Prints a statement if there are no managed areas with appropriate data
  print("There are no monitoring locations that qualify.")
} else {
  for (i in 1:n) {
    ma_i <- coral_sr_MA_Include[i]
    # Gets data for target managed area
    plot_data <- MA_Y_Stats[ManagedAreaName==ma_i, ]
    # Determines most recent year with available data for managed area
    t_max <- max(MA_Ov_Stats[ManagedAreaName==ma_i, LatestYear])
    # Determines earliest recent year with available data for managed area
    t_min <- min(MA_Ov_Stats[ManagedAreaName==ma_i, EarliestYear])
    # Determines how many years of data are present
    t <- t_max-t_min

    # Creates break intervals for plots based on number of years of data
```

```

if(t>=30){
  # Set breaks to every 10 years if more than 30 years of data
  brk <- -10
}else if(t<30 & t>=10){
  # Set breaks to every 5 years if between 30 and 10 years of data
  brk <- -5
}else if(t<10 & t>=4){
  # Set breaks to every 2 years if between 10 and 4 years of data
  brk <- -2
}else if(t<4 & t>=2){
  # Set breaks to every year if between 4 and 2 years of data
  brk <- -1
}else if(t<2){
  # Set breaks to every year if less than 2 years of data
  brk <- -1
  # Sets t_max to be 1 year greater and t_min to be 1 year lower
  # Forces graph to have at least 3 tick marks
  t_max <- t_max+1
  t_min <- t_min-1
}
# Determine range of data values for the managed area
y_range <- max(plot_data$Mean) - min(plot_data$Mean)

# Determines lower bound of y-axis based on data range. Set based on
# relation of data range to minimum value. Designed to set lower boundary
# to be 10% of the data range below the minimum value
y_min <- if(min(plot_data$Mean)-(0.1*y_range)<0){
  # If 10% of the data range below the minimum value is less than 0,
  # set as 0
  y_min <- 0
} else {
  # Otherwise set minimum bound as 10% data range below minimum value
  y_min <- min(plot_data$Mean)-(0.1*y_range)
}

# Sets upper bound of y-axis to be 10% of the data range above the
# maximum value.
y_max <- max(plot_data$Mean)+(0.1*y_range)

# Creates plot object using plot_data.
# Data is plotted as symbols with connected lines.
p1 <- ggplot(data=plot_data) +
  geom_line(aes(x=Year, y=Mean), color=color_palette[1],
    size=0.75, alpha=1) +
  geom_point(aes(x=Year, y=Mean), fill=color_palette[1],
    shape=21, size=2, color="#333333", alpha=1) +
  labs(title="Grazers and Reef-Dependent Species Richness",
    subtitle=ma_i,
    x="Year", y="Richness (# of species)") +
  scale_x_continuous(limits=c(t_min-0.25, t_max+0.25),
    breaks=seq(t_max, t_min, brk)) +
  scale_y_continuous(limits=c(y_min, y_max),
    breaks=pretty_breaks(n=5)) +

```



```

    plot_theme
    # Sets file name of plot created
    outname <- paste0("Coral_", param_file, "_", gsub(" ", "", ma_i),
                      ".png")
    # Saves plot as a png image
    png(paste0(out_dir, "/Figures/", outname),
        width = 8,
        height = 4,
        units = "in",
        res = 200)
    print(p1)
    dev.off()

    # Creates a data table object to be shown underneath plots in report
    ResultTable <- MA_Ov_Stats[ManagedAreaName==ma_i,]
    # Removes location, and parameter information because it is in plot
    # labels
    ResultTable <- ResultTable[,-c("AreaID", "ManagedAreaName",
                                   "ProgramIDs", "Programs", "ParameterName")]
    # Renames StandardDeviation to StDev to save horizontal space
    ResultTable <- ResultTable %>%
      rename("StDev"="StandardDeviation")
    # Converts all non-integer values to 2 decimal places for space
    ResultTable$Min <- round(ResultTable$Min, digits=2)
    ResultTable$Max <- round(ResultTable$Max, digits=2)
    ResultTable$Median <- round(ResultTable$Median, digits=2)
    ResultTable$Mean <- round(ResultTable$Mean, digits=2)
    ResultTable$StDev <- round(ResultTable$StDev, digits=2)
    # Stores as plot table object
    t1 <- ggtexttable(ResultTable, rows = NULL,
                      theme=ttheme(base_size=7))
    # Combines plot and table into one figure
    print(ggarrange(p1, t1, ncol=1, heights=c(0.85, 0.15)))

    # Add extra space at the end to prevent the next figure from being too
    # close. Does not add space after last plot
    if(i!=n){
      cat("\n \n \n \n")
    }
  }
}

```

Coral Species Richness

Biscayne Bay-Cape Florida to Monroe County Line Aquatic Preserve

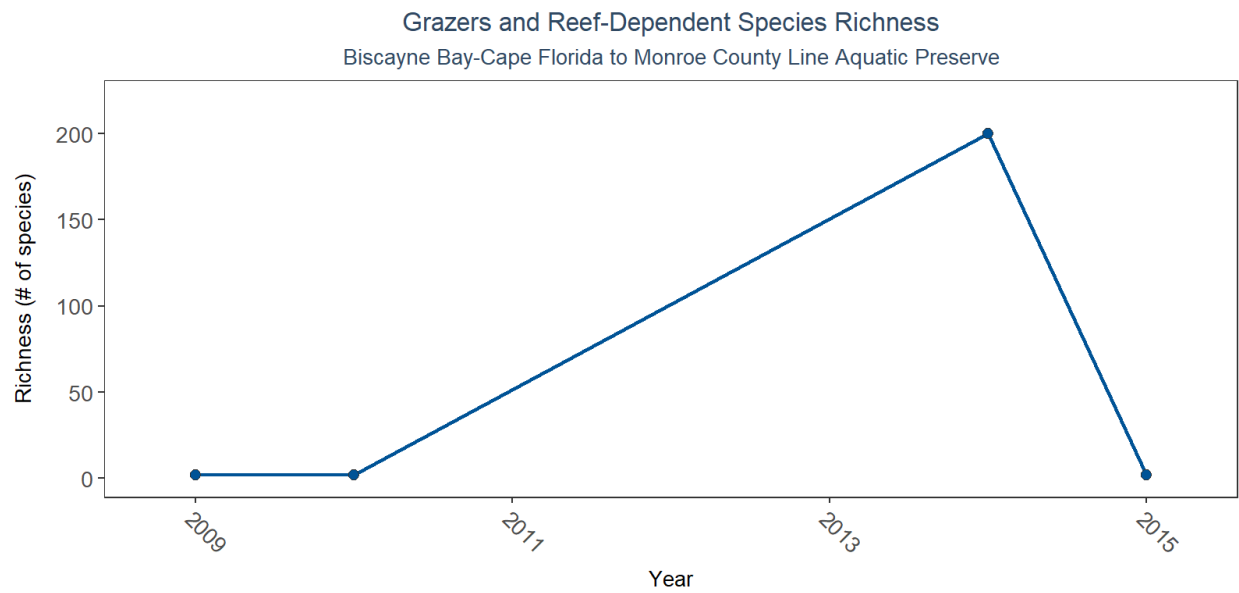


Table 1: Coastal Wetlands Species Richness - Biscayne Bay-Cape Florida to Monroe County Line Aquatic Preserve

N-Years	EarliestYear	LatestYear	N-Data	Min	Max	Median	Mean	StDev	Year-MinRichness	Year-MaxRichness
4	2009	2015	5	2	200	2	81.2	108.45	2009	2014

Biscayne Bay Aquatic Preserve

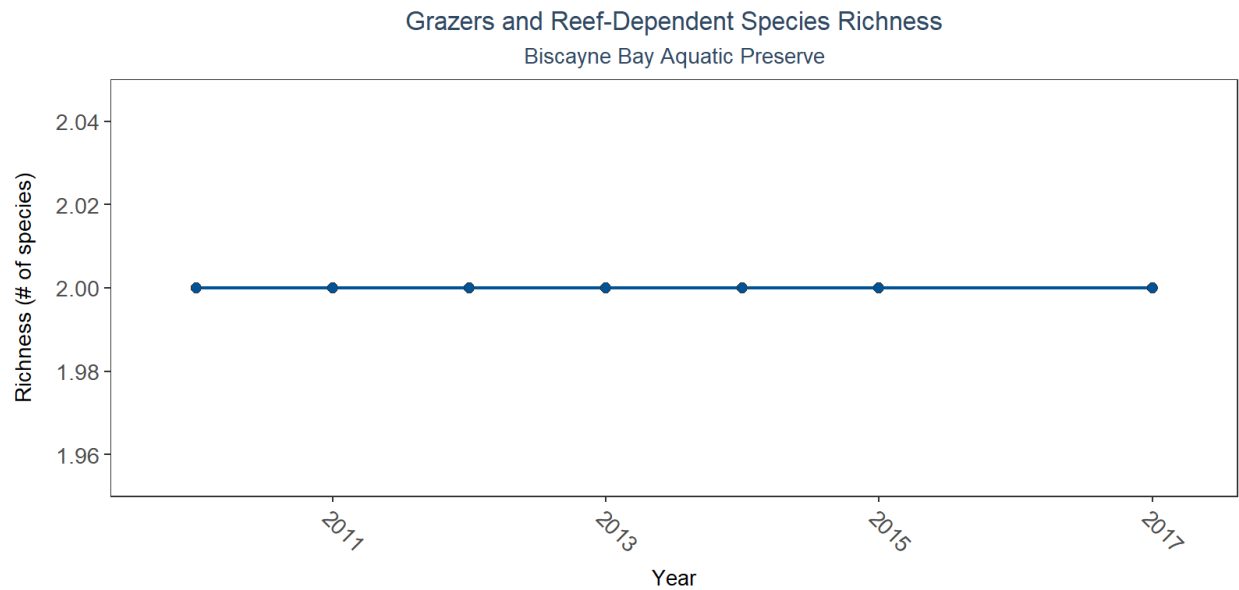


Table 2: Coastal Wetlands Species Richness - Biscayne Bay Aquatic Preserve

N-Years	EarliestYear	LatestYear	N-Data	Min	Max	Median	Mean	StDev	Year-MinRichness	Year-MaxRichness
7	2010	2017	19	2	2	2	2	0	2010	2010

Coupon Bight Aquatic Preserve

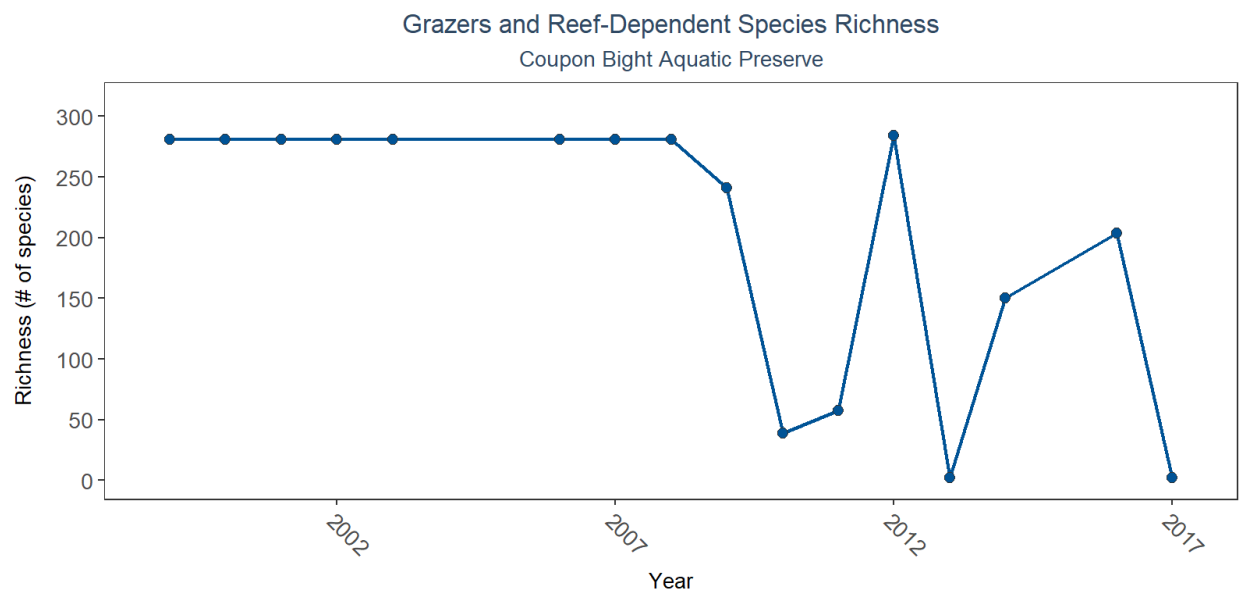


Table 3: Coastal Wetlands Species Richness - Coupon Bight Aquatic Preserve

N-Years	EarliestYear	LatestYear	N-Data	Min	Max	Median	Mean	StDev	Year-MinRichness	Year-MaxRichness
16	1999	2017	72	2	284	281	182.12	126.81	2013	2012

Florida Keys National Marine Sanctuary

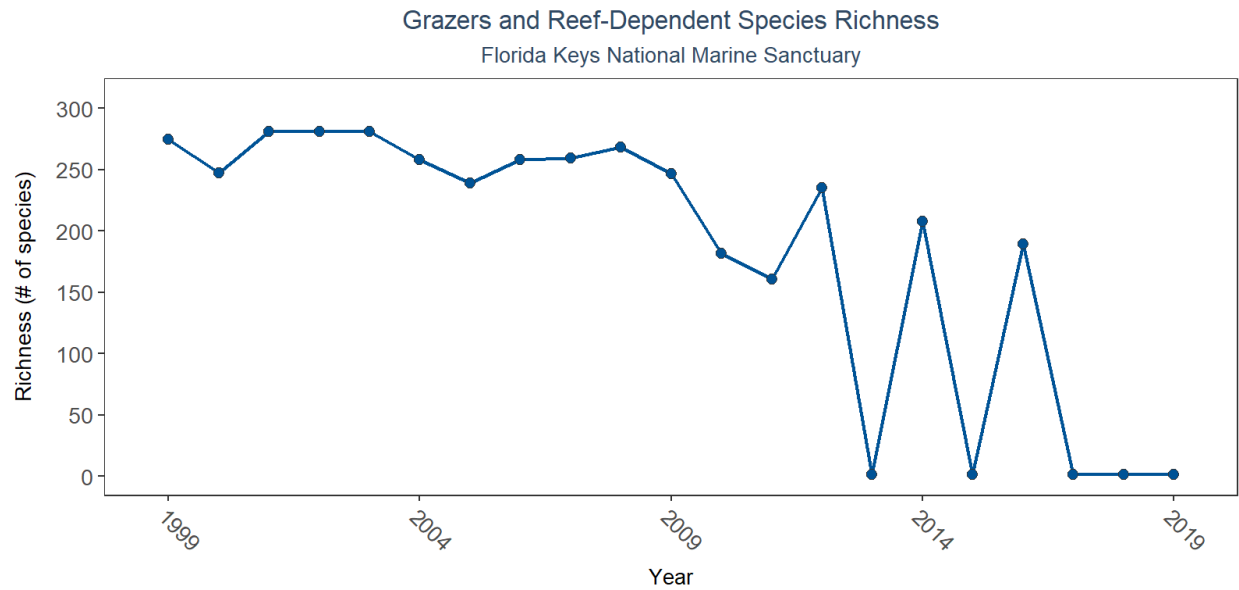


Table 4: Coastal Wetlands Species Richness - Florida Keys National Marine Sanctuary

N-Years	EarliestYear	LatestYear	N-Data	Min	Max	Median	Mean	StDev	Year-MinRichness	Year-MaxRichness
21	1999	2019	11081	1	302	281	220.75	106.06	2019	2001

Jensen Beach to Jupiter Inlet Aquatic Preserve

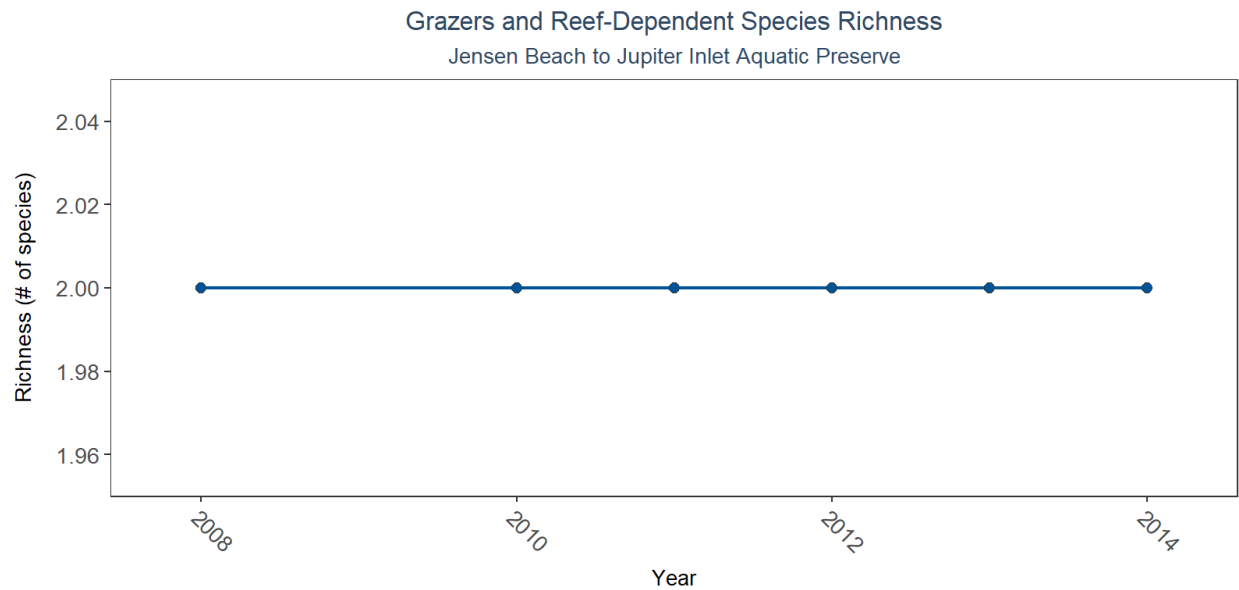


Table 5: Coastal Wetlands Species Richness - Jensen Beach to Jupiter Inlet Aquatic Preserve

N-Years	EarliestYear	LatestYear	N-Data	Min	Max	Median	Mean	StDev	Year-MinRichness	Year-MaxRichness
6	2008	2014	23	2	2	2	2	0	2008	2008

Loxahatchee River-Lake Worth Creek Aquatic Preserve

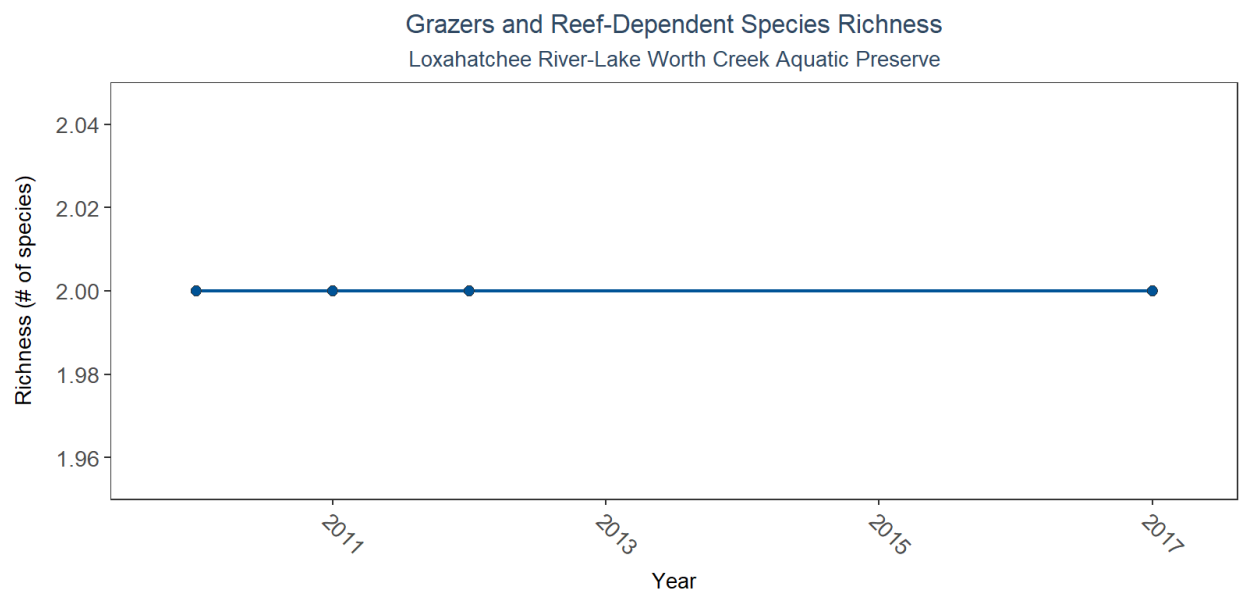


Table 6: Coastal Wetlands Species Richness - Loxahatchee River-Lake Worth Creek Aquatic Preserve

N-Years	EarliestYear	LatestYear	N-Data	Min	Max	Median	Mean	StDev	Year-MinRichness	Year-MaxRichness
4	2010	2017	8	2	2	2	2	0	2010	2010

Southeast Florida Coral Reef Ecosystem Conservation Area

Grazers and Reef-Dependent Species Richness
Southeast Florida Coral Reef Ecosystem Conservation Area

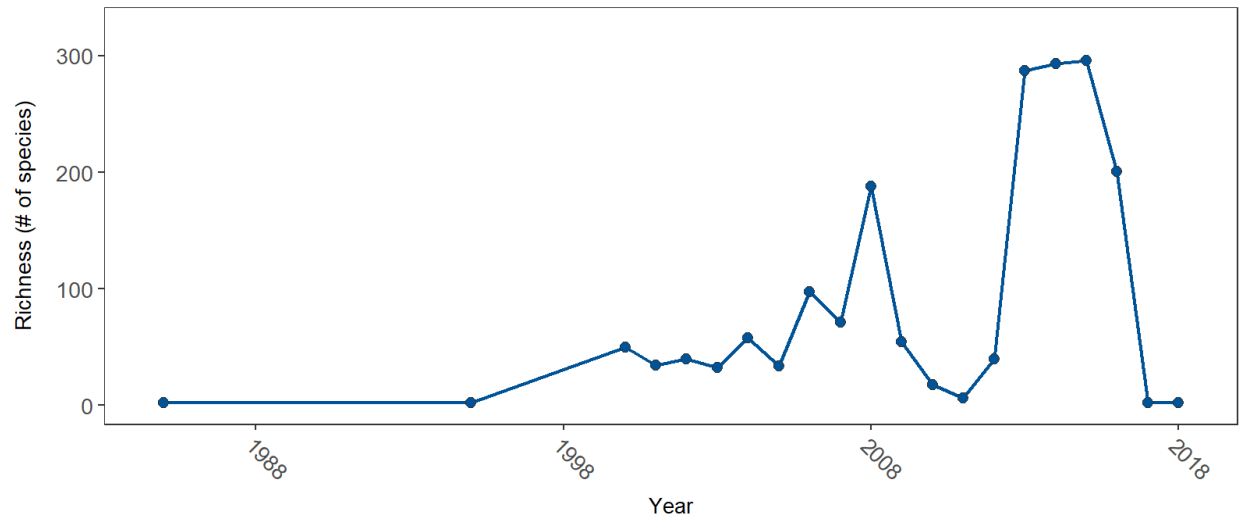


Table 7: Coastal Wetlands Species Richness - Southeast Florida Coral Reef Ecosystem Conservation Area

N-Years	EarliestYear	LatestYear	N-Data	Min	Max	Median	Mean	StDev	Year-MinRichness	Year-MaxRichness
21	1985	2018	3025	2	302	294	228.04	108.83	1985	2015