

# SEACAR Continuous Water Quality Analysis: NW Region for Water Temperature

Last compiled on 19 May, 2022

## Contents

<b>Important Notes</b>	<b>1</b>
<b>Libraries</b>	<b>1</b>
<b>File Import</b>	<b>2</b>
<b>Data Filtering</b>	<b>2</b>
<b>Monitoring Location Statistics</b>	<b>4</b>
<b>Seasonal Kendall Tau Analysis</b>	<b>5</b>
<b>Appendix I: Dataset Summary Box Plots</b>	<b>9</b>
<b>Appendix II: Excluded Monitoring Locations</b>	<b>15</b>
<b>Appendix III: Monitoring Location Trendlines</b>	<b>21</b>
<b>Appendix IV: Monitoring Location Summary Box Plots</b>	<b>34</b>

## Important Notes

All scripts and outputs can be found on the SEACAR GitHub repository:

[https://github.com/FloridaSEACAR/SEACAR\\_Panzik](https://github.com/FloridaSEACAR/SEACAR_Panzik)

Note: The top 2% of data is excluded when computing mean and standard deviations in plotting sections solely for the purpose of getting y-axis scales. The exclusion of the top 2% is not used in any statistics that are exported.

## Libraries

Loads libraries used in the script. The inclusion of `scipen` option limits how frequently R defaults to scientific notation.

```
library(knitr)
library(data.table)
library(dplyr)
library(lubridate)
library(ggplot2)
library(ggpubr)
library(scales)
library(EnvStats)
library(tidyr)
options(scipen = 999)
```

## File Import

Imports file that is determined in the WC\_Continuous\_parameter\_ReportCompile.R script.

The command `fread` is used because of its improved speed while handling large data files. Only columns that are used by the script are imported from the file, and are designated in the `select` input.

The script then gets the name of the parameter as it appears in the data file and units of the parameter.

```
data <- fread(file_in, sep = "|", header = TRUE, stringsAsFactors = FALSE,
              select = c("ManagedAreaName", "ProgramID", "ProgramName",
                        "ProgramLocationID", "SampleDate", "Year", "Month",
                        "RelativeDepth", "ActivityType", "ParameterName",
                        "ResultValue", "ParameterUnits", "ValueQualifier",
                        "SEACAR_QAQCFlagCode", "Include"),
              na.strings = "")
parameter <- unique(data$ParameterName)
unit <- unique(data$ParameterUnits)
```

## Data Filtering

Most data filtering is performed on export from the database, and is indicated by the `Include` variable. `Include` values of 1 indicate the data should be used for analysis, values of 0 indicate the data should not be used for analysis. Documentation on the database filtering is provided here: SEACAR Documentation-Analysis Filters and Calculations.docx

The filtering that is performed by the script at this point removes rows that are missing values for `ResultValue` and `RelativeDepth`, and removes any activity type that has “Blank” in the description. Data passes the filtering the process if it has an `Include` value of 1.

The script then gets the units of the parameter, sets the `SampleDate` as a date object, and creates various scales of the date to be used by plotting functions.

Because the continuous data is extensive and most measurements are taken every 15 minutes, a daily average is determined and used based on grouping `ManagedAreaName`, `ProgramID`, `ProgramName`, `ProgramLocationID`, and `SampleDate`. The new `ResultValue` is the mean of all values on that date from that specific monitoring location. Sets the `SampleDate` as a date object, and creates various scales of the date to be used by plotting functions.

Creates a variable for each `MonitoringID` which is defined as a unique combination of `ManagedAreaName`, `ProgramID`, `ProgramAreaName`, and `ProgramLocationID`.

After the initial filtering, a second filter variable is created to determine whether enough time is represented in the managed area, which is that each managed area has 5 year or more of unique year entries for observation that pass the initial filter. If data passes the first set of filtering criteria and the time criteria, they are used in the analysis.

```
data$Include <- as.logical(data$Include)
data <- data[data$Include==TRUE,]
data <- data[!is.na(data$ResultValue),]
data <- data[!is.na(data$RelativeDepth),]
data <- data[!grep("Blank", data$ActivityType),]
```

```
if(param_name == "Water_Temperature"){
  data <- data[data$ResultValue>=-5,]
} else{
  data <- data[data$ResultValue>=0,]
}
```

```
data <- data %>%
  group_by(ManagedAreaName, ProgramID, ProgramName, ProgramLocationID,
    SampleDate) %>%
  summarise(Year = unique(Year), Month = unique(Month),
    RelativeDepth = unique(RelativeDepth),
    ResultValue = mean(ResultValue), Include = unique(Include))
```

## 'summarise()' has grouped output by 'ManagedAreaName', 'ProgramID', 'ProgramName', 'ProgramLocationID'  
## '.groups' argument.

```
data <- merge.data.frame(MA_All[,c("AreaID", "ManagedAreaName")],
  data, by = "ManagedAreaName")
```

```
data$SampleDate <- as.Date(data$SampleDate)
data$YearMonth <- paste0(data$Month, "-", data$Year)
data$YearMonthDec <- data$Year + ((data$Month-0.5) / 12)
data$DecDate <- decimal_date(data$SampleDate)
```

```
data <- data %>%
  group_by(ManagedAreaName, ProgramID, ProgramName, ProgramLocationID) %>%
  mutate(MonitoringID = cur_group_id())
# data <- data %>%
#   mutate(MonitoringID = group_indices(., ManagedAreaName, ProgramID,
#     ProgramName, ProgramLocationID))
#
Mon_Years <- data[data$Include == TRUE, ] %>%
  group_by(MonitoringID) %>%
  summarize(AreaID = unique(AreaID),
    ManagedAreaName = unique(ManagedAreaName),
    ProgramID = unique(ProgramID),
    ProgramName = unique(ProgramName),
    ProgramLocationID = unique(ProgramLocationID),
    ParameterName = parameter,
    RelativeDepth = unique(RelativeDepth),
    Y = length(unique(Year)))
```

```

Mon_Years <- as.data.table(Mon_Years[
  order(Mon_Years$MonitoringID), ])
Mon_Years$Enough_Time <- ifelse(Mon_Years$Y < 5, FALSE, TRUE)
data <- merge.data.frame(data, Mon_Years[,c("MonitoringID", "Enough_Time")],
  by = "MonitoringID")
# data$Exclude_MonitoringID <- is.element(data$MonitoringID,
#                                         Mon_Years$MonitoringID[
#                                         Mon_Years$Enough_Time == FALSE])
data$Use_In_Analysis <- ifelse(data$Include == TRUE &
  data$Enough_Time == TRUE,
  TRUE, FALSE)
Mon_IDs <- unique(data$MonitoringID[data$Use_In_Analysis == TRUE])
Mon_IDs <- Mon_IDs[order(Mon_IDs)]
n <- length(Mon_IDs)

```

## Monitoring Location Statistics

Gets summary statistics for each monitoring location. Excluded monitoring locations are not included into whether the data should be used or not. Uses piping from dplyr package to feed into subsequent steps. The following steps are performed:

1. Take the `data` variable and only include rows that have a `Use_In_Analysis` value of `TRUE`
2. Group data that have the same `ManagedAreaName`, `ProgramID`, `ProgramName`, `ProgramLocationID`, `Year`, and `Month`.
  - Second summary statistics consider the monitoring location grouping and `Year`.
  - Third summary statistics consider the monitoring location grouping and `Month`.
3. For each group, provide the following information: Earliest Sample Date (`EarliestSampleDate`), Latest Sample Date (`LastSampleDate`), Number of Entries (`N`), Lowest Value (`Min`), Largest Value (`Max`), Median, Mean, Standard Deviation, and a list of all Program IDs included in these measurements.
4. Sort the data in ascending (A to Z and 0 to 9) order based on `ManagedAreaName`, `ProgramID`, `ProgramName`, `ProgramLocationID`, `Year`, and `Month` in that order.
5. Write summary stats to a pipe-delimited `.txt` file in the output directory

```

Mon_YM_Stats <- data[data$Use_In_Analysis == TRUE, ] %>%
  group_by(AreaID, ManagedAreaName, ProgramID, ProgramName, ProgramLocationID,
    Year, Month) %>%
  summarize(ParameterName = parameter,
    RelativeDepth = unique(RelativeDepth),
    EarliestSampleDate = min(SampleDate),
    LastSampleDate = max(SampleDate), N = length(ResultValue),
    Min = min(ResultValue), Max = max(ResultValue),
    Median = median(ResultValue), Mean = mean(ResultValue),
    StandardDeviation = sd(ResultValue))
Mon_YM_Stats <- as.data.table(Mon_YM_Stats[order(Mon_YM_Stats$ManagedAreaName,
  Mon_YM_Stats$ProgramID,
  Mon_YM_Stats$ProgramName,
  Mon_YM_Stats$ProgramLocationID,
  Mon_YM_Stats$Year,
  Mon_YM_Stats$Month), ])
fwrite(Mon_YM_Stats, paste0(out_dir, "/", param_name, "_", region,

```

```

                                "_MonitoringLoc_YearMonth_Stats.txt"), sep = "|")

Mon_Y_Stats <- data[data$Use_In_Analysis == TRUE, ] %>%
  group_by(AreaID, ManagedAreaName, ProgramID, ProgramName, ProgramLocationID,
    Year) %>%
  summarize(ParameterName = parameter,
    RelativeDepth = unique(RelativeDepth),
    EarliestSampleDate = min(SampleDate),
    LastSampleDate = max(SampleDate), N = length(ResultValue),
    Min = min(ResultValue), Max = max(ResultValue),
    Median = median(ResultValue), Mean = mean(ResultValue),
    StandardDeviation = sd(ResultValue))
Mon_Y_Stats <- as.data.table(Mon_Y_Stats[order(Mon_Y_Stats$ManagedAreaName,
  Mon_Y_Stats$ProgramID,
  Mon_Y_Stats$ProgramName,
  Mon_Y_Stats$ProgramLocationID,
  Mon_Y_Stats$Year), ])

fwrite(Mon_Y_Stats, paste0(out_dir, "/", param_name, "_", region,
  "_MonitoringLoc_Year_Stats.txt"), sep = "|")

Mon_M_Stats <- data[data$Use_In_Analysis == TRUE, ] %>%
  group_by(AreaID, ManagedAreaName, ProgramID, ProgramName, ProgramLocationID,
    Month) %>%
  summarize(ParameterName = parameter,
    RelativeDepth = unique(RelativeDepth),
    EarliestSampleDate = min(SampleDate),
    LastSampleDate = max(SampleDate), N = length(ResultValue),
    Min = min(ResultValue), Max = max(ResultValue),
    Median = median(ResultValue), Mean = mean(ResultValue),
    StandardDeviation = sd(ResultValue))
Mon_M_Stats <- as.data.table(Mon_M_Stats[order(Mon_M_Stats$ManagedAreaName,
  Mon_M_Stats$ProgramID,
  Mon_M_Stats$ProgramName,
  Mon_M_Stats$ProgramLocationID,
  Mon_M_Stats$Month), ])

fwrite(Mon_M_Stats, paste0(out_dir, "/", param_name, "_", region,
  "_MonitoringLoc_Month_Stats.txt"), sep = "|")

```

## Seasonal Kendall Tau Analysis

Gets seasonal Kendall Tau statistics using the `kendallSeasonalTrendTest` from the `EnvStats` package. The `Trend` parameter is determined from a user-defined function based on the median, Senn slope, and p values from the data. Analysis modified from that performed at The Water Atlas: <https://sarasota.wateratlas.usf.edu/water-quality-trends/#analysis-overview>

The following steps are performed:

1. Define the trend function.
2. Take the `data` variable and only include rows that have a `Use_In_Analysis` value of `TRUE`
3. Group data that have the same `ManagedAreaName`, `ProgramID`, `ProgramName`, and `ProgramLocationID`.

4. For each group, provides the following information: Earliest Sample Date (EarliestSampleDate), Latest Sample Date (LastSampleDate), Number of Entries (N), Lowest Value (Min), Largest Value (Max), Median, Mean, Standard Deviation,
5. For each group, a temporary variable is created to run the `kendallSeasonalTrendTest` function using the `Year` values for year, and `Month` as the seasonal qualifier, and `Trend`.
  - An `independent.obs` value of `TRUE` indicates that the data should be treated as not being serially auto-correlated. An `independent.obs` value of `FALSE` indicates that it is treated as being serially auto-correlated, but also requires one observation per season per year for the full time of observation.
  - `tau`, Senn Slope (`SennSlope`), Senn Intercept (`SennIntercept`), and `p` are extracted from the model results.
6. The two stats tables are merged based on similar groups, and then `Trend` is determined from the user-defined function.
7. Write summary stats to a pipe-delimited `.txt` file in the output directory
  - [Click this text](#) to open Git directory with output files
8. Add the Monitoring IDS to `KT.Stats` for easier use while plotting.

```
tauSeasonal <- function(data, independent, stats.median, stats.minYear,
                        stats.maxYear) {
  tau <- NULL
  tryCatch({
    ken <-
      kendallSeasonalTrendTest(
        y = data$ResultValue,
        season = data$Month,
        year = data$Year,
        independent.obs = independent
      )
    tau <- ken$estimate[1]
    p <- ken$p.value[2]
    slope <- ken$estimate[2]
    intercept <- ken$estimate[3]
    trend <- trend_calculator(slope, stats.median, p)
  }, warning = function(w) {
    print(w)
  }, error = function(e) {
    print(e)
  }, finally = {
    if (!exists("tau")) {
      tau <- NULL
    }
    if (!exists("p")) {
      p <- NULL
    }
    if (!exists("slope")) {
      slope <- NULL
    }
    if (!exists("intercept")) {
      intercept <- NULL
    }
  })
}
```

```

    }
    if (!exists("trend")) {
      trend <- NULL
    }
  })
  KT <- c(unique(data$MonitoringID),
          independent,
          stats.median,
          nrow(data),
          stats.minYear,
          stats.maxYear,
          tau,
          p,
          slope,
          intercept,
          trend)
  return(KT)
}

runStats <- function(data) {
  data$Index <- as.Date(data$SampleDate) # , "%Y-%m-%d")
  data$ResultValue <- as.numeric(data$ResultValue)
  # Calculate basic stats
  stats.median <- median(data$ResultValue, na.rm = TRUE)
  stats.minYear <- min(data$Year, na.rm = TRUE)
  stats.maxYear <- max(data$Year, na.rm = TRUE)
  # Calculate Kendall Tau and Slope stats, then update appropriate columns and table
  KT <- tauSeasonal(data, TRUE, stats.median,
                    stats.minYear, stats.maxYear)
  if (is.null(KT[11])) {
    KT <- tauSeasonal(data, FALSE, stats.median,
                      stats.minYear, stats.maxYear)
  }
  if (is.null(KT.Stats) == TRUE) {
    KT.Stats <- KT
  } else {
    KT.Stats <- rbind(KT.Stats, KT)
  }
  return(KT.Stats)
}

trend_calculator <- function(slope, median_value, p) {
  trend <-
    if (p < .05 & abs(slope) > abs(median_value) / 10.) {
      if (slope > 0) {
        2
      }
      else {
        -2
      }
    }
    else if (p < .05 & abs(slope) < abs(median_value) / 10.) {
      if (slope > 0) {
        1
      }
    }

```

```

    else {
      -1
    }
  }
  else
    0
  return(trend)
}
KT.Stats <- NULL
# Loop that goes through each managed area.
# List of managed areas stored in MA_Years$ManagedAreaName
c_names <- c("MonitoringID", "Independent", "Median", "N", "EarliestYear",
             "LatestYear", "tau", "p", "SennSlope", "SennIntercept", "Trend")
if(n==0){
  c_names <- c("AreaID", "ManagedAreaName", "ProgramID", "ProgramName",
              "ProgramLocationID", "ParameterName", "RelativeDepth",
              "Independent", "Median", "N", "EarliestYear", "LatestYear",
              "tau", "p", "SennSlope", "SennIntercept", "Trend")
  KT.Stats <- data.frame(matrix(ncol=17, nrow=0))
  colnames(KT.Stats) <- c_names
  fwrite(KT.Stats, paste0(out_dir, "/", param_name, "_", region,
                          "_KendallTau_Stats.txt"), sep = "|")
} else{
  for (i in 1:n) {
    values <- data[data$Use_In_Analysis == TRUE &
                  data$MonitoringID == Mon_IDs[i], ]
    if (nrow(values) > 0) {
      KT.Stats <- runStats(values)
    }
  }
  KT.Stats <- as.data.frame(KT.Stats)
  if(dim(KT.Stats)[2]==1){
    KT.Stats <- as.data.frame(t(KT.Stats))
  }

  c_names <- c("MonitoringID", "Independent", "Median", "N", "EarliestYear",
              "LatestYear", "tau", "p", "SennSlope", "SennIntercept", "Trend")
  colnames(KT.Stats) <- c_names
  rownames(KT.Stats) <- seq(1:nrow(KT.Stats))
  KT.Stats$Independent <- as.logical(KT.Stats$Independent)
  KT.Stats$Median <- as.numeric(KT.Stats$Median)
  KT.Stats$N <- as.integer(KT.Stats$N)
  KT.Stats$EarliestYear <- as.integer(KT.Stats$EarliestYear)
  KT.Stats$LatestYear <- as.integer(KT.Stats$LatestYear)
  KT.Stats$tau <- round(as.numeric(KT.Stats$tau), digits=4)
  KT.Stats$p <- round(as.numeric(KT.Stats$p), digits=4)
  KT.Stats$SennSlope <- as.numeric(KT.Stats$SennSlope)
  KT.Stats$SennIntercept <- as.numeric(KT.Stats$SennIntercept)
  KT.Stats$Trend <- as.integer(KT.Stats$Trend)
  KT.Stats <- merge.data.frame(Mon_Years[, -c("Y", "Enough_Time")],
                              KT.Stats, by = "MonitoringID")
  KT.Stats$MonitoringID <- NULL
  fwrite(KT.Stats, paste0(out_dir, "/", param_name, "_", region,

```



```

                                "_KendallTau_Stats.txt"), sep = "|")
KT.Stats$MonitoringID <- Mon_IDs
}

```

## Appendix I: Dataset Summary Box Plots

Box plots are created by using the entire data set and excludes any data that has been previously filtered out. The scripts that create plots follow this format

1. Use the data set that only has Use\_In\_Analysis of TRUE
2. Set what values are to be used for the x-axis, y-axis, and the variable that should determine groups for the box plots
3. Set the plot type as a box plot with the size of the outlier points
4. Create the title, x-axis, y-axis, and color fill labels
5. Set the y and x limits
6. Make the axis labels bold
7. Plot the arrangement as a set of panels

This set of box plots are grouped by year.

```

min_RV <- min(data$ResultValue[data$Include == TRUE])
mn_RV <- mean(data$ResultValue[data$Include == TRUE &
                                data$ResultValue <
                                quantile(data$ResultValue, 0.98)])
sd_RV <- sd(data$ResultValue[data$Include == TRUE &
                                data$ResultValue <
                                quantile(data$ResultValue, 0.98)])
y_scale <- mn_RV + 4 * sd_RV

p1 <- ggplot(data = data[data$Include == TRUE, ],
             aes(x = Year, y = ResultValue, group = Year)) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Autoscale", x = "Year",
       y = paste0("Values (", unit, ")")) +
  theme_bw() +
  theme(axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold"))

p2 <- ggplot(data = data[data$Include == TRUE, ],
             aes(x = Year, y = ResultValue, group = Year)) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 4x Standard Deviation", x = "Year",
       y = paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  theme_bw() + theme(axis.text.x = element_text(face = "bold"),
                    axis.text.y = element_text(face = "bold"))

p3 <- ggplot(data = data[data$Include == TRUE, ],
             aes(x = as.integer(Year), y = ResultValue, group = Year)) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 4x Standard Deviation, Last 10 Years",

```

```

    x = "Year", y = paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  scale_x_continuous(limits = c(max(data$Year) - 10.5, max(data$Year)+0.5),
                    breaks = seq(max(data$Year) - 10, max(data$Year), 2)) +
  theme_bw() +
  theme(axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold"))

set <- ggarrange(p1, p2, p3, ncol = 1)

p0 <- ggplot() + labs(title = "Summary Box Plots for Entire Data",
                    subtitle = "By Year") + theme_bw() +
  theme(plot.title = element_text(face="bold", hjust=0.5),
        panel.border = element_blank(), panel.grid.major = element_blank(),
        panel.grid.minor = element_blank(), axis.line = element_blank())

Yset <- ggarrange(p0, set, ncol=1, heights = c(0.07, 1))

```

This set of box plots are grouped by year and month with the color being related to the month.

```

p1 <- ggplot(data = data[data$Include == TRUE, ],
            aes(x = YearMonthDec, y = ResultValue,
                group = YearMonth, color = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Autoscale", x = "Year",
       y = paste0("Values (", unit, ")"), color="Month") +
  theme_bw() +
  theme(legend.position = "top", legend.box = "horizontal",
        axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold")) +
  guides(color = guide_legend(nrow = 1))

p2 <- ggplot(data = data[data$Include == TRUE, ],
            aes(x = YearMonthDec, y = ResultValue,
                group = YearMonth, color = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 5x Standard Deviation",
       x = "Year", y = paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  theme_bw() +
  theme(legend.position = "none", axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold"))

p3 <- ggplot(data = data[data$Include == TRUE, ],
            aes(x = YearMonthDec, y = ResultValue,
                group = YearMonth, color = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 5x Standard Deviation, Last 10 Years",
       x = "Year", y = paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  scale_x_continuous(limits = c(max(data$Year) - 10.5, max(data$Year)+0.5),
                    breaks = seq(max(data$Year) - 10, max(data$Year), 2)) +
  theme_bw() +

```

```

    theme(legend.position = "none", axis.text.x = element_text(face = "bold"),
          axis.text.y = element_text(face = "bold"))
leg <- get_legend(p1)
set <- ggarrange(leg, p1 + theme(legend.position = "none"), p2, p3, ncol = 1,
                 heights = c(0.1, 1, 1, 1))

p0 <- ggplot() + labs(title = "Summary Box Plots for Entire Data",
                     subtitle = "By Year & Month") + theme_bw() +
  theme(plot.title = element_text(face="bold", hjust=0.5),
        panel.border = element_blank(), panel.grid.major = element_blank(),
        panel.grid.minor = element_blank(), axis.line = element_blank())

YMset <- ggarrange(p0, set, ncol=1, heights = c(0.07, 1))

```

The following box plots are grouped by month with fill color being related to the month. This is designed to view potential seasonal trends.

```

p1 <- ggplot(data = data[data$Include == TRUE, ],
             aes(x = Month, y = ResultValue,
                 group = Month, fill = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Autoscale", x = "Month",
       y = paste0("Values (", unit, ")"), fill="Month") +
  scale_x_continuous(limits = c(0, 13), breaks = seq(3, 12, 3)) +
  theme_bw() +
  theme(legend.position = "top", legend.box = "horizontal",
        axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold")) +
  guides(fill = guide_legend(nrow = 1))

p2 <- ggplot(data = data[data$Include == TRUE, ],
             aes(x = Month, y = ResultValue,
                 group = Month, fill = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 5x Standard Deviation",
       x = "Month", y = paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  scale_x_continuous(limits = c(0, 13), breaks = seq(3, 12, 3)) +
  theme_bw() +
  theme(legend.position = "none", axis.text.x = element_text(face = "bold"),
        axis.text.y = element_text(face = "bold"))

p3 <- ggplot(data = data[data$Include == TRUE &
                         data$Year >= max(data$Year) - 10, ],
             aes(x = Month, y = ResultValue,
                 group = Month, fill = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 5x Standard Deviation, Last 10 Years",
       x = "Month", y = paste0("Values (", unit, ")")) +
  ylim(0, y_scale) +
  scale_x_continuous(limits = c(0, 13), breaks = seq(3, 12, 3)) +
  theme_bw() +
  theme(legend.position = "none", axis.text.x = element_text(face = "bold"),

```

```

      axis.text.y = element_text(face = "bold"))
leg <- get_legend(p1)
set <- ggarrange(leg, p1 + theme(legend.position = "none"), p2, p3, ncol = 1,
  heights = c(0.1, 1, 1, 1))




p0 <- ggplot() + labs(title = "Summary Box Plots for Entire Data",
  subtitle = "By Month") + theme_bw() +
  theme(plot.title = element_text(face="bold", hjust=0.5),
    panel.border = element_blank(), panel.grid.major = element_blank(),
    panel.grid.minor = element_blank(), axis.line = element_blank())

Mset <- ggarrange(p0, set, ncol=1, heights = c(0.07, 1))

```


## Summary Box Plots for Entire Data


By Year

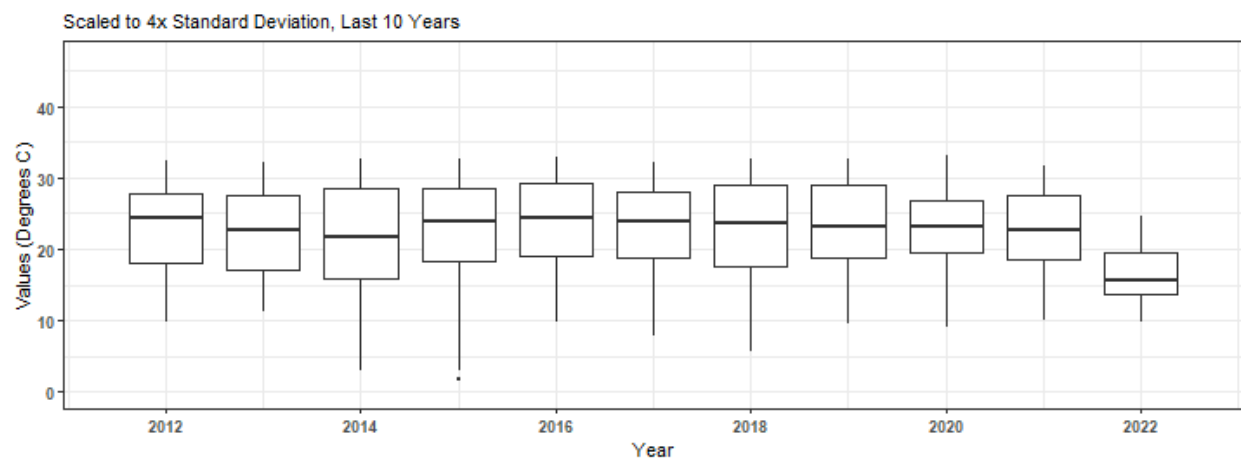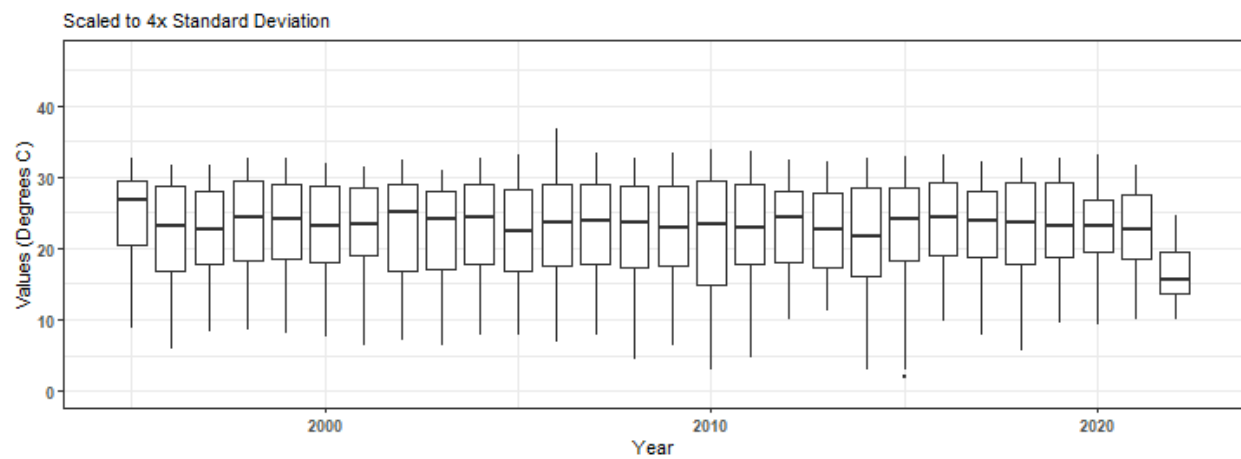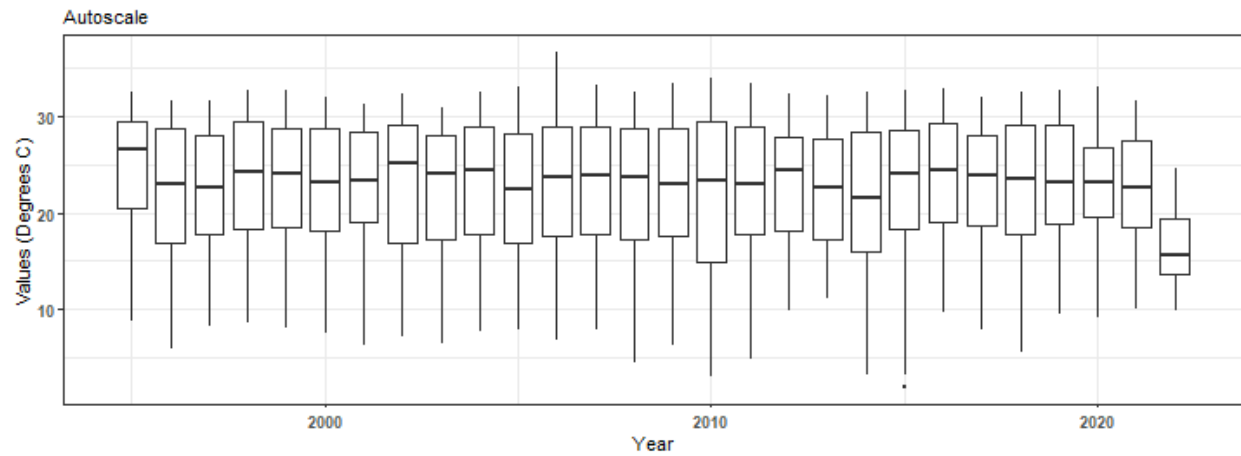

## Summary Box Plots for Entire Data

By Year & Month

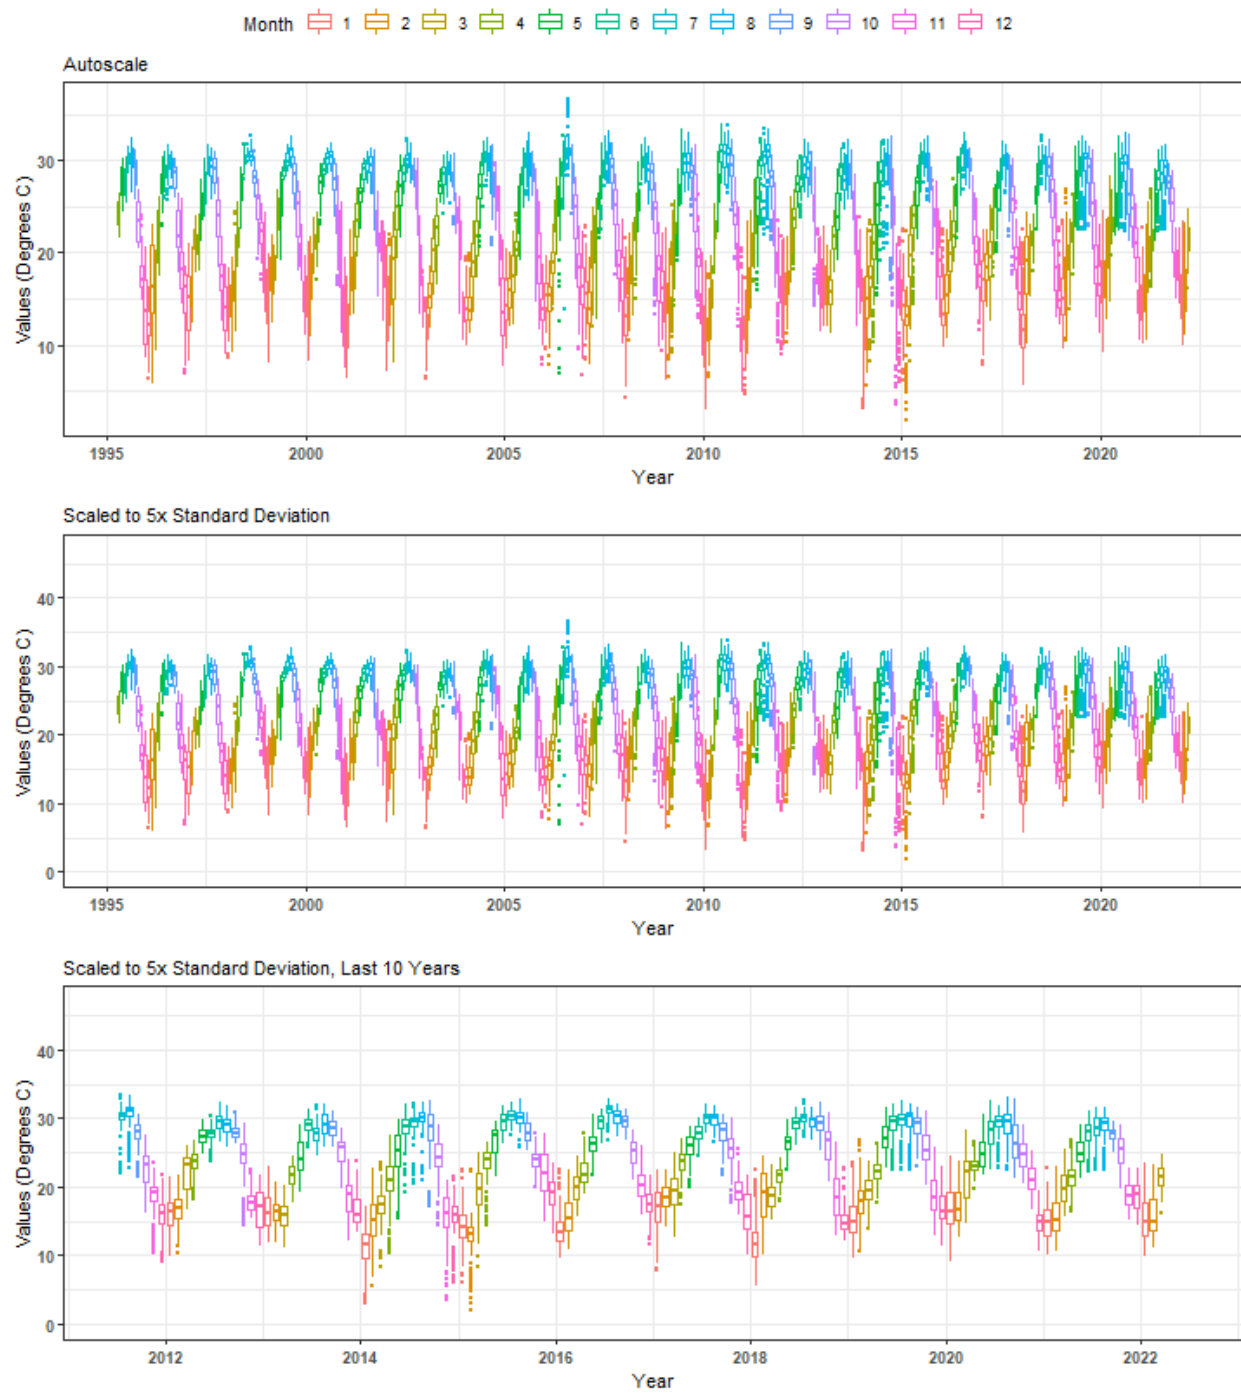

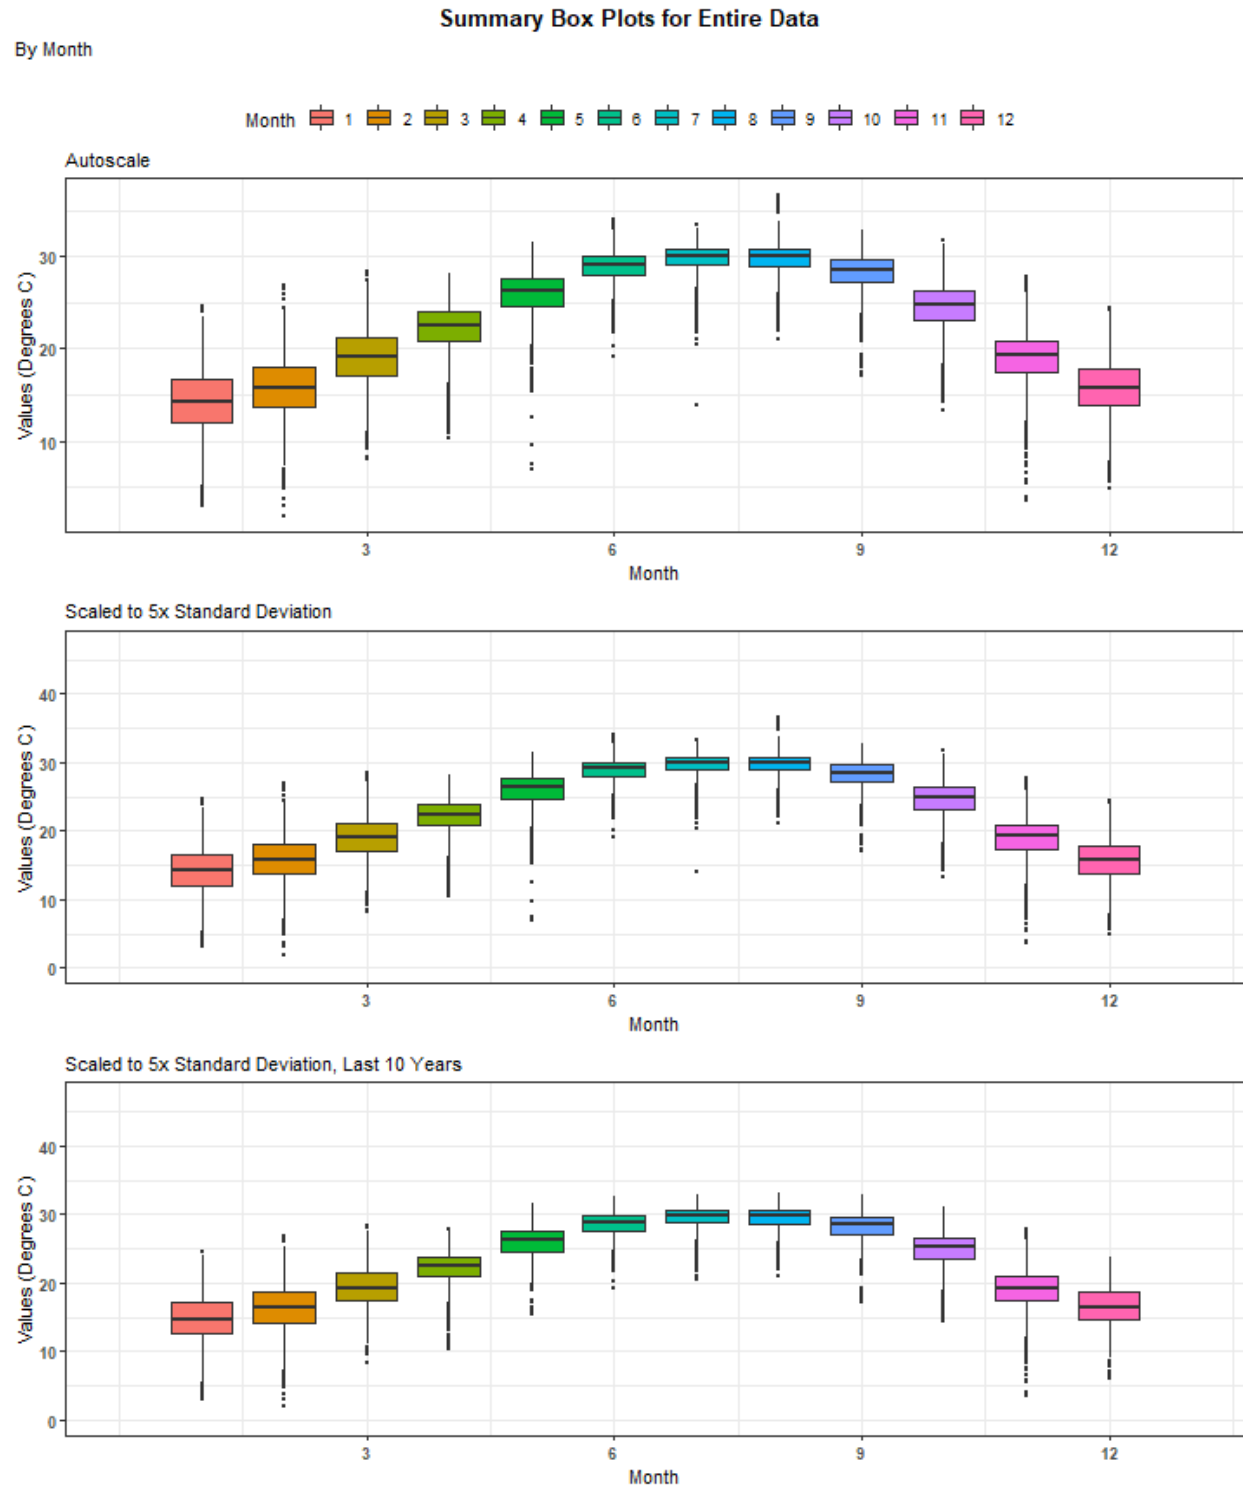

## Appendix II: Excluded Monitoring Locations

Scatter plots of data values are created for monitoring locations that have fewer than 5 separate years of data entries.

```

Mon_Exclude <- Mon_Years[Mon_Years$Enough_Time==FALSE,]
Mon_Exclude <- Mon_Exclude[order(Mon_Exclude$MonitoringID),]
z=length(Mon_Exclude$MonitoringID)


if(z==0){
  print("There are no monitoring locations that qualify.")
} else {
  for(i in 1:z){
    MA_name <- unique(data$ManagedAreaName[
      data$MonitoringID==Mon_Exclude$MonitoringID[i]])
    Mon_name <- paste(unique(data$ProgramID[
      data$MonitoringID==Mon_Exclude$MonitoringID[i]]),
      unique(data$ProgramName[
        data$MonitoringID==Mon_Exclude$MonitoringID[i]]),
      unique(data$ProgramLocationID[
        data$MonitoringID==Mon_Exclude$MonitoringID[i]]),
      sep = " | ")

    p1<-ggplot(data=data[data$MonitoringID==Mon_Exclude$MonitoringID[i]&
      data$Include == TRUE, ],
      aes(x = SampleDate, y = ResultValue)) +
    geom_point() +
    labs(title=
      paste0("Scatter Plot of Excluded Monitoring Location ",
        MA_name, "\n", Mon_name, "\n(", Mon_Exclude$Y[i],
        " Unique Years)"),
      subtitle="Autoscale", x = "Year",
      y = paste0("Values (", unit, ")")) +
    theme_bw() +
    theme(plot.title = element_text(face="bold", hjust=0.5),
      axis.text.x = element_text(face = "bold")) +
    scale_x_date(labels = date_format("%m-%Y"))
    print(p1)
  }
}


```




Scatter Plot of Excluded Monitoring Location Alligator Harbor Aquatic Preserve  
 468 | Central Panhandle Aquatic Preserves Continuous Water Quality Monitoring | CPAH  
 (2 Unique Years)

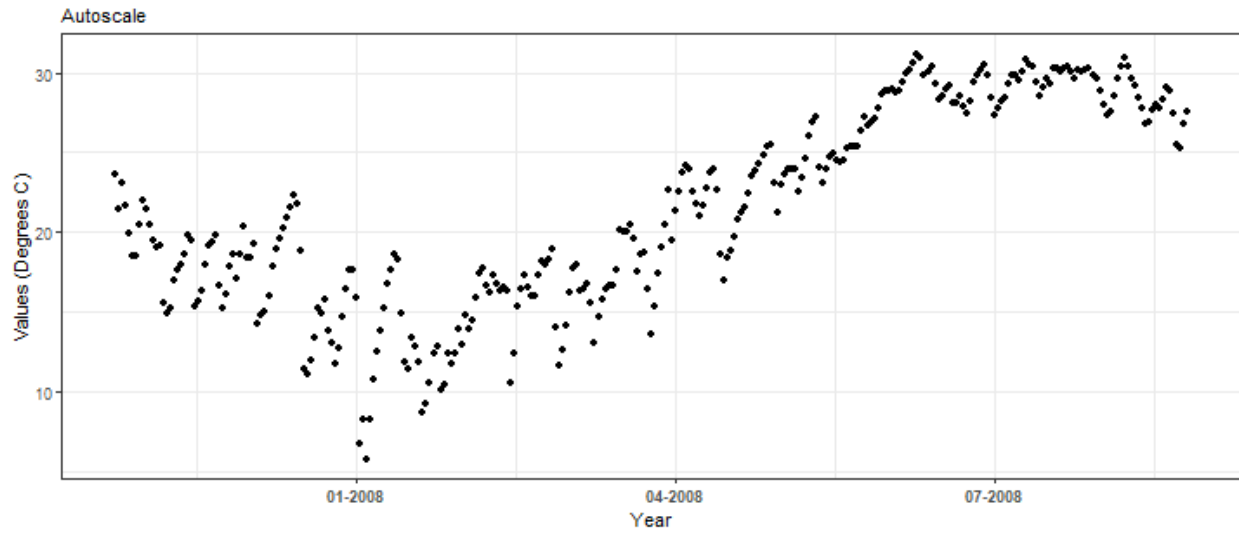


Scatter Plot of Excluded Monitoring Location Alligator Harbor Aquatic Preserve  
 468 | Central Panhandle Aquatic Preserves Continuous Water Quality Monitoring | CPAH2  
 (1 Unique Years)

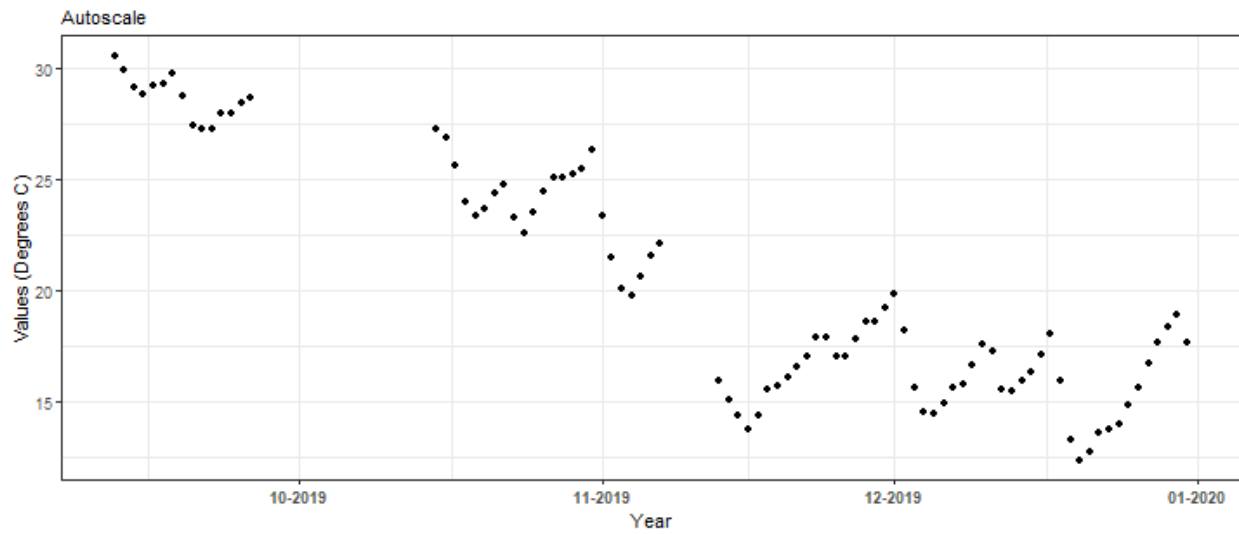


Scatter Plot of Excluded Monitoring Location Alligator Harbor Aquatic Preserve  
 468 | Central Panhandle Aquatic Preserves Continuous Water Quality Monitoring | CPFS  
 (1 Unique Years)

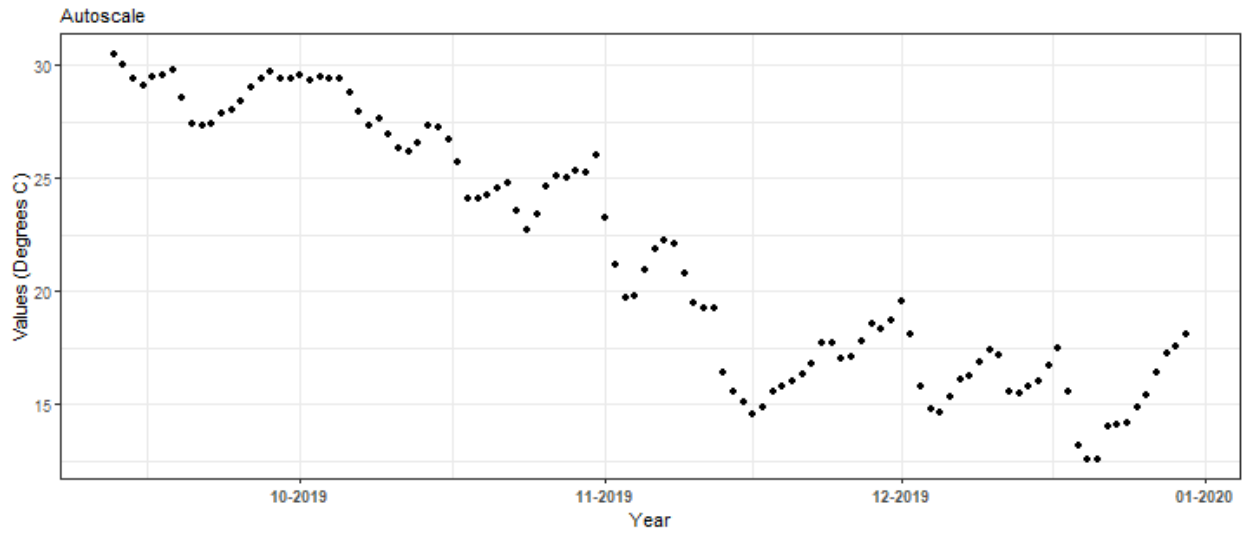


Scatter Plot of Excluded Monitoring Location Apalachicola National Estuarine Research Reserve  
 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apabpwq  
 (3 Unique Years)

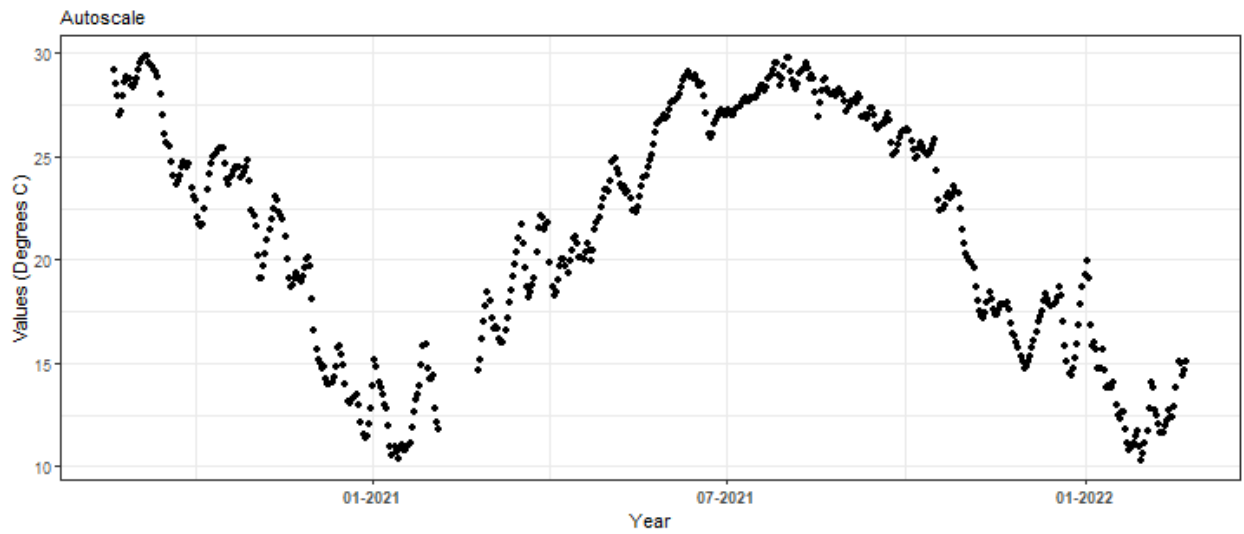


Scatter Plot of Excluded Monitoring Location Big Bend Seagrasses Aquatic Preserve  
7 | National Water Information System | 02313700  
(4 Unique Years)

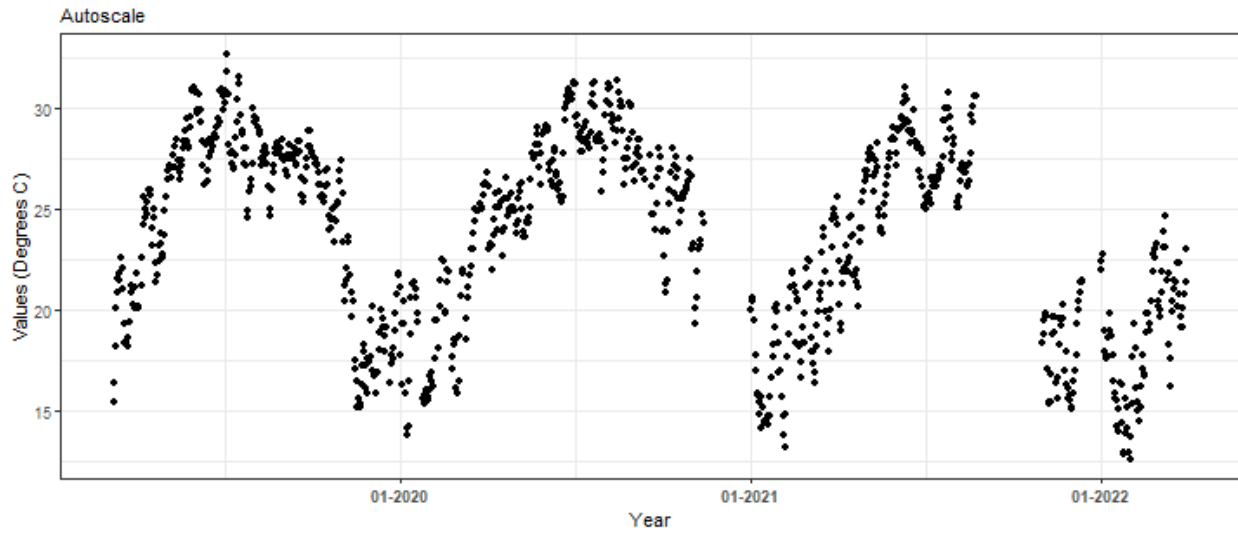


Scatter Plot of Excluded Monitoring Location Big Bend Seagrasses Aquatic Preserve  
7 | National Water Information System | 291652083064100  
(1 Unique Years)

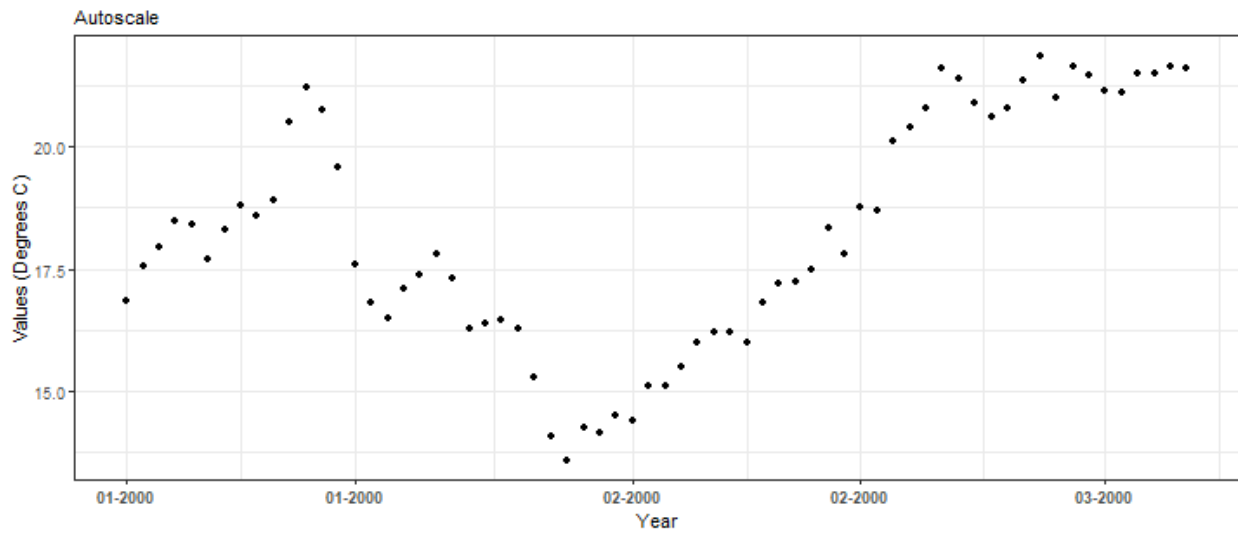


Scatter Plot of Excluded Monitoring Location Big Bend Seagrasses Aquatic Preserve  
 471 | Big Bend Seagrasses Aquatic Preserves Continuous Water Quality Monitoring | BBSST  
 (2 Unique Years)

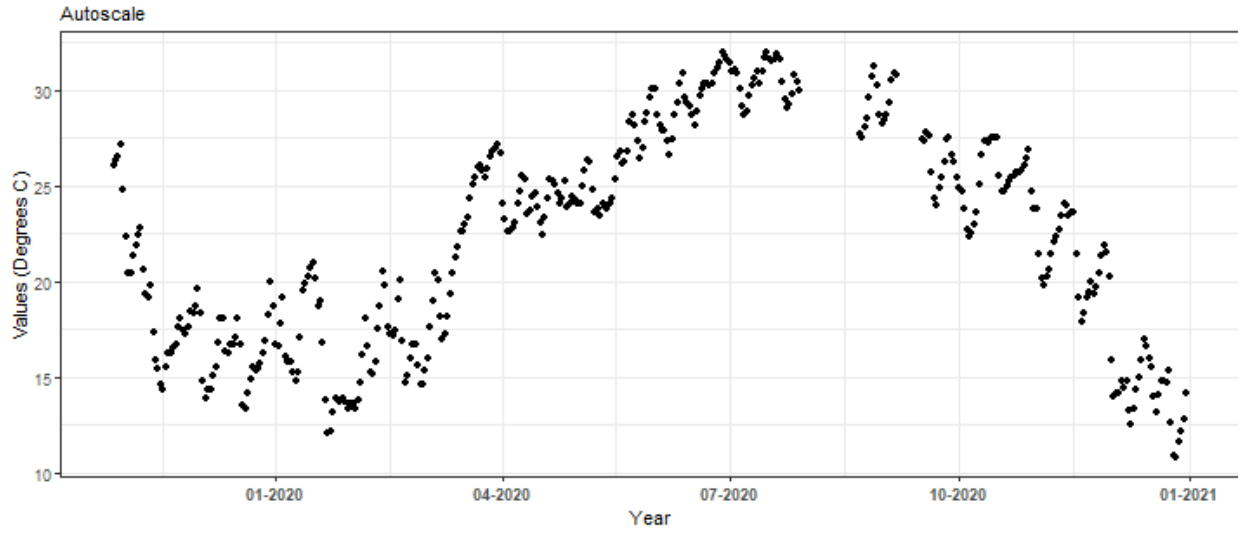

Scatter Plot of Excluded Monitoring Location Fort Pickens State Park Aquatic Preserve  
 505 | Pensacola Bay Water Quality Monitoring Program | EX4  
 (1 Unique Years)

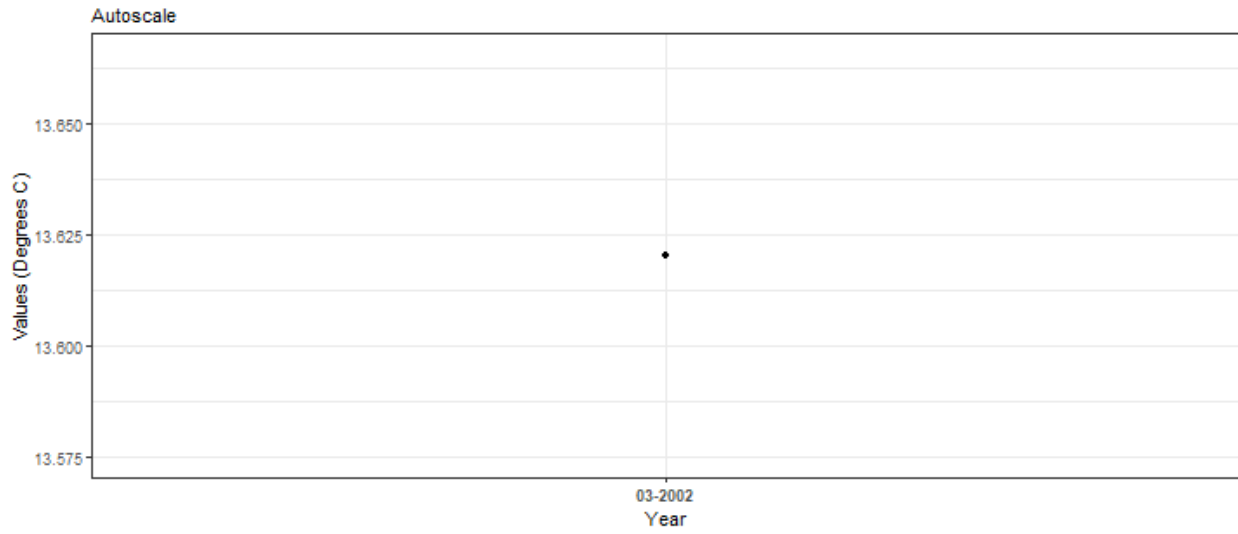

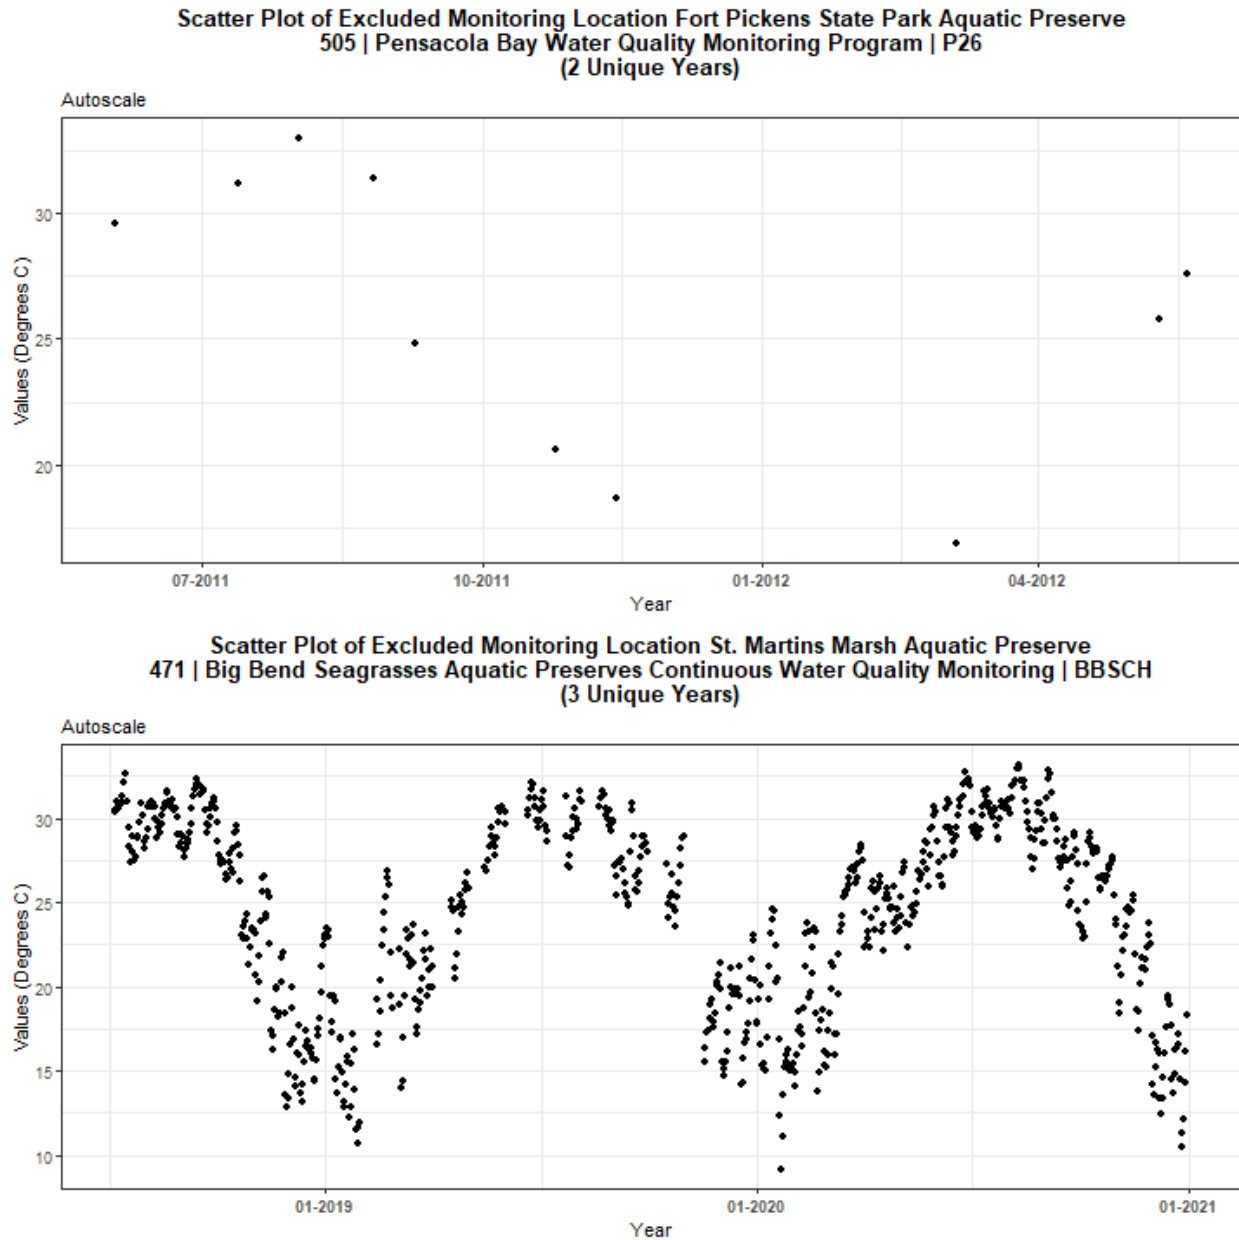

## Appendix III: Monitoring Location Trendlines

The plots created in this section are designed to show the general trend of the data. Data is taken and grouped by `MonitoringID`. The trendlines on the plots are created using the Senn slope and intercept from the seasonal Kendall Tau analysis. The scripts that create plots follow this format

1. Use the data set that only has `Use_In_Analysis` of `TRUE` for the desired monitoring location
2. Determine the earliest and latest year of the data to create x-axis scale and intervals
3. Determine the minimum, mean, and standard deviation for the data to be used for y-axis scales
  - Excludes the top 2% of values to reduce the impact of extreme outliers on the y-axis scale
4. Set what values are to be used for the x-axis, y-axis, and the variable that should determine groups for the plots

5. Set the plot type as a point plot with the size of the points
6. Add the linear trend
7. Create the title, x-axis, y-axis, and color fill labels
8. Set the y and x limits
9. Make the axis labels bold
10. Plot the arrangement as a set of panels

```

if(n==0){
  print("There are no monitoring locations that qualify.")
} else {
  for (i in 1:n) {
    plot_data <- data[data$Use_In_Analysis == TRUE &
                      data$MonitoringID == Mon_IDs[i],]

    year_lower <- min(plot_data$Year)
    year_upper <- max(plot_data$Year)
    min_RV <- min(plot_data$ResultValue)
    mn_RV <- mean(plot_data$ResultValue[plot_data$ResultValue <
                                         quantile(plot_data$ResultValue, 0.98)])
    sd_RV <- sd(plot_data$ResultValue[plot_data$ResultValue <
                                       quantile(plot_data$ResultValue, 0.98)])

    x_scale <- ifelse(year_upper - year_lower > 30, 10, 5)
    y_scale <- mn_RV + 4 * sd_RV

    tau <- KT.Stats$tau[KT.Stats$MonitoringID == Mon_IDs[i]]
    s_slope <- KT.Stats$SennSlope[KT.Stats$MonitoringID == Mon_IDs[i]]
    s_int <- KT.Stats$SennIntercept[KT.Stats$MonitoringID == Mon_IDs[i]]
    trend <- KT.Stats$Trend[KT.Stats$MonitoringID == Mon_IDs[i]]
    p <- KT.Stats$p[KT.Stats$MonitoringID == Mon_IDs[i]]

    model <- lm(ResultValue ~ DecDate,
                data = plot_data)
    m_int <- coef(model)[[1]]
    m_slope <- coef(model)[[2]]
    MA_name <- KT.Stats$ManagedAreaName[KT.Stats$MonitoringID == Mon_IDs[i]]
    Mon_name <- paste(KT.Stats$ProgramID[KT.Stats$MonitoringID == Mon_IDs[i]],
                     KT.Stats$ProgramName[KT.Stats$MonitoringID == Mon_IDs[i]],
                     KT.Stats$ProgramLocationID[KT.Stats$MonitoringID == Mon_IDs[i]],
                     sep = " | ")

    p1 <- ggplot(data = plot_data,
                 aes(x = DecDate, y = ResultValue)) +
      geom_point(size = 1.5) +
      geom_abline(aes(slope=s_slope, intercept=s_int),
                  color="red", size=1.5) +
      labs(subtitle = "Autoscale",
           x = "Year", y = paste0("Values (", unit, ")")) +
      theme_bw() +
      theme(axis.text.x = element_text(face = "bold"),
            axis.text.y = element_text(face="bold"))

    p2 <- ggplot(data = plot_data,
                 aes(x = DecDate, y = ResultValue)) +
      geom_point(size = 1.5) +
      geom_abline(aes(slope=s_slope, intercept=s_int),

```


```

        color="red", size=1.5) +
ylim(min_RV-0.1*y_scale, y_scale) +
labs(subtitle = "Scaled to 4x Standard Deviation",
     x = "Year", y = paste0("Values (", unit, ")")) +
theme_bw() +
theme(axis.text.x = element_text(face = "bold"),
      axis.text.y = element_text(face="bold"))
KTset <- ggarrange(p1, p2, ncol = 1, heights = c(1, 1))

p0 <- ggplot() + labs(title = paste0("Data Points with Trendlines for ",
                                   MA_name, "\n", Mon_name),
                    subtitle = paste0("Senn Slope = ", s_slope,
                                   ", Senn Intercept = ", s_int,
                                   "\nTrend = ", trend,
                                   ", tau = ", tau,
                                   ", p = ", p,
                                   "\nLinear Trendline: ",
                                   "y = ", m_slope,"x + ",m_int)) +
theme_bw() + theme(plot.title = element_text(face="bold", hjust=0.5),
                  panel.border = element_blank(),
                  panel.grid.major = element_blank(),
                  panel.grid.minor = element_blank(),
                  axis.line = element_blank())



print(ggarrange(p0, KTset, ncol = 1, heights = c(0.20, 1)))
}
}

```

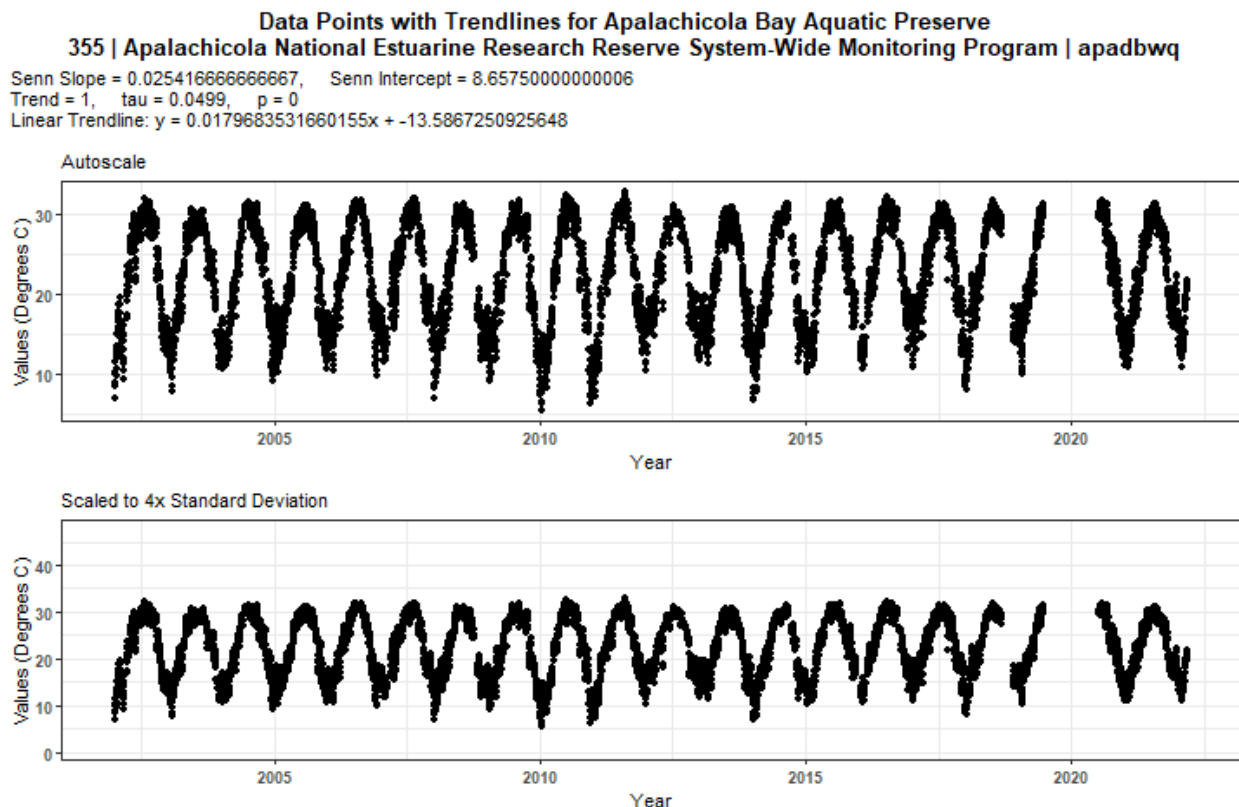



### Data Points with Trendlines for Apalachicola Bay Aquatic Preserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaebwq

Senn Slope = 0.0186848958333334, Senn Intercept = -14.2931249999998  
Trend = 1, tau = 0.0453, p = 0  
Linear Trendline:  $y = 0.00674647537173045x + 9.58344923925973$

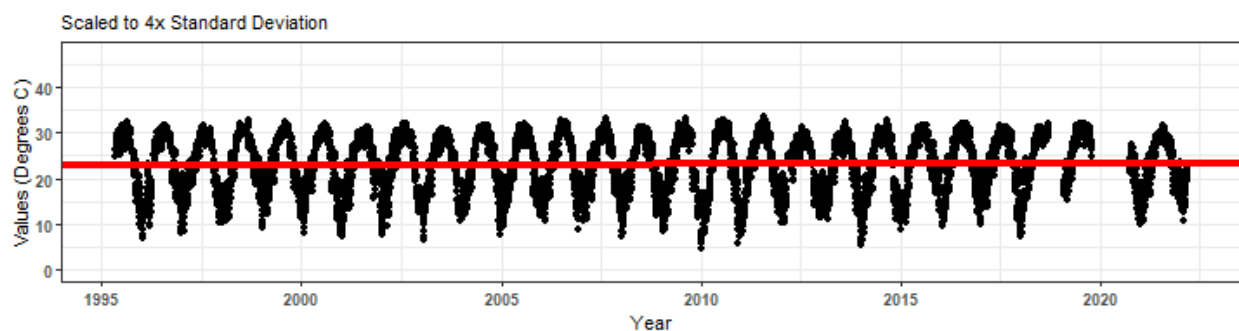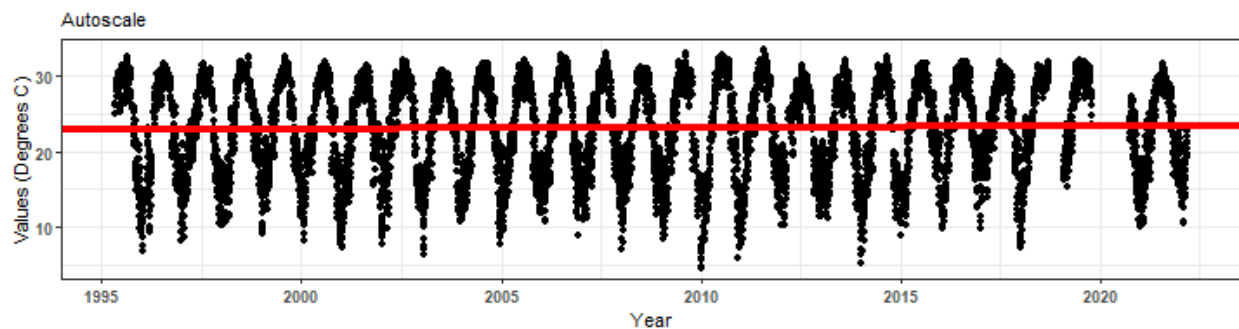

### Data Points with Trendlines for Apalachicola Bay Aquatic Preserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaeswq



Senn Slope = 0.0331845238095238, Senn Intercept = -46.6137862723215  
Trend = 1, tau = 0.0799, p = 0  
Linear Trendline:  $y = 0.0432146770704752x + -63.697272622716$

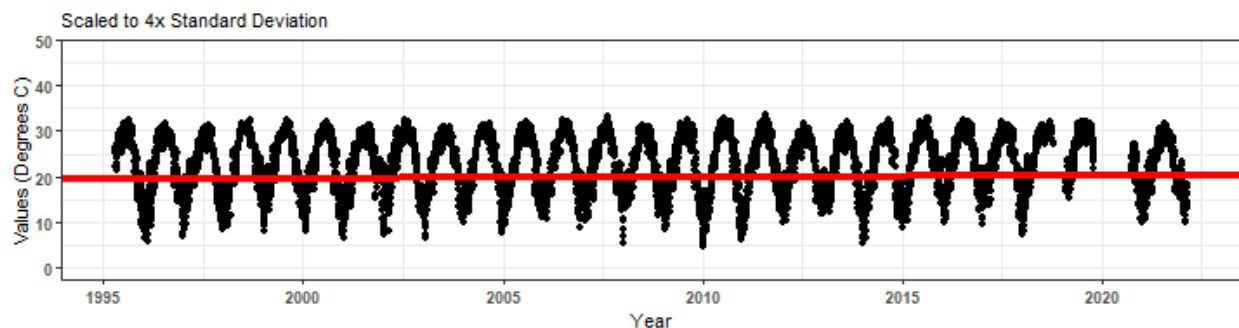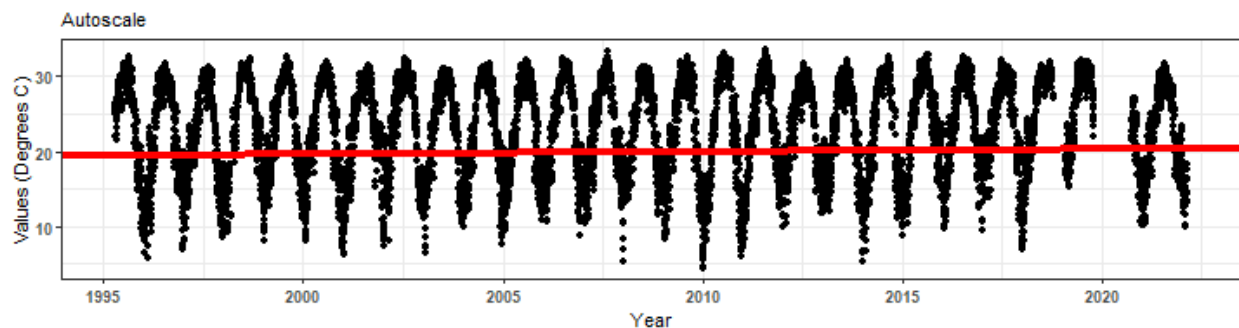





**Data Points with Trendlines for Apalachicola Bay Aquatic Preserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apalmwq**

Senn Slope = -0.202387152777778, Senn Intercept = 356.921679687501  
Trend = -1, tau = -0.1009, p = 0  
Linear Trendline:  $y = -0.23316250676901x + 492.910208978837$

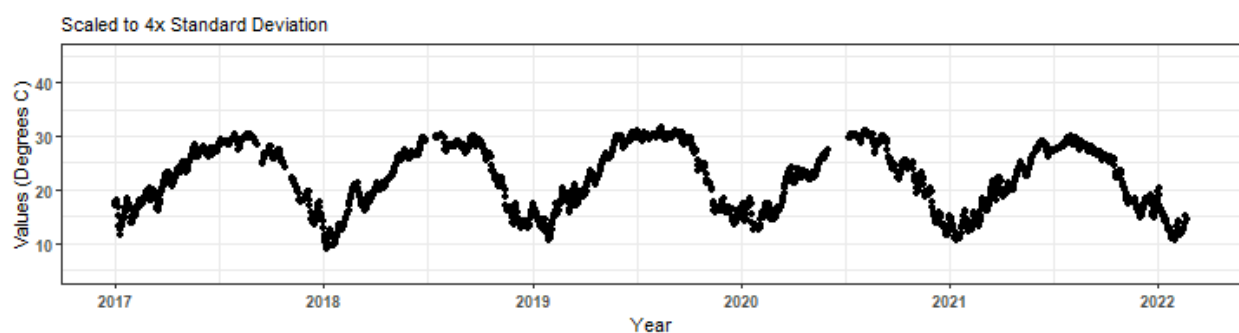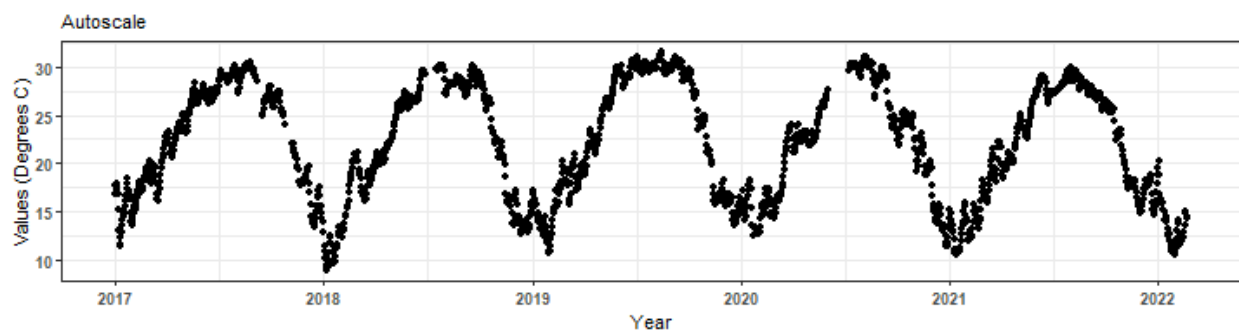



**Data Points with Trendlines for Apalachicola Bay Aquatic Preserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apapcwq**

Senn Slope = -0.0924045138888886, Senn Intercept = 232.101692708334  
Trend = -1, tau = -0.0488, p = 0.0014  
Linear Trendline:  $y = -0.056062712888517x + 135.918125570908$

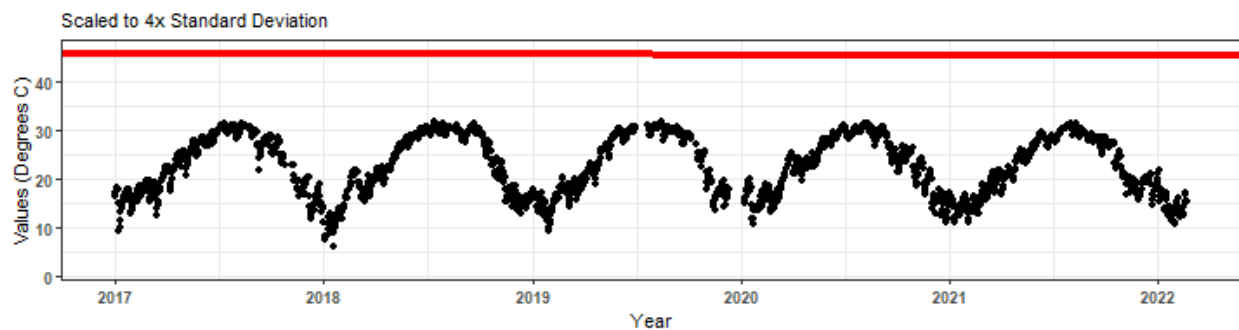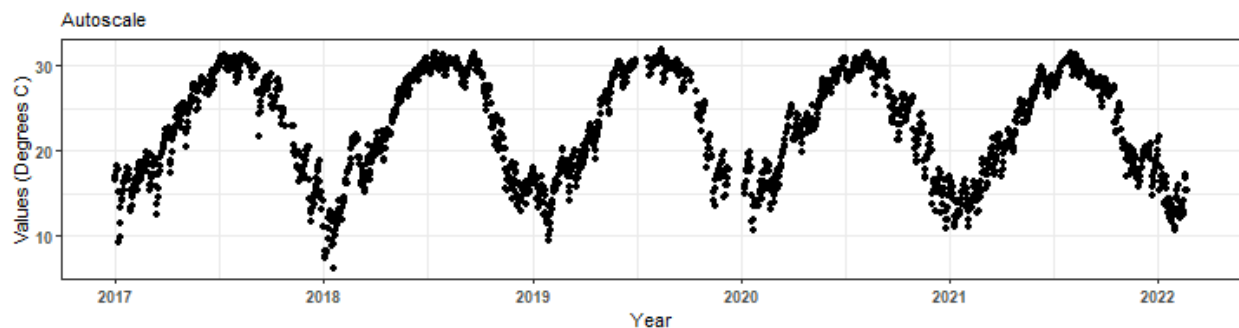



**Data Points with Trendlines for Apalachicola National Estuarine Research Reserve  
5 | National Data Buoy Center | APCF1**

Senn Slope = 0.0321129943502825, Senn Intercept = -32.8663397579983  
Trend = 1, tau = 0.0502, p = 0  
Linear Trendline:  $y = -0.0389950067023035x + 101.361518676645$

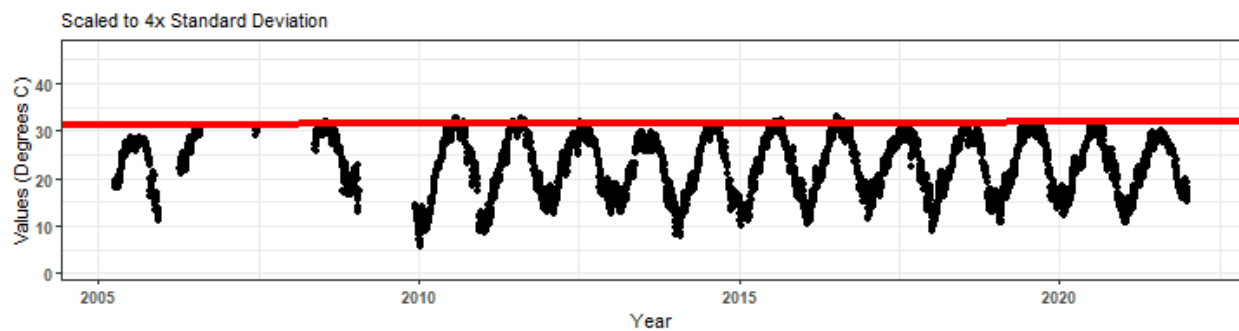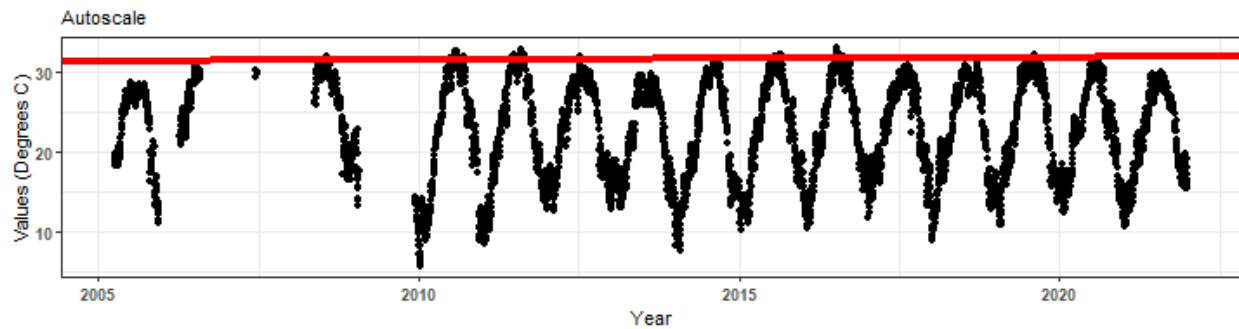



**Data Points with Trendlines for Apalachicola National Estuarine Research Reserve  
355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apacpwq**

Senn Slope = 0.03125, Senn Intercept = -32.0222489316239  
Trend = 1, tau = 0.0666, p = 0  
Linear Trendline:  $y = 0.0608493731078776x + -99.6331207967384$

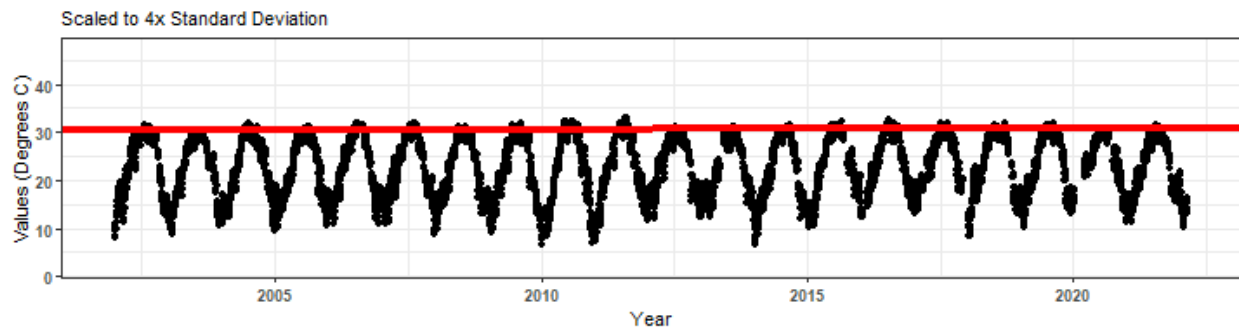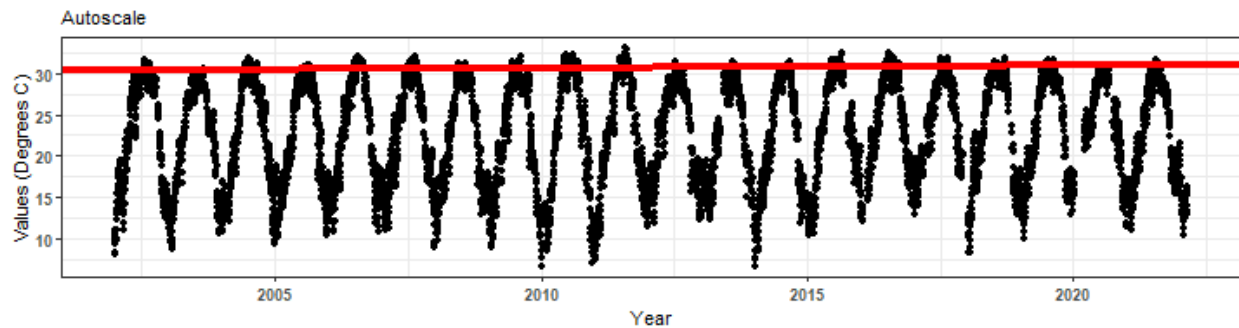



**Data Points with Trendlines for Apalachicola National Estuarine Research Reserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apadbwq**

Senn Slope = 0.025416666666667, Senn Intercept = 8.657500000000006  
Trend = 1, tau = 0.0499, p = 0  
Linear Trendline:  $y = 0.0179683531660155x - 13.5867250925648$

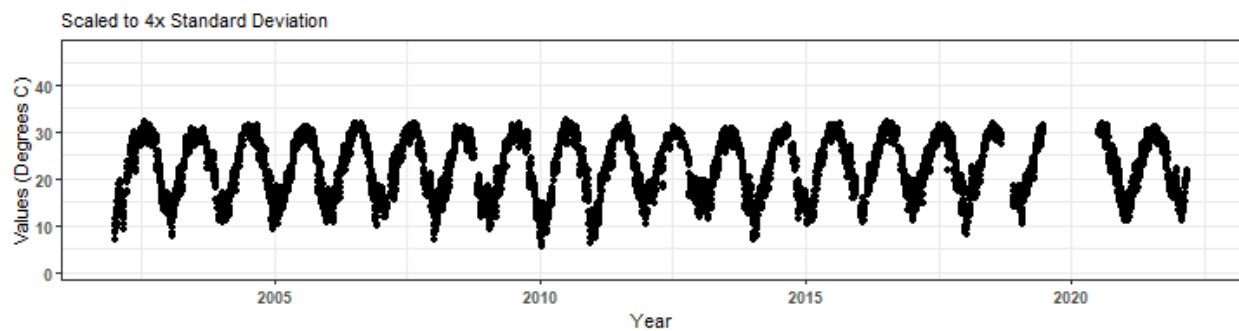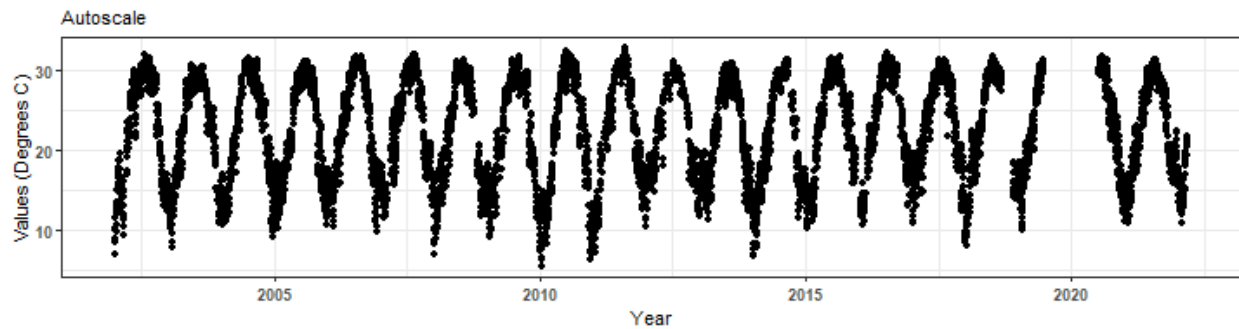



**Data Points with Trendlines for Apalachicola National Estuarine Research Reserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaebwq**

Senn Slope = 0.0186848958333334, Senn Intercept = -14.2931249999998  
Trend = 1, tau = 0.0453, p = 0  
Linear Trendline:  $y = 0.00674647537173045x + 9.58344923925973$

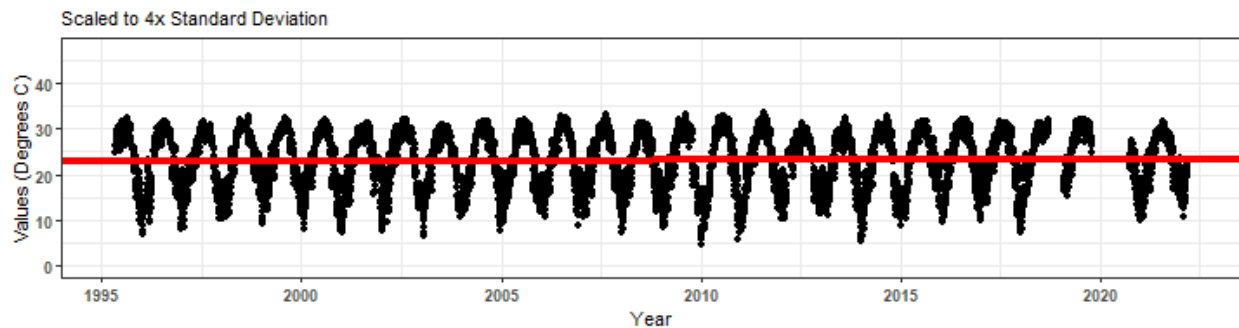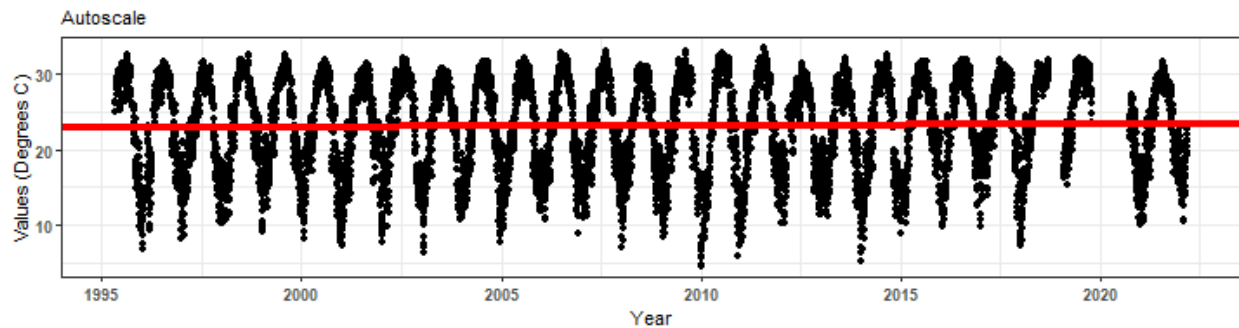



**Data Points with Trendlines for Apalachicola National Estuarine Research Reserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaeswq**

Senn Slope = 0.0331845238095238, Senn Intercept = -46.6137862723215  
Trend = 1, tau = 0.0799, p = 0  
Linear Trendline:  $y = 0.0432146770704752x - 63.697272622716$

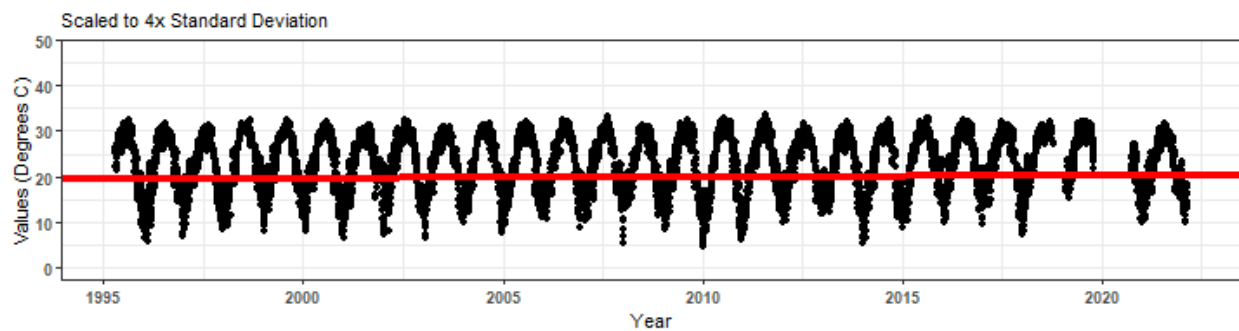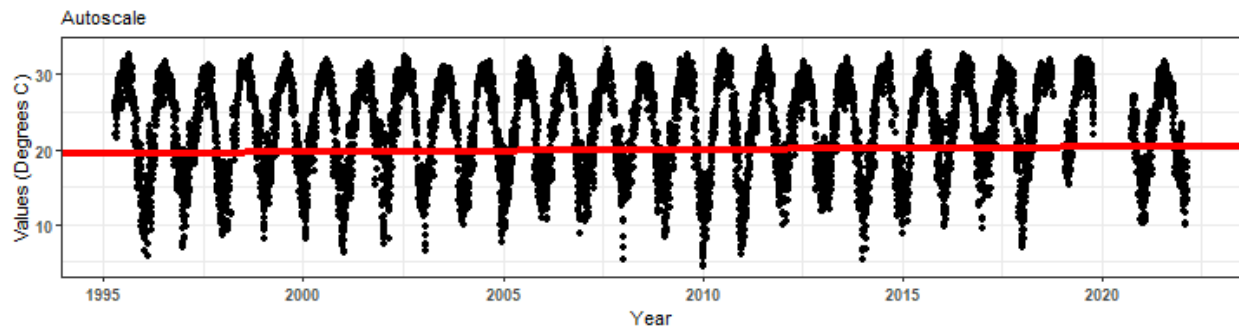



**Data Points with Trendlines for Apalachicola National Estuarine Research Reserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apalmwq**

Senn Slope = -0.202387152777778, Senn Intercept = 356.921679687501  
Trend = -1, tau = -0.1009, p = 0  
Linear Trendline:  $y = -0.23316250676901x + 492.910208978837$

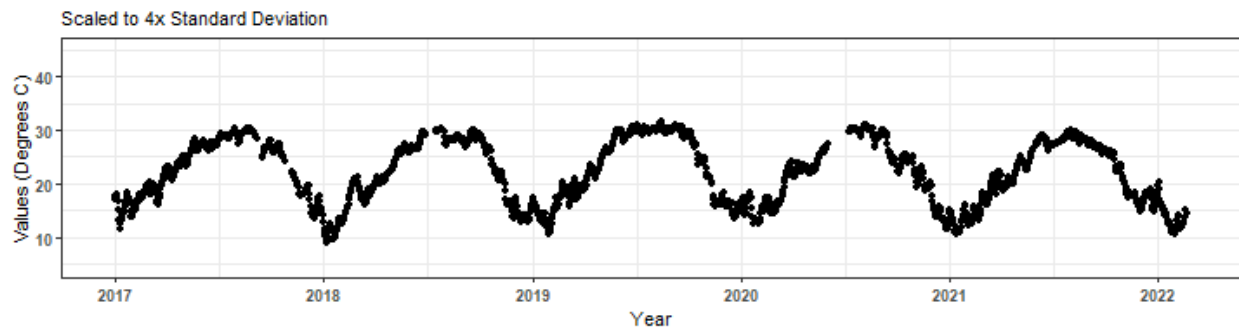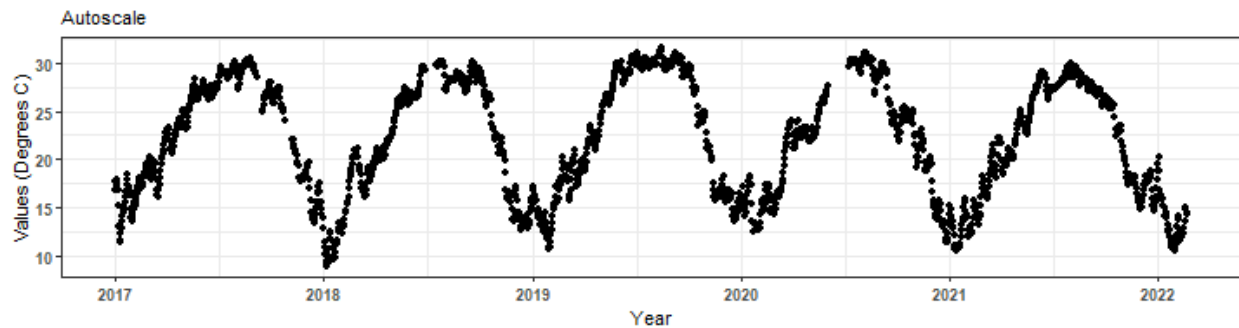



**Data Points with Trendlines for Apalachicola National Estuarine Research Reserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apapcwq**

Senn Slope = -0.0924045138888886, Senn Intercept = 232.101692708334  
Trend = -1, tau = -0.0488, p = 0.0014  
Linear Trendline:  $y = -0.056062712888517x + 135.918125570908$

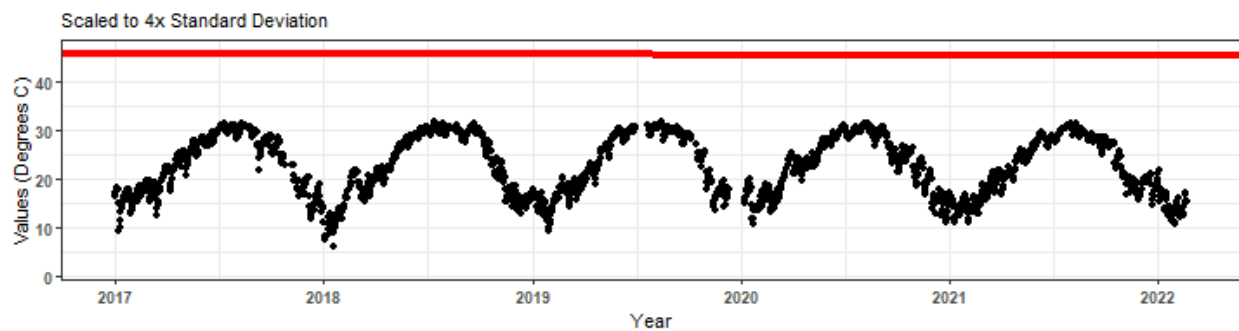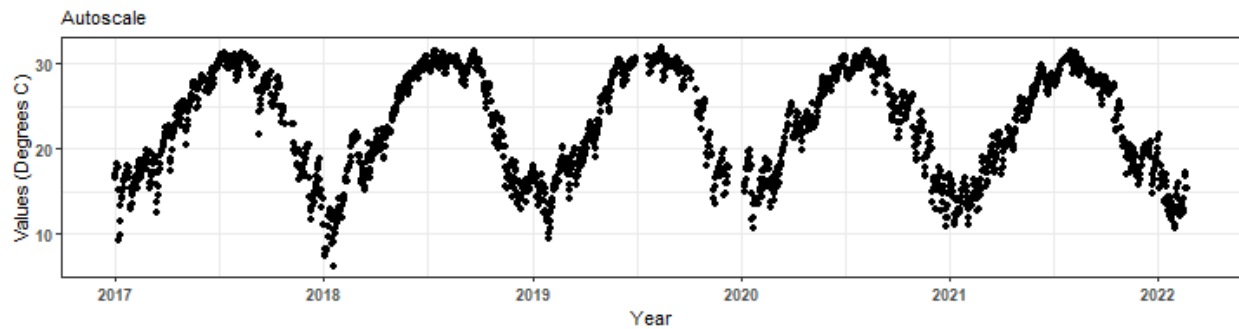



**Data Points with Trendlines for Big Bend Seagrasses Aquatic Preserve**  
**7 | National Water Information System | 02323566**

Senn Slope = 0.0499999999999999, Senn Intercept = -17.6999999999999  
Trend = 1, tau = 0.2685, p = 0  
Linear Trendline:  $y = 0.0637767707911917x - 106.321648057791$

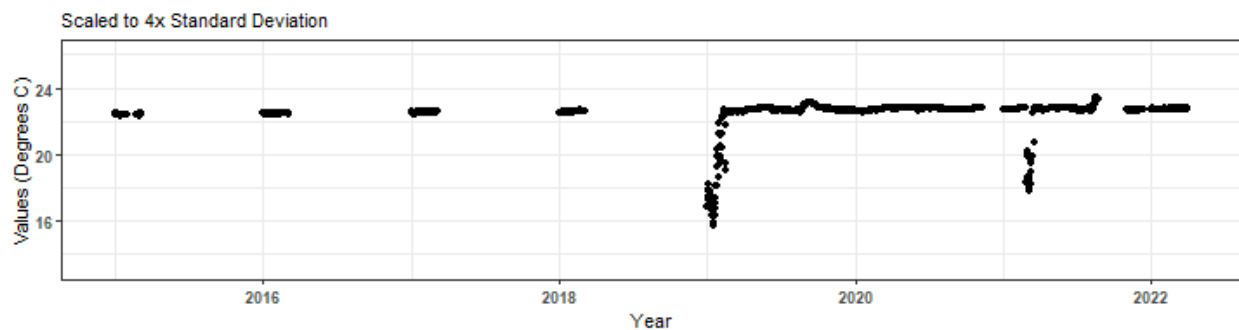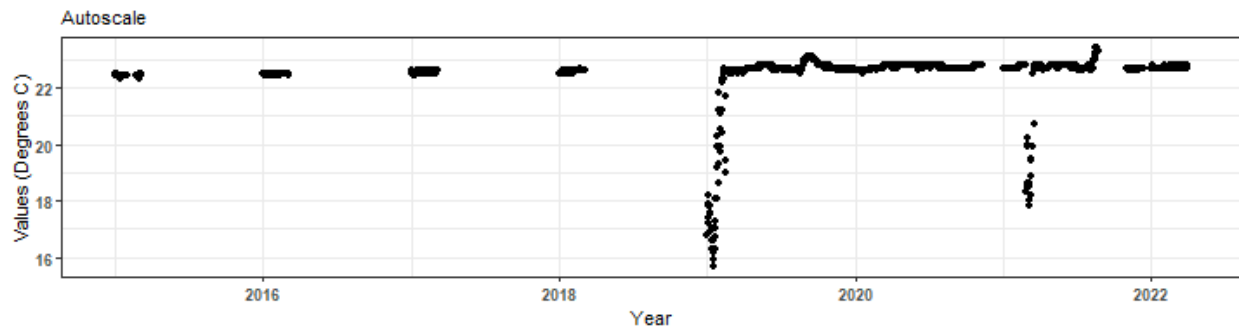



**Data Points with Trendlines for Big Bend Seagrasses Aquatic Preserve  
7 | National Water Information System | 02326526**

Senn Slope = -0.19999999999999999, Senn Intercept = 829.0499999999999  
Trend = -1, tau = -0.143, p = 0  
Linear Trendline:  $y = 0.297425612717862x - 579.096916184273$

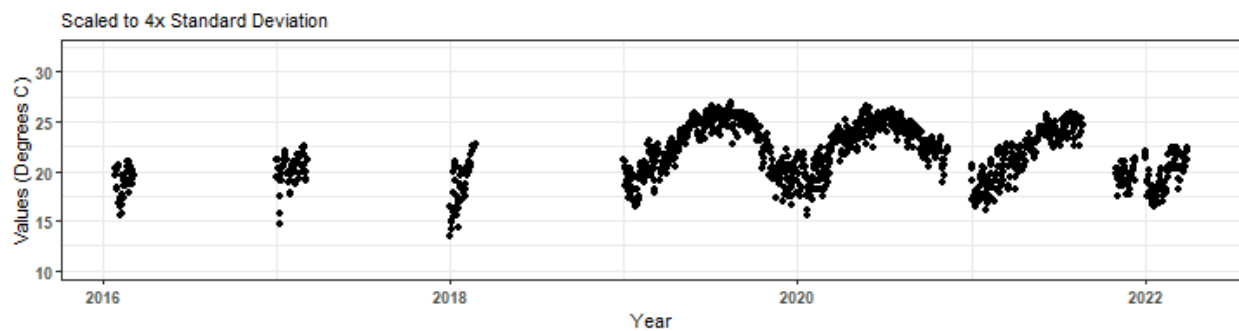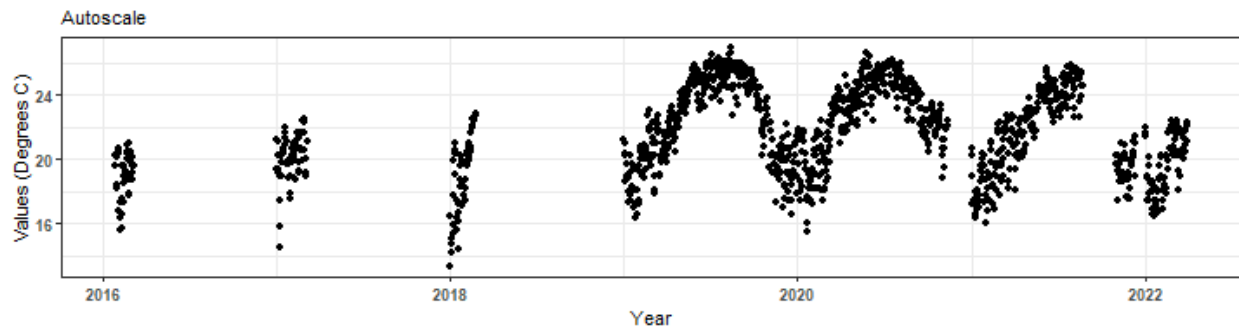



**Data Points with Trendlines for Big Bend Seagrasses Aquatic Preserve  
471 | Big Bend Seagrasses Aquatic Preserves Continuous Water Quality Monitoring | BBSSK**

Senn Slope = -0.36145833333333334, Senn Intercept = 804.180539772727  
Trend = -1, tau = -0.2136, p = 0  
Linear Trendline:  $y = -0.61851879210426x + 1264.62392556368$

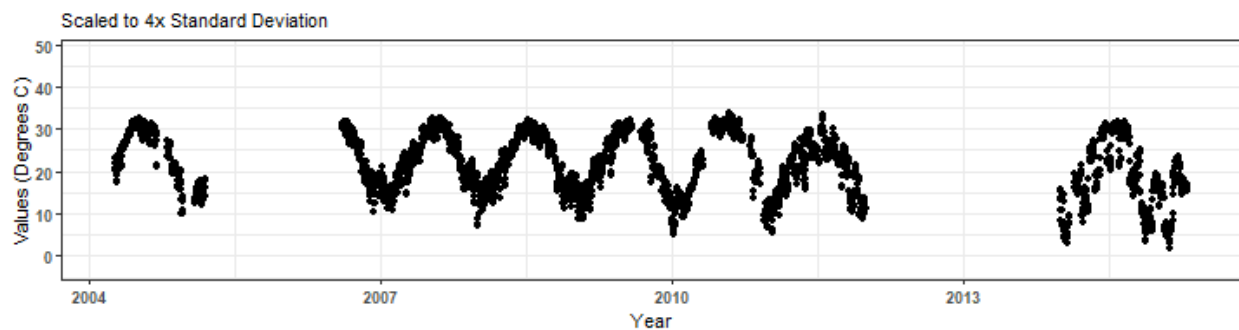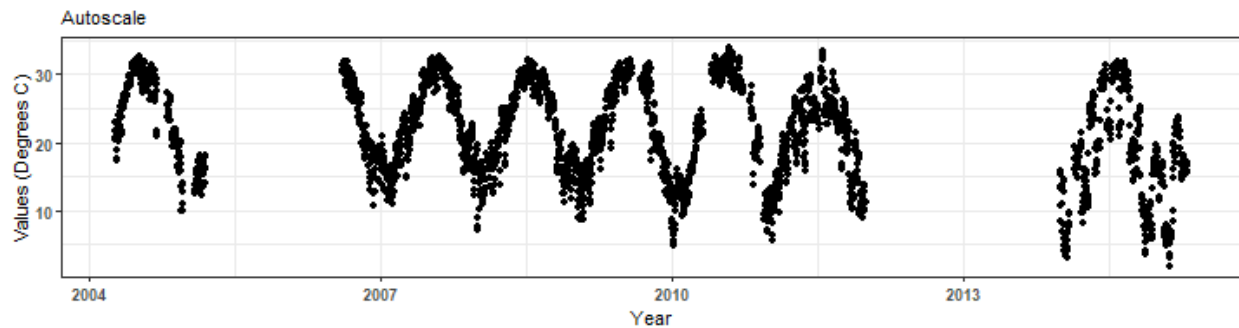



**Data Points with Trendlines for Big Bend Seagrasses Aquatic Preserve**  
**471 | Big Bend Seagrasses Aquatic Preserves Continuous Water Quality Monitoring | BBSSW**

Senn Slope = 0.00625, Senn Intercept = -20.0907446946172  
Trend = 0, tau = 0.0058, p = 0.7669  
Linear Trendline:  $y = 0.167195620569622x + -313.600135589666$

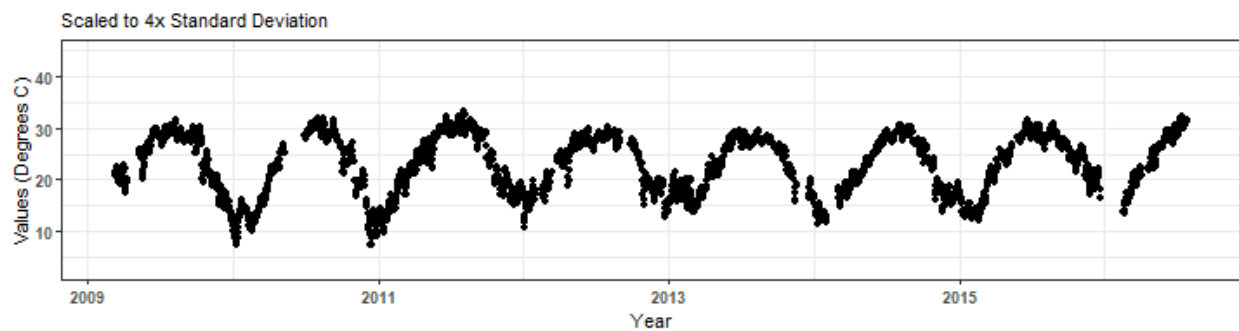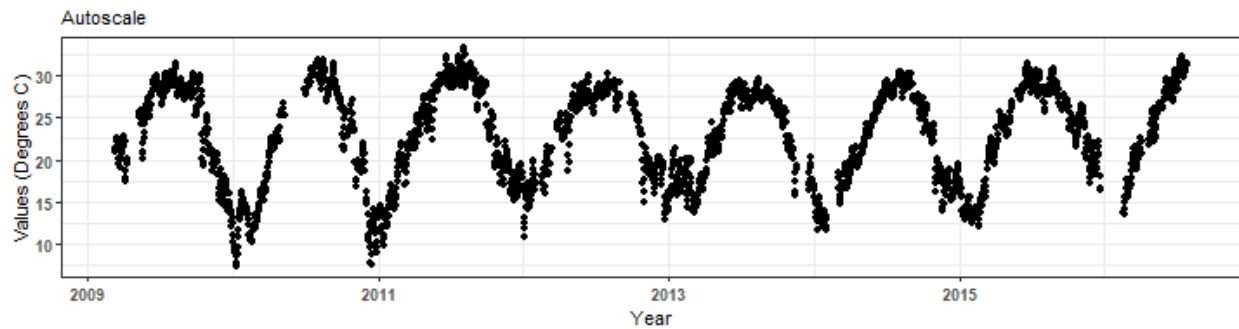



**Data Points with Trendlines for Fort Pickens State Park Aquatic Preserve**  
**505 | Pensacola Bay Water Quality Monitoring Program | P09**

Senn Slope = 0.0587299999999999, Senn Intercept = -241.330818322173  
Trend = 0, tau = 0.1071, p = 0.2259  
Linear Trendline:  $y = 0.0341713918080144x + -44.6616142811487$

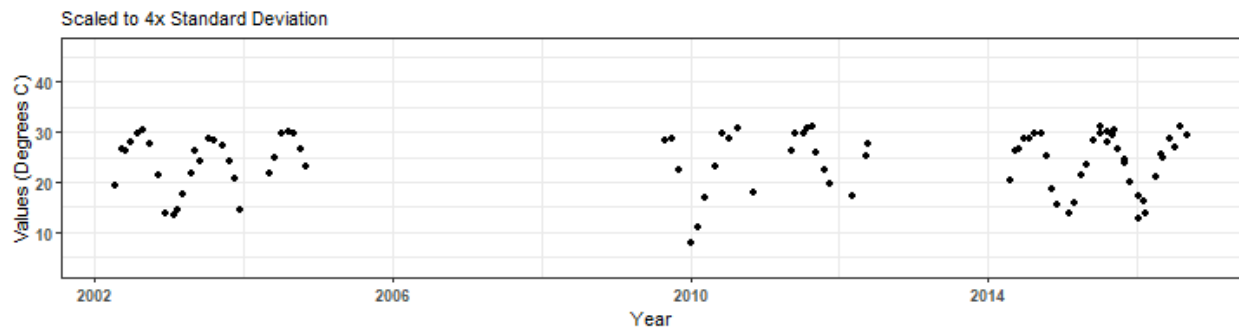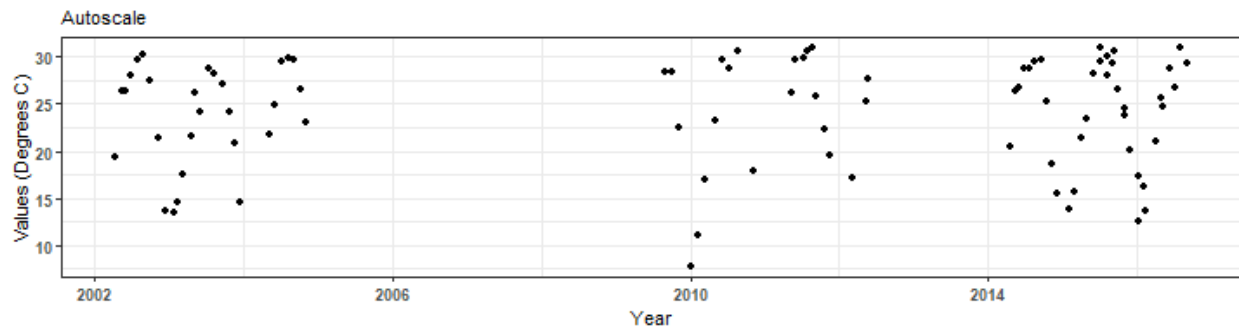



**Data Points with Trendlines for Nature Coast Aquatic Preserve**  
**471 | Big Bend Seagrasses Aquatic Preserves Continuous Water Quality Monitoring | BBSHS**

Senn Slope = 0.0250000000000004, Senn Intercept = -62.4815848214288  
Trend = 0, tau = 0.0215, p = 0.0521  
Linear Trendline:  $y = 0.0999913455187596x - 177.272582637149$

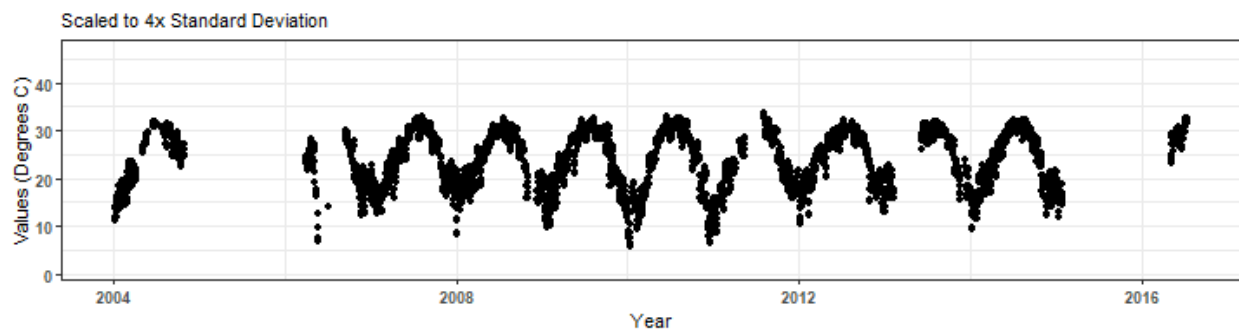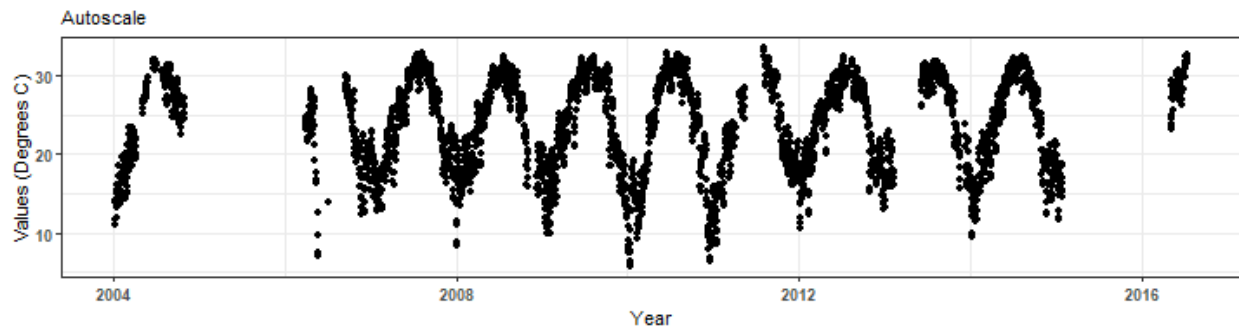

**Data Points with Trendlines for St. Joseph Bay Aquatic Preserve**  
**468 | Central Panhandle Aquatic Preserves Continuous Water Quality Monitoring | CPRH**



Senn Slope = -0.129166666666666, Senn Intercept = 314.349305555556  
Trend = -1, tau = -0.0544, p = 0.0001  
Linear Trendline:  $y = -0.444919305778496x + 915.61791396803$

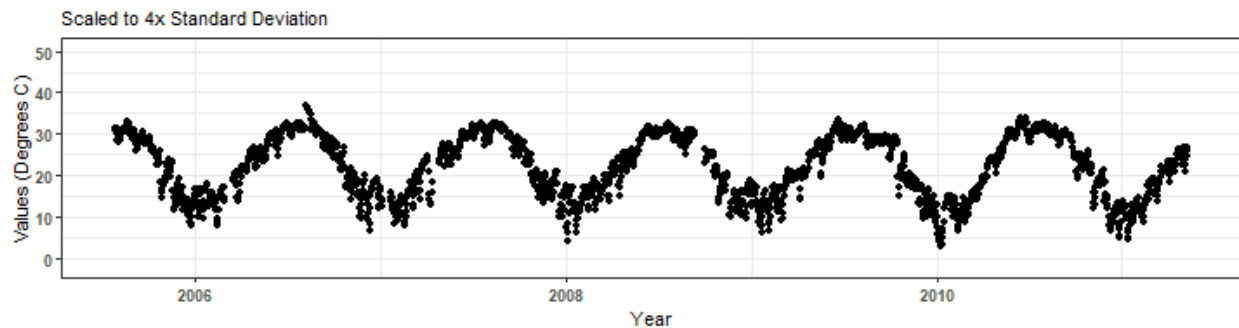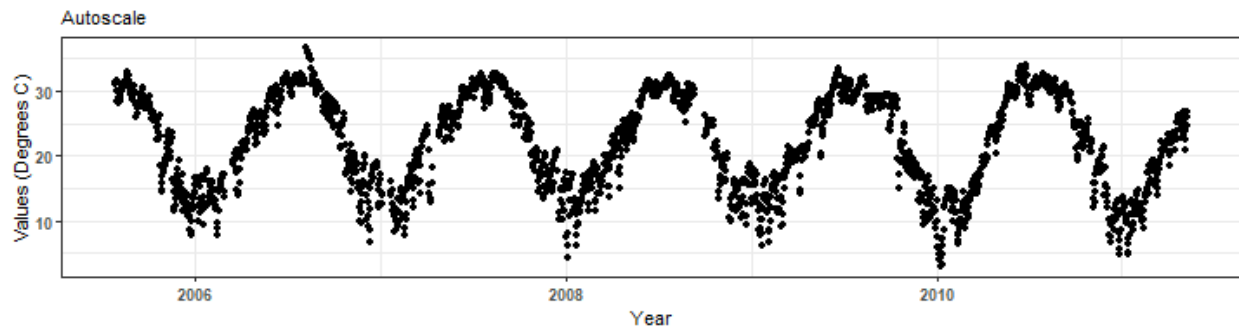





**Data Points with Trendlines for Yellow River Marsh Aquatic Preserve**  
**467 | Yellow River Marsh Aquatic Preserve Continuous Water Quality Monitoring | YRMAP1**

Senn Slope = -0.11145833333333, Senn Intercept = 166.513401988636  
Trend = -1, tau = -0.0467, p = 0.0033  
Linear Trendline:  $y = 0.0946448513359728x + -168.775269232983$

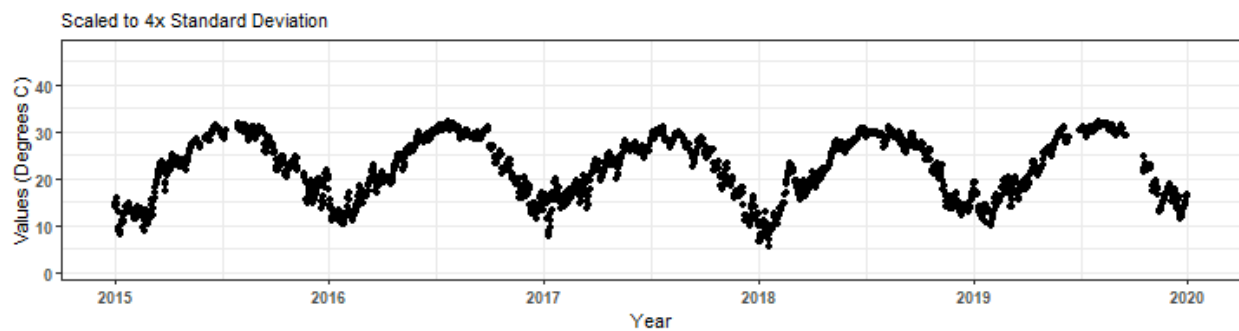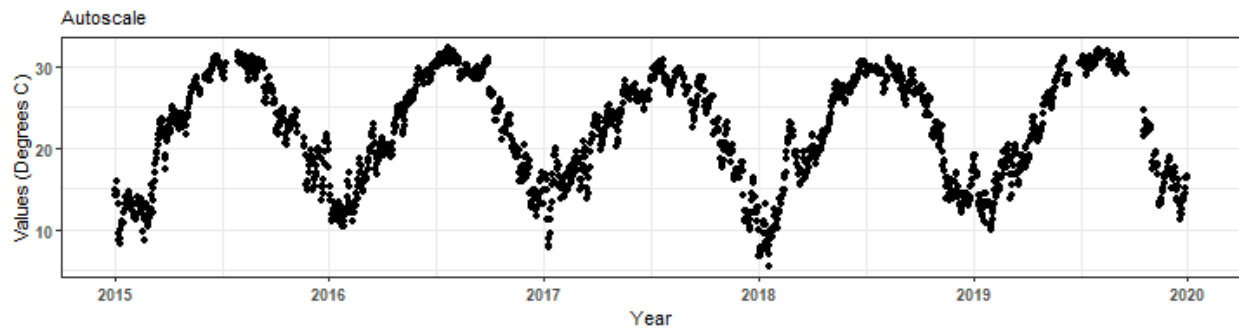

**Data Points with Trendlines for Yellow River Marsh Aquatic Preserve**  
**505 | Pensacola Bay Water Quality Monitoring Program | P11**

Senn Slope = 0.103553333333333, Senn Intercept = -141.0433025  
Trend = 0, tau = 0.1474, p = 0.3229  
Linear Trendline:  $y = 0.136296290900381x + -249.71995682201$

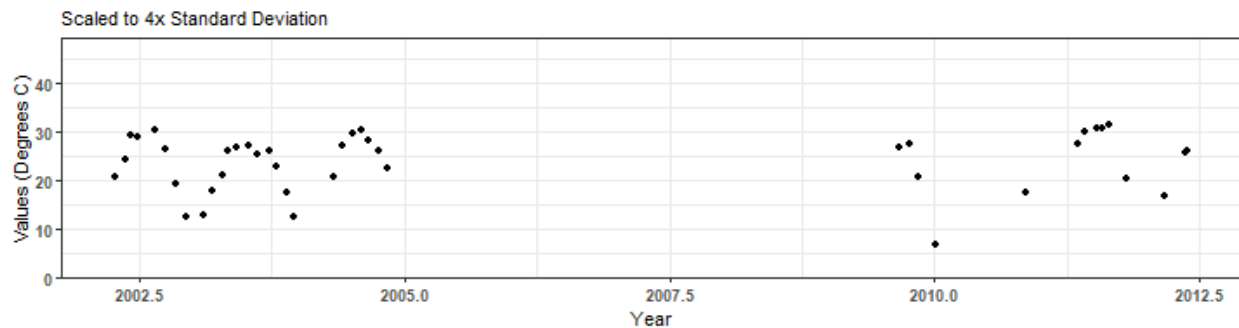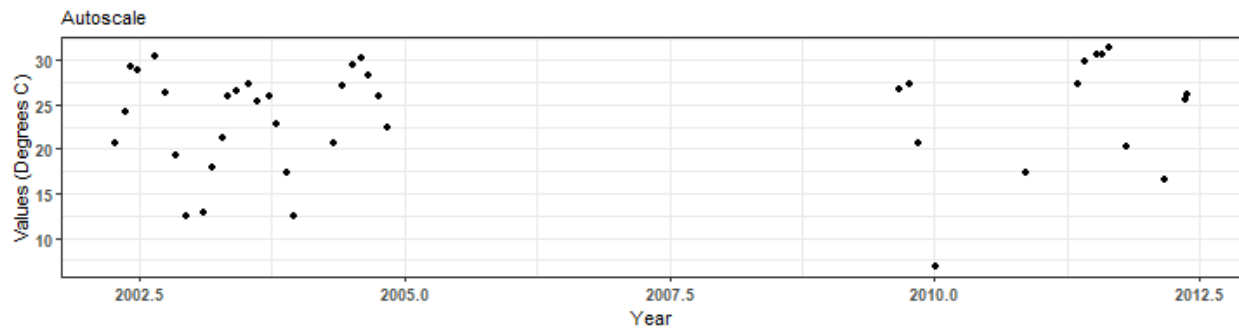

## Appendix IV: Monitoring Location Summary Box Plots

Data is taken and grouped by `MonitoringID`. The scripts that create plots follow this format

1. Use the data set that only has `Use_In_Analysis` of `TRUE` for the desired monitoring location
2. Determine the earliest and latest year of the data to create x-axis scale and intervals
3. Determine the minimum, mean, and standard deviation for the data to be used for y-axis scales
  - Excludes the top 2% of values to reduce the impact of extreme outliers on the y-axis scale
4. Set what values are to be used for the x-axis, y-axis, and the variable that should determine groups for the box plots
5. Set the plot type as a box plot with the size of the outlier points
6. Create the title, x-axis, y-axis, and color fill labels
7. Set the y and x limits
8. Make the axis labels bold
9. Plot the arrangement as a set of panels

The following plots are arranged by `MonitoringID` with data grouped by `Year`, then `Year` and `Month`, then finally `Month` only. Each program area will have 3 sets of plots, each with 3 panels in them. Each panel goes as follows:

1. Y-axis autoscaled
2. Y-axis set to be mean + 4 times the standard deviation
3. Y-axis set to be mean + 4 times the standard deviation for most recent 10 years of data

```
if(n==0){
  print("There are no monitoring locations that qualify.")
} else {
  for (i in 1:n) {
    year_lower <- min(data$Year[data$Use_In_Analysis == TRUE &
                               data$MonitoringID == Mon_IDs[i]])
    year_upper <- max(data$Year[data$Use_In_Analysis == TRUE &
                               data$MonitoringID == Mon_IDs[i]])
    min_RV <- min(data$ResultValue[data$Use_In_Analysis == TRUE &
                                     data$MonitoringID == Mon_IDs[i]])
    mn_RV <- mean(data$ResultValue[data$Use_In_Analysis == TRUE &
                                     data$MonitoringID == Mon_IDs[i] &
                                     data$ResultValue <
                                     quantile(data$ResultValue, 0.98)])
    sd_RV <- sd(data$ResultValue[data$Use_In_Analysis == TRUE &
                                   data$MonitoringID == Mon_IDs[i] &
                                   data$ResultValue <
                                   quantile(data$ResultValue, 0.98)])
    x_scale <- ifelse(year_upper - year_lower > 30, 10, 5)
    y_scale <- mn_RV + 4 * sd_RV
    MA_name <- KT.Stats$ManagedAreaName[KT.Stats$MonitoringID == Mon_IDs[i]]
    Mon_name <- paste(KT.Stats$ProgramID[KT.Stats$MonitoringID == Mon_IDs[i]],
                      KT.Stats$ProgramName[KT.Stats$MonitoringID == Mon_IDs[i]],
                      KT.Stats$ProgramLocationID[KT.Stats$MonitoringID == Mon_IDs[i]],
                      sep = " | ")

    ##Year plots
    p1 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
```

```

                                data$MonitoringID == Mon_IDs[i], ],
                                aes(x = Year, y = ResultValue, group = Year)) +
geom_boxplot(outlier.size = 0.5) +
labs(subtitle = "Autoscale",
      x = "Year", y = paste0("Values (", unit, ")")) +
scale_x_continuous(limits = c(year_lower - 1, year_upper + 1),
                   breaks = rev(seq(year_upper,
                                     year_lower, -x_scale))) +
theme_bw() +
theme(axis.text.x = element_text(face = "bold"),
      axis.text.y = element_text(face = "bold"))

p2 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                          data$MonitoringID == Mon_IDs[i], ],
             aes(x = Year, y = ResultValue, group = Year)) +
geom_boxplot(outlier.size = 0.5) +
labs(subtitle = "Scaled to 4x Standard Deviation",
      x = "Year", y = paste0("Values (", unit, ")")) +
ylim(min_RV, y_scale) +
scale_x_continuous(limits = c(year_lower - 1, year_upper + 1),
                   breaks = rev(seq(year_upper,
                                     year_lower, -x_scale))) +
theme_bw() +
theme(axis.text.x = element_text(face = "bold"),
      axis.text.y = element_text(face = "bold"))

p3 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                          data$MonitoringID == Mon_IDs[i] &
                          data$Year >= year_upper - 10, ],
             aes(x = Year, y = ResultValue, group = Year)) +
geom_boxplot(outlier.size = 0.5) +
labs(subtitle = "Scaled to 4x Standard Deviation, Last 10 Years",
      x = "Year", y = paste0("Values (", unit, ")")) +
ylim(min_RV, y_scale) +
scale_x_continuous(limits = c(year_upper - 10.5, year_upper + 1),
                   breaks = rev(seq(year_upper, year_upper - 10, -2))) +
theme_bw() +
theme(axis.text.x = element_text(face = "bold"),
      axis.text.y = element_text(face = "bold"))

Yset <- ggarrange(p1, p2, p3, ncol = 1)

p0 <- ggplot() + labs(title = paste0("Summary Box Plots for ",
                                     MA_name, "\n", Mon_name),
                     subtitle = "By Year") +
theme_bw() + theme(plot.title = element_text(face="bold", hjust=0.5),
                  panel.border = element_blank(),
                  panel.grid.major = element_blank(),
                  panel.grid.minor = element_blank(), axis.line = element_blank())

## Year & Month Plots
p4 <- ggplot(data = data[data$Use_In_Analysis == TRUE &

```

```

                                data$MonitoringID == Mon_IDs[i], ],
                                aes(x = YearMonthDec, y = ResultValue,
                                    group = YearMonth, color = as.factor(Month))) +
geom_boxplot(outlier.size = 0.5) +
labs(subtitle = "Autoscale",
     x = "Year", y = paste0("Values (", unit, ")"), color = "Month") +
scale_x_continuous(limits = c(year_lower - 1, year_upper + 1),
                  breaks = rev(seq(year_upper,
                                   year_lower, -x_scale))) +

theme_bw() +
theme(legend.position = "none",
      axis.text.x = element_text(face = "bold"),
      axis.text.y = element_text(face = "bold"))

p5 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                        data$MonitoringID == Mon_IDs[i], ],
            aes(x = YearMonthDec, y = ResultValue,
                group = YearMonth, color = as.factor(Month))) +
geom_boxplot(outlier.size = 0.5) +
labs(subtitle = "Scaled to 4x Standard Deviation",
     x = "Year", y = paste0("Values (", unit, ")"), color = "Month") +
ylim(min_RV, y_scale) +
scale_x_continuous(limits = c(year_lower - 1, year_upper + 1),
                  breaks = rev(seq(year_upper,
                                   year_lower, -x_scale))) +

theme_bw() +
theme(legend.position = "top", legend.box = "horizontal",
      axis.text.x = element_text(face = "bold"),
      axis.text.y = element_text(face = "bold")) +
guides(color = guide_legend(nrow = 1))

p6 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
                        data$MonitoringID == Mon_IDs[i], ],
            aes(x = YearMonthDec, y = ResultValue,
                group = YearMonth, color = as.factor(Month)
                )) +
geom_boxplot(outlier.size = 0.5) +
labs(subtitle = "Scaled to 4x Standard Deviation, Last 10 Years",
     x = "Year", y = paste0("Values (", unit, ")"), color = "Month") +
ylim(min_RV, y_scale) +
scale_x_continuous(limits = c(year_upper - 10.5, year_upper + 1),
                  breaks = rev(seq(year_upper, year_upper - 10, -2))) +

theme_bw() +
theme(legend.position = "none",
      axis.text.x = element_text(face = "bold"),
      axis.text.y = element_text(face = "bold"))

leg1 <- get_legend(p5)
YMset <- ggarrange(leg1, p4, p5 + theme(legend.position = "none"), p6,
                  ncol = 1, heights = c(0.1, 1, 1, 1))

p00 <- ggplot() + labs(title = paste0("Summary Box Plots for ",
                                     MA_name, "\n", Mon_name),

```

```

        subtitle = "By Year & Month") + theme_bw() +
  theme(plot.title = element_text(face="bold", hjust=0.5),
        panel.border = element_blank(),
        panel.grid.major = element_blank(),
        panel.grid.minor = element_blank(), axis.line = element_blank())

## Month Plots
p7 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
  data$MonitoringID == Mon_IDs[i], ],
  aes(x = Month, y = ResultValue,
      group = Month, fill = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Autoscale",
      x = "Month", y = paste0("Values (", unit, ")"), fill = "Month") +
  scale_x_continuous(limits = c(0, 13), breaks = seq(3, 12, 3)) +
  theme_bw() +
  theme(legend.position = "none",
      axis.text.x = element_text(face = "bold"),
      axis.text.y = element_text(face = "bold"))

p8 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
  data$MonitoringID == Mon_IDs[i], ],
  aes(x = Month, y = ResultValue,
      group = Month, fill = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 4x Standard Deviation",
      x = "Month", y = paste0("Values (", unit, ")"), fill = "Month") +
  ylim(min_RV, y_scale) +
  scale_x_continuous(limits = c(0, 13), breaks = seq(3, 12, 3)) +
  theme_bw() +
  theme(legend.position = "top", legend.box = "horizontal",
      axis.text.x = element_text(face = "bold"),
      axis.text.y = element_text(face = "bold")) +
  guides(fill = guide_legend(nrow = 1))

p9 <- ggplot(data = data[data$Use_In_Analysis == TRUE &
  data$MonitoringID == Mon_IDs[i] &
  data$Year >= year_upper - 10, ],
  aes(x = Month, y = ResultValue,
      group = Month, fill = as.factor(Month))) +
  geom_boxplot(outlier.size = 0.5) +
  labs(subtitle = "Scaled to 4x Standard Deviation, Last 10 Years",
      x = "Month", y = paste0("Values (", unit, ")"), fill = "Month") +
  ylim(min_RV, y_scale) +
  scale_x_continuous(limits = c(0, 13), breaks = seq(3, 12, 3)) +
  theme_bw() +
  theme(legend.position = "none",
      axis.text.x = element_text(face = "bold"),
      axis.text.y = element_text(face = "bold"))

leg2 <- get_legend(p8)
Mset <- ggarrange(leg2, p7, p8 + theme(legend.position = "none"), p9,
  ncol = 1, heights = c(0.1, 1, 1, 1))

```

```




p000 <- ggplot() + labs(title = paste0("Summary Box Plots for ",
                                     MA_name, "\n", Mon_name),
                      subtitle = "By Month") + theme_bw() +
  theme(plot.title = element_text(face="bold", hjust=0.5),
        panel.border = element_blank(),
        panel.grid.major = element_blank(),
        panel.grid.minor = element_blank(), axis.line = element_blank())

print(ggarrange(p0, Yset, ncol = 1, heights = c(0.1, 1)))
print(ggarrange(p00, YMset, ncol = 1, heights = c(0.1, 1)))
print(ggarrange(p000, Mset, ncol = 1, heights = c(0.1, 1)))
}


```

**Summary Box Plots for Apalachicola Bay Aquatic Preserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apadbwq**

By Year

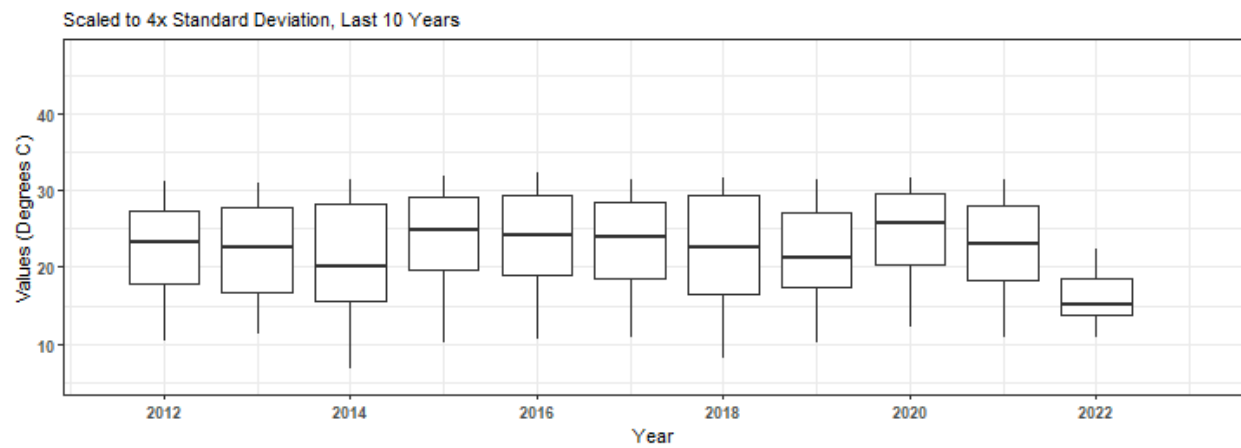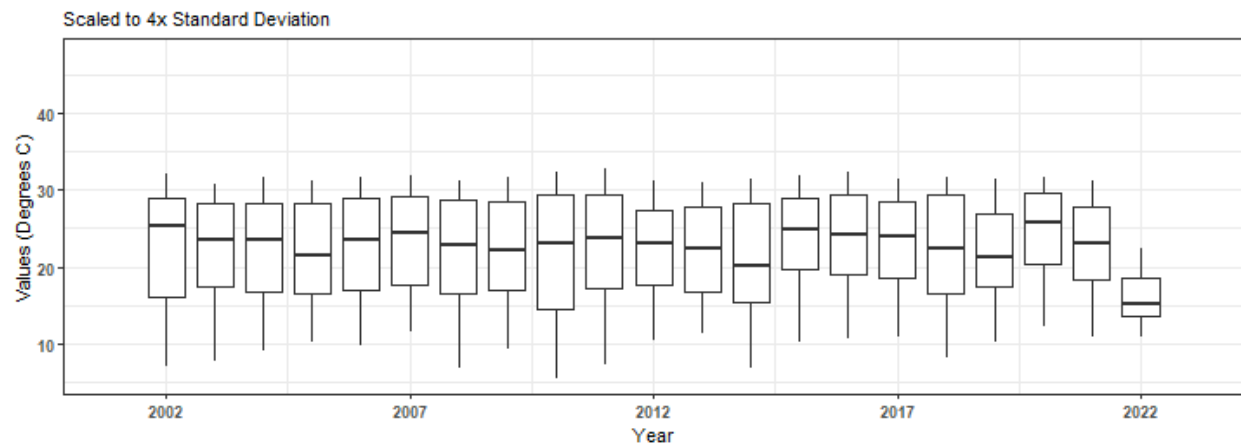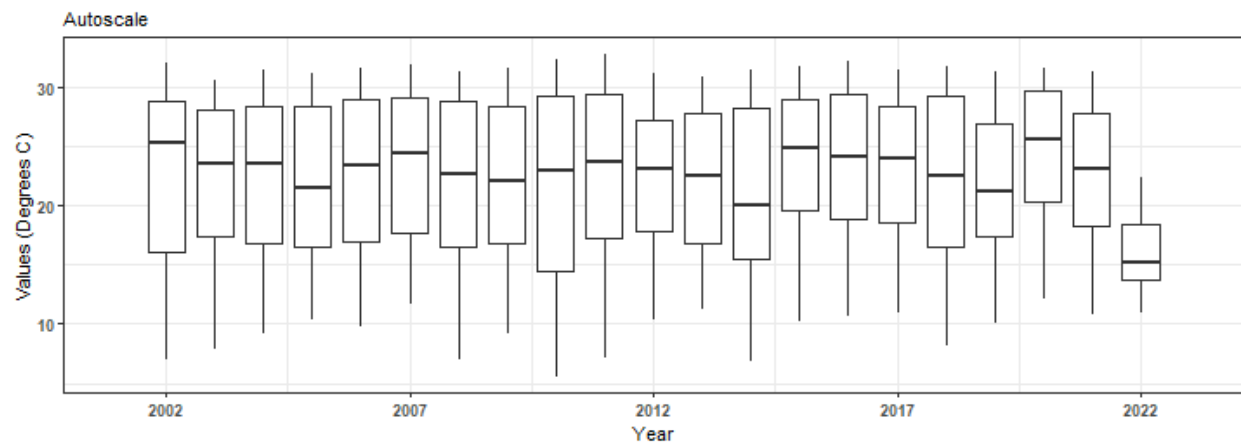


**Summary Box Plots for Apalachicola Bay Aquatic Preserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apadbwq**  
 By Year & Month

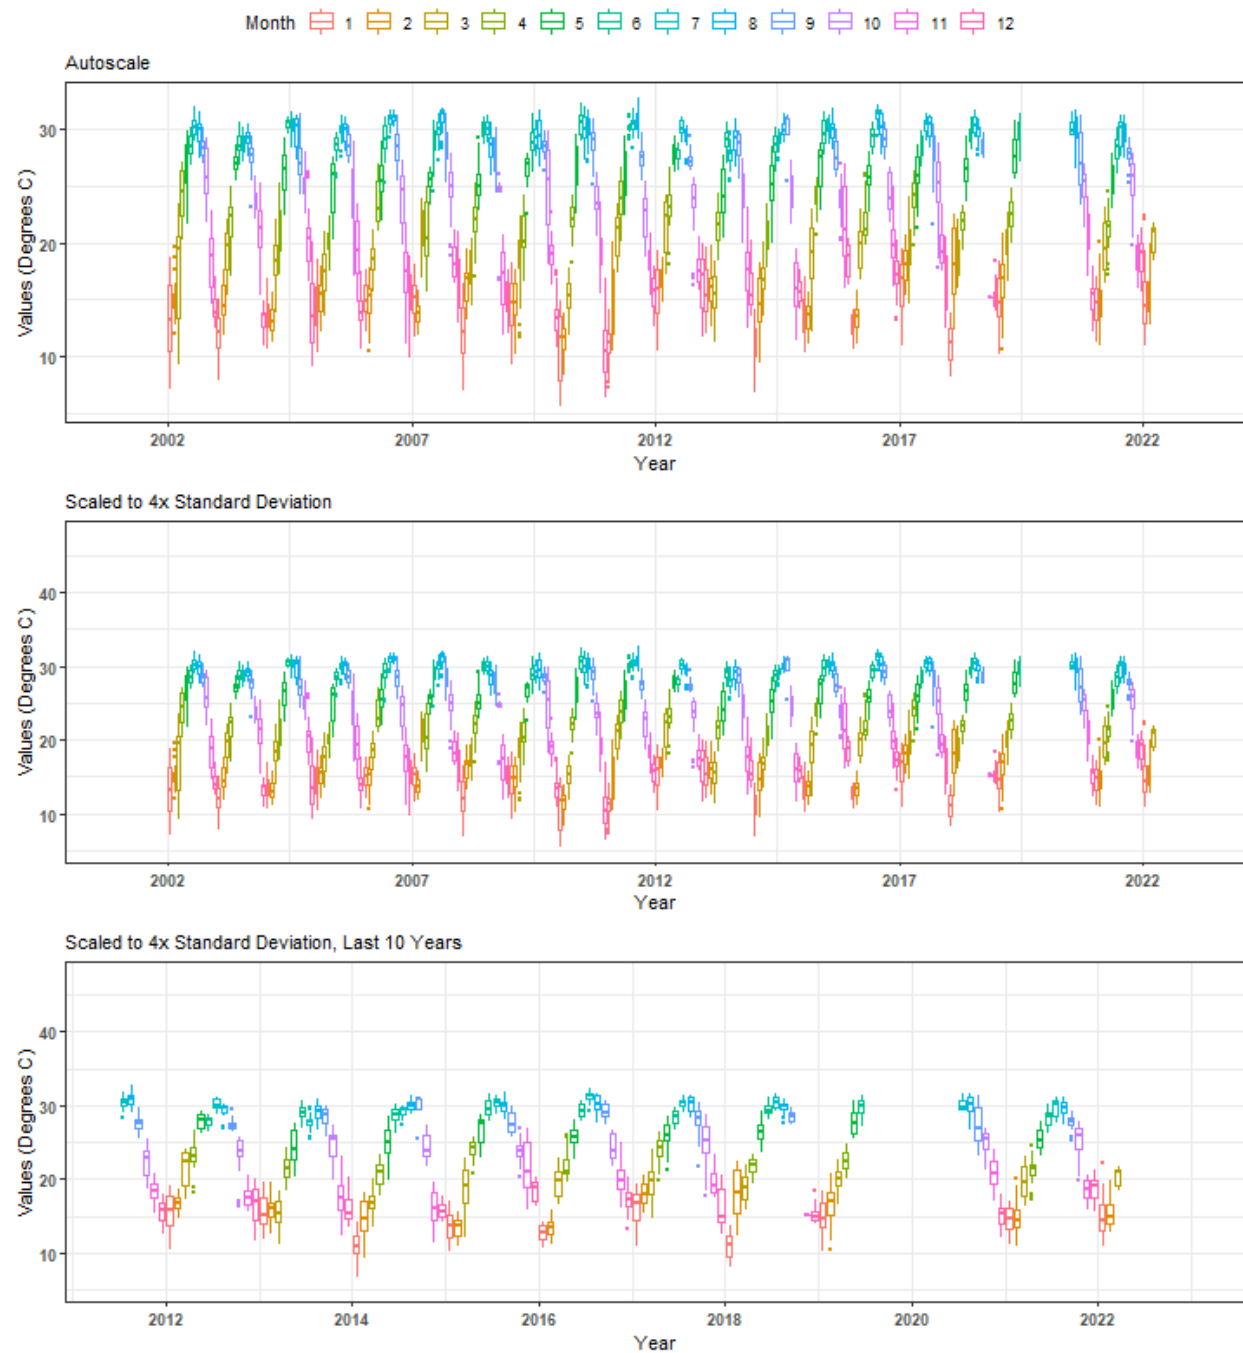






# Summary Box Plots for Apalachicola Bay Aquatic Preserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apadbwq

By Month

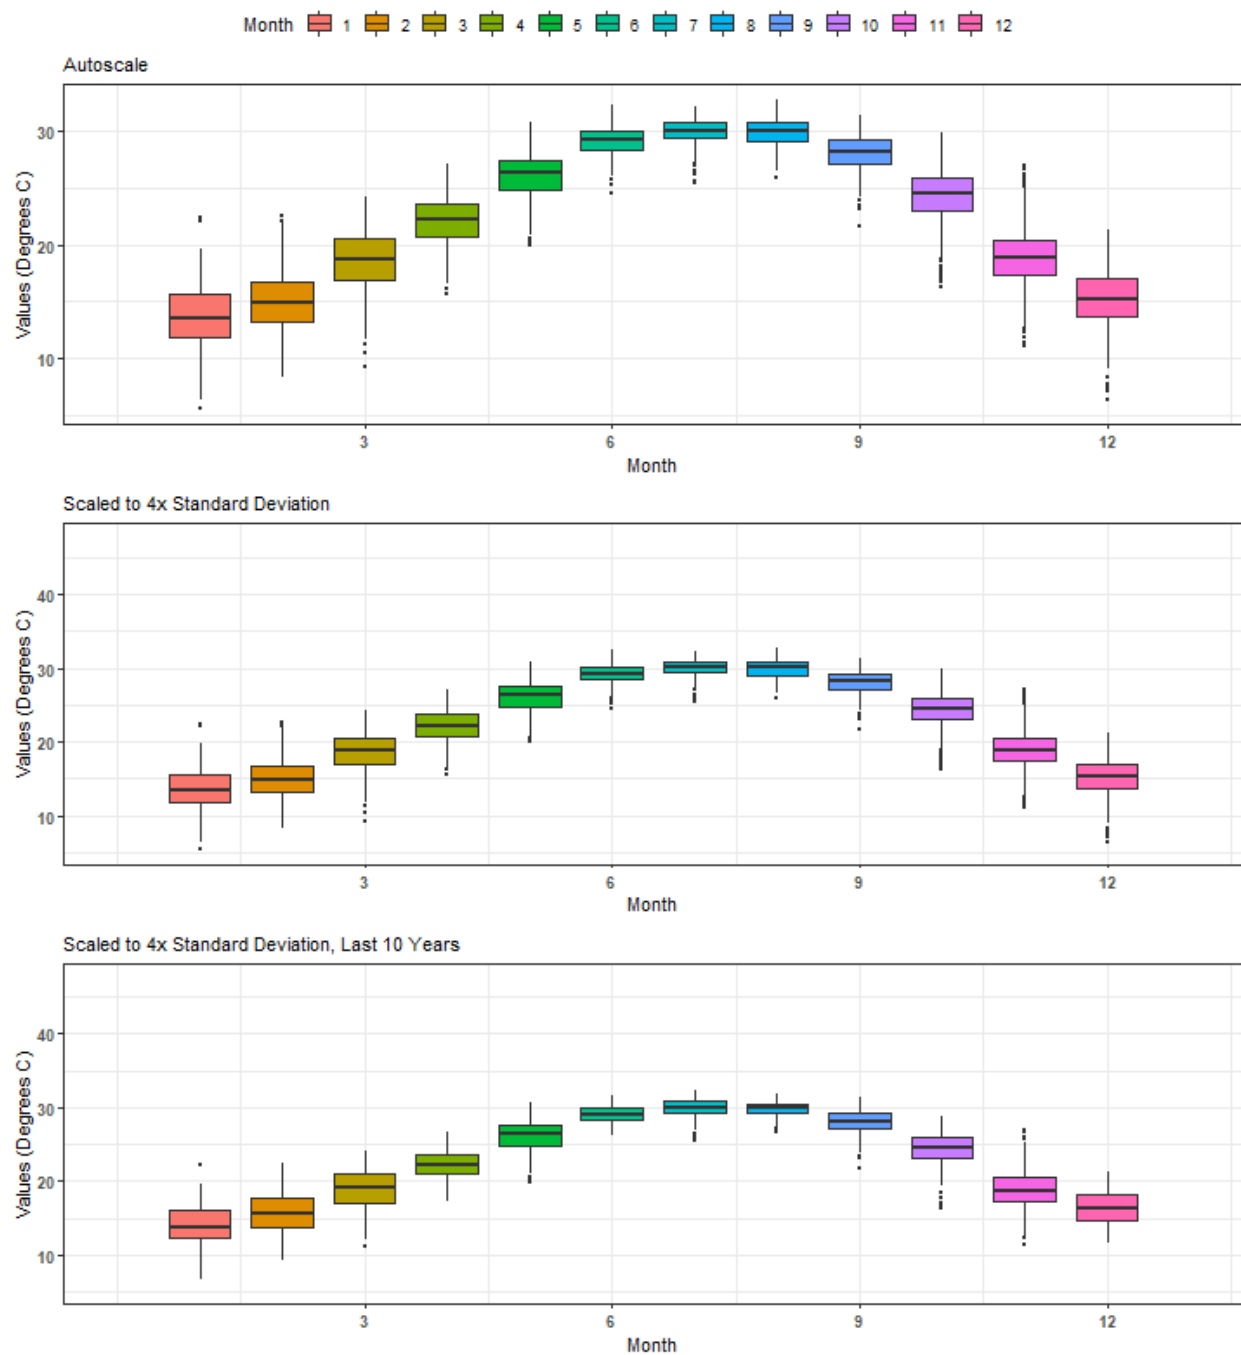


**Summary Box Plots for Apalachicola Bay Aquatic Preserve  
355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaebwq**

By Year

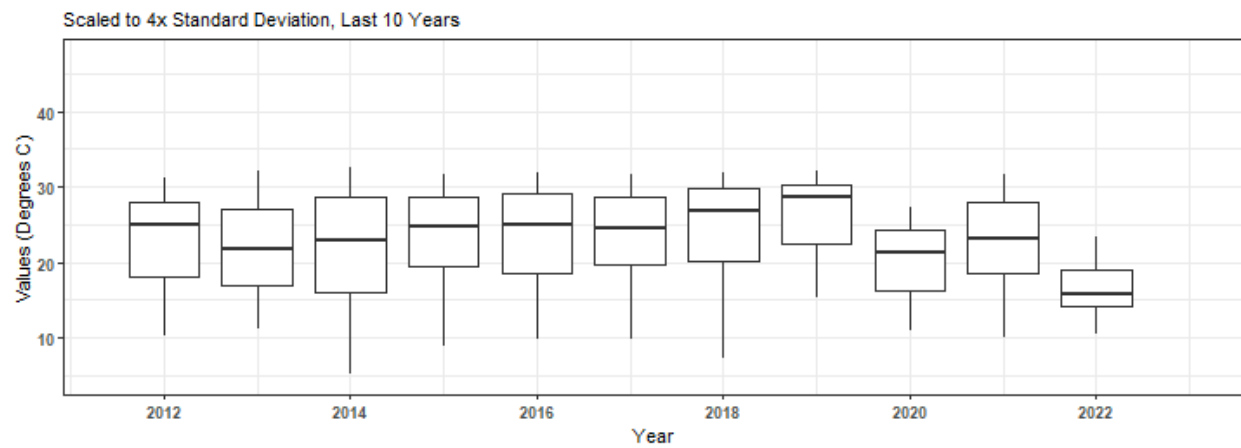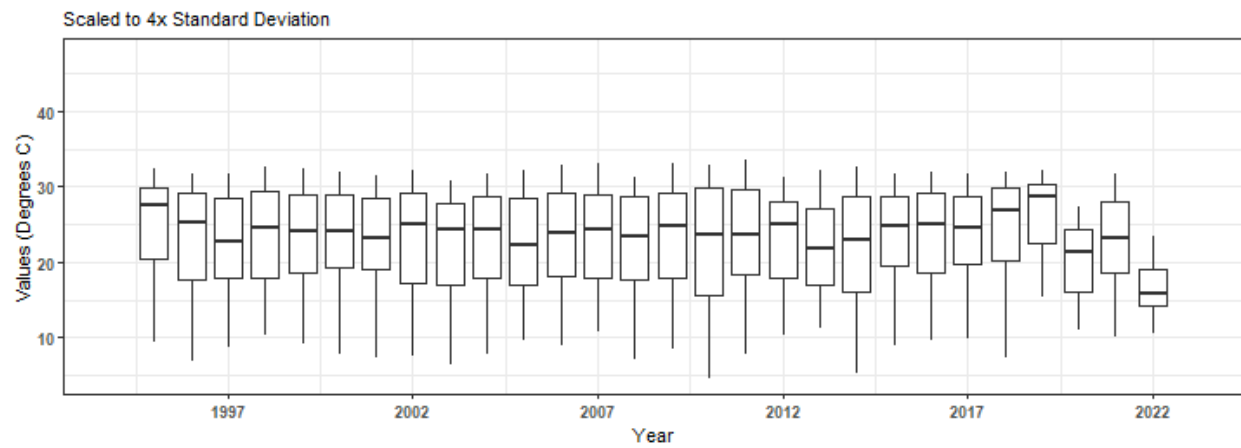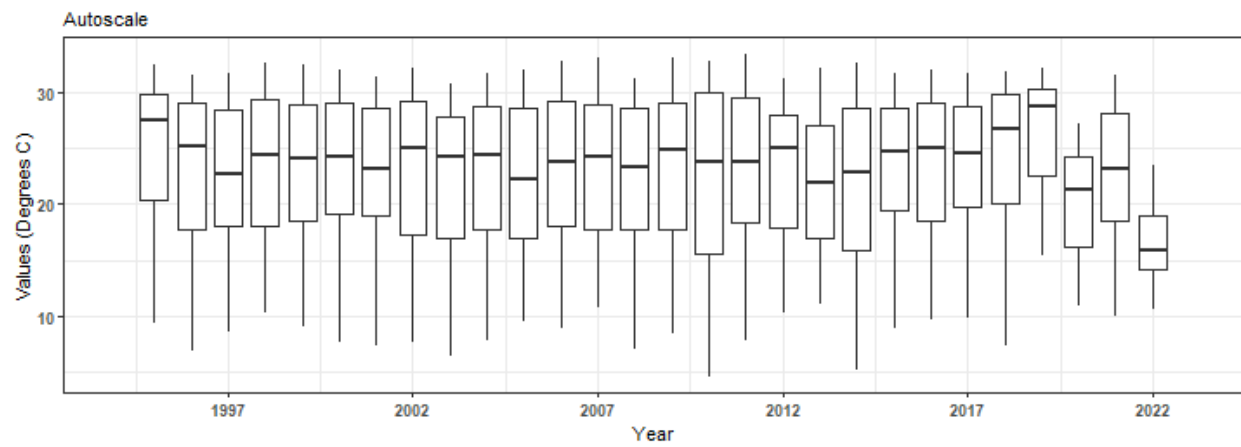


**Summary Box Plots for Apalachicola Bay Aquatic Preserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaebwq**  
 By Year & Month

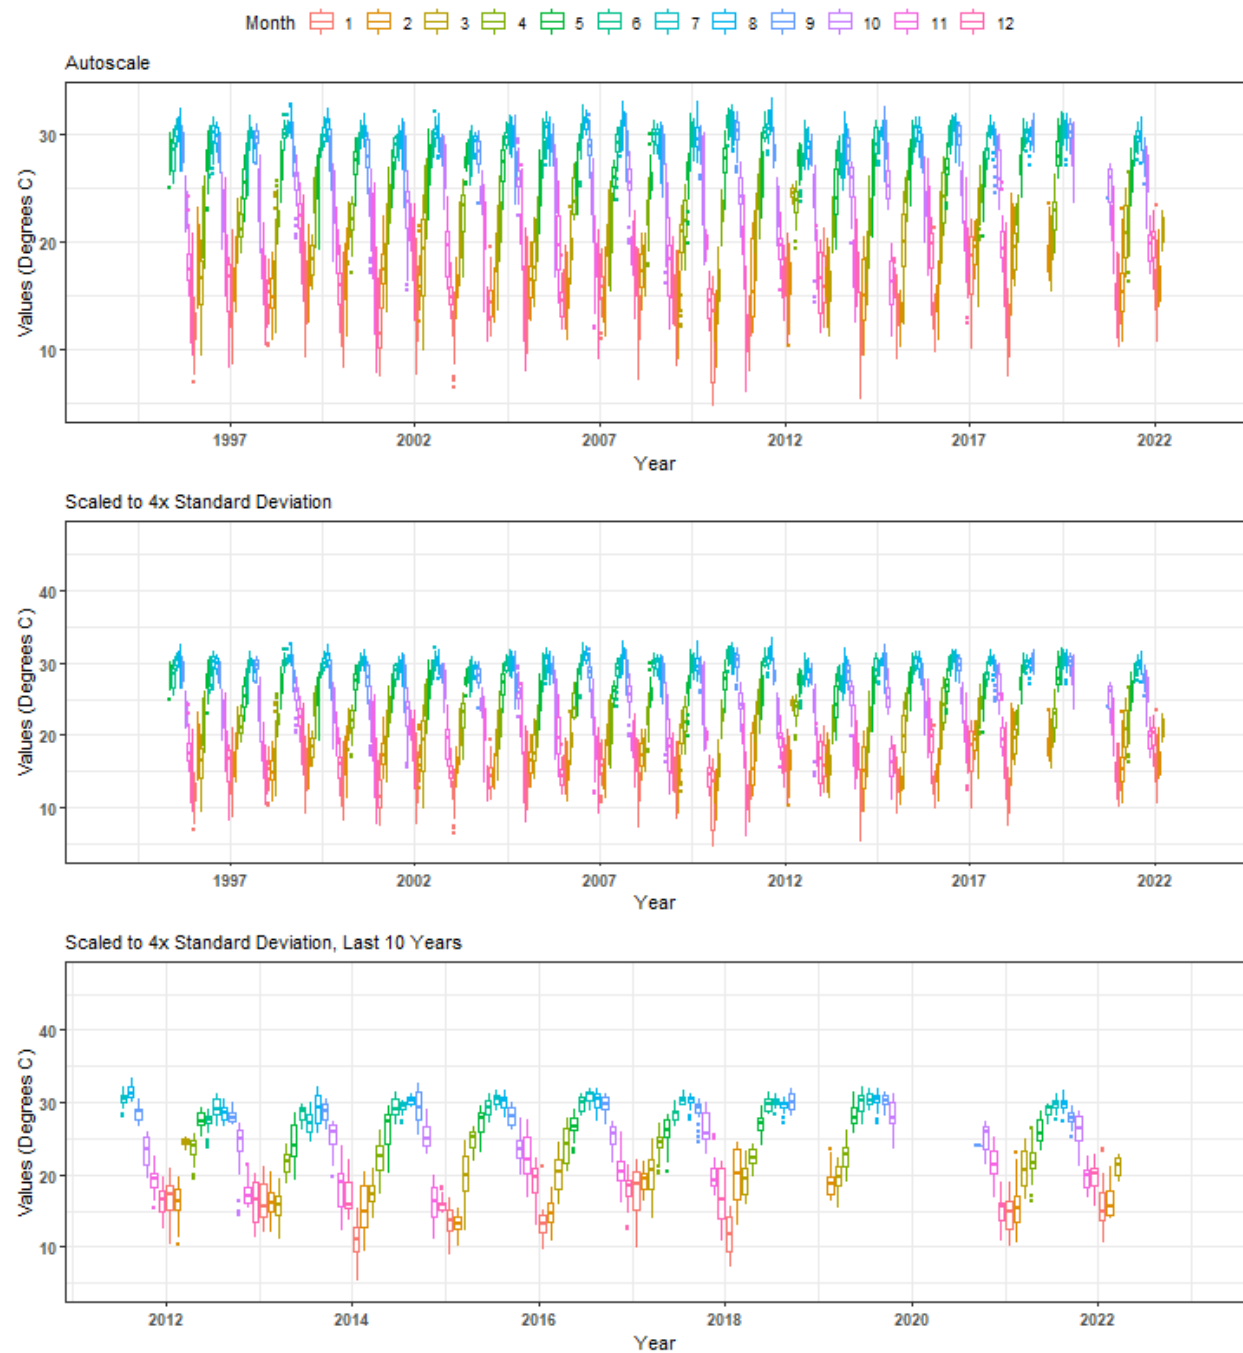




# Summary Box Plots for Apalachicola Bay Aquatic Preserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaebwq

By Month

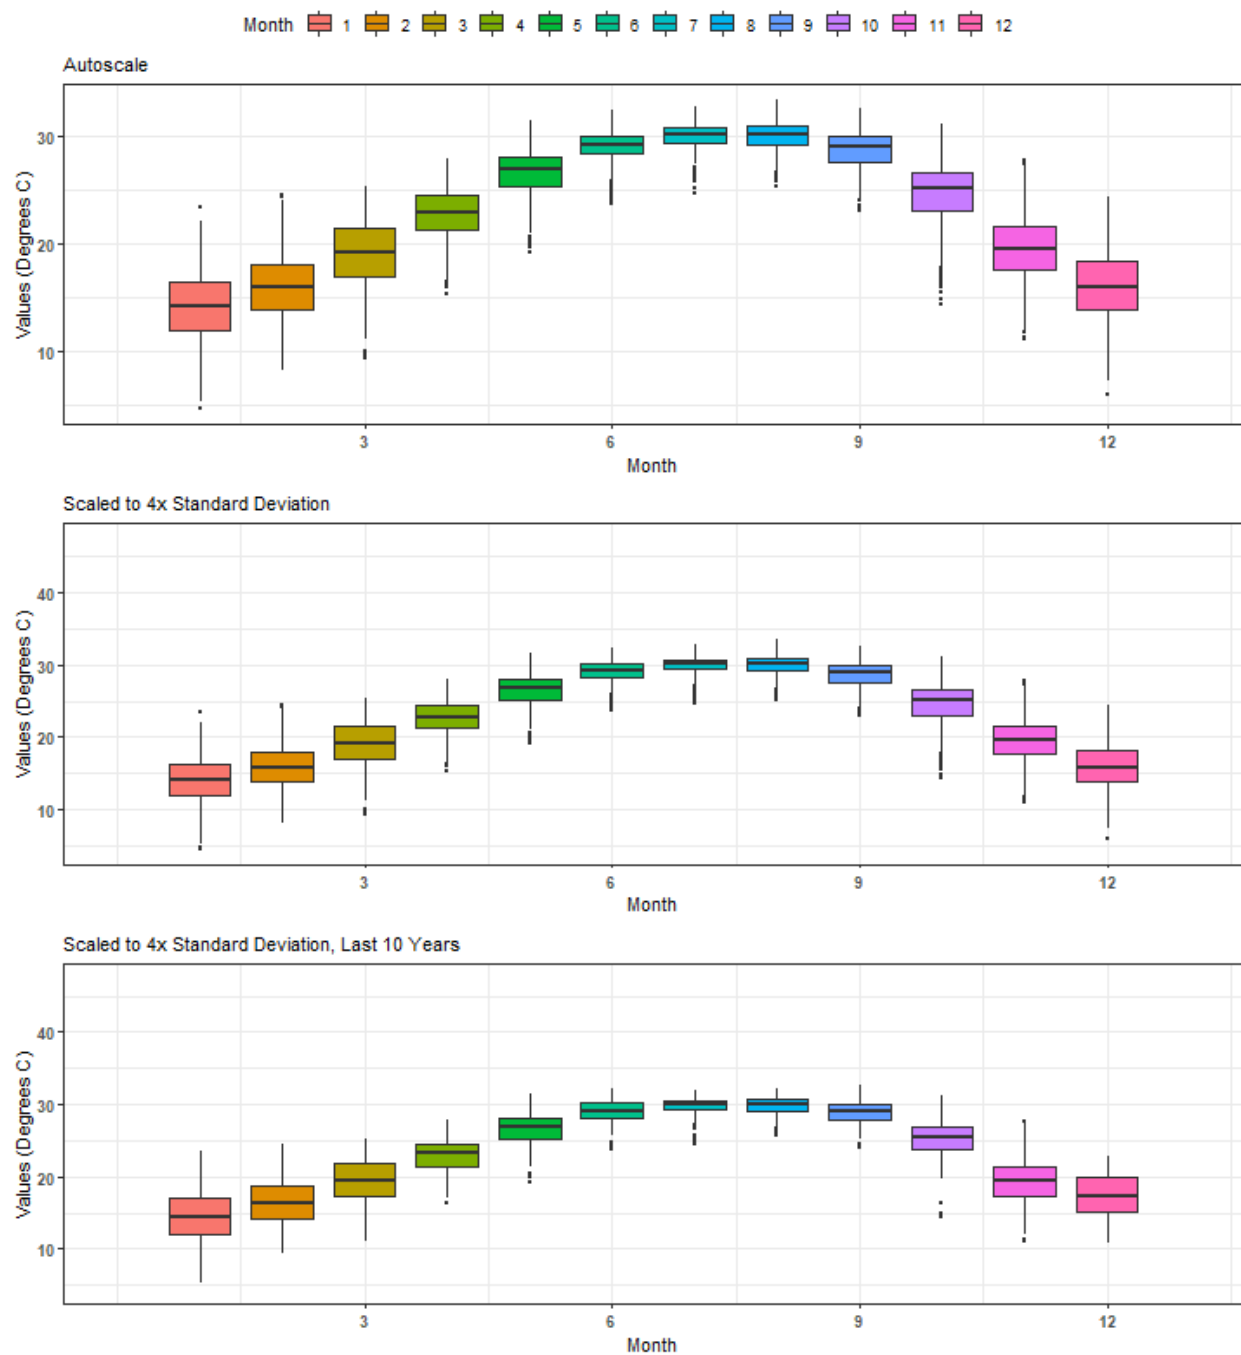


**Summary Box Plots for Apalachicola Bay Aquatic Preserve  
355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaeswq**

By Year

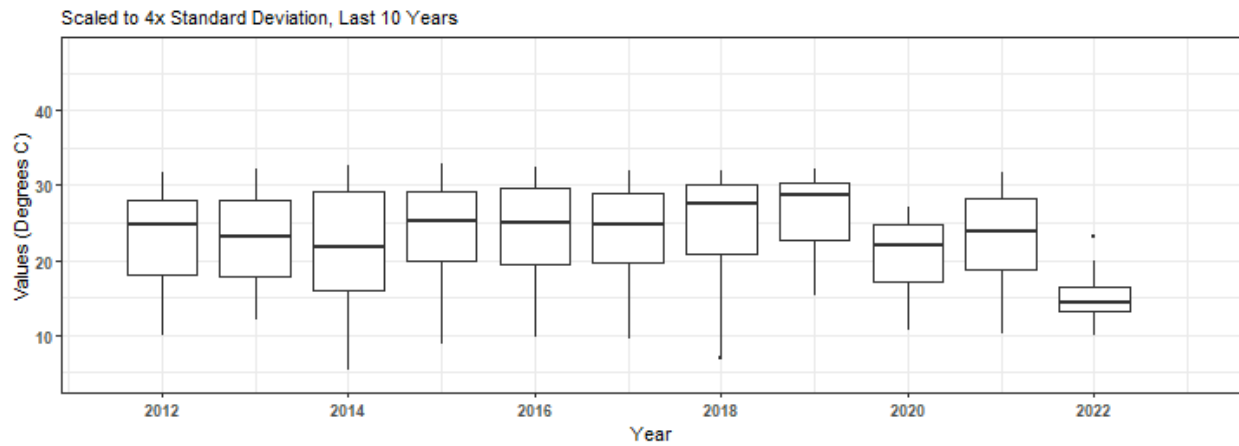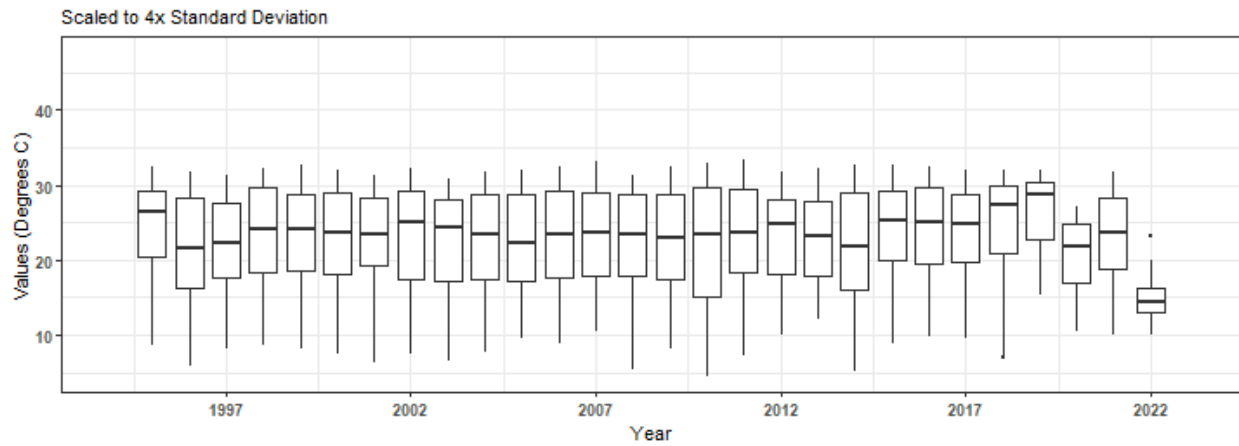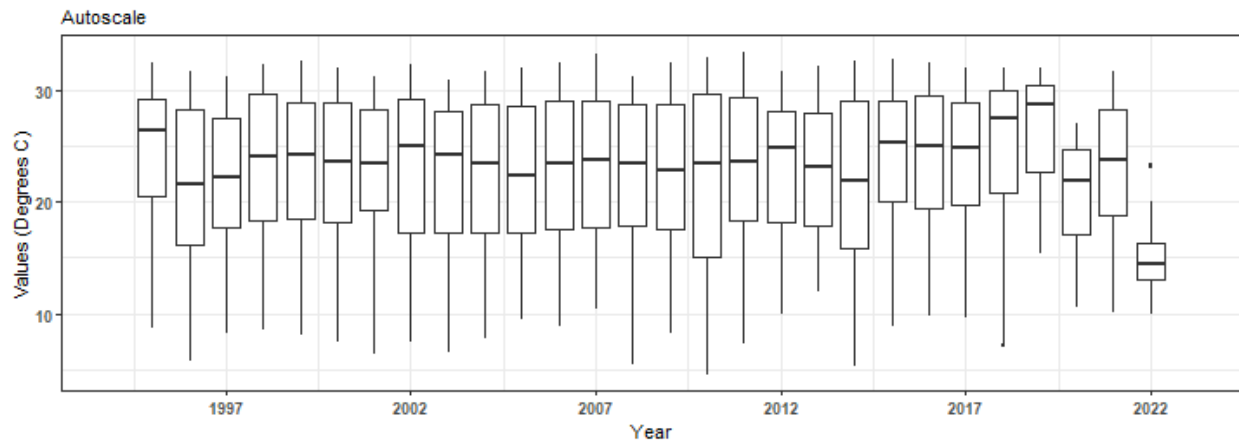


**Summary Box Plots for Apalachicola Bay Aquatic Preserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaeswq**  
 By Year & Month

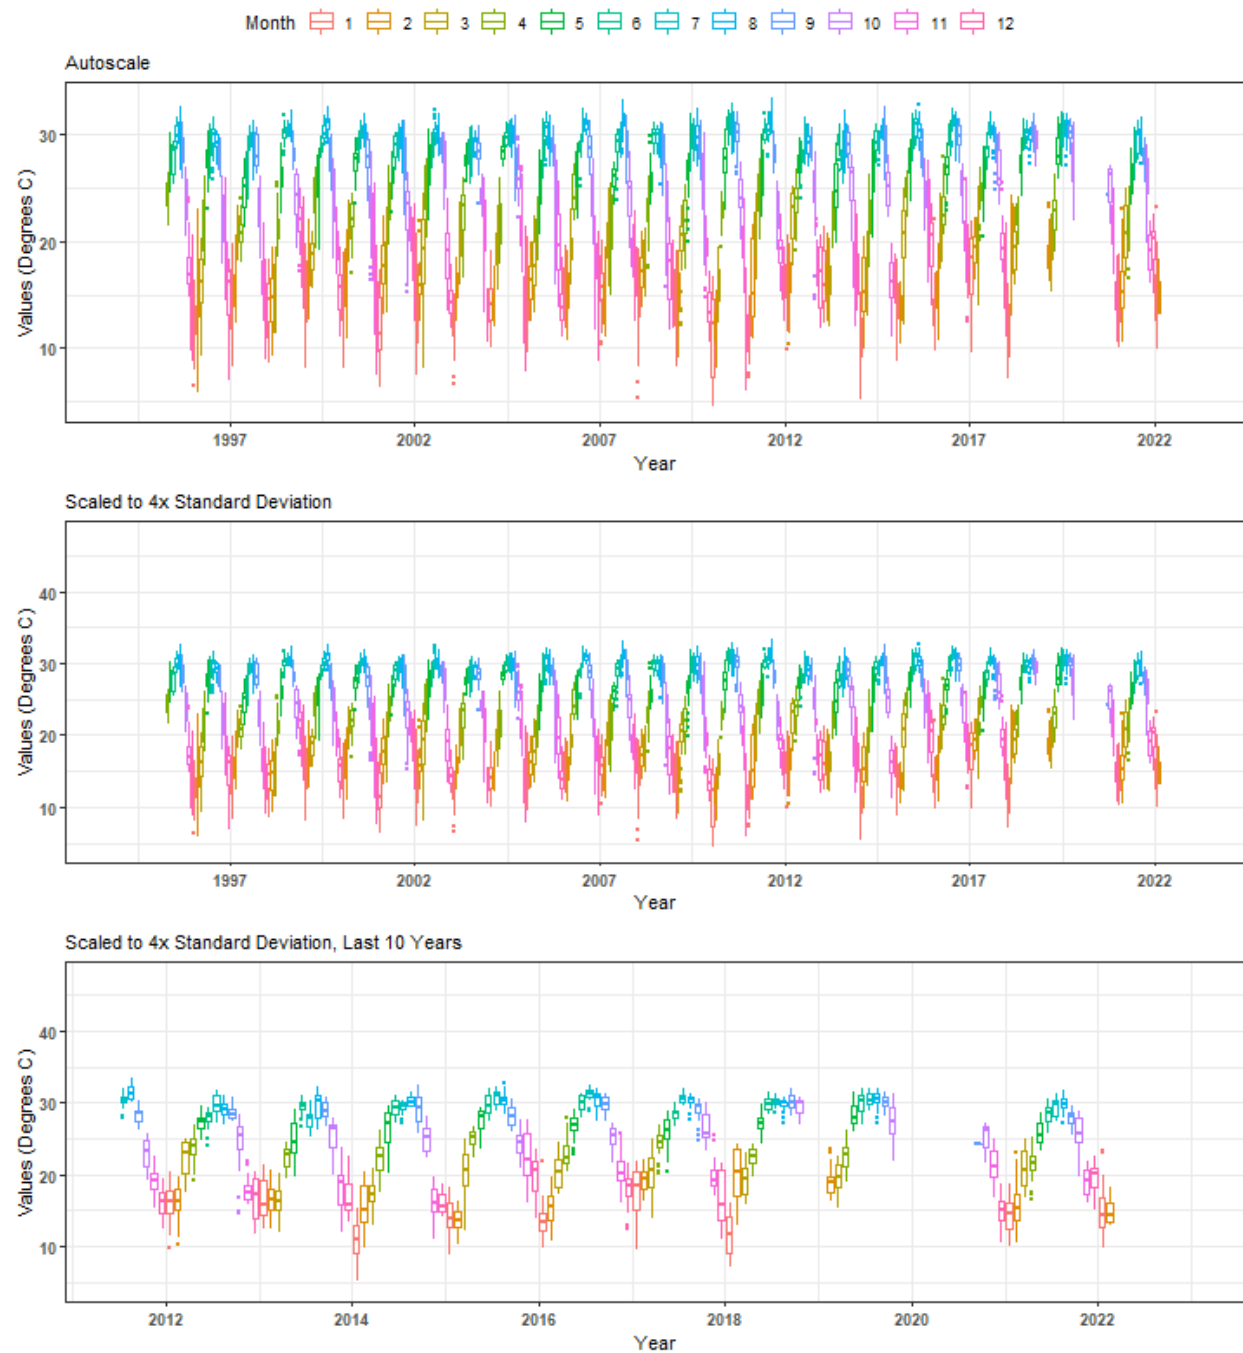




# Summary Box Plots for Apalachicola Bay Aquatic Preserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaeswq

By Month

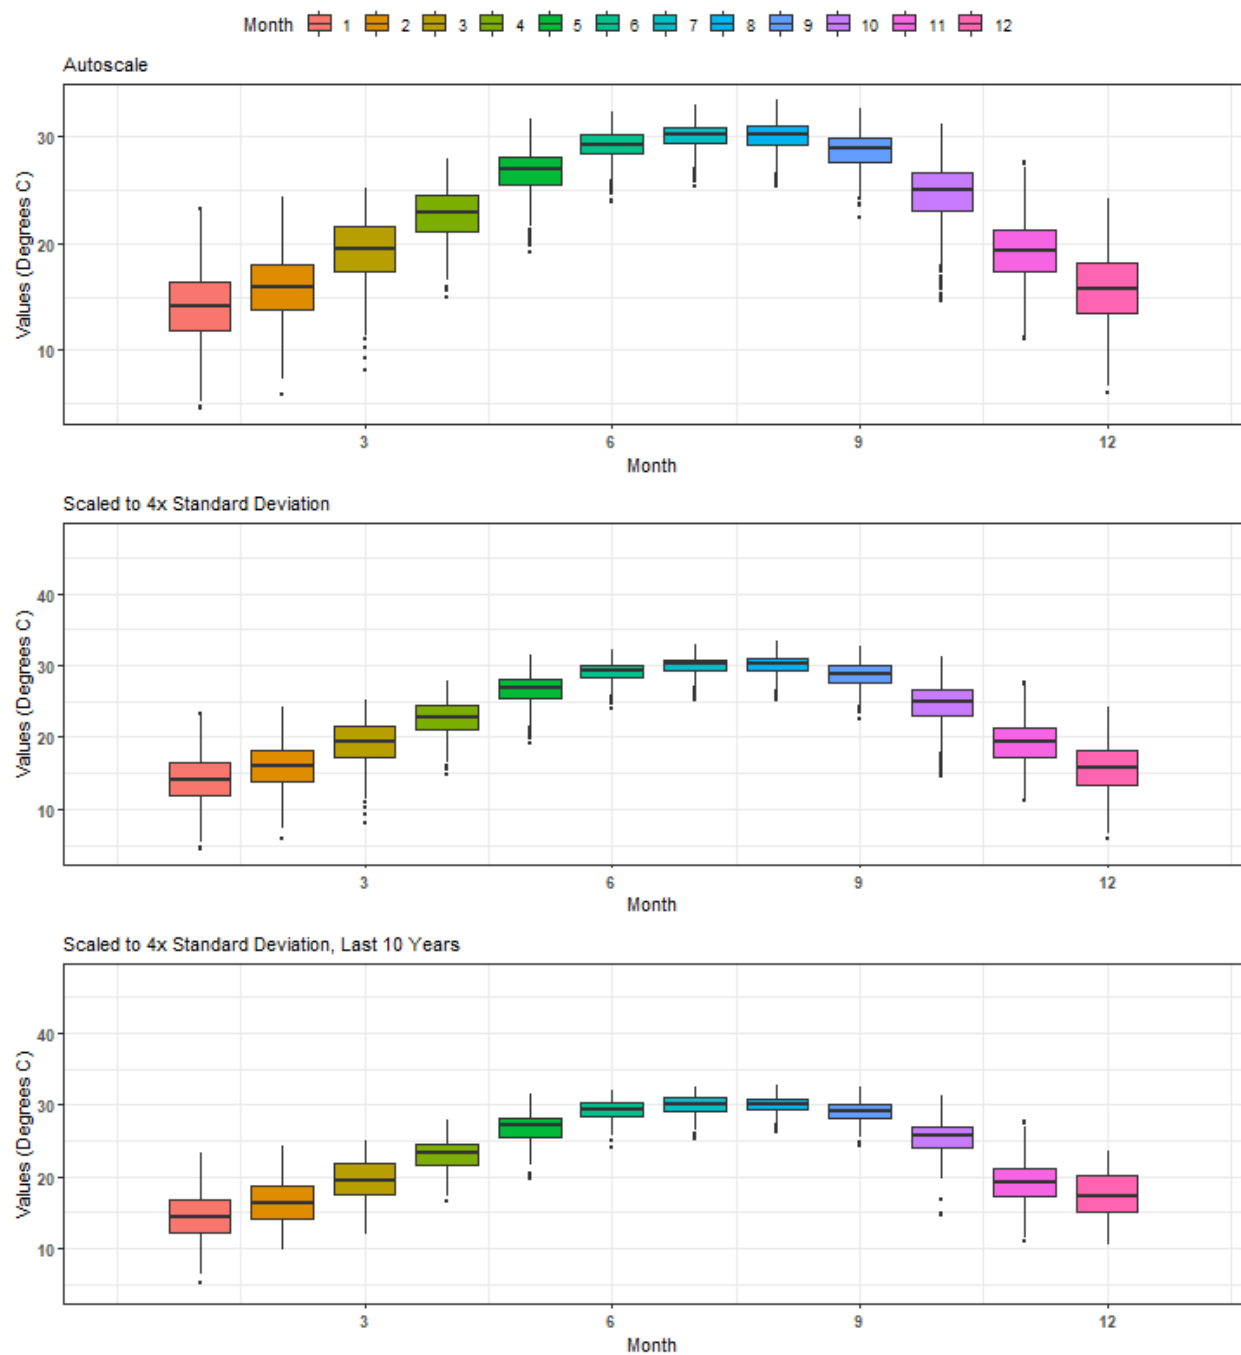


# Summary Box Plots for Apalachicola Bay Aquatic Preserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apalmwq

By Year

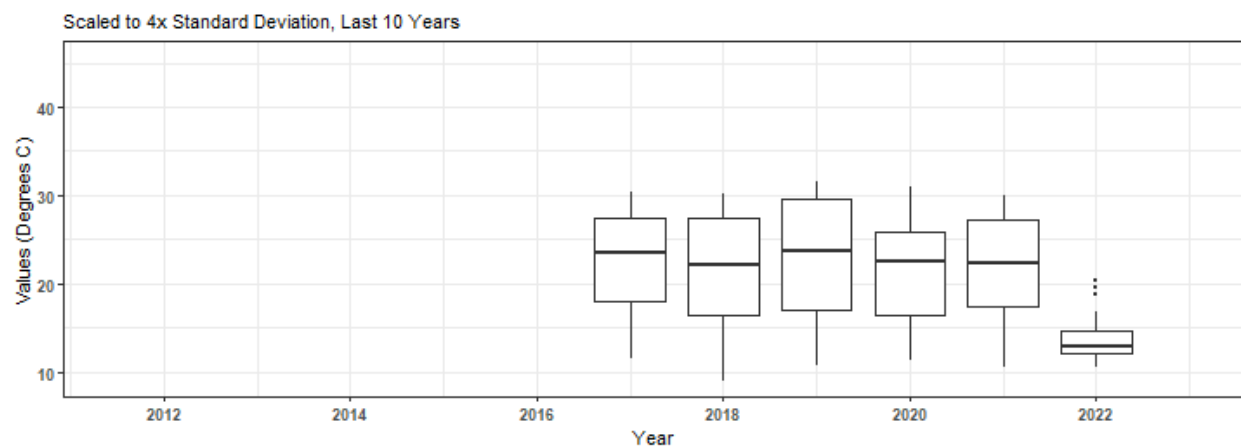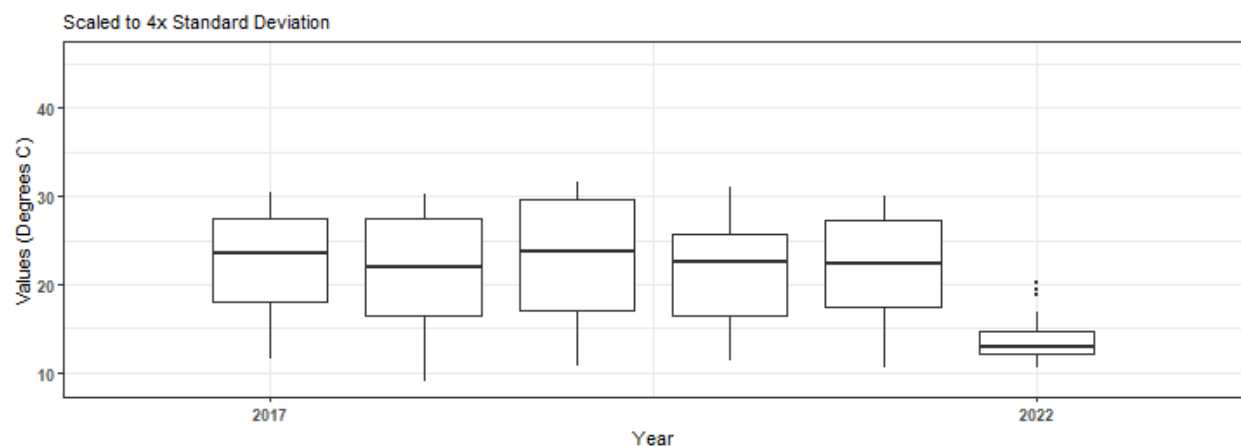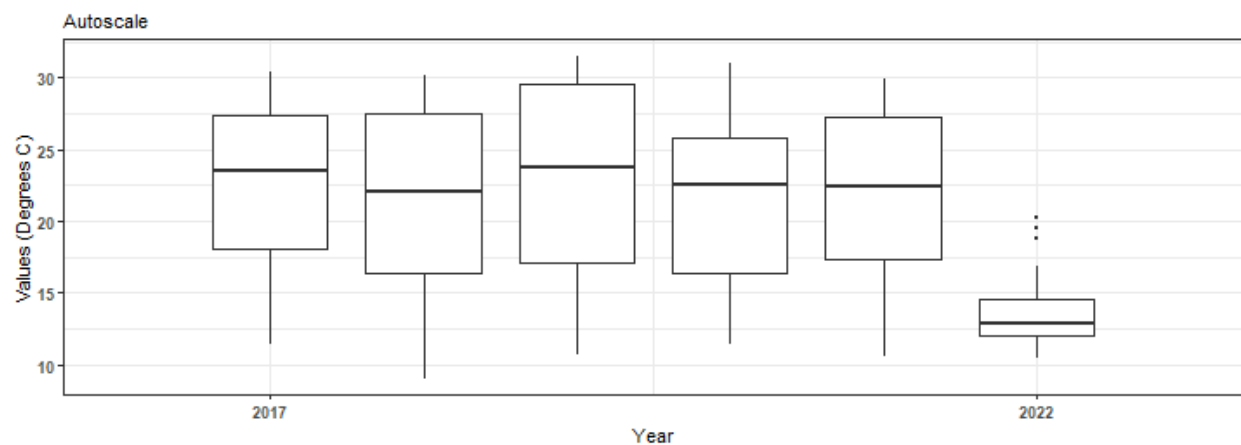




**Summary Box Plots for Apalachicola Bay Aquatic Preserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apalmwq**  
 By Year & Month

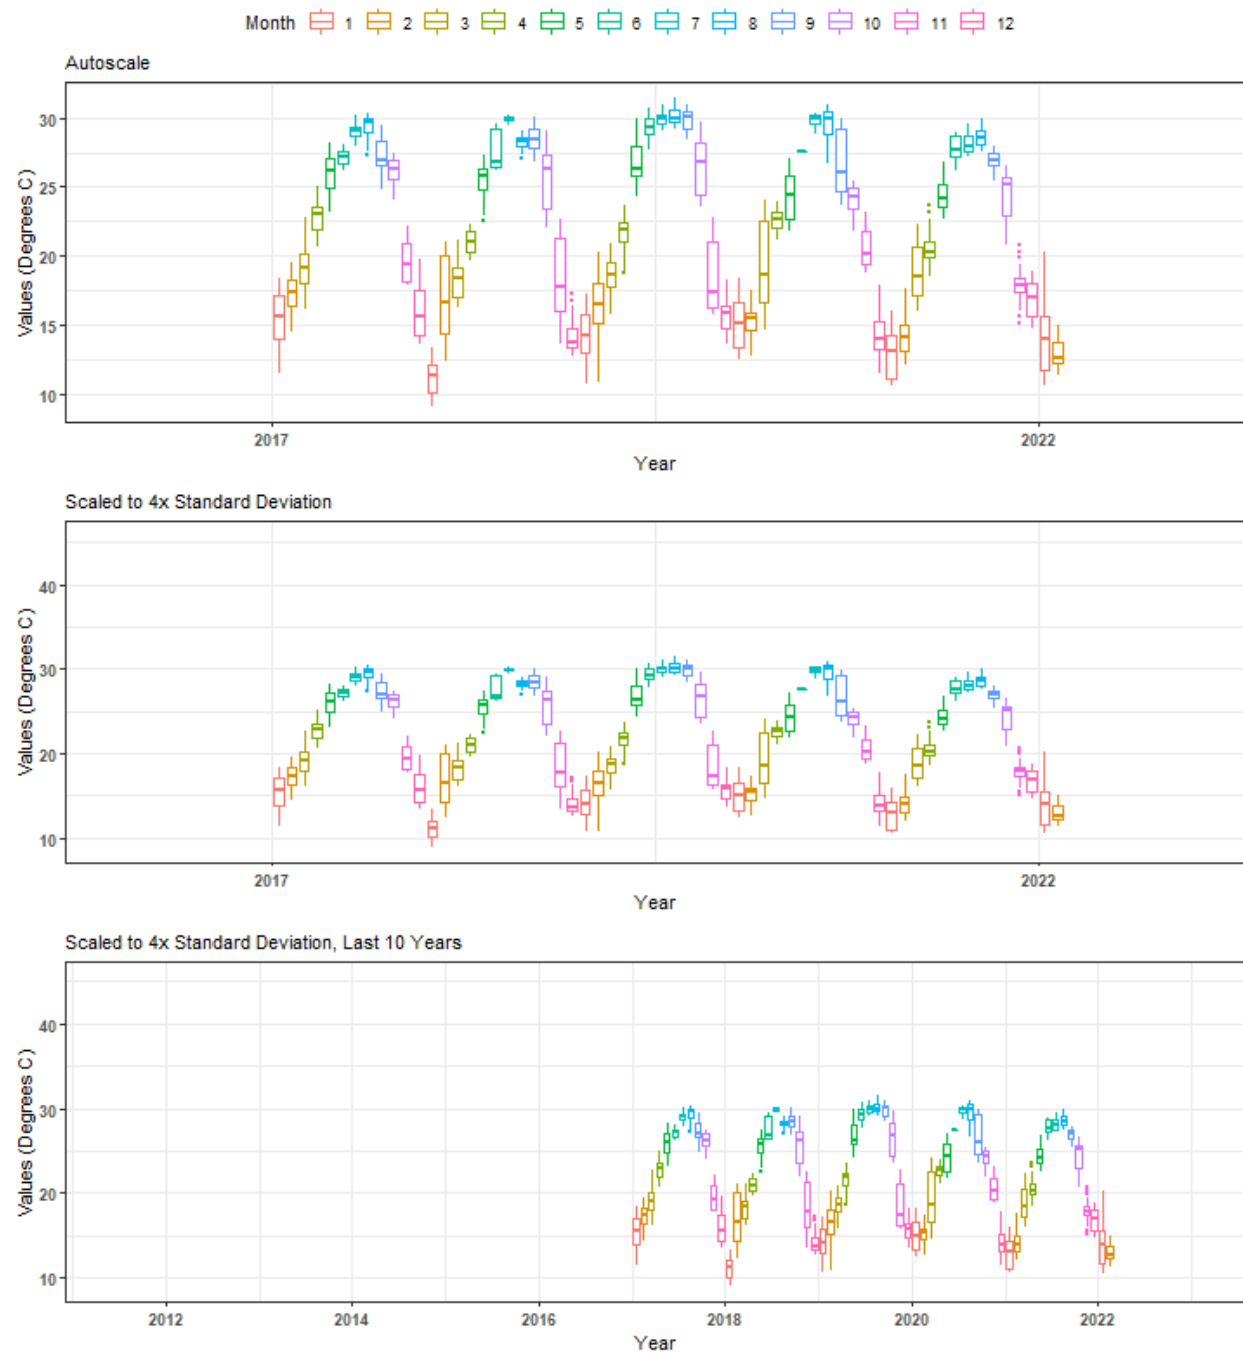




# Summary Box Plots for Apalachicola Bay Aquatic Preserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apalmwq

By Month

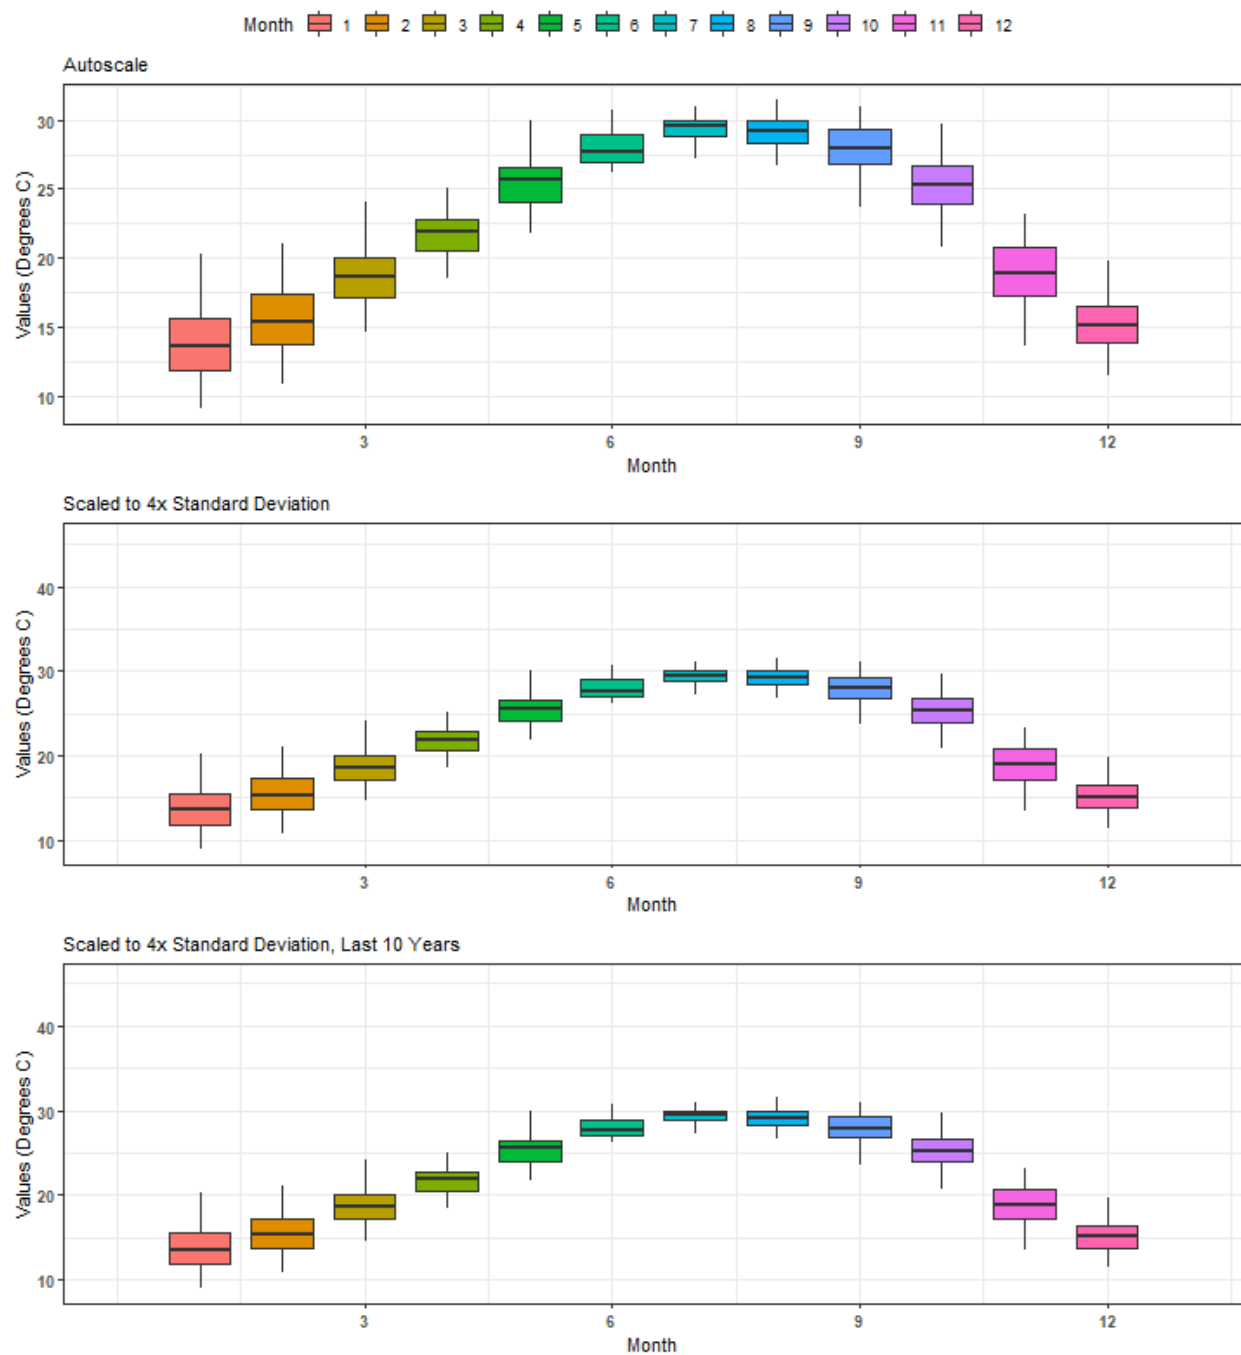


**Summary Box Plots for Apalachicola Bay Aquatic Preserve  
355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apapcwq**

By Year

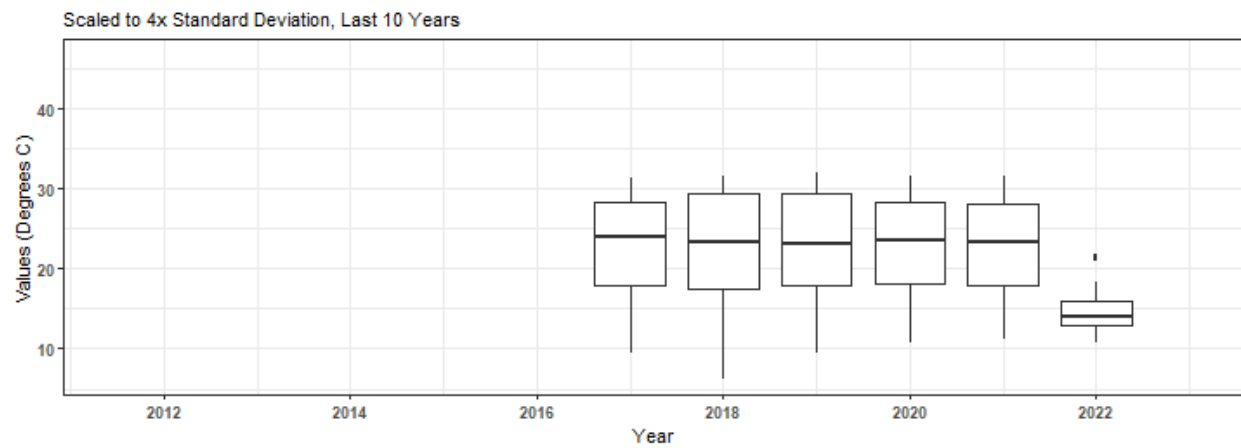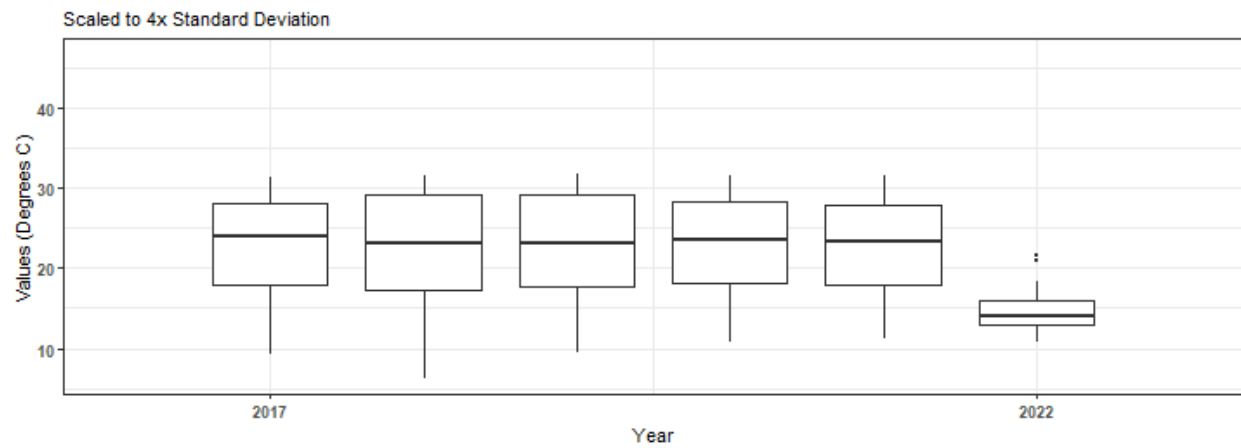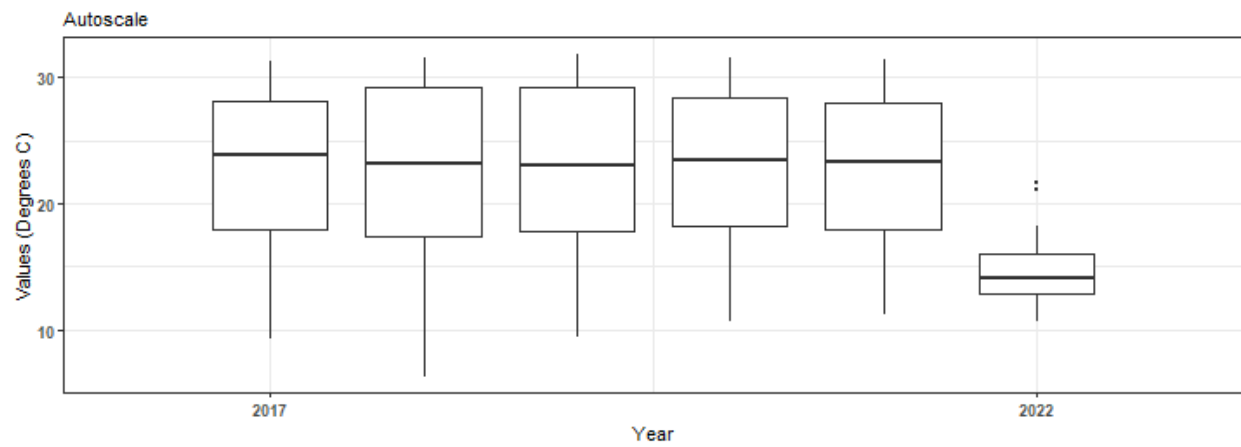


**Summary Box Plots for Apalachicola Bay Aquatic Preserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apapcwq**  
 By Year & Month

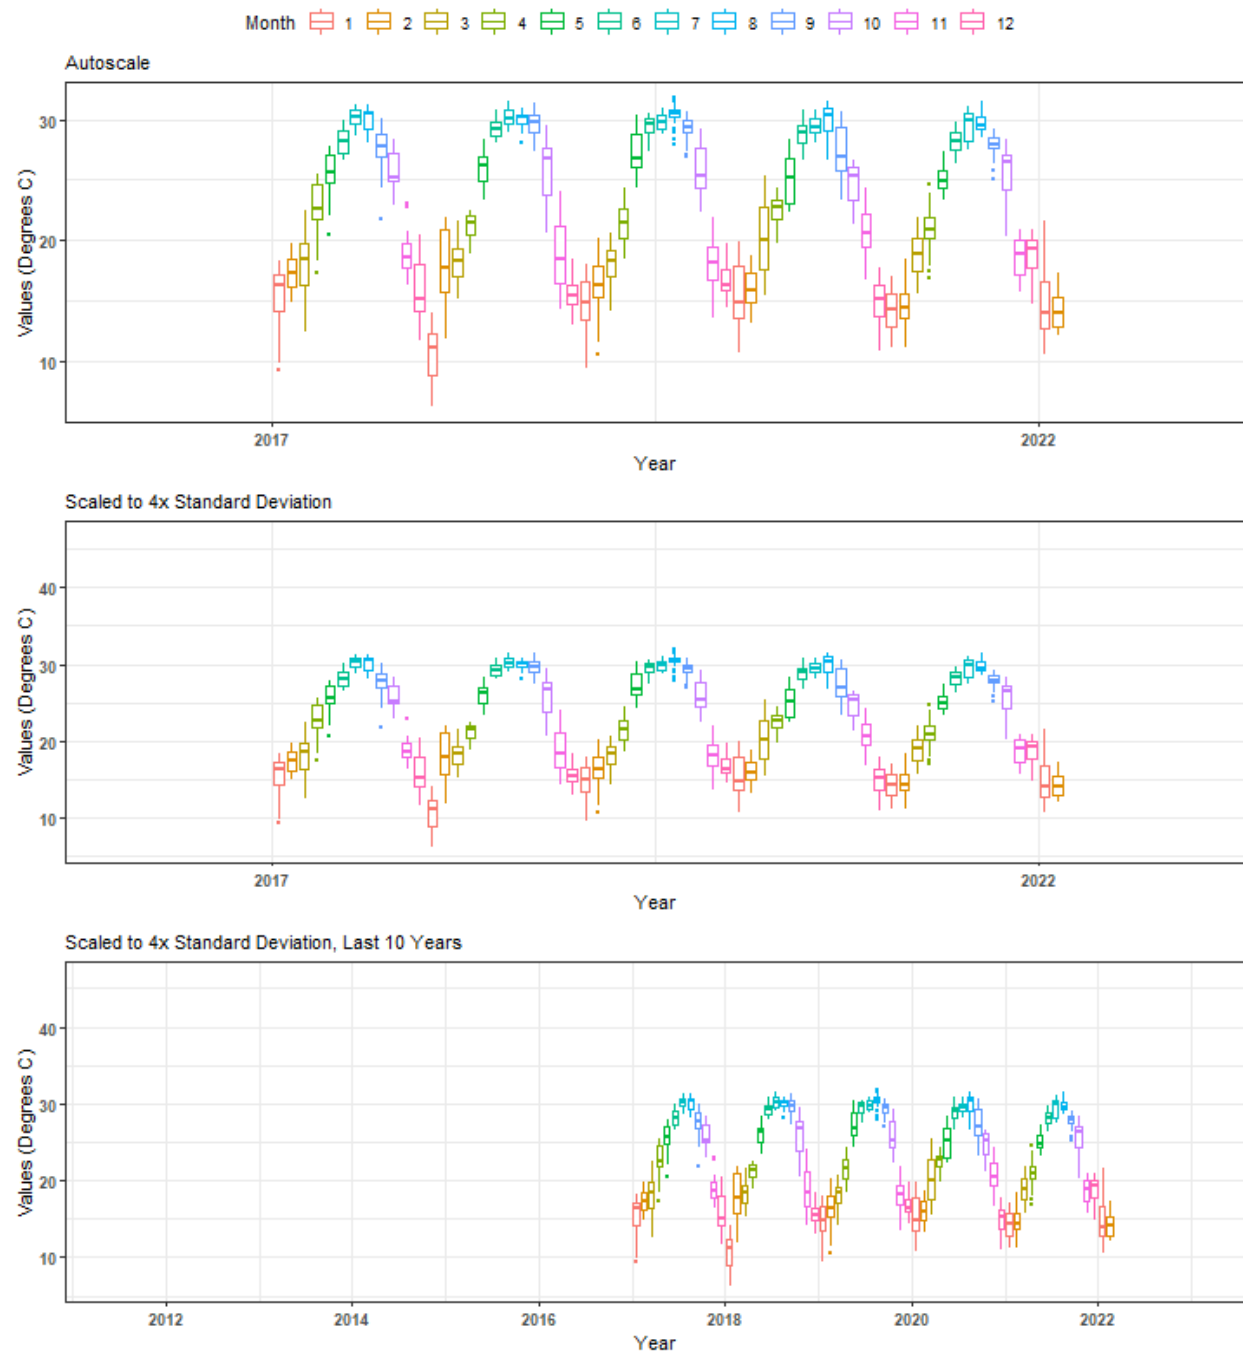




# Summary Box Plots for Apalachicola Bay Aquatic Preserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apapcwq

By Month

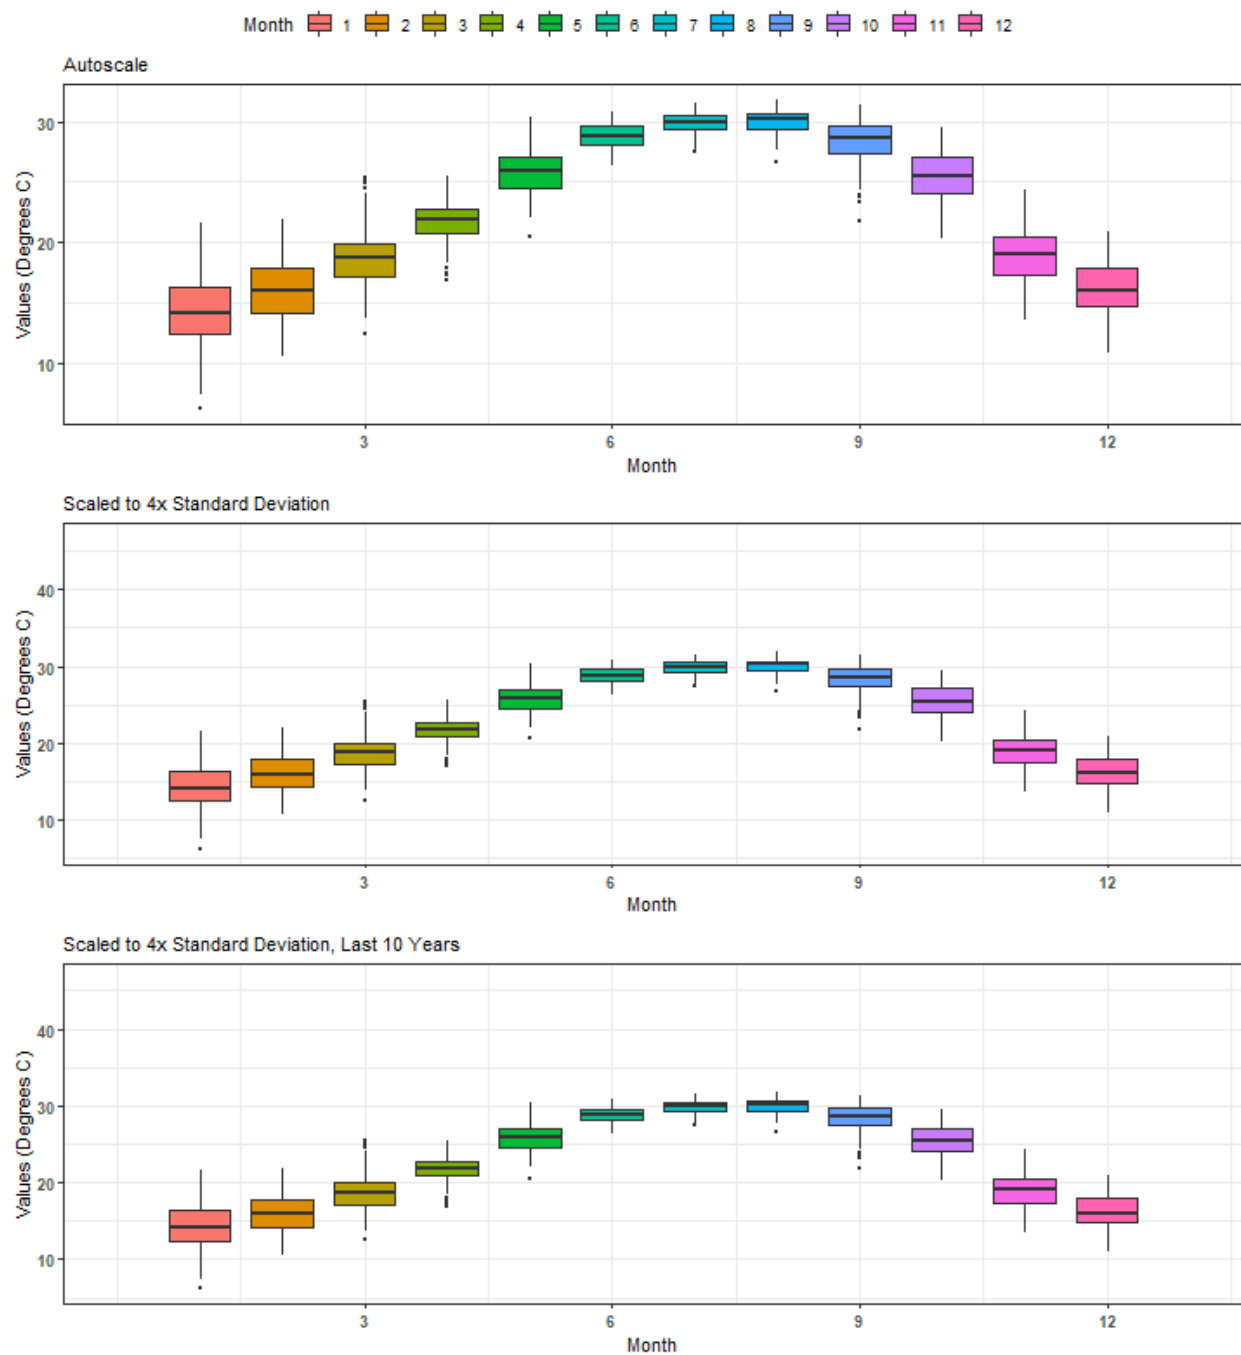


Summary Box Plots for Apalachicola National Estuarine Research Reserve  
5 | National Data Buoy Center | APCF1

By Year

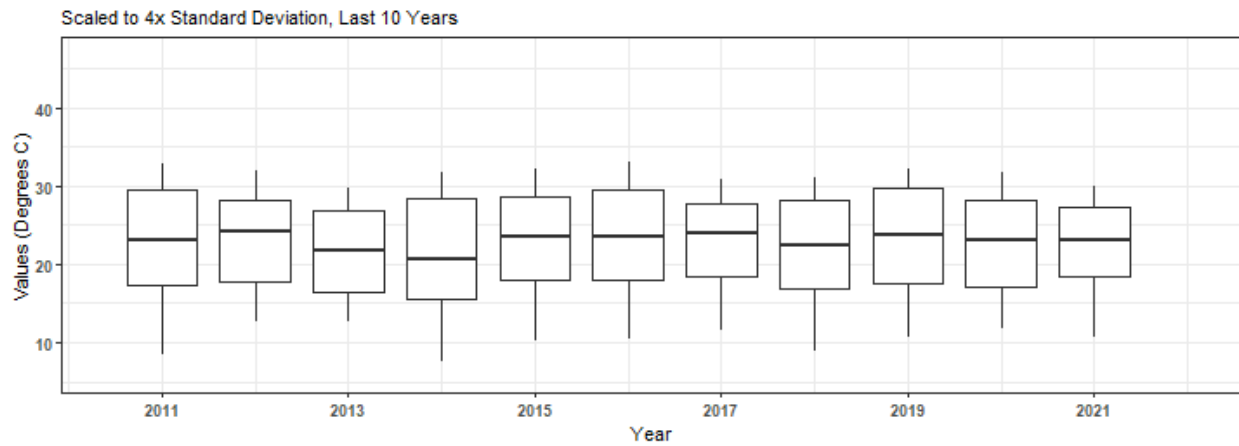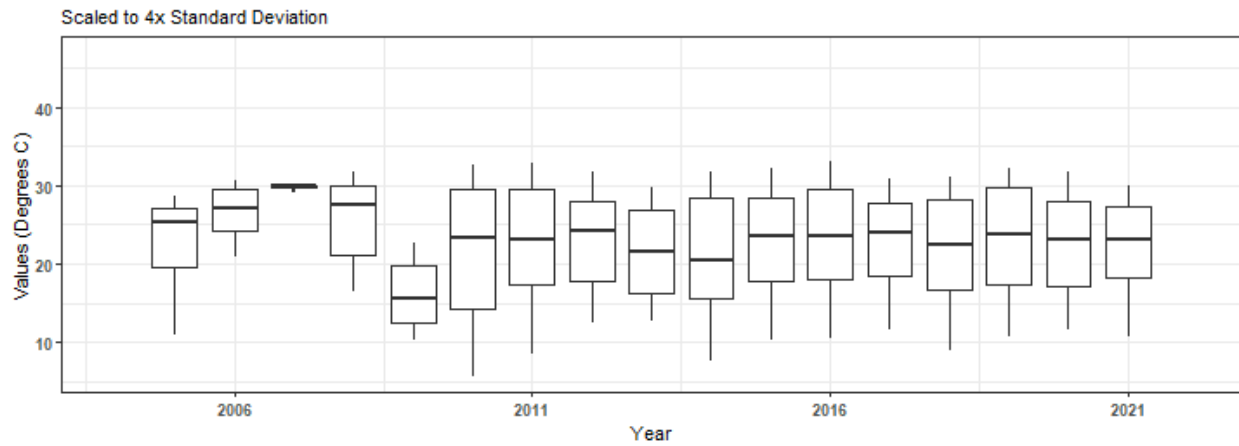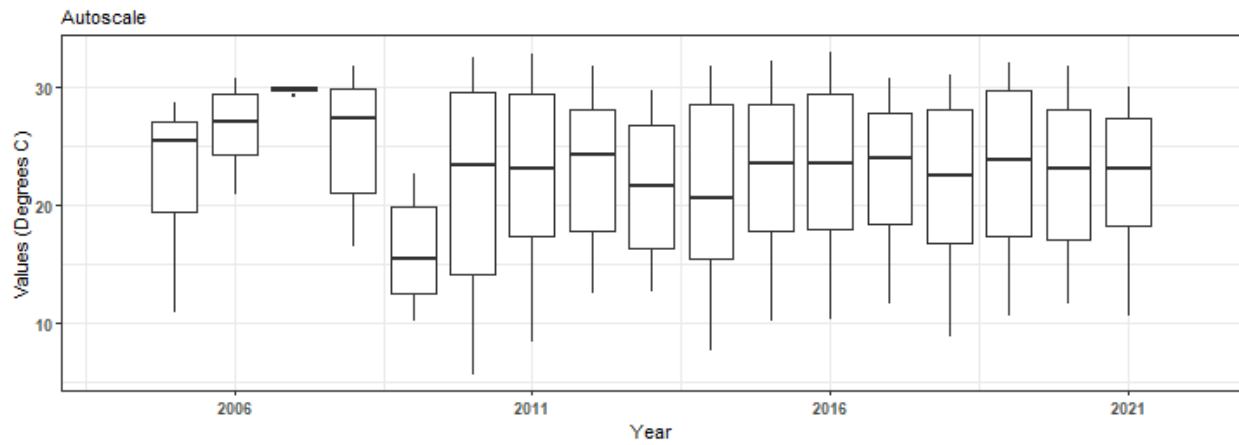


# Summary Box Plots for Apalachicola National Estuarine Research Reserve 5 | National Data Buoy Center | APCF1

By Year & Month

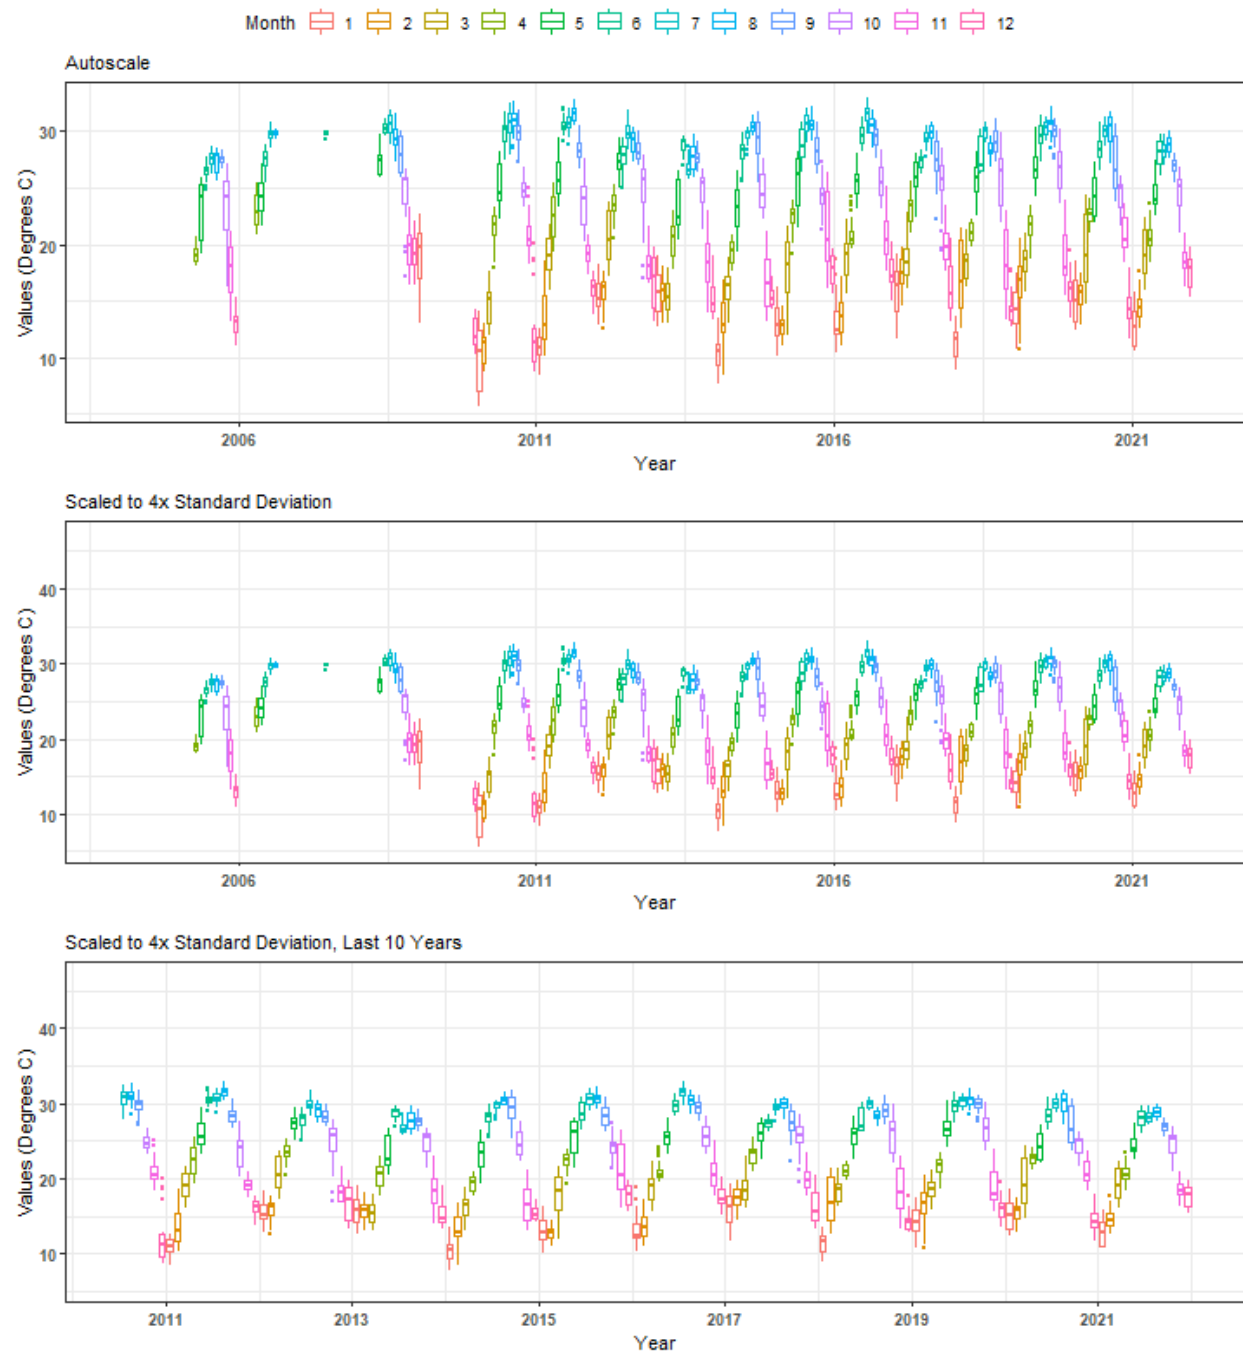

# Summary Box Plots for Apalachicola National Estuarine Research Reserve 5 | National Data Buoy Center | APCF1




By Month

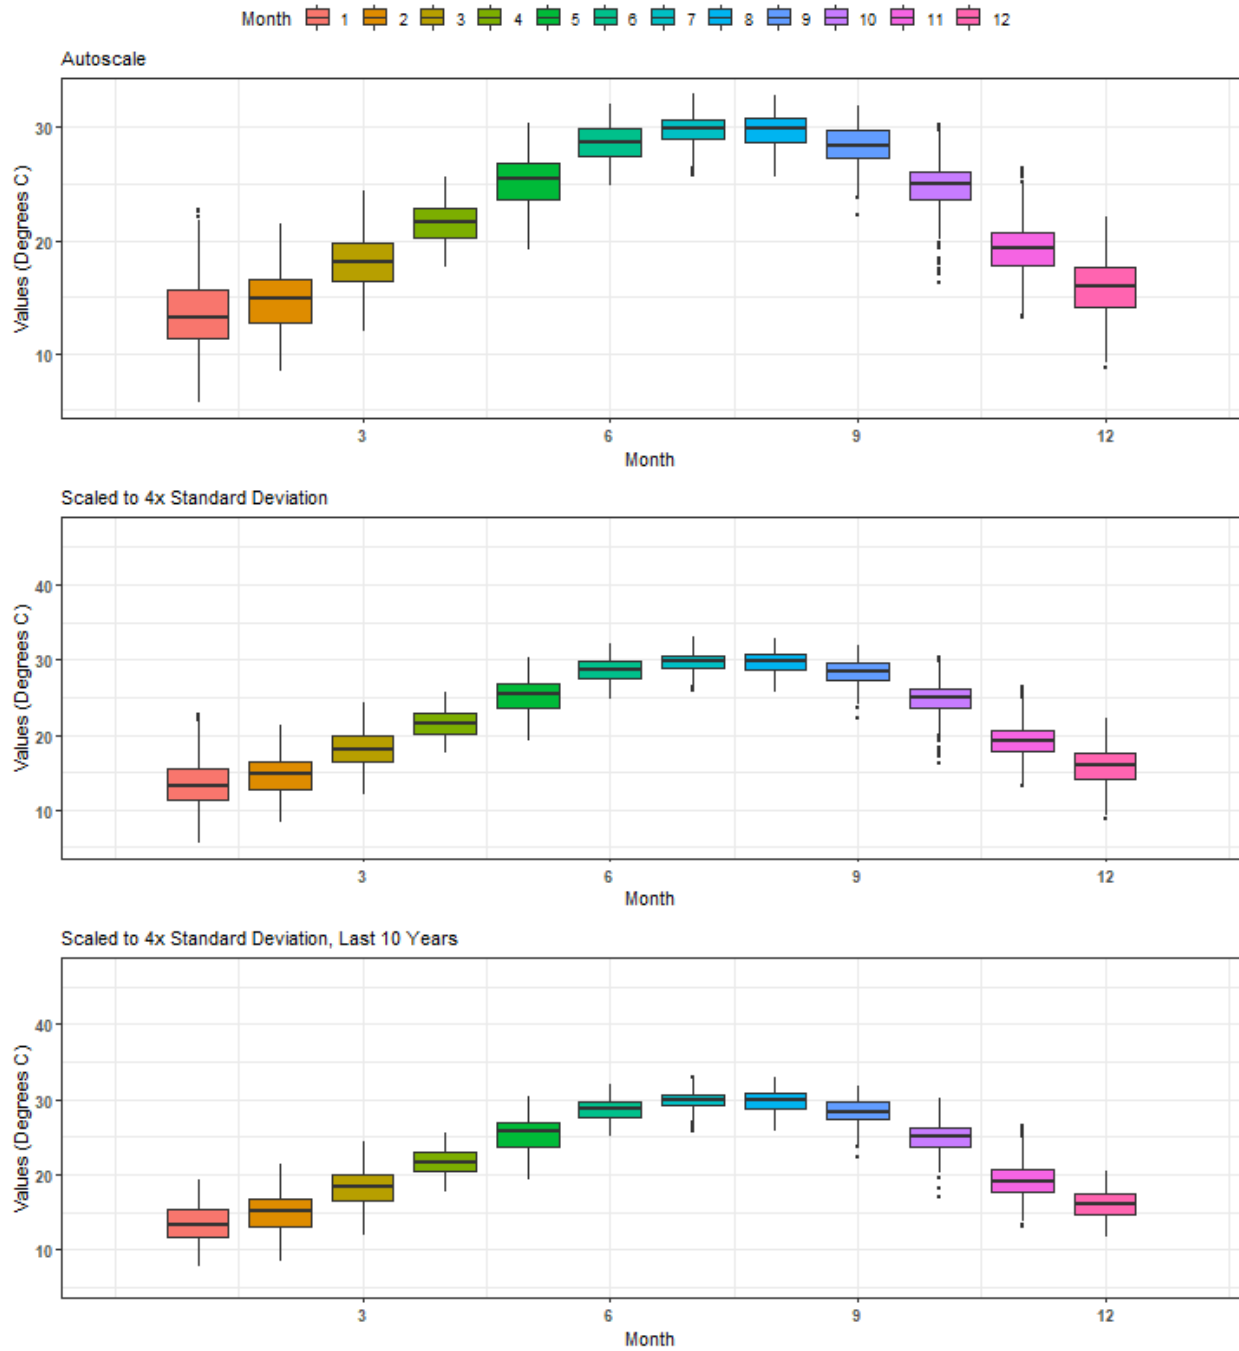




# Summary Box Plots for Apalachicola National Estuarine Research Reserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apacpwq

By Year

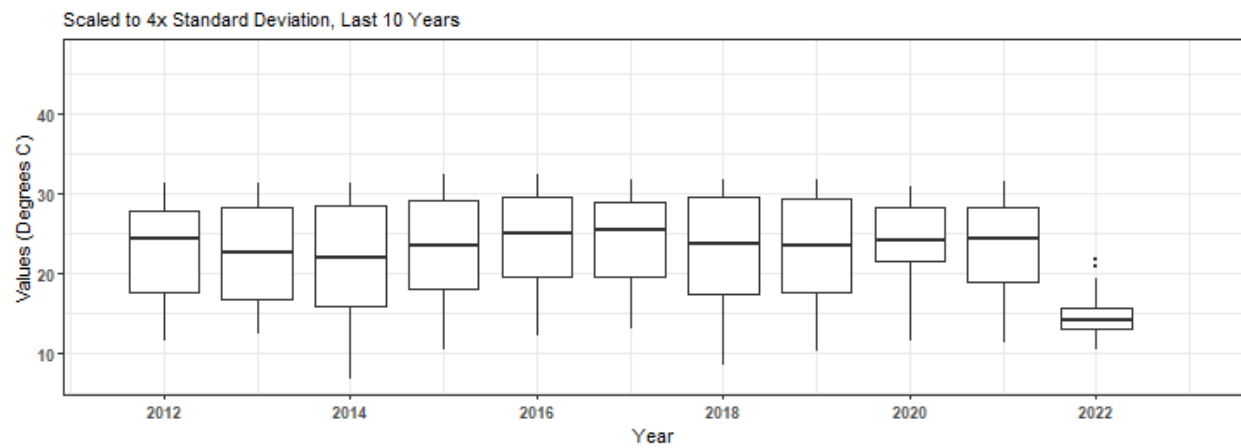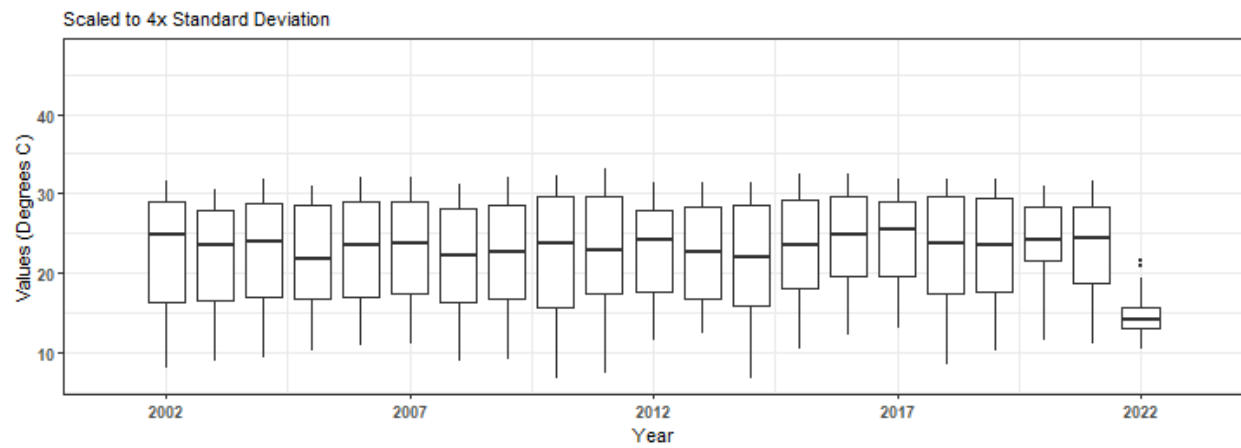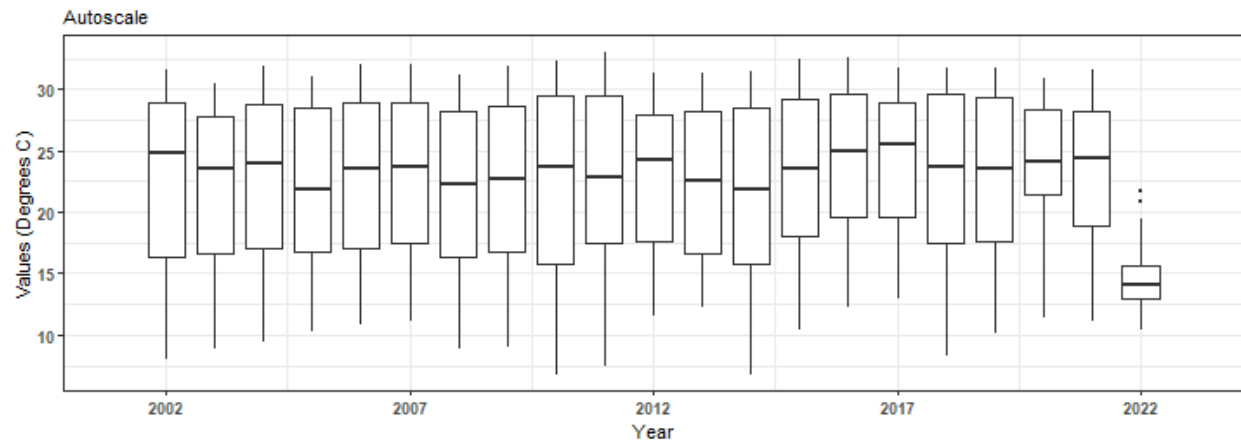


# Summary Box Plots for Apalachicola National Estuarine Research Reserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apacpwq

By Year & Month

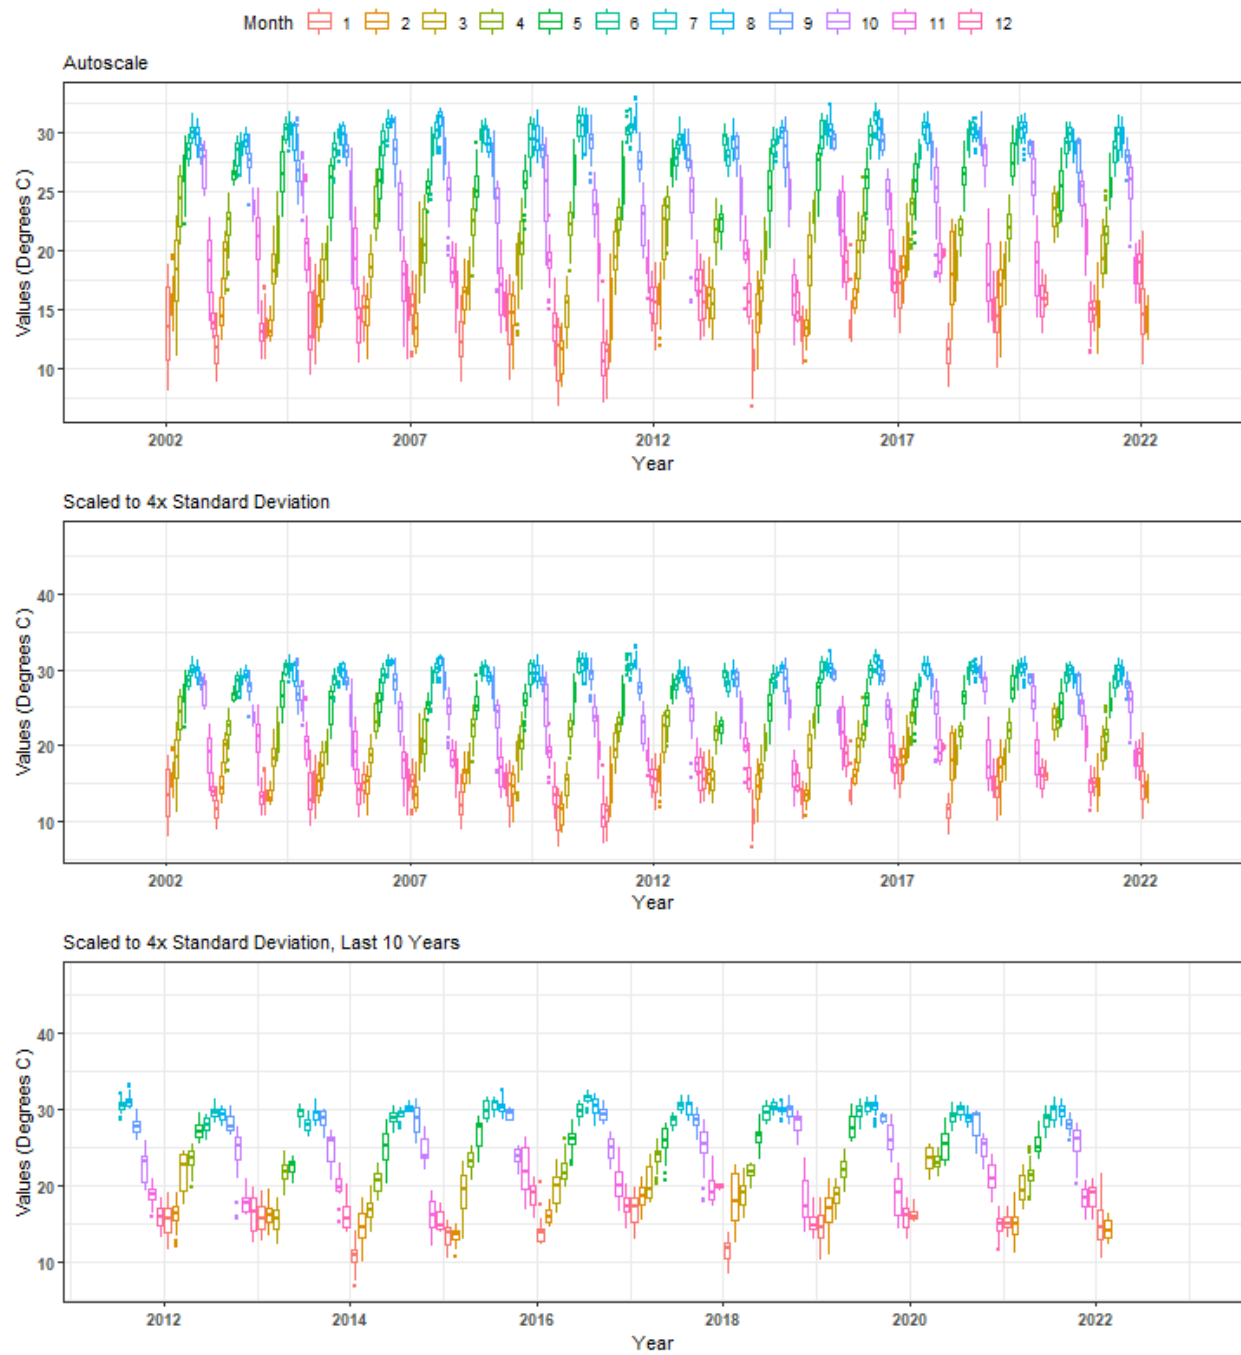




# Summary Box Plots for Apalachicola National Estuarine Research Reserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apacpwq

By Month

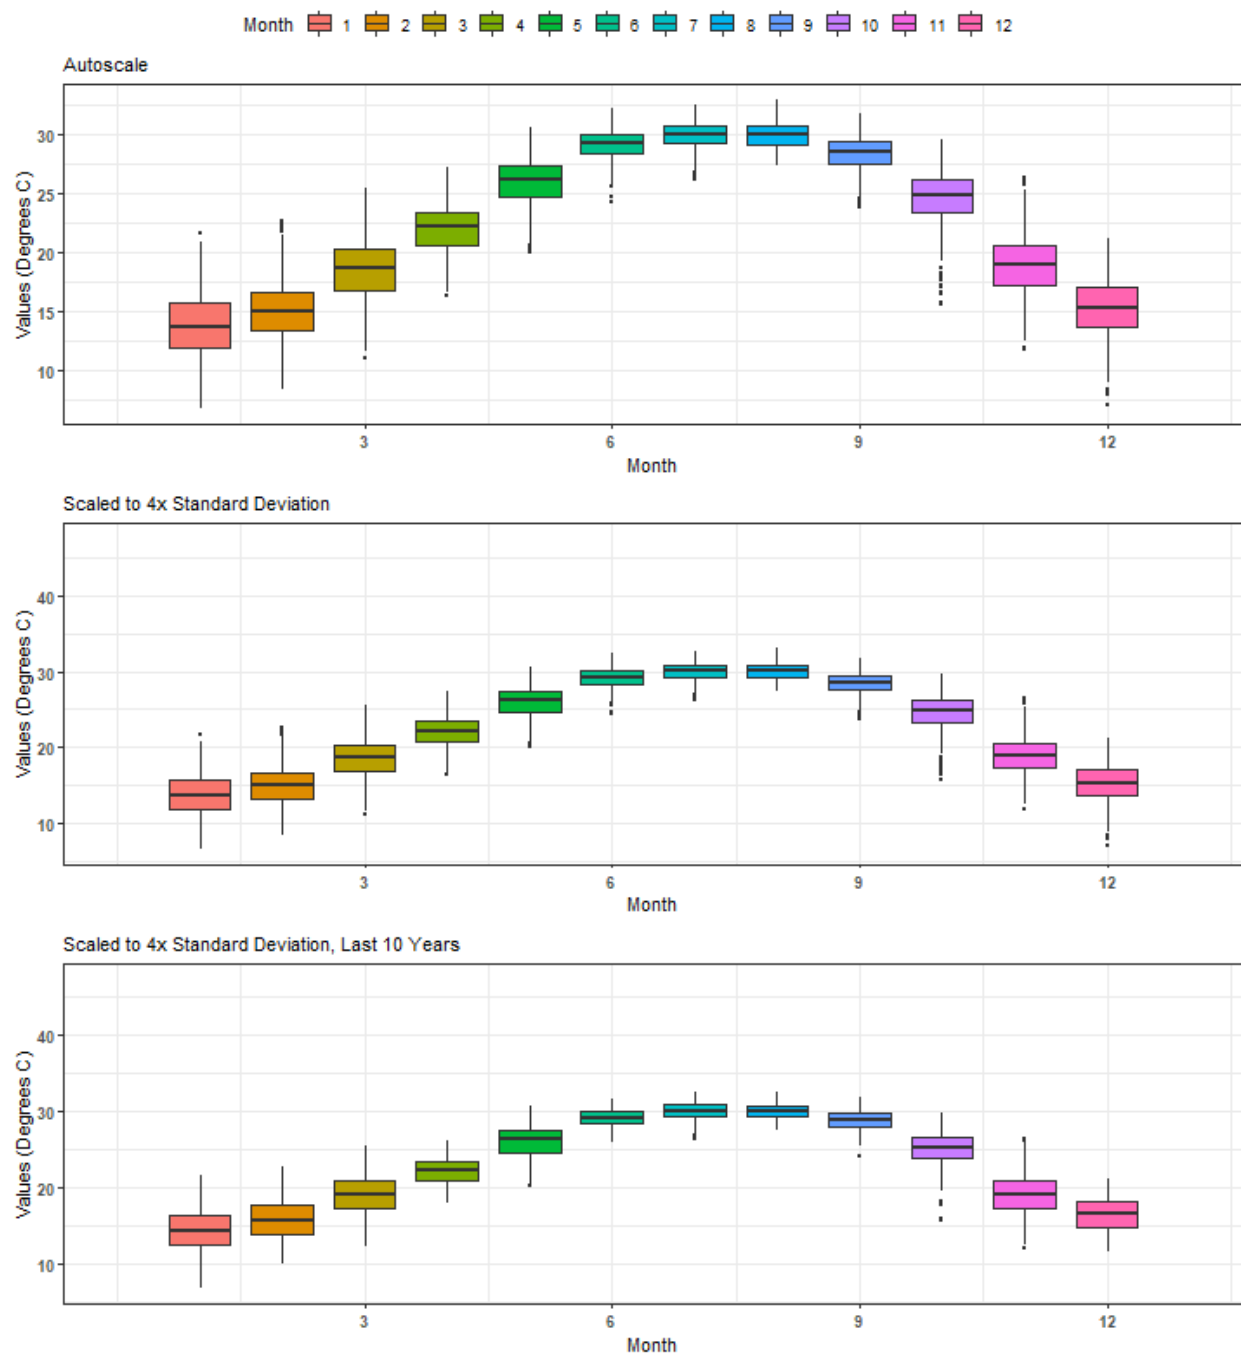


# Summary Box Plots for Apalachicola National Estuarine Research Reserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apadbwq

By Year

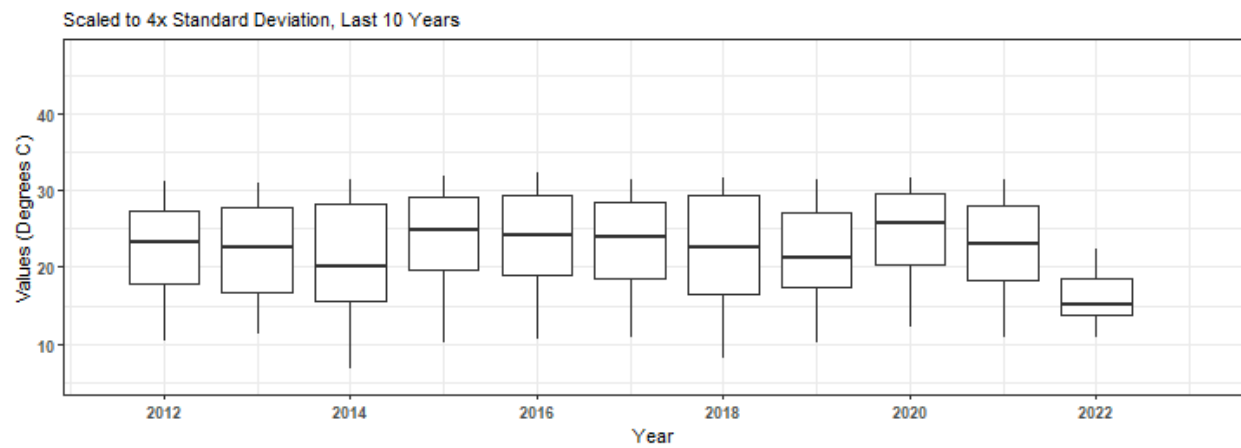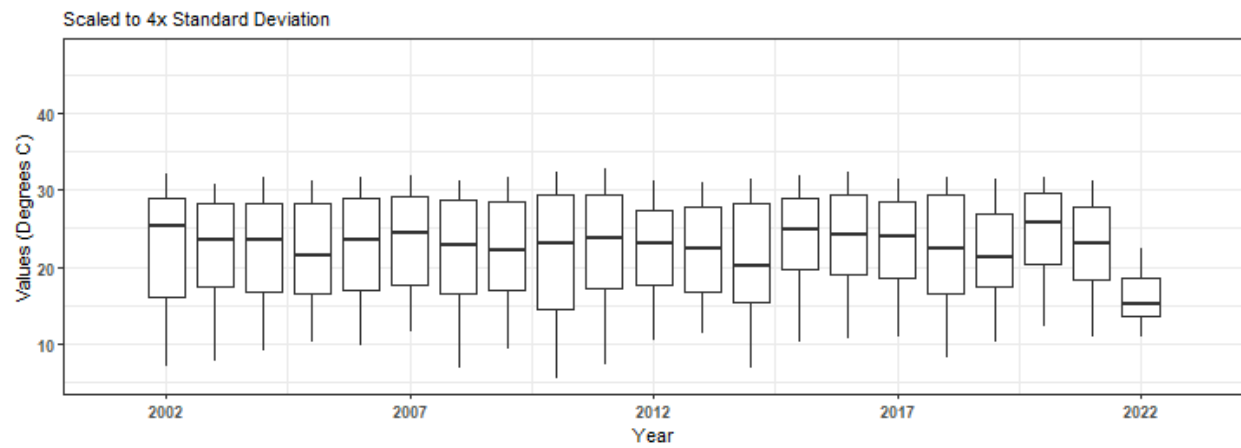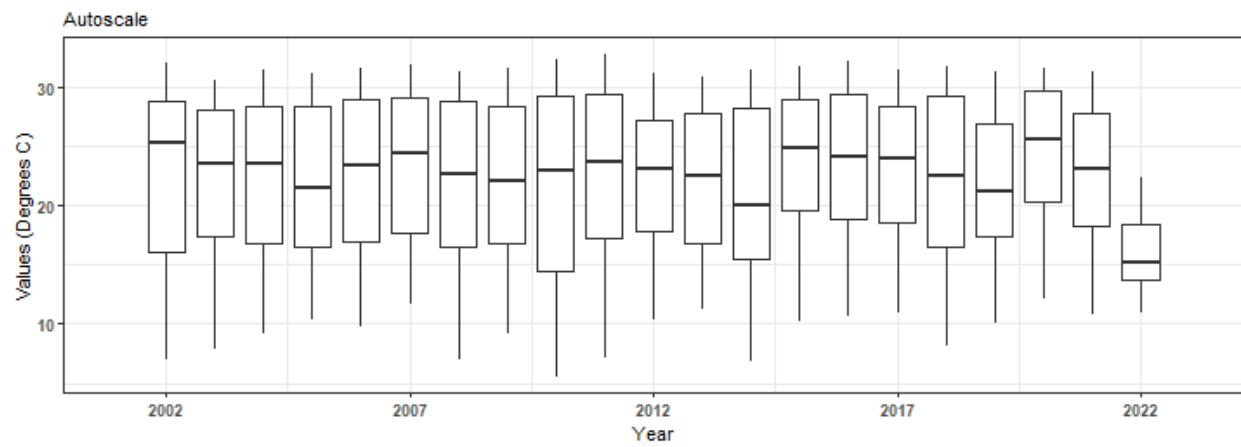


**Summary Box Plots for Apalachicola National Estuarine Research Reserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apadbwq**  
 By Year & Month

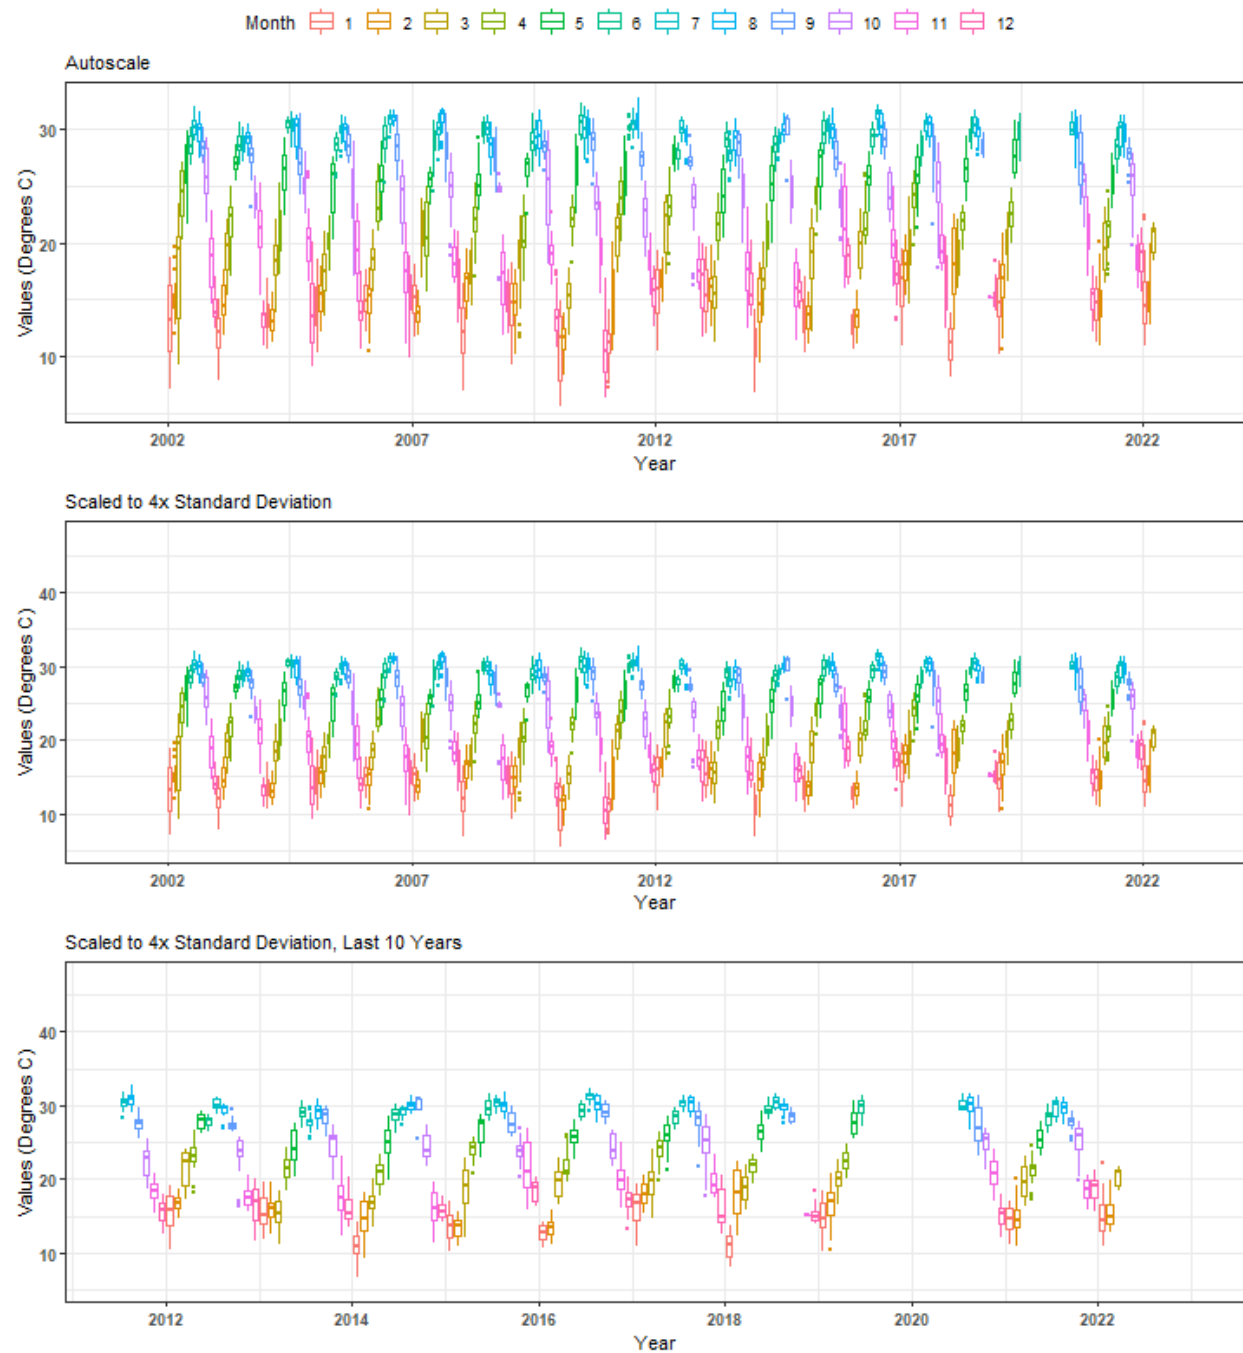




# Summary Box Plots for Apalachicola National Estuarine Research Reserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apadbwq

By Month

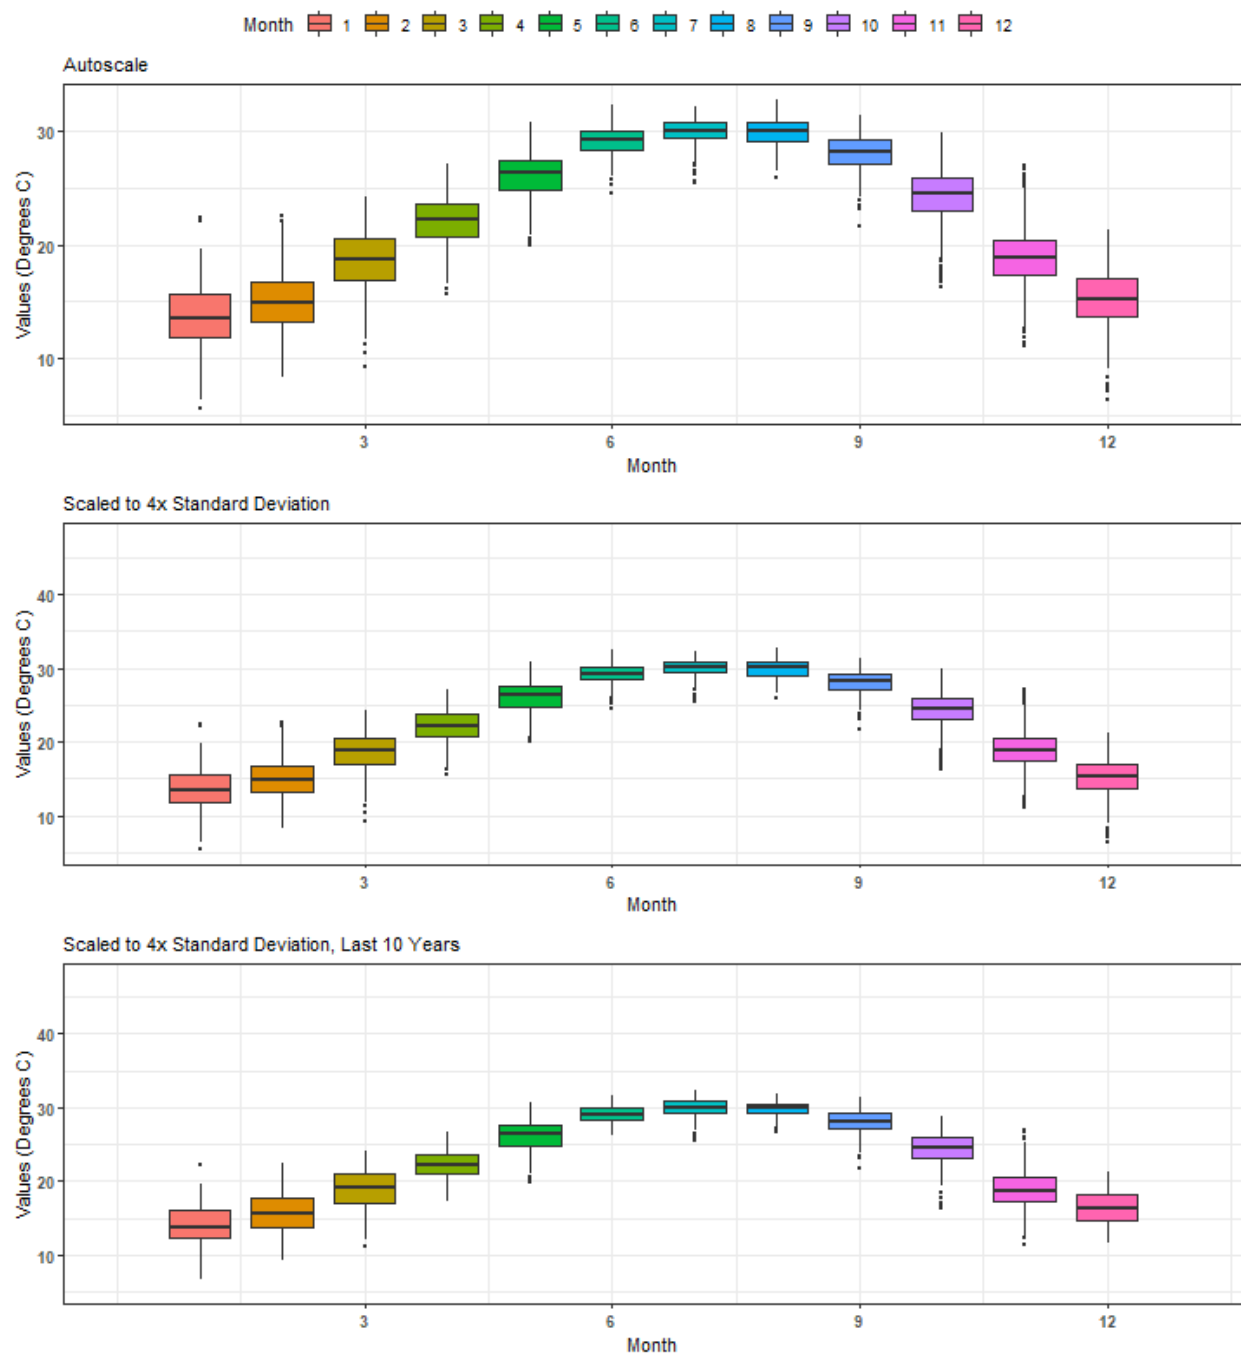


**Summary Box Plots for Apalachicola National Estuarine Research Reserve**  
**355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaebwq**

By Year

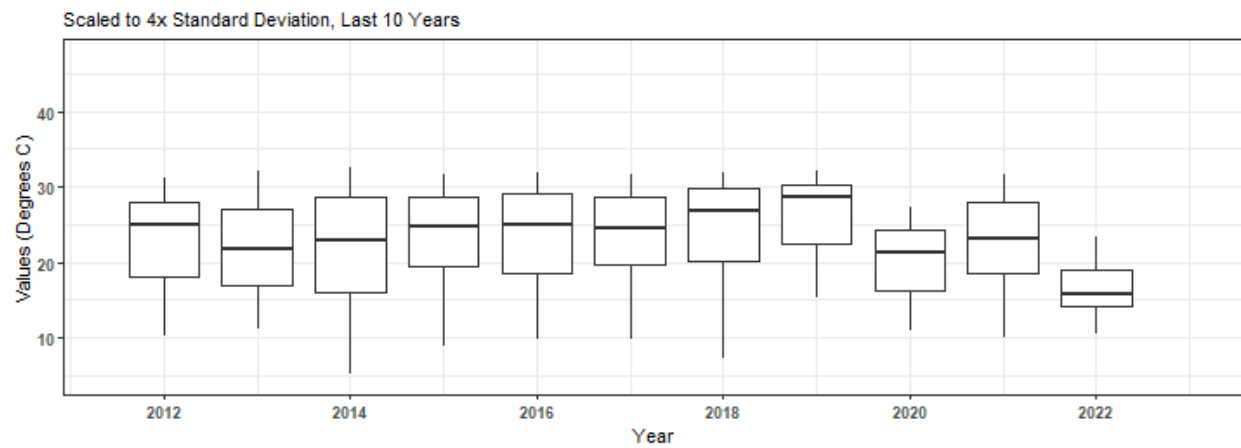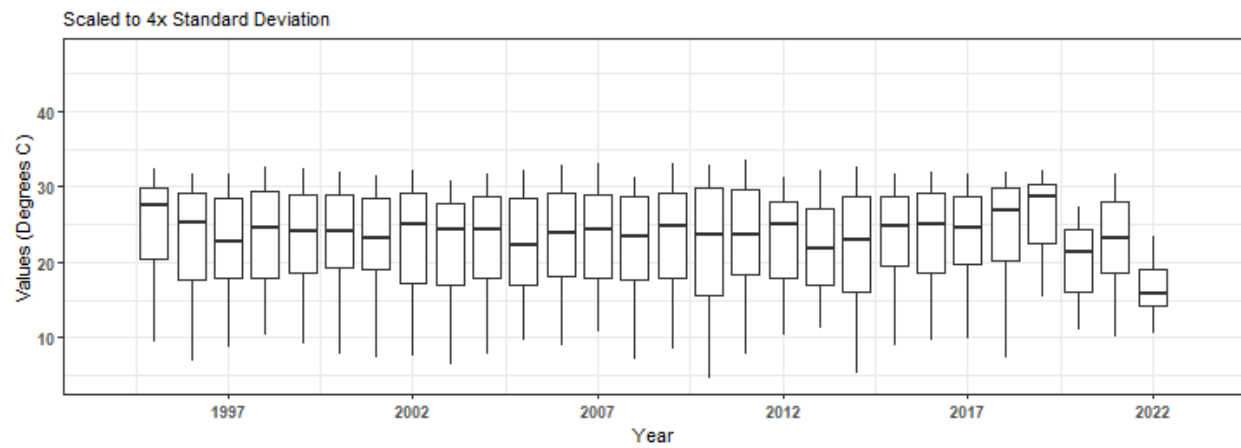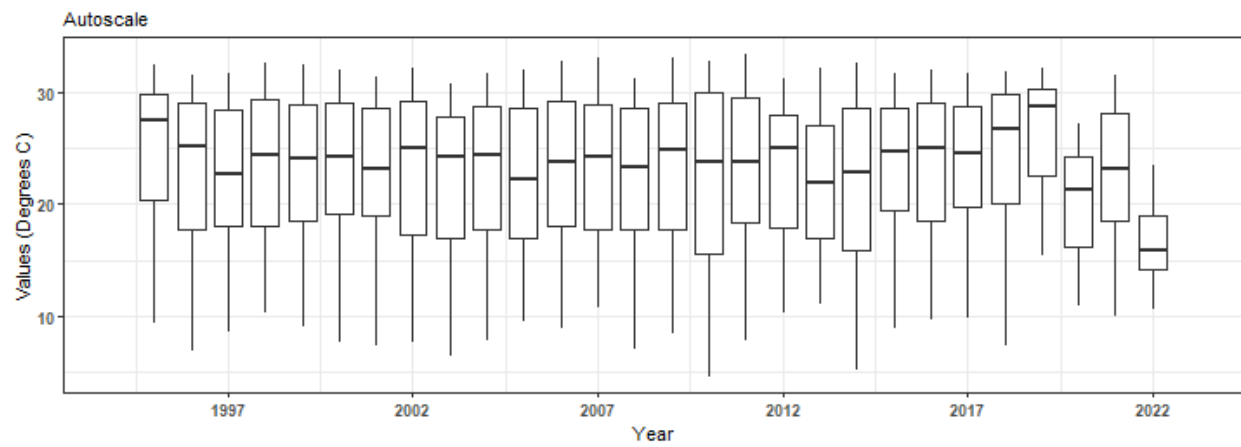


Summary Box Plots for Apalachicola National Estuarine Research Reserve  
 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaebwq  
 By Year & Month

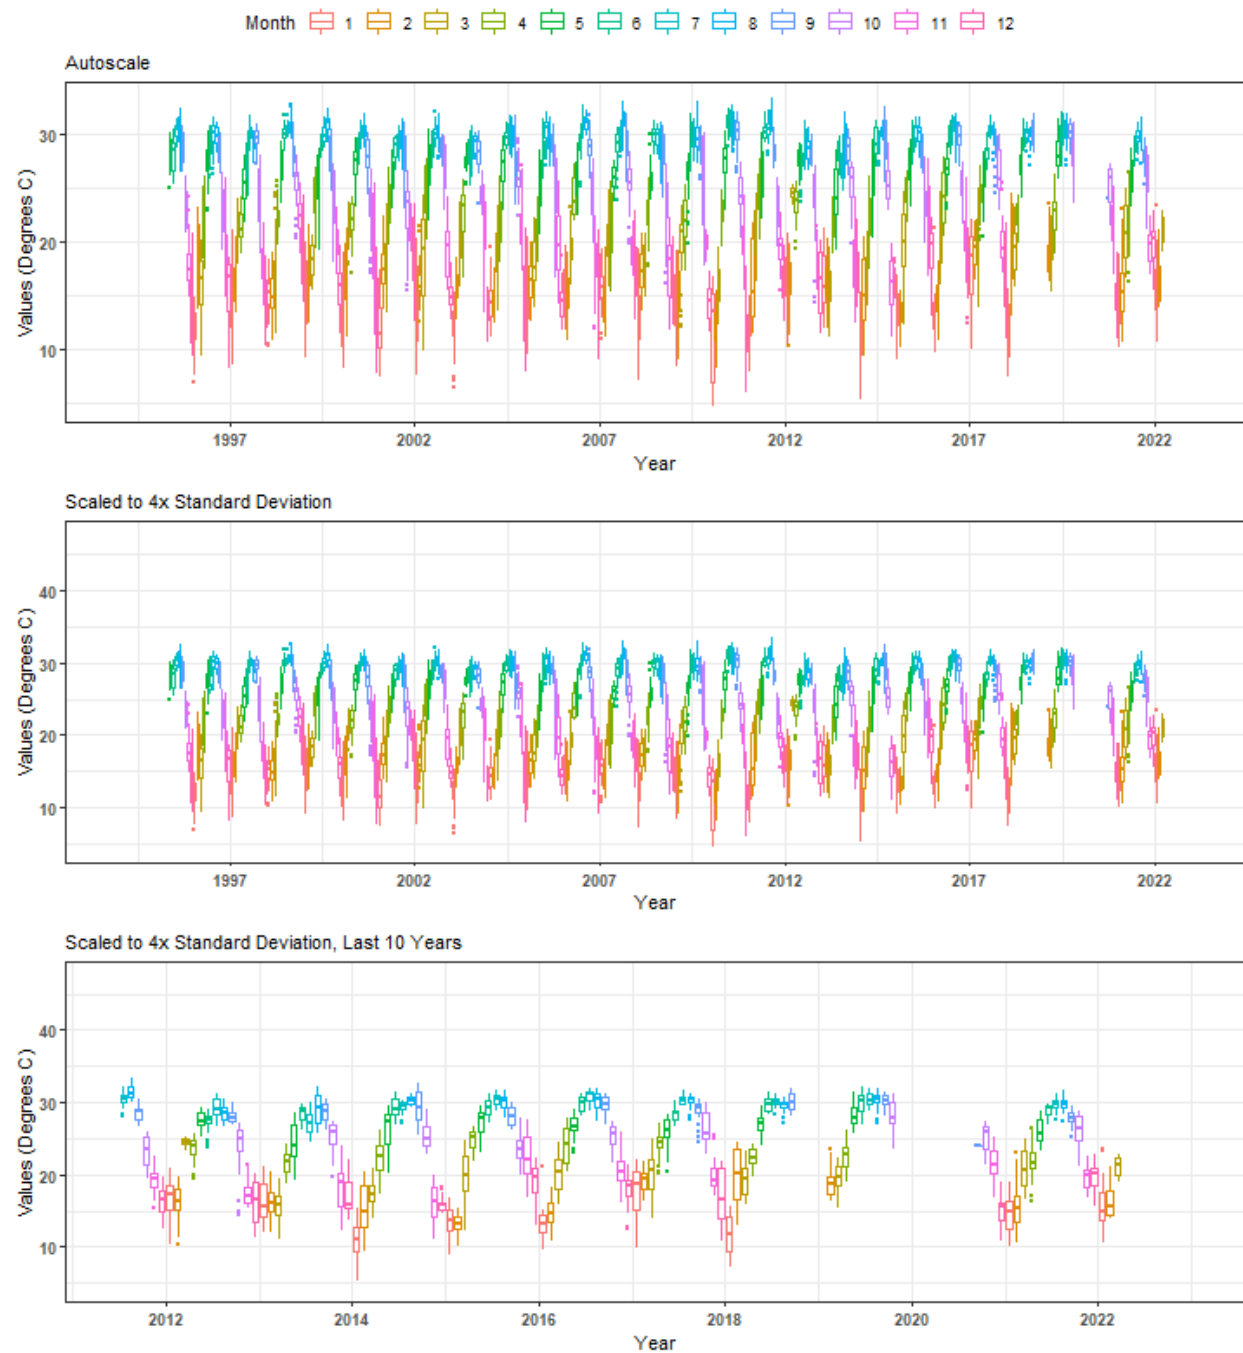






# Summary Box Plots for Apalachicola National Estuarine Research Reserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaebwq

By Month

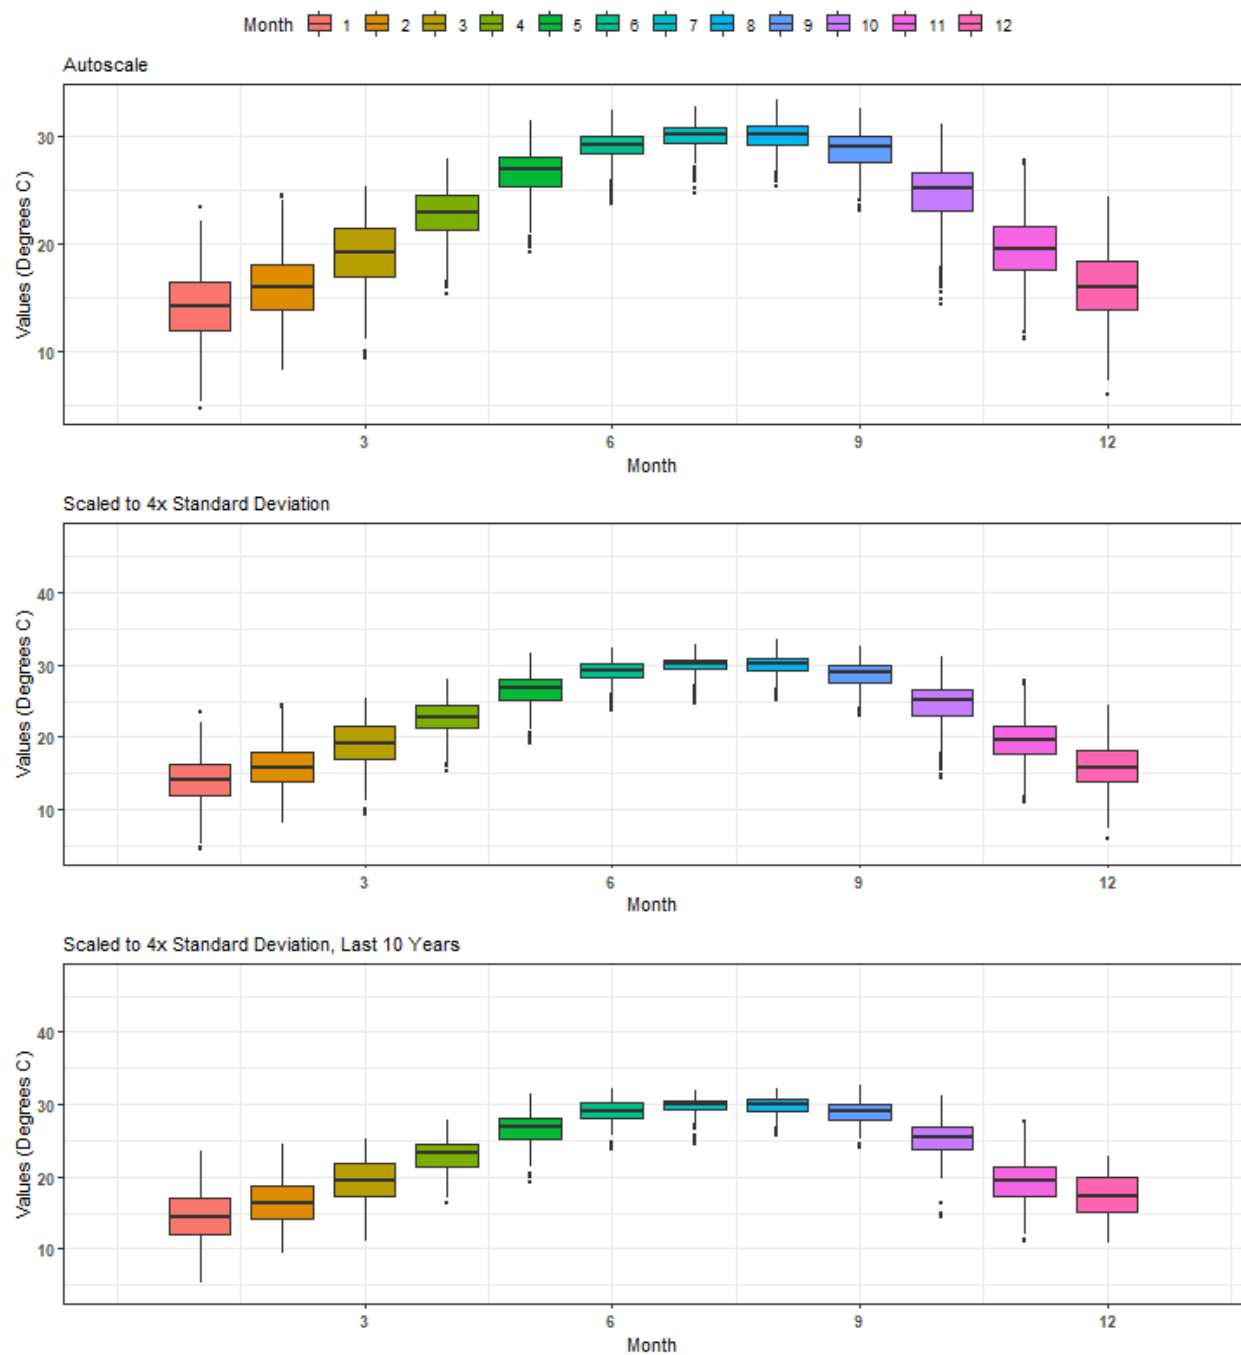


Summary Box Plots for Apalachicola National Estuarine Research Reserve  
355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaeswq

By Year

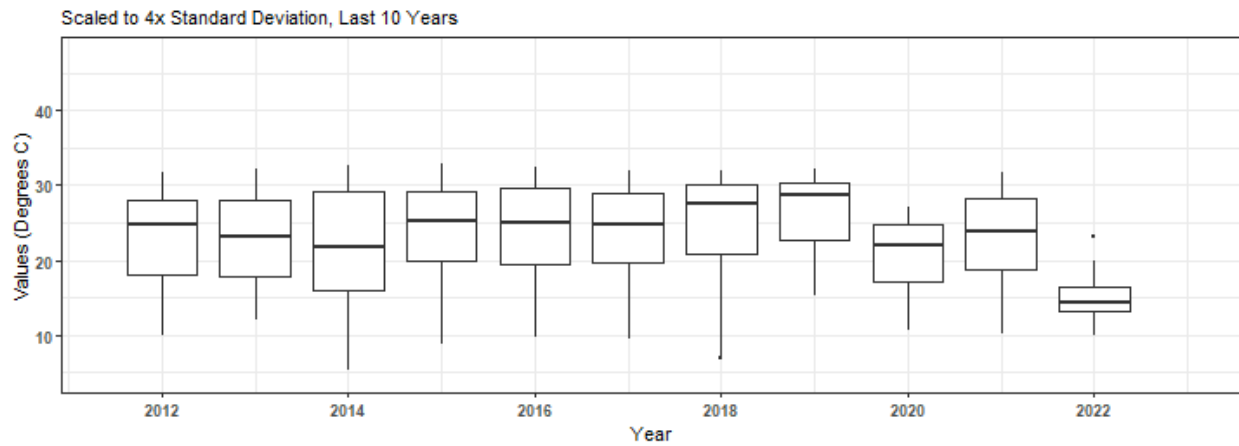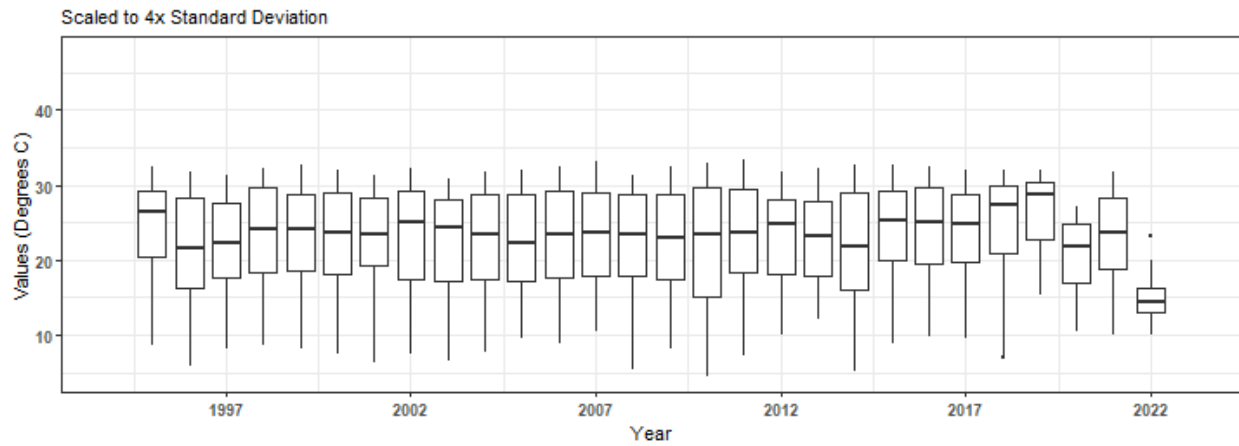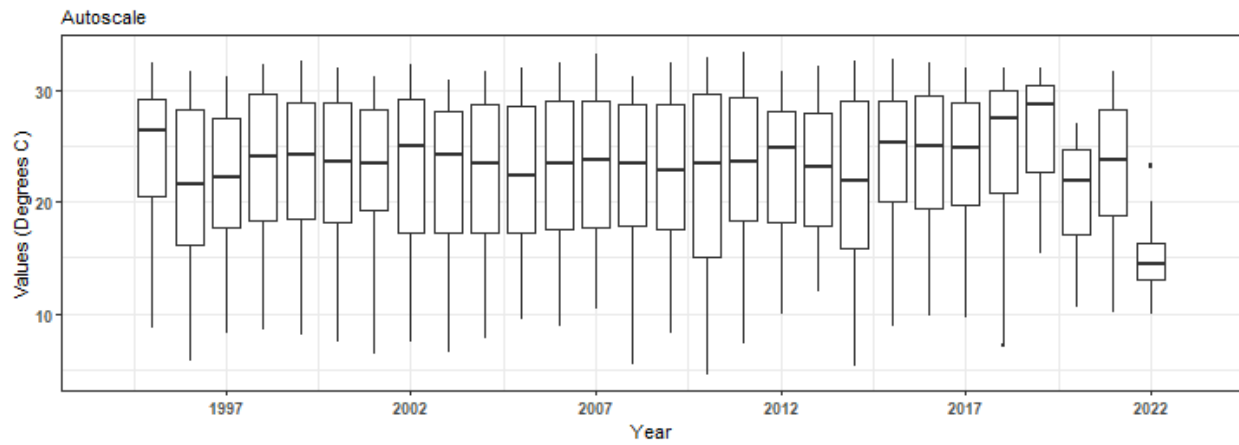


Summary Box Plots for Apalachicola National Estuarine Research Reserve  
355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaeswq

By Year & Month

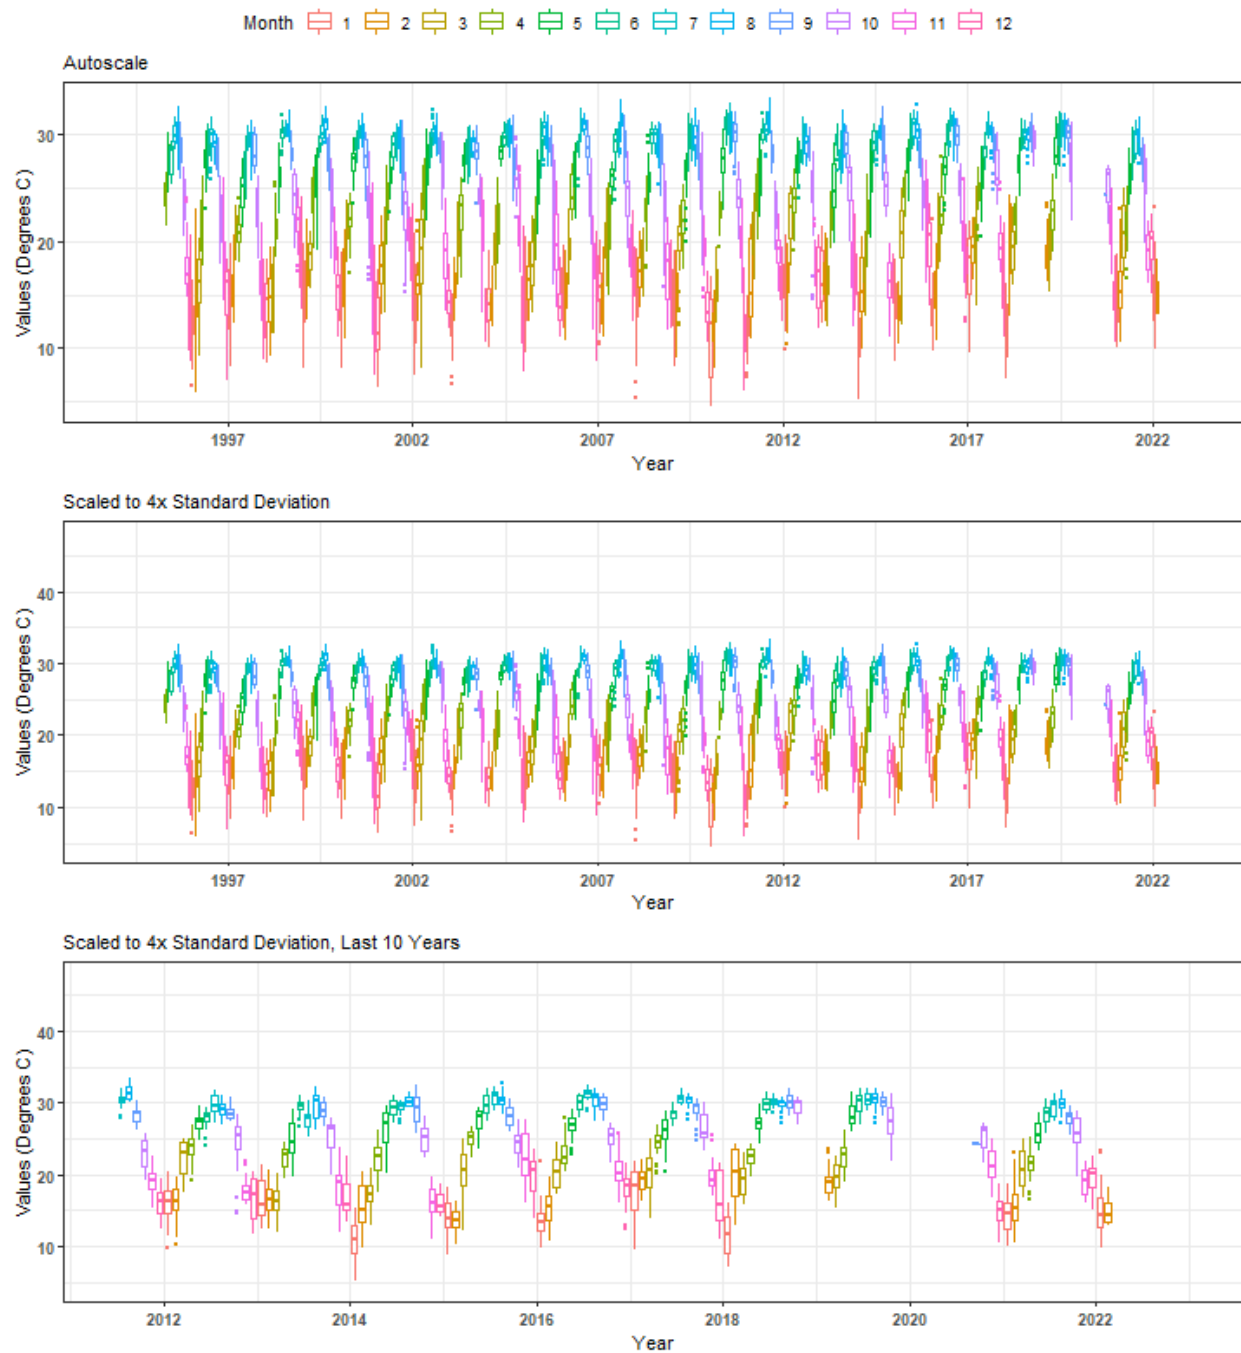




# Summary Box Plots for Apalachicola National Estuarine Research Reserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apaeswq

By Month

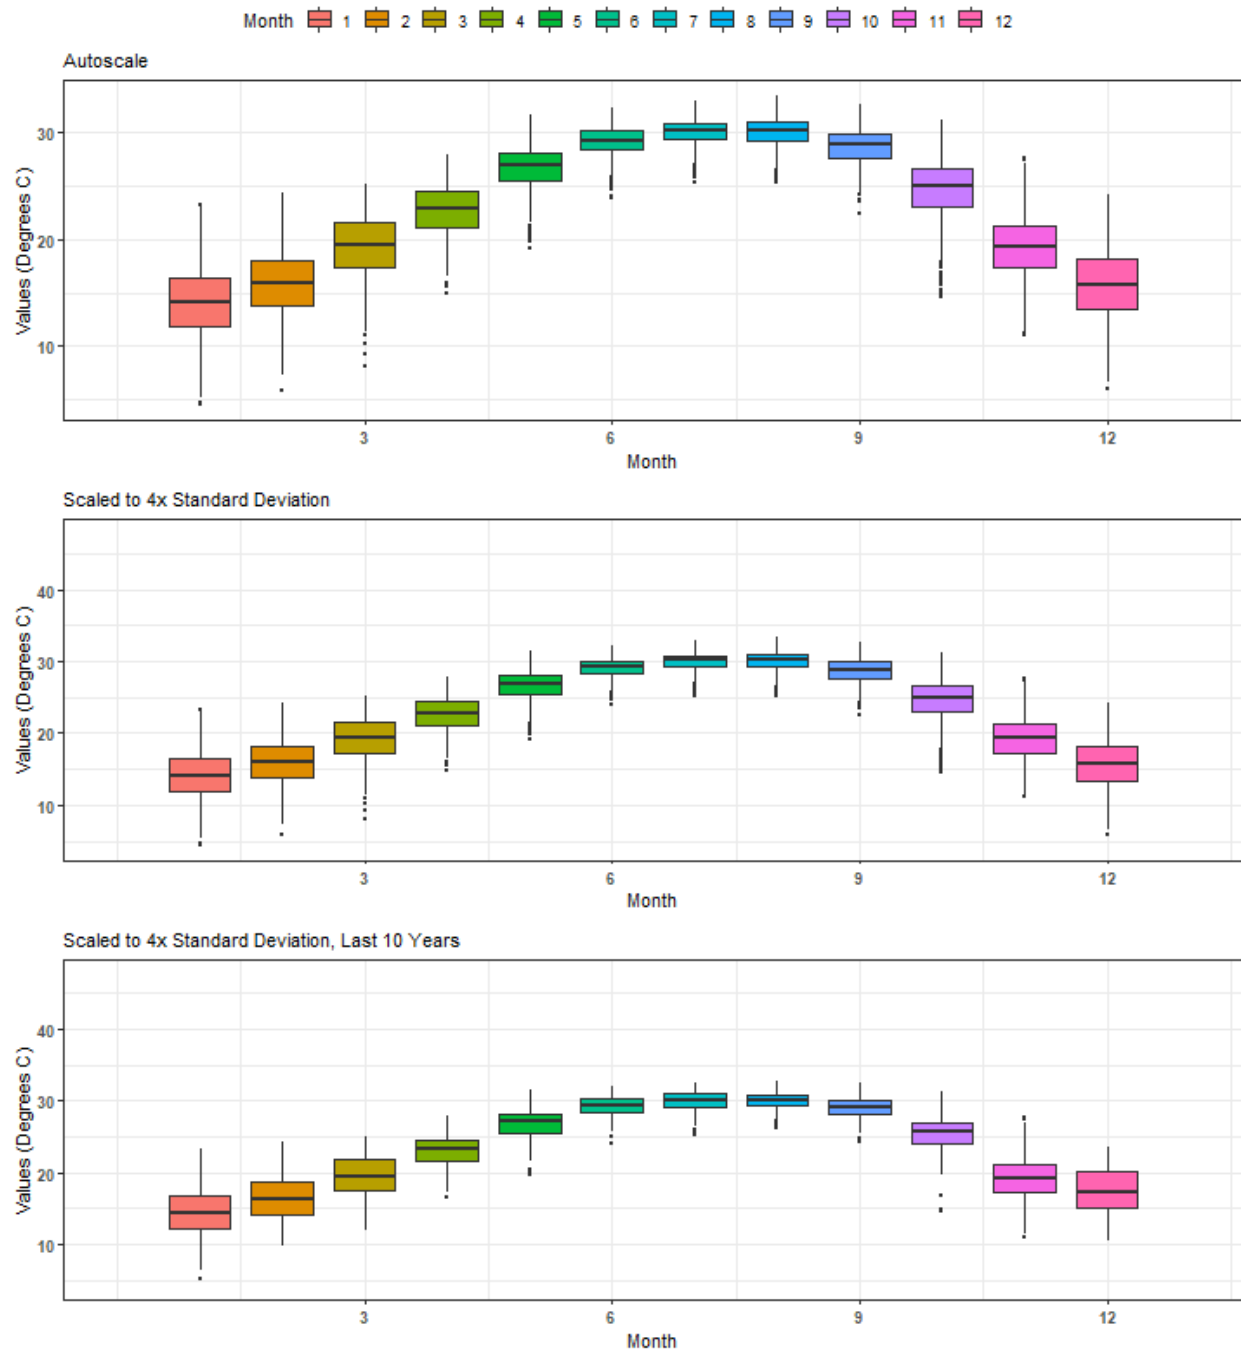


# Summary Box Plots for Apalachicola National Estuarine Research Reserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apalmwq

By Year

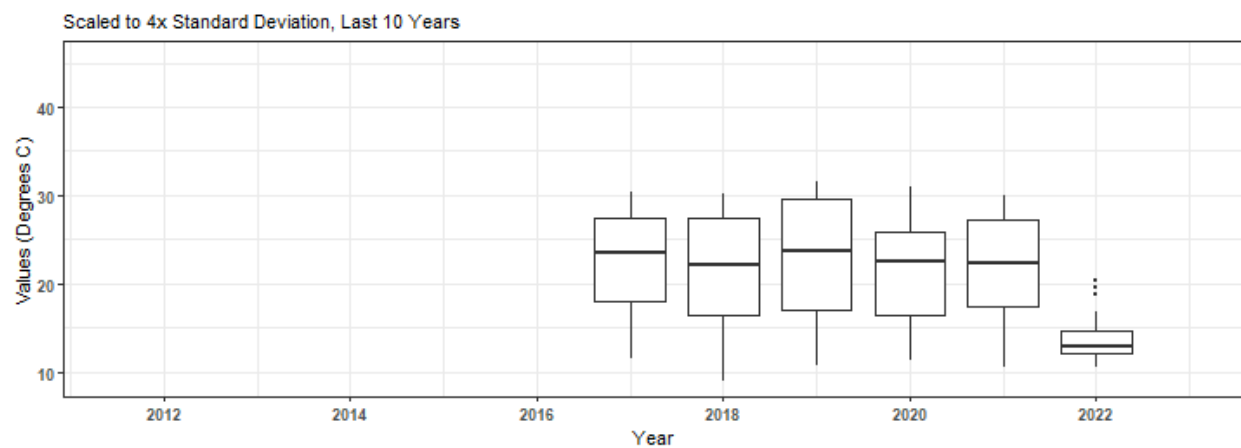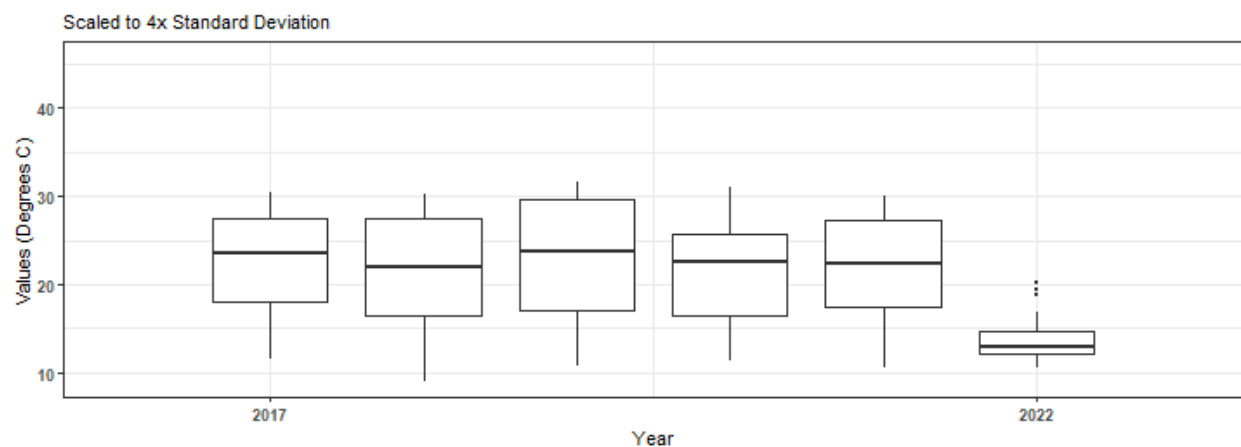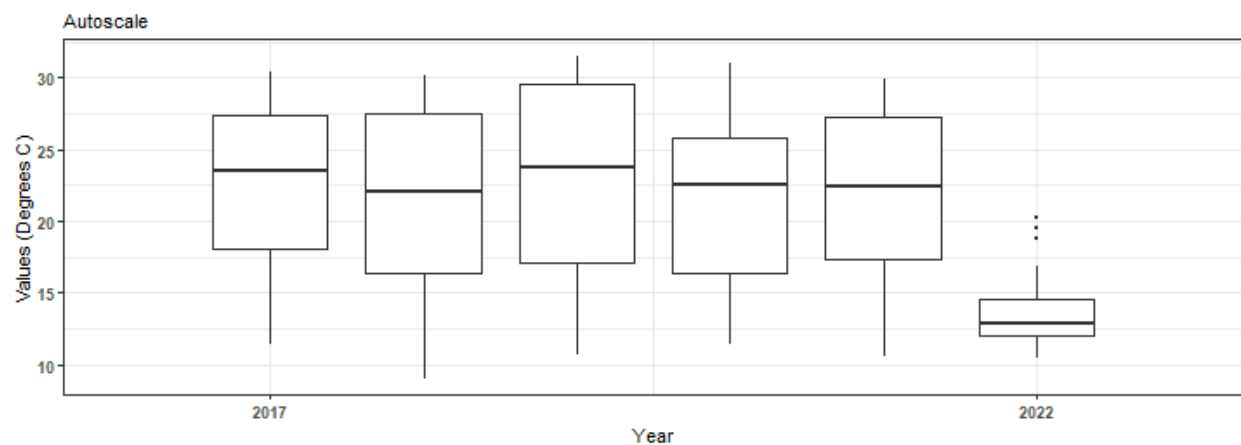


# Summary Box Plots for Apalachicola National Estuarine Research Reserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apalmwq

By Year & Month

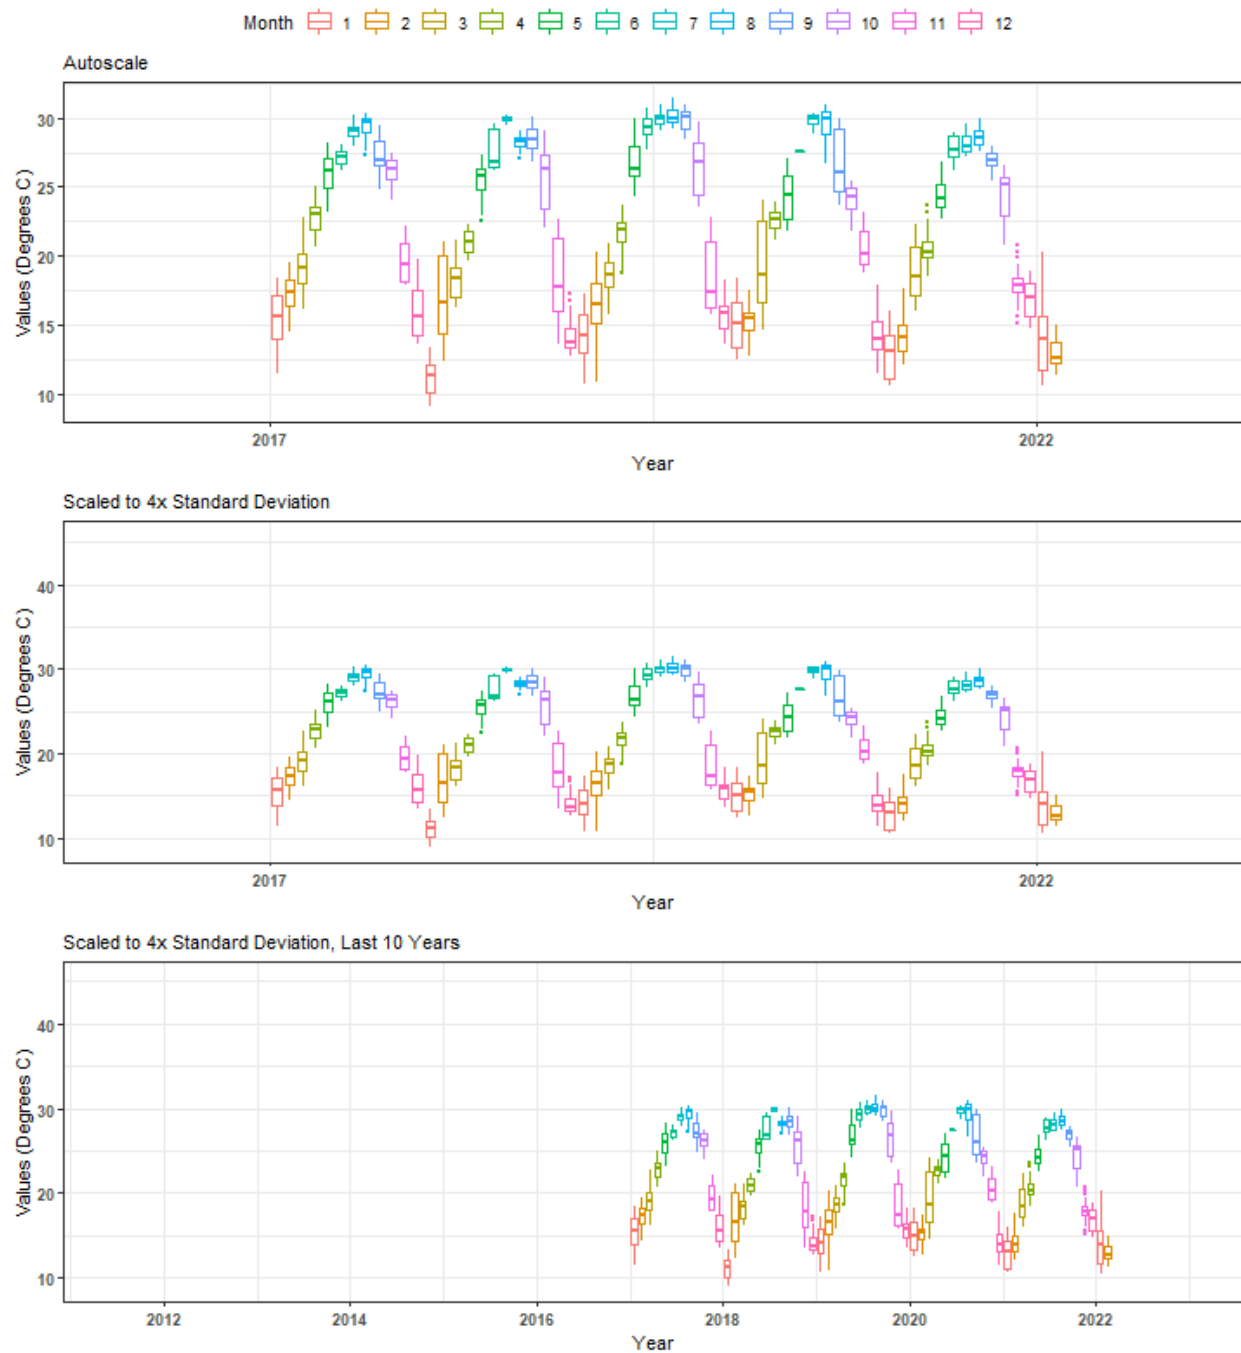




# Summary Box Plots for Apalachicola National Estuarine Research Reserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apalmwq

By Month

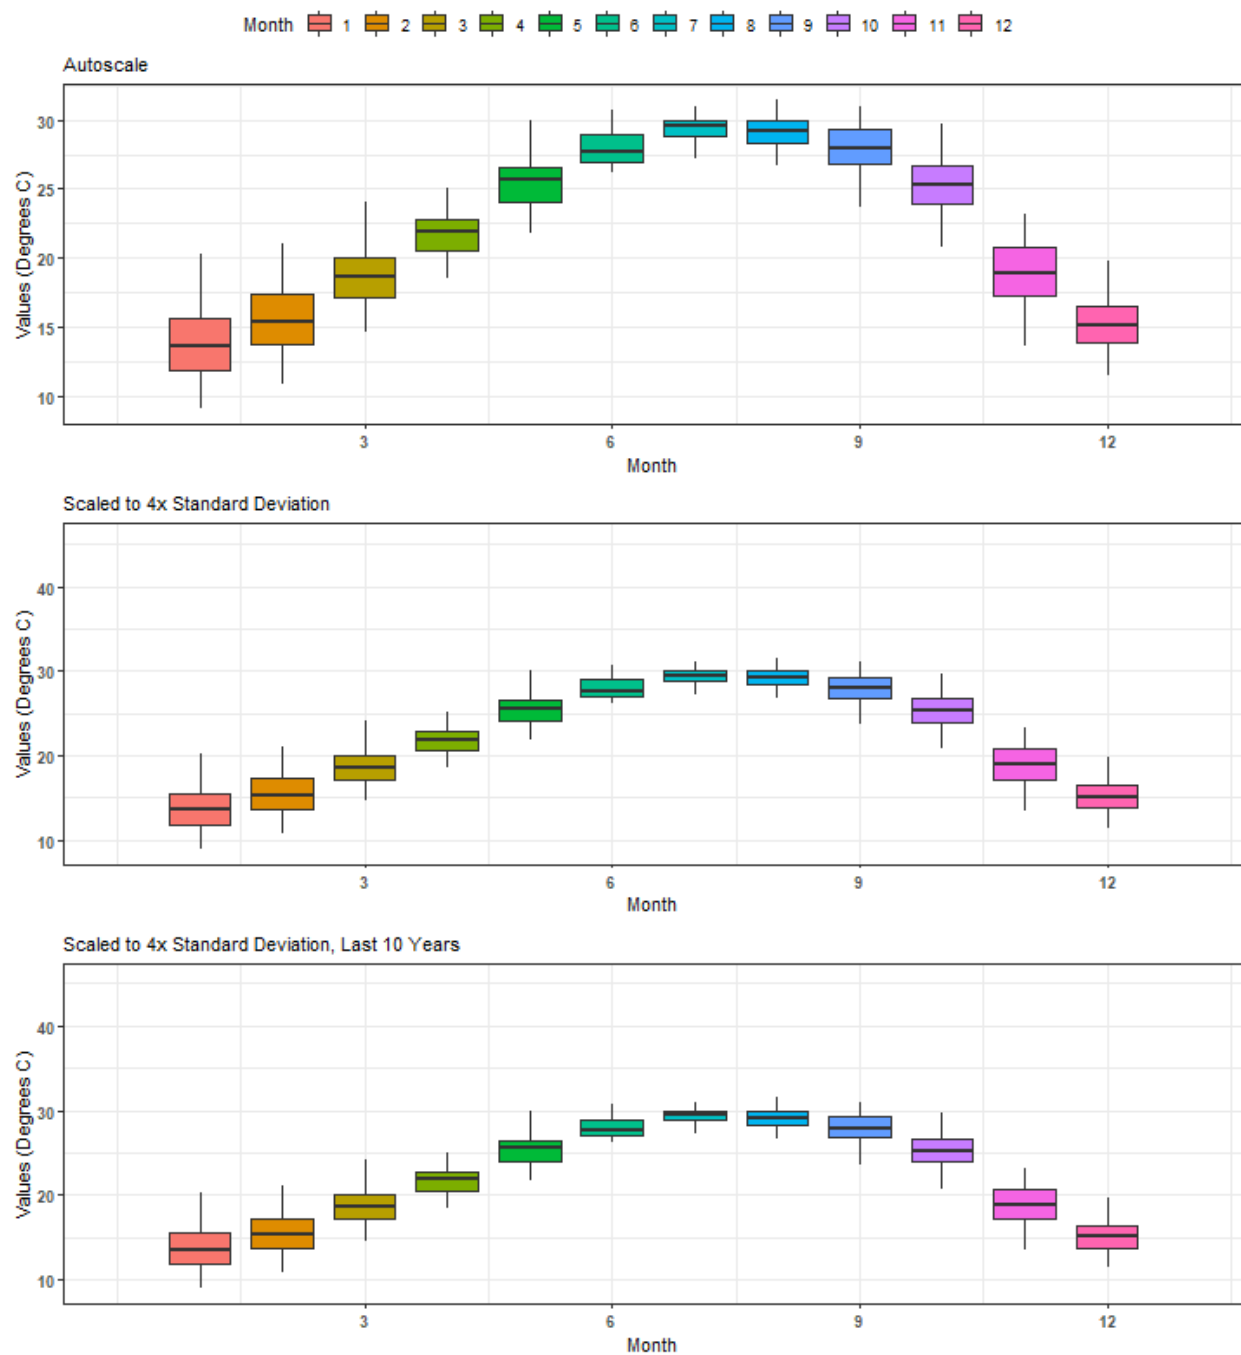

# Summary Box Plots for Apalachicola National Estuarine Research Reserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apapcwq


By Year

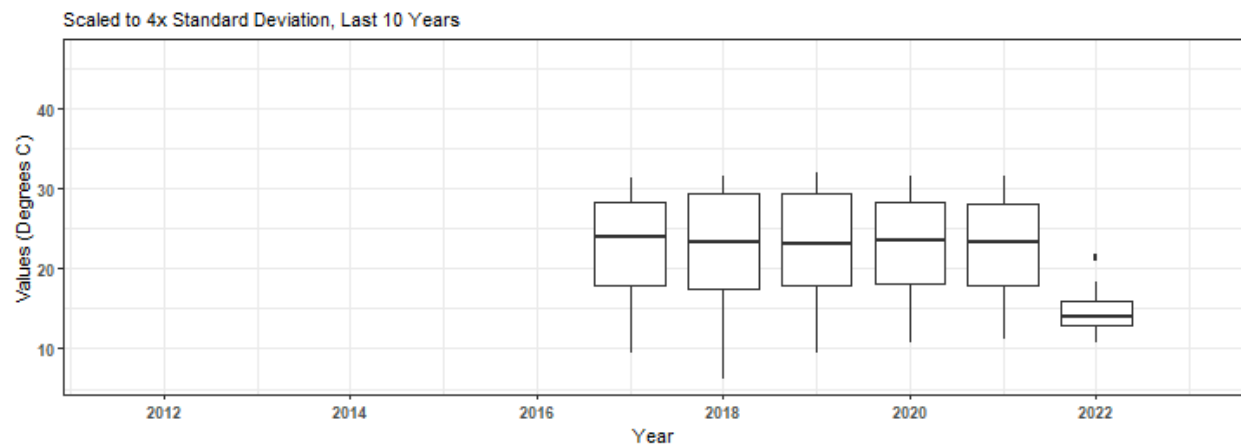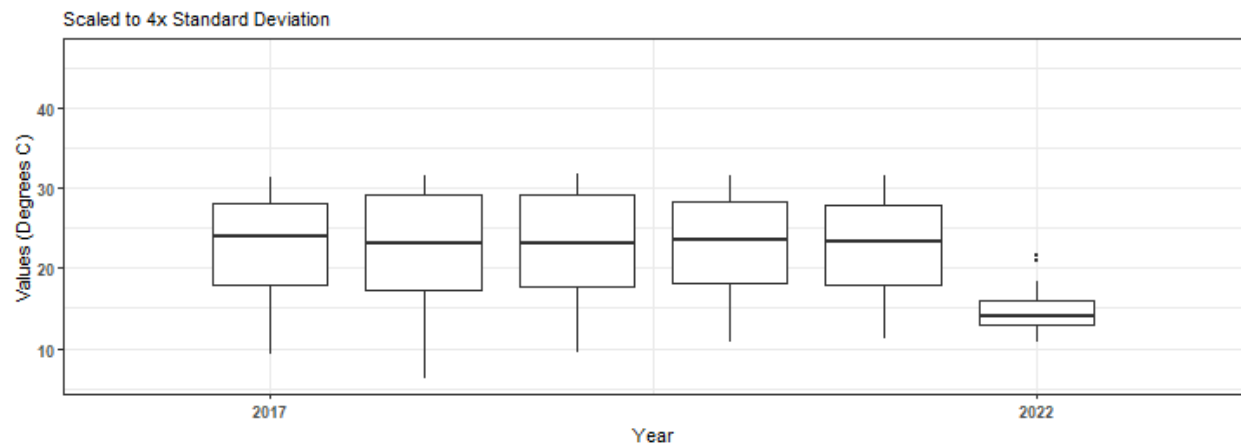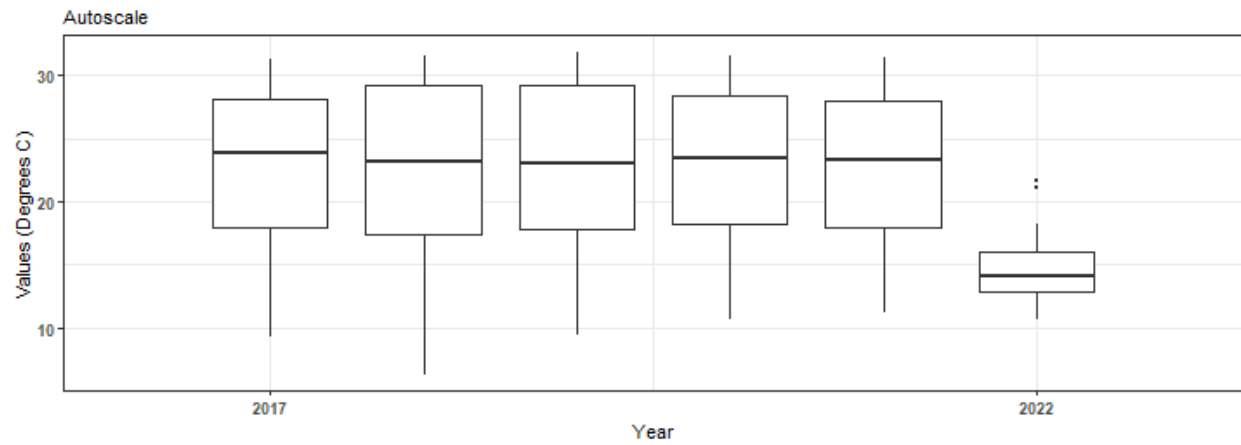




# Summary Box Plots for Apalachicola National Estuarine Research Reserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apapcwq

By Year & Month

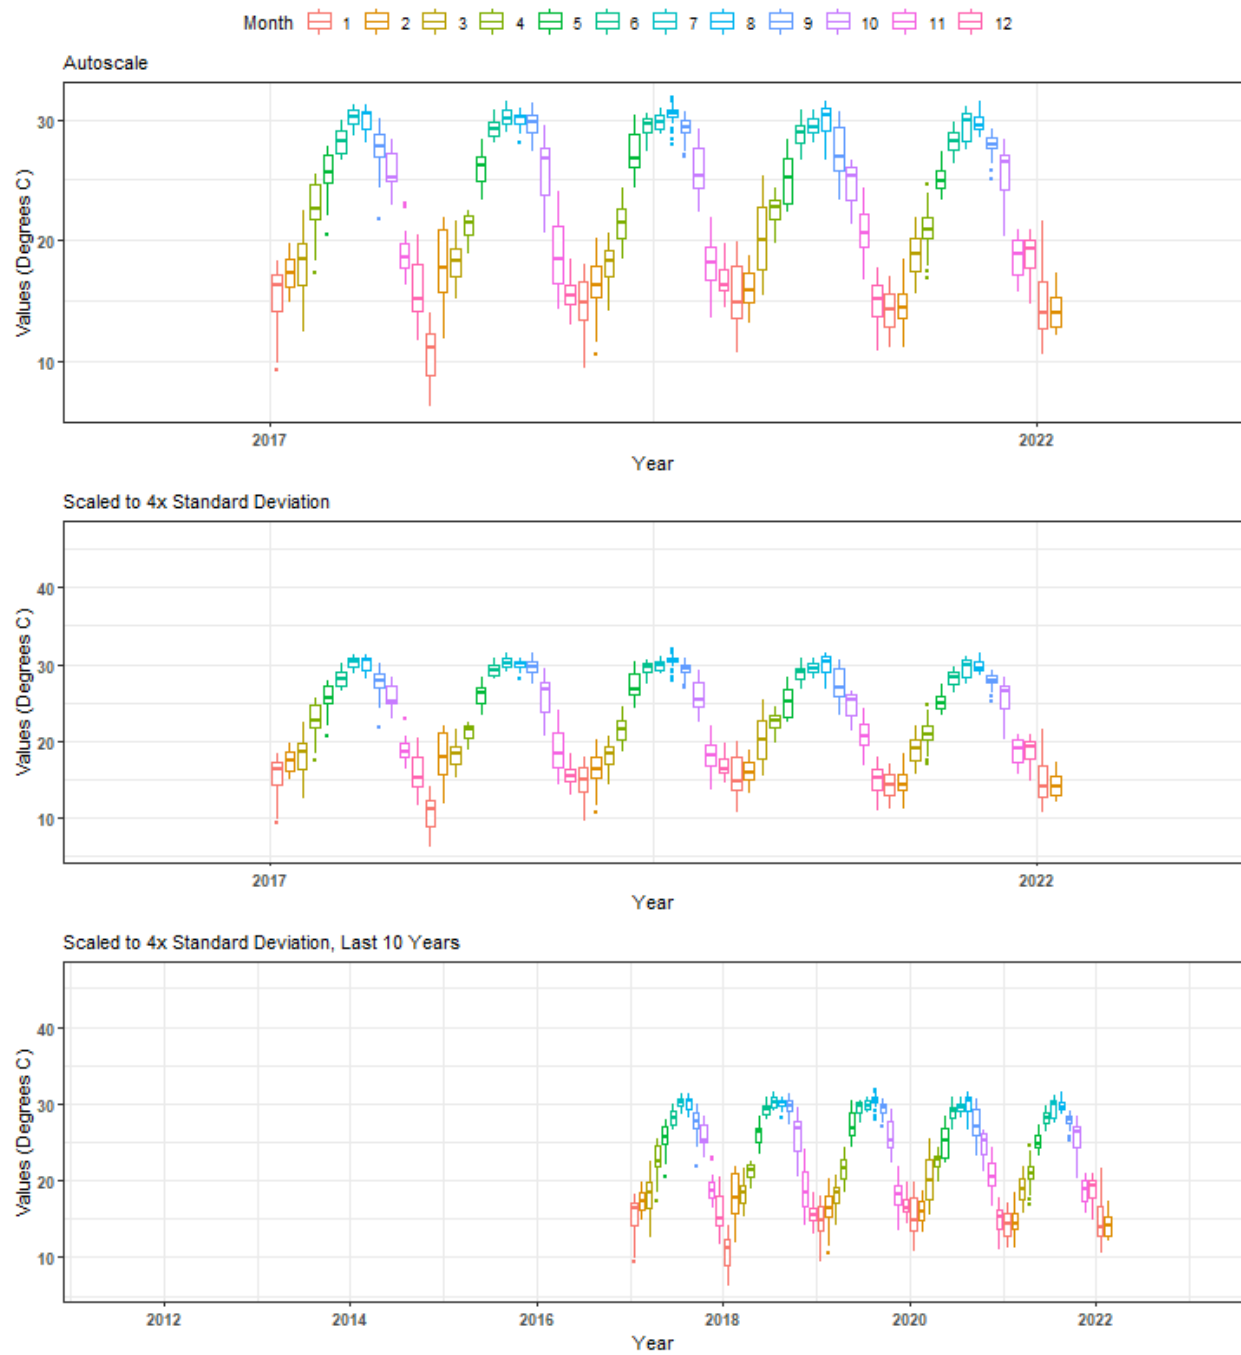


# Summary Box Plots for Apalachicola National Estuarine Research Reserve 355 | Apalachicola National Estuarine Research Reserve System-Wide Monitoring Program | apapcwq

By Month

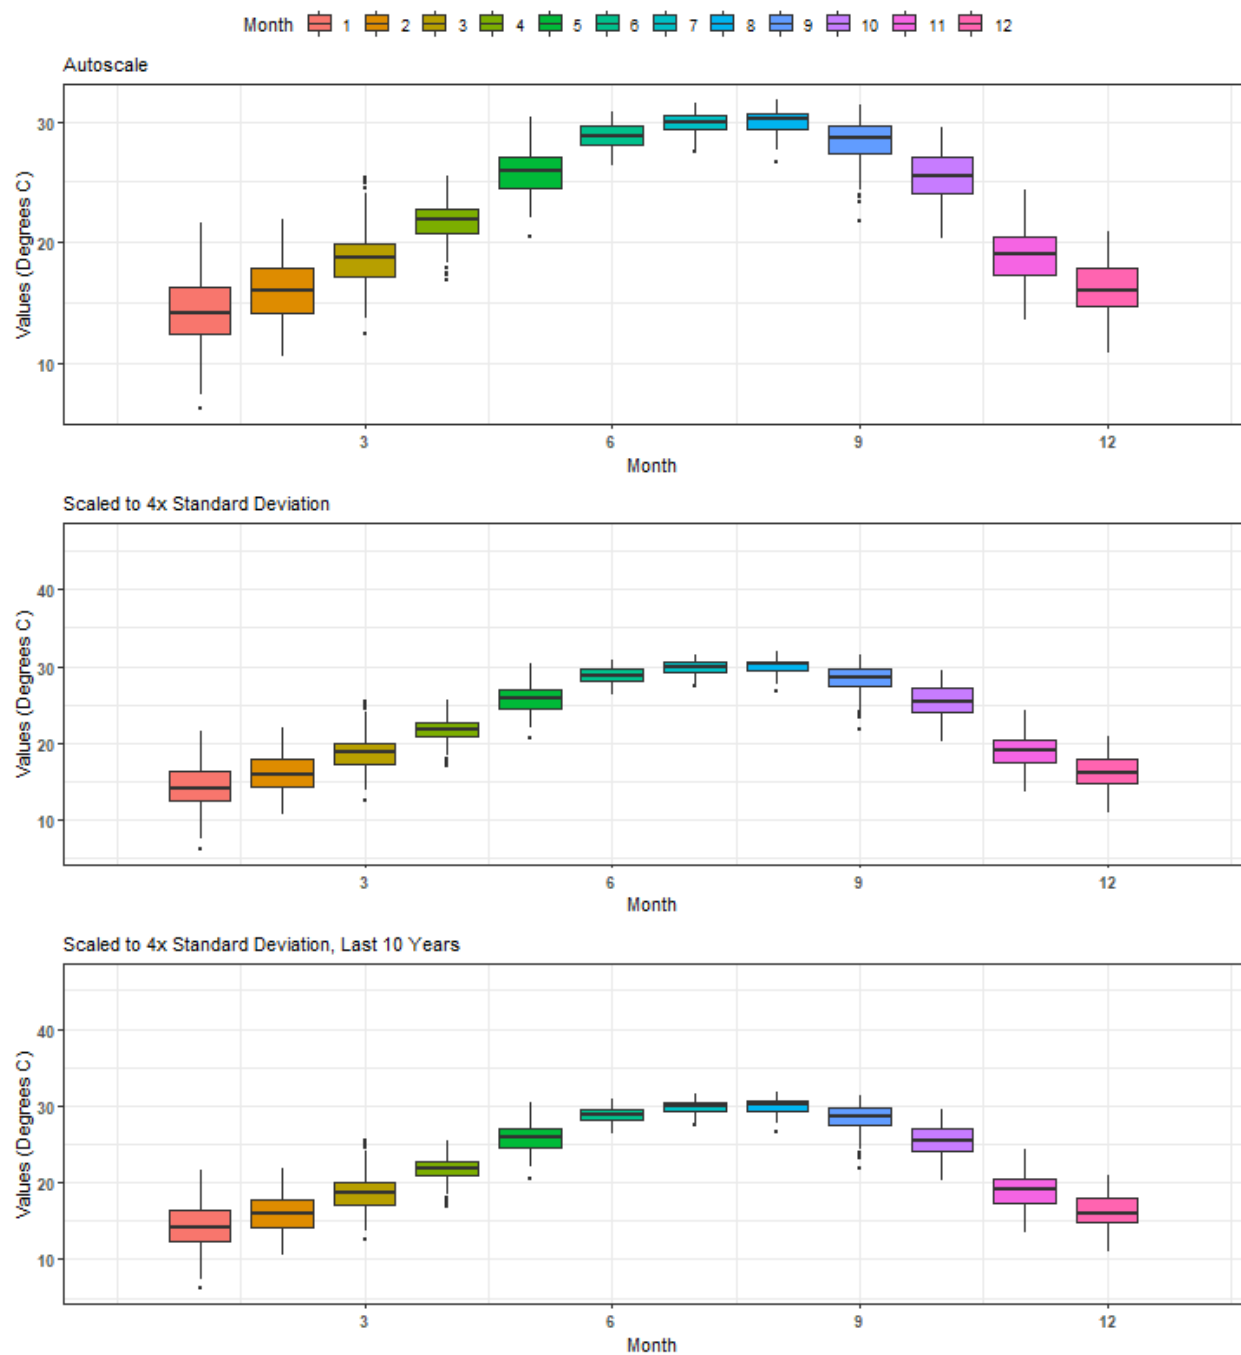


# Summary Box Plots for Big Bend Seagrasses Aquatic Preserve 7 | National Water Information System | 02323566

By Year

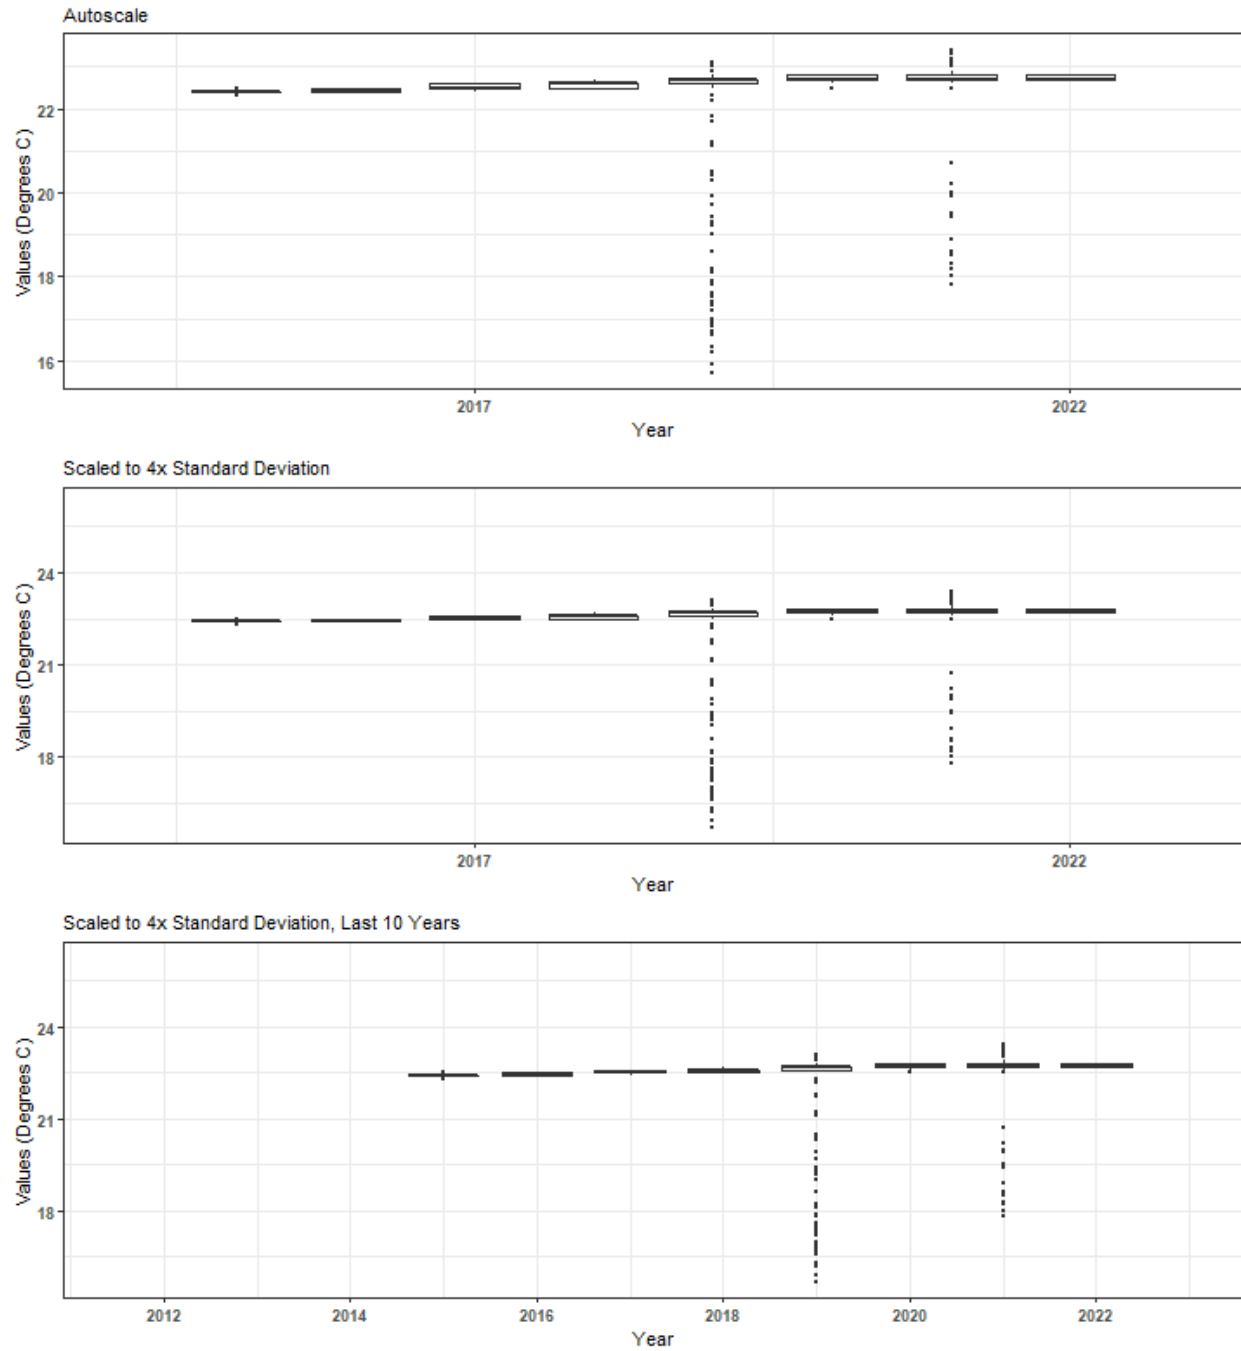


# Summary Box Plots for Big Bend Seagrasses Aquatic Preserve 7 | National Water Information System | 02323566

By Year & Month

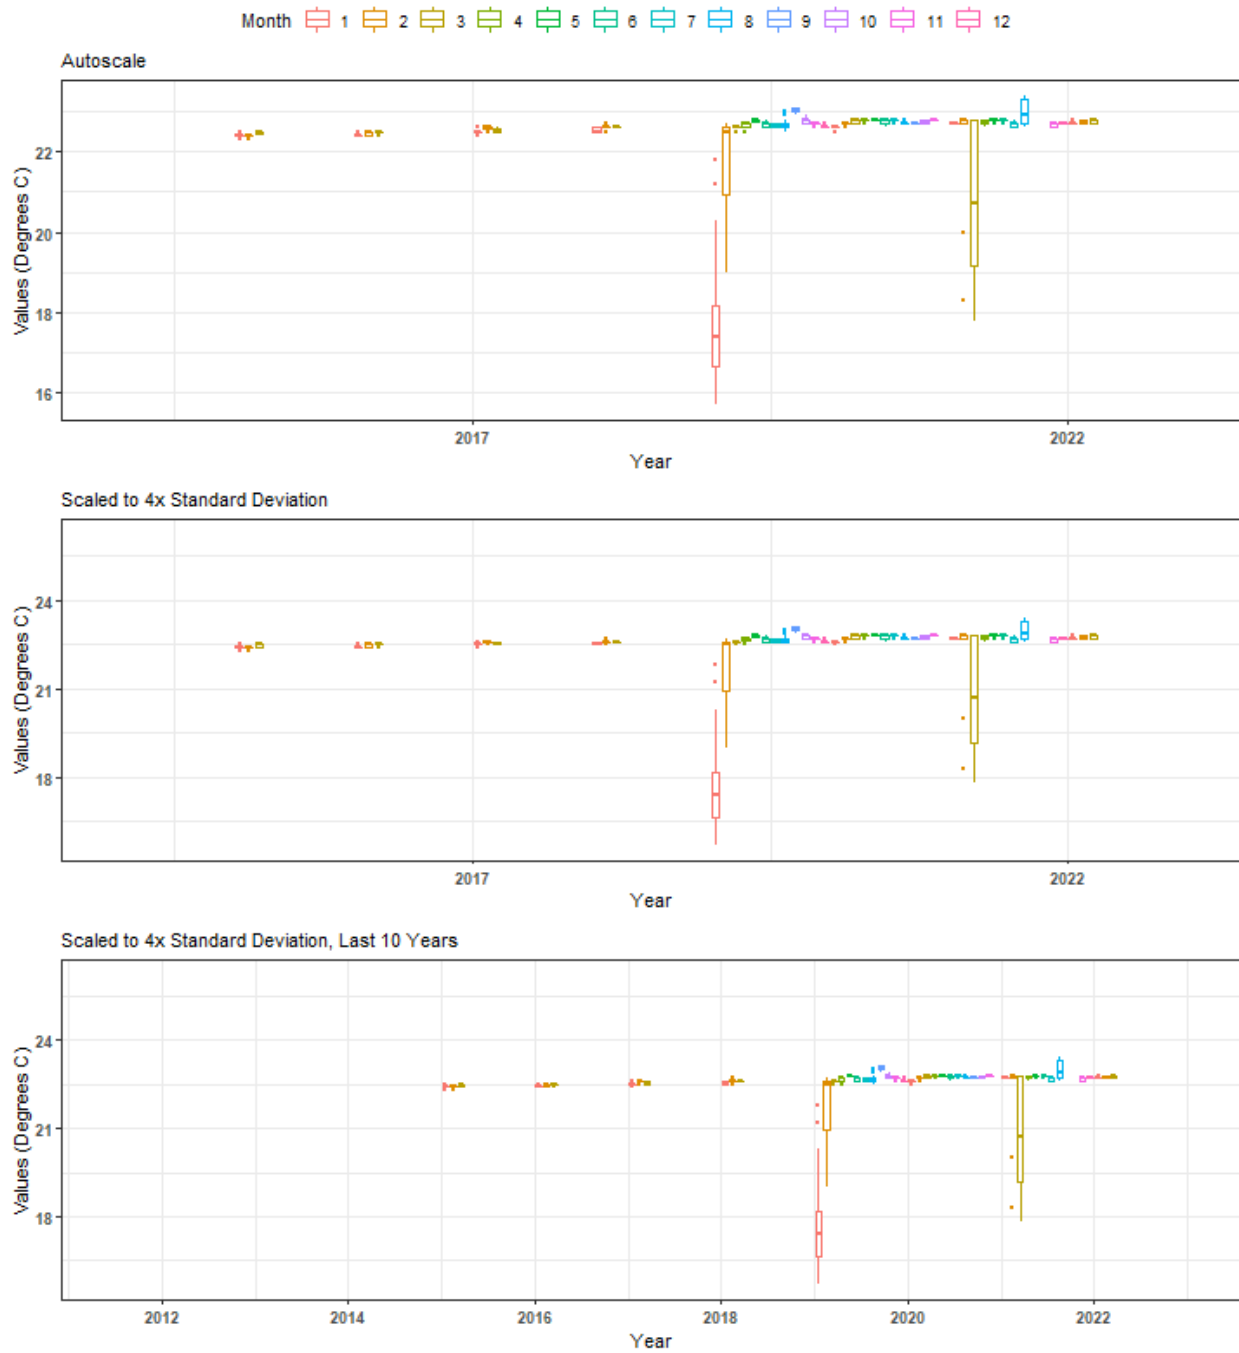




# Summary Box Plots for Big Bend Seagrasses Aquatic Preserve 7 | National Water Information System | 02323566

By Month

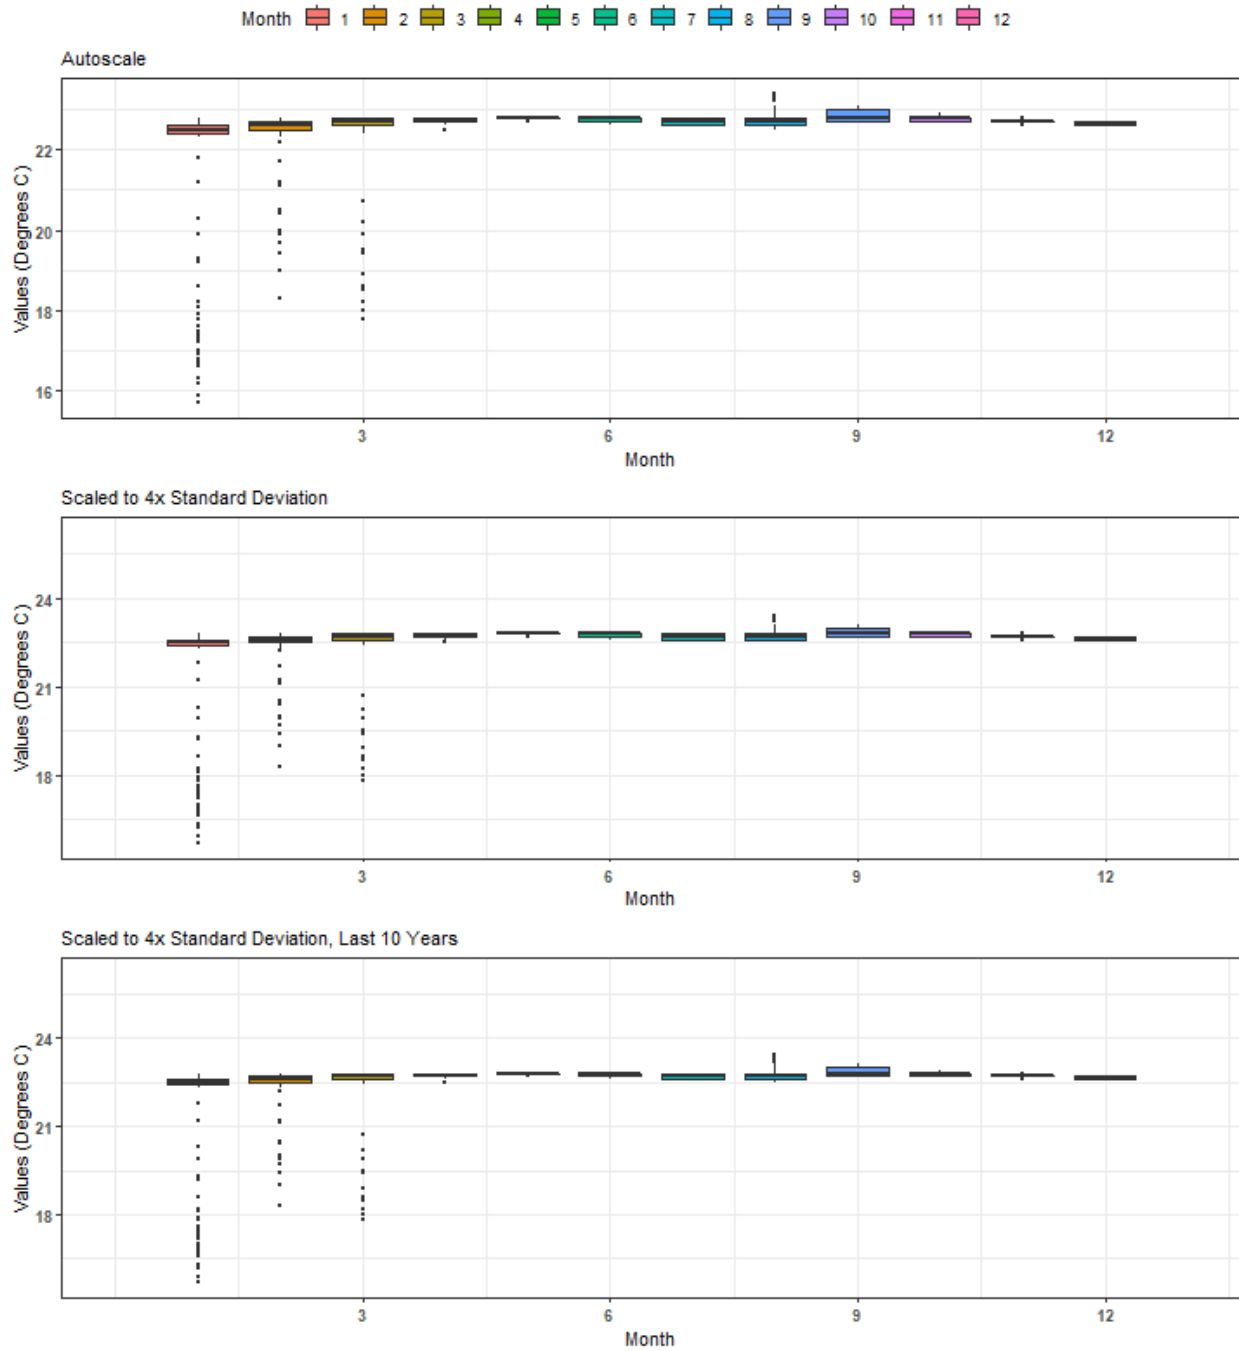


Summary Box Plots for Big Bend Seagrasses Aquatic Preserve  
7 | National Water Information System | 02326526

By Year

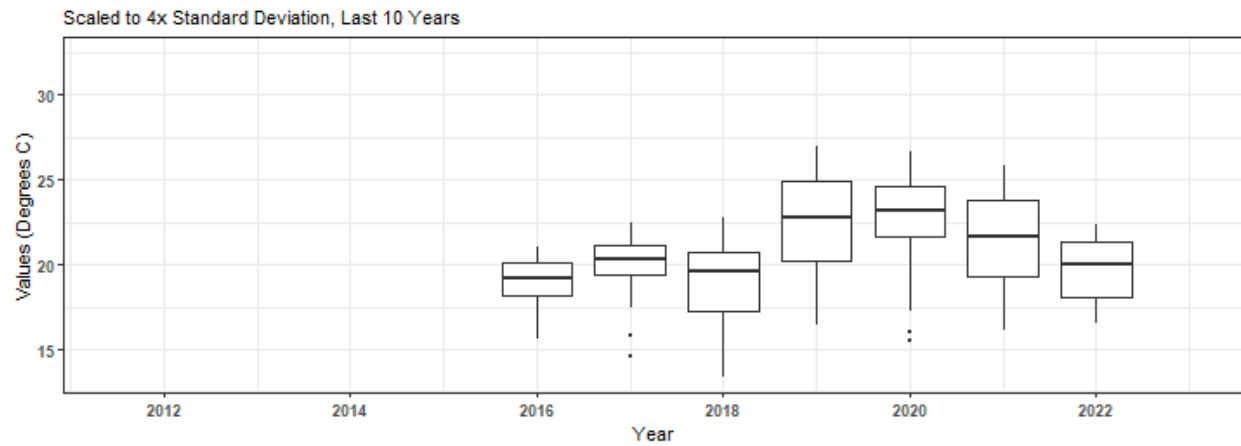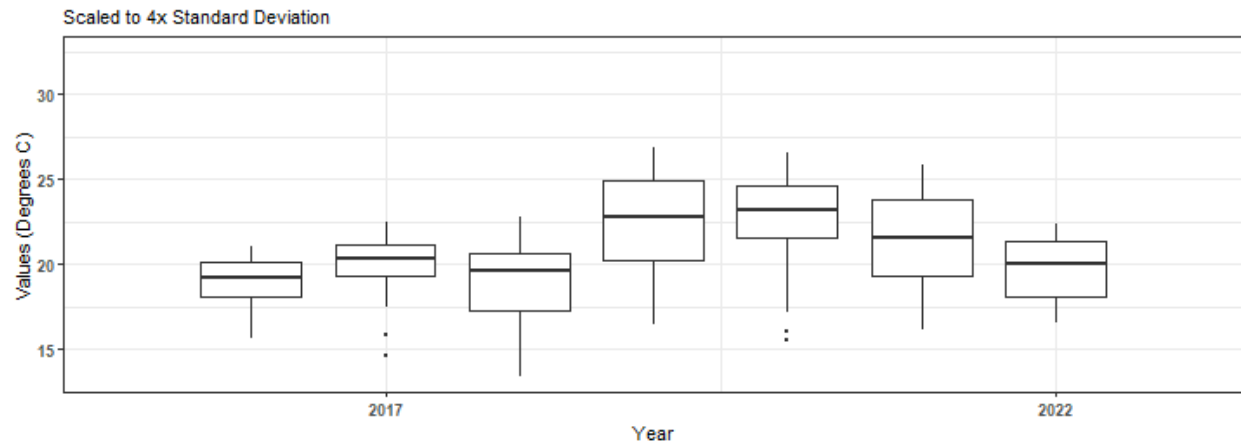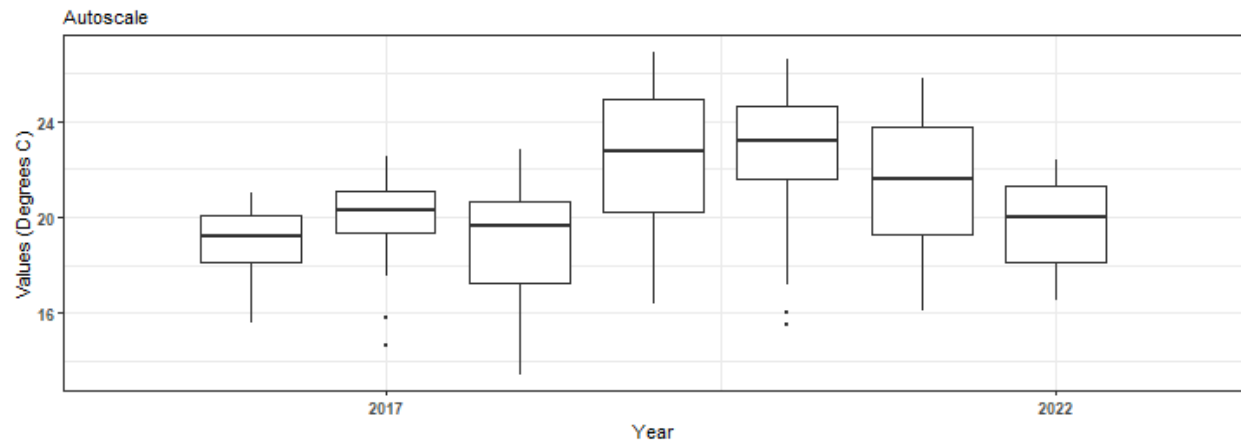


# Summary Box Plots for Big Bend Seagrasses Aquatic Preserve 7 | National Water Information System | 02326526

By Year & Month

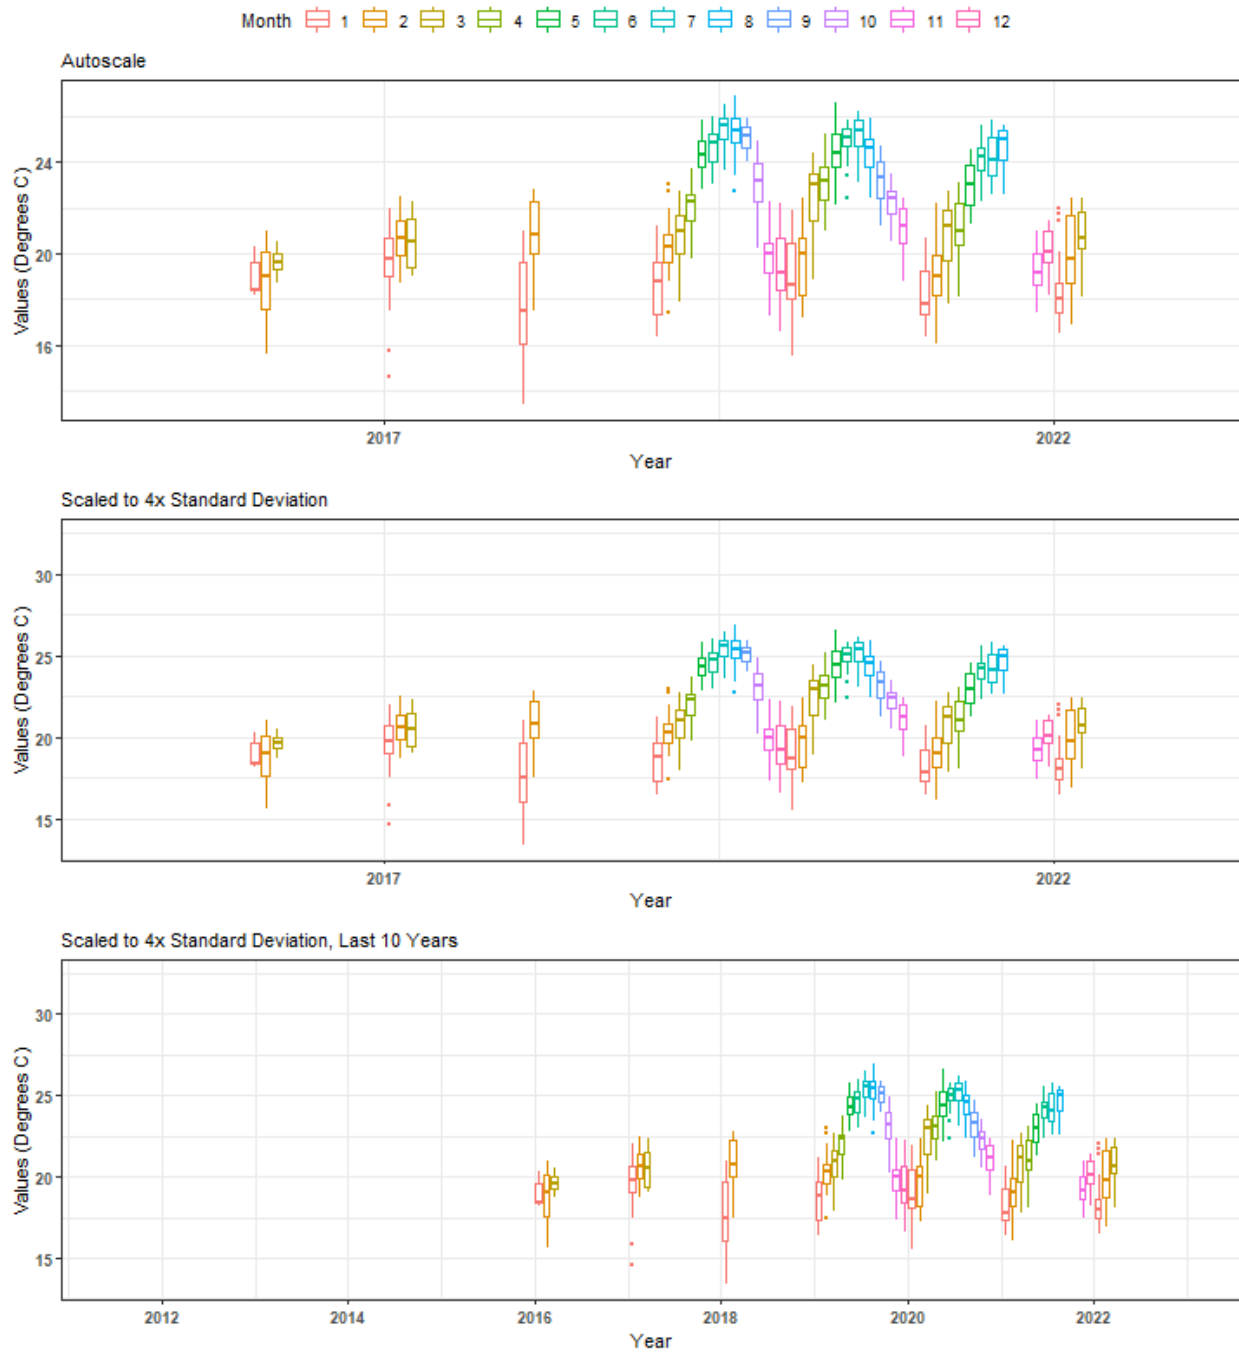

# Summary Box Plots for Big Bend Seagrasses Aquatic Preserve 7 | National Water Information System | 02326526


By Month

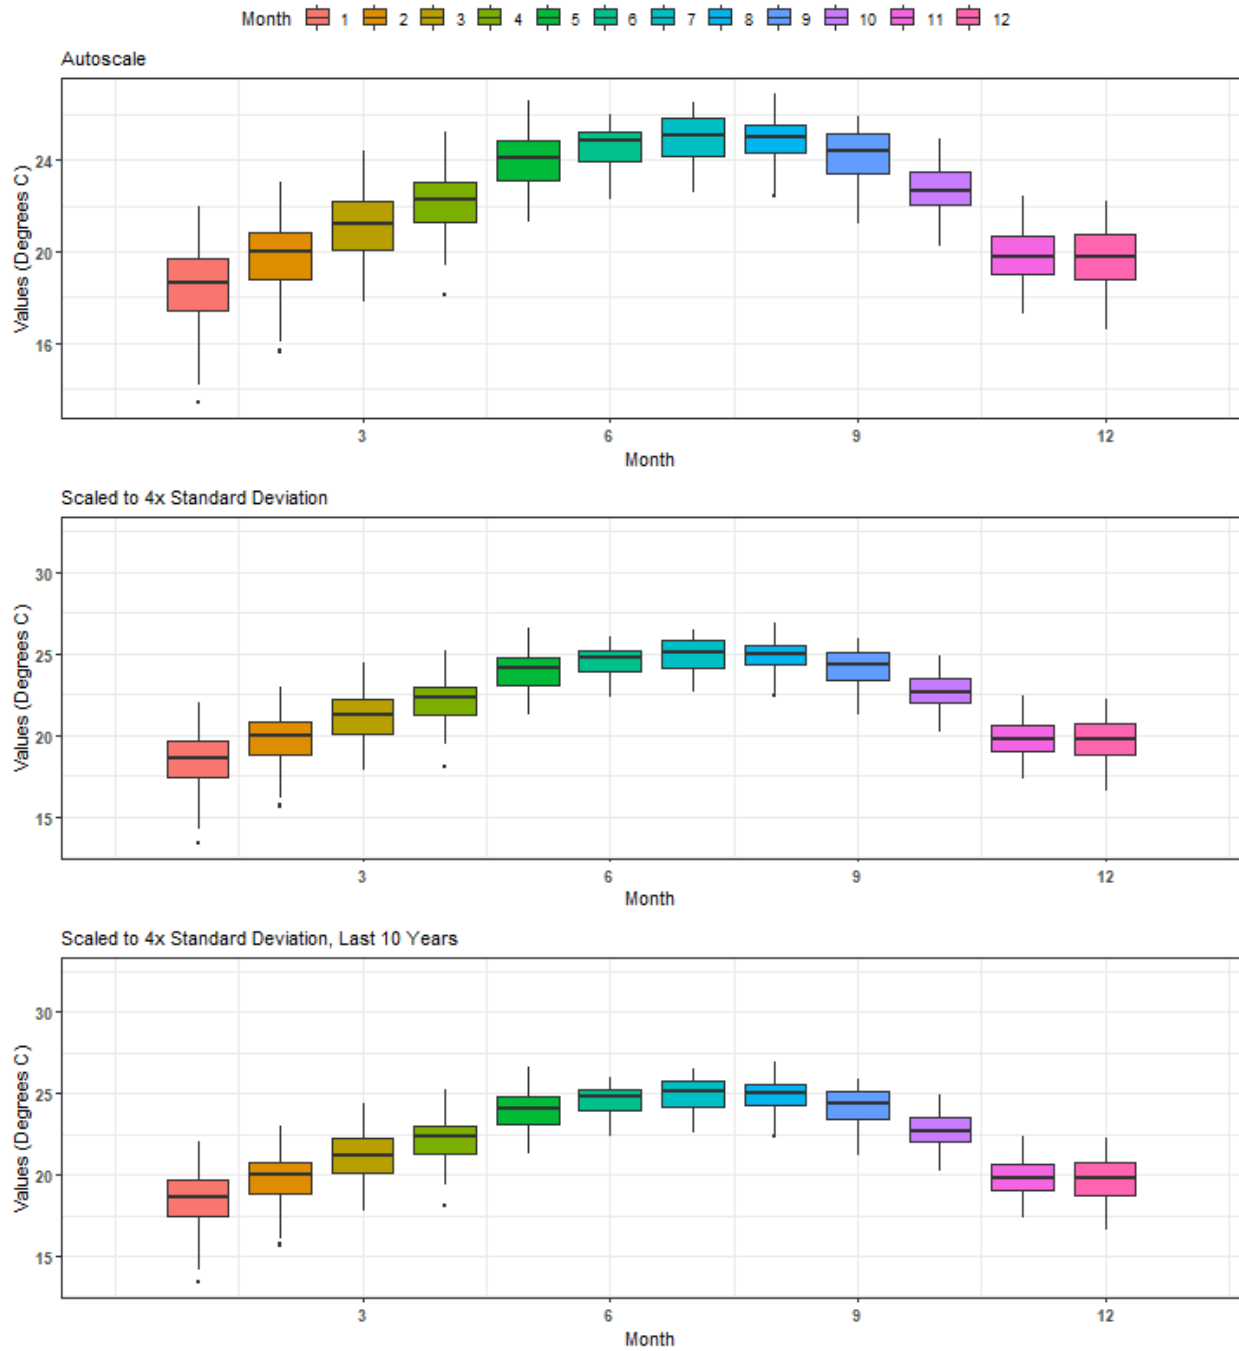




# Summary Box Plots for Big Bend Seagrasses Aquatic Preserve 471 | Big Bend Seagrasses Aquatic Preserves Continuous Water Quality Monitoring | BBSSK

By Year

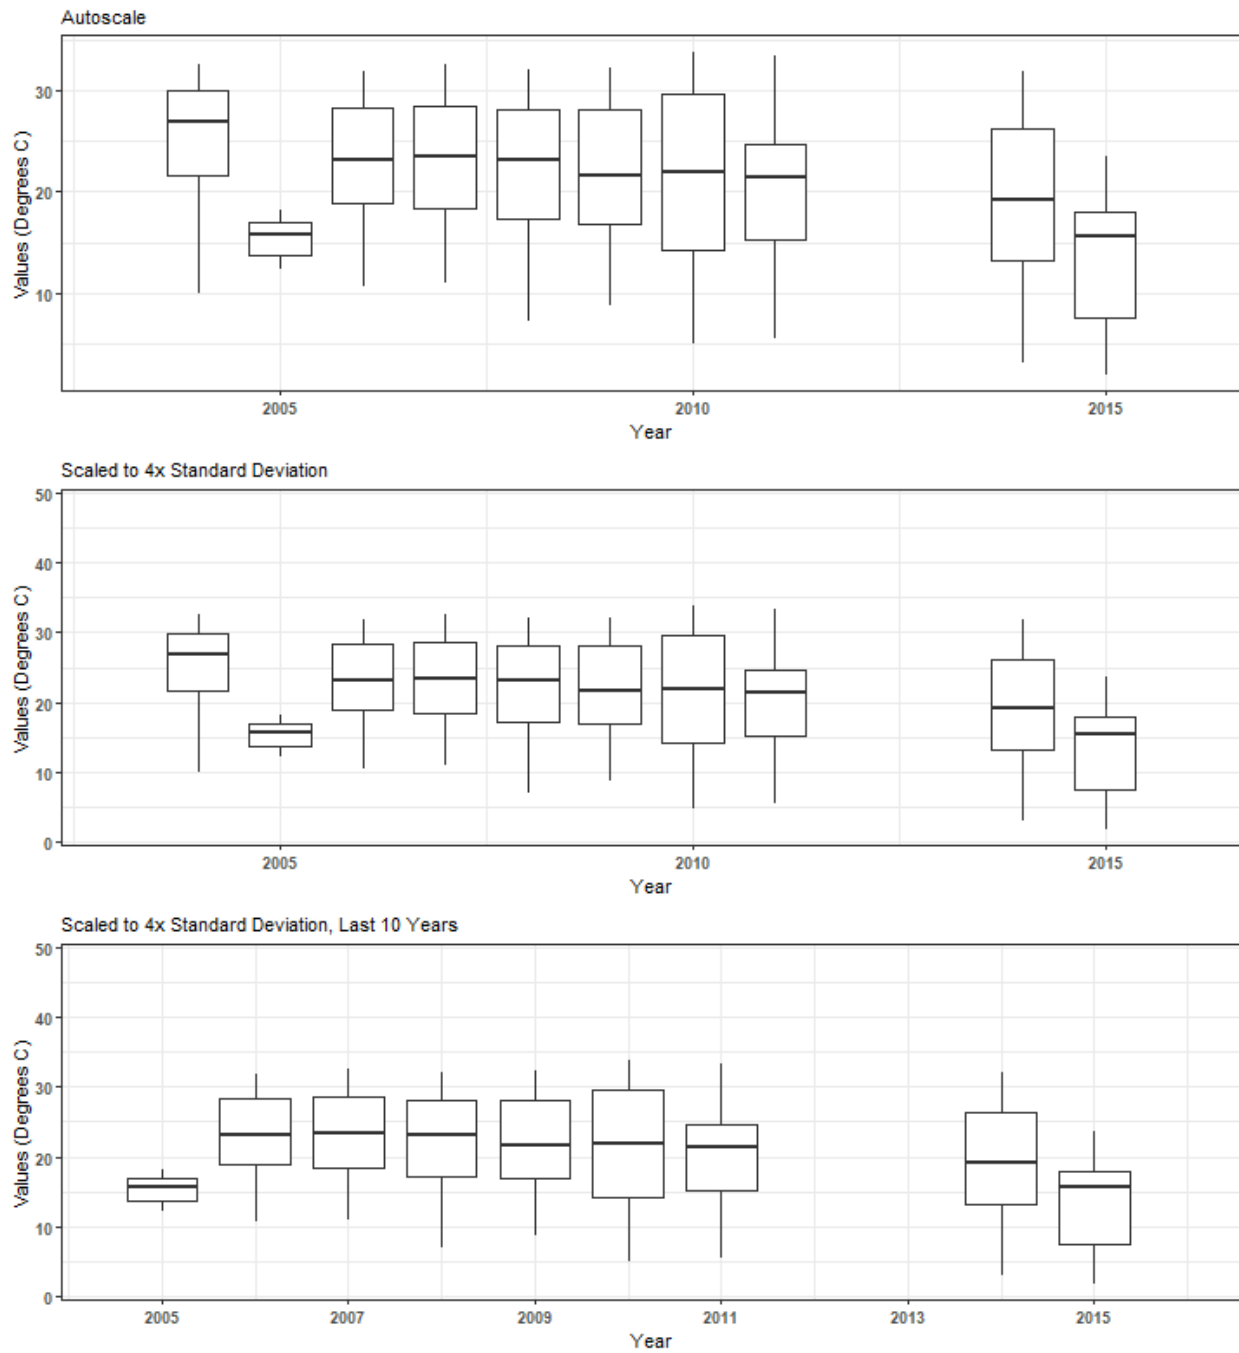


# Summary Box Plots for Big Bend Seagrasses Aquatic Preserve 471 | Big Bend Seagrasses Aquatic Preserves Continuous Water Quality Monitoring | BBSSK

By Year & Month

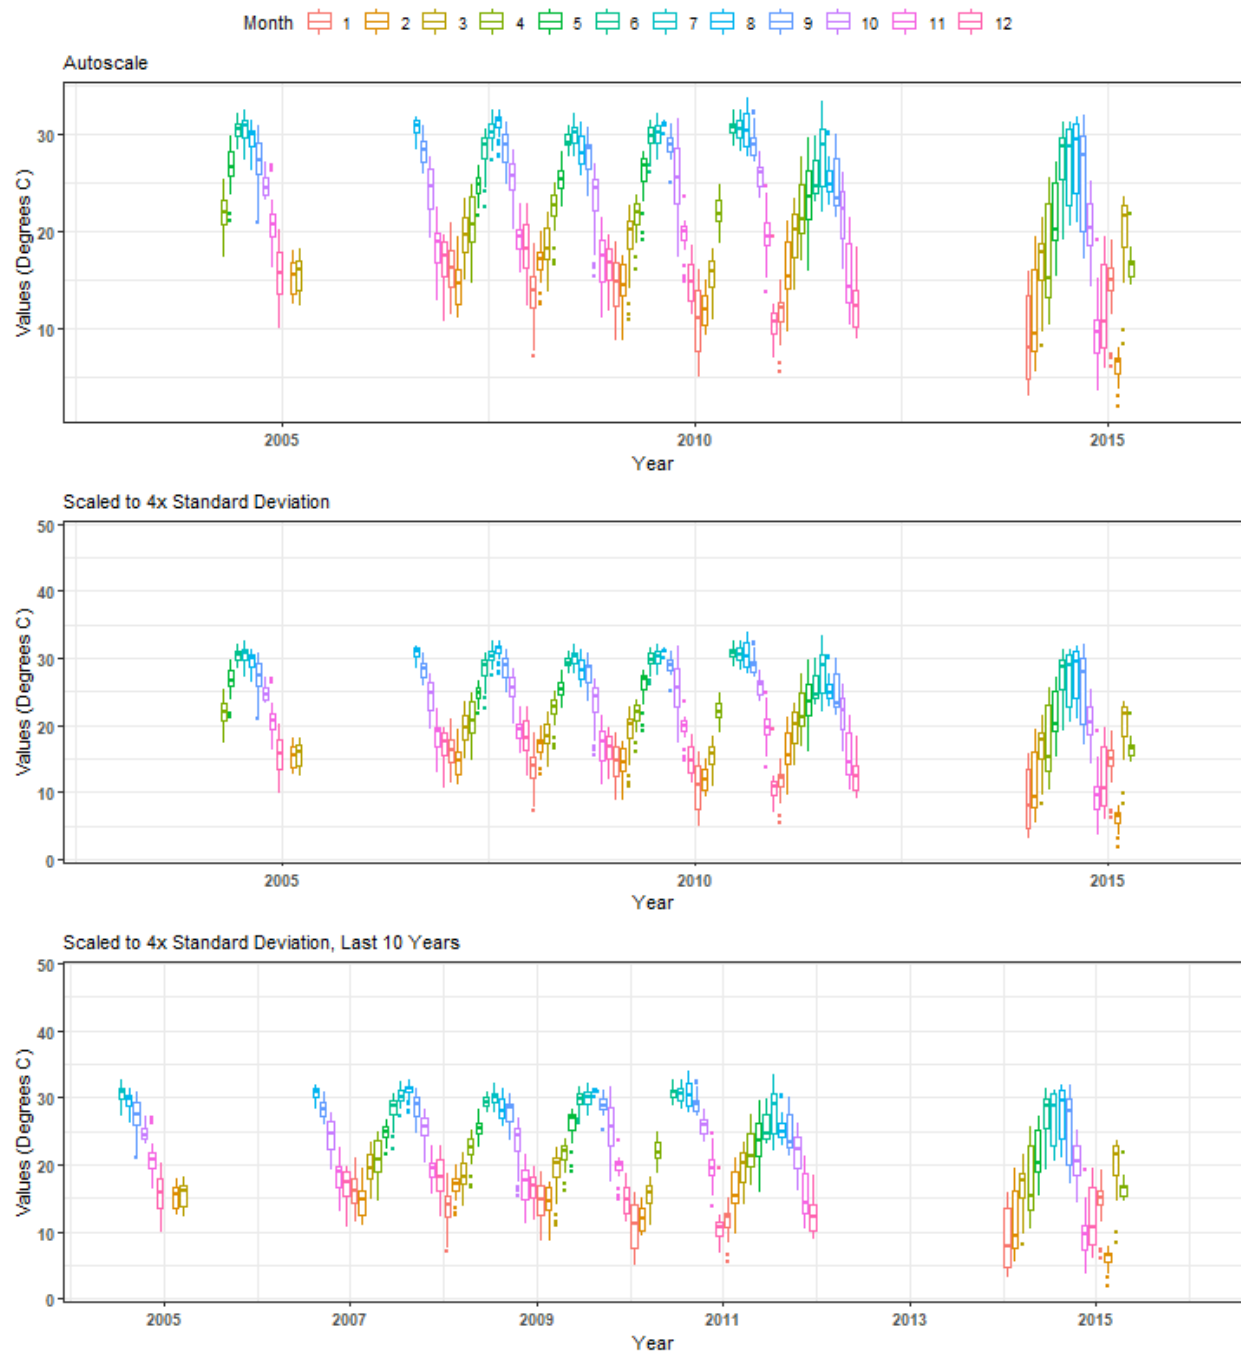




# Summary Box Plots for Big Bend Seagrasses Aquatic Preserve 471 | Big Bend Seagrasses Aquatic Preserves Continuous Water Quality Monitoring | BBSSK

By Month

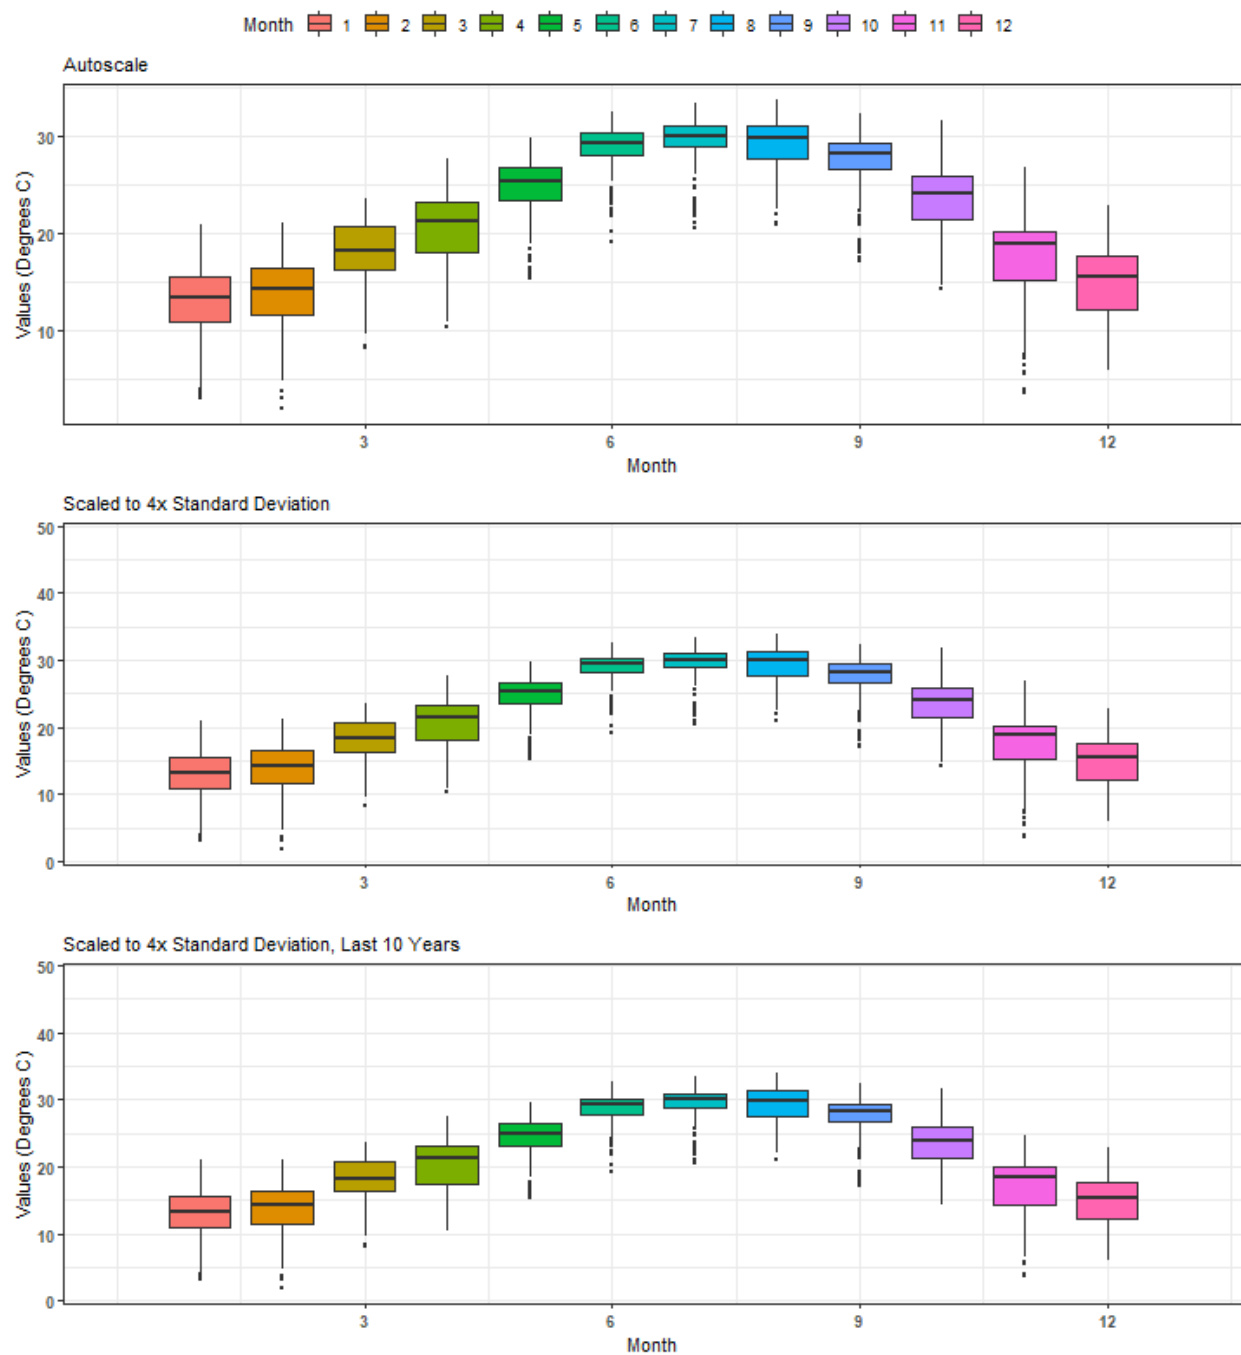


# Summary Box Plots for Big Bend Seagrasses Aquatic Preserve 471 | Big Bend Seagrasses Aquatic Preserves Continuous Water Quality Monitoring | BBSSW

By Year

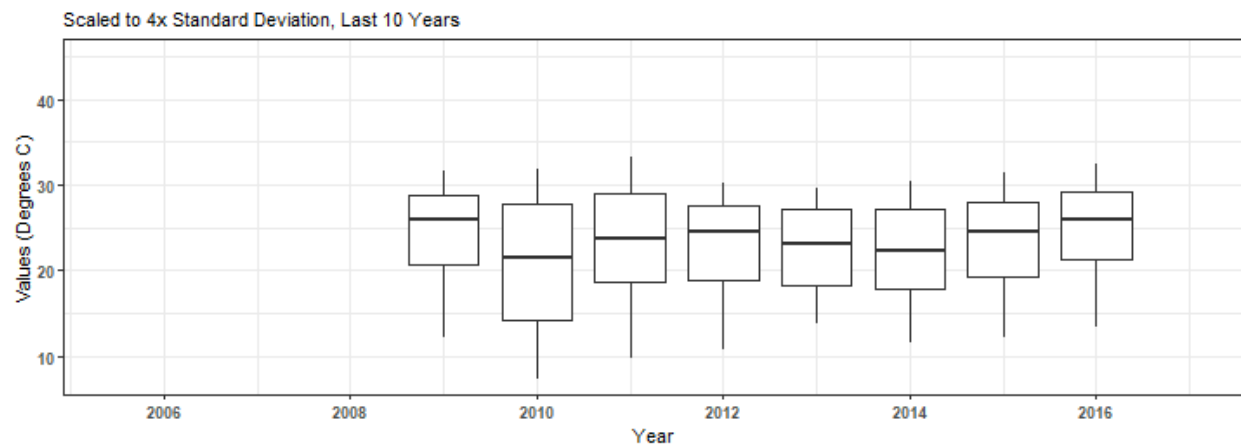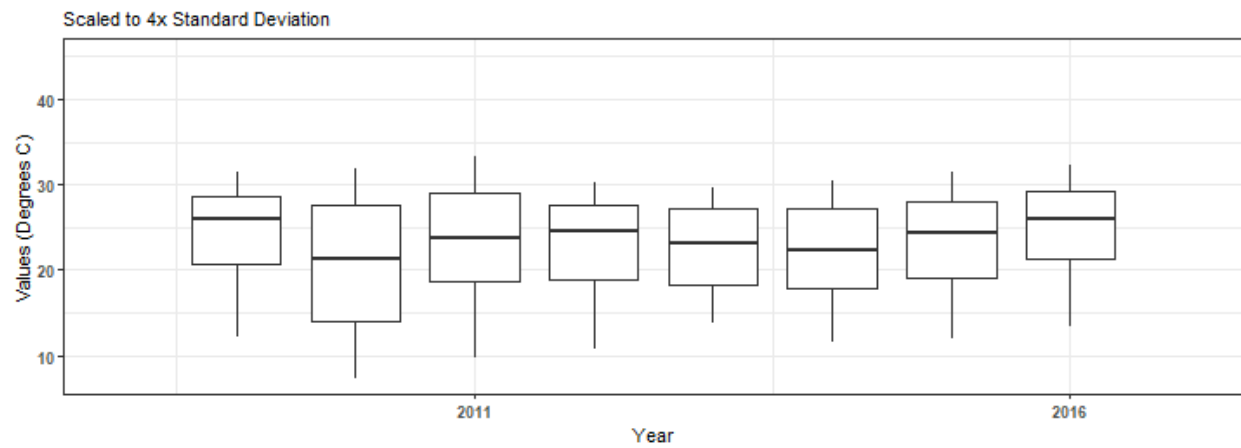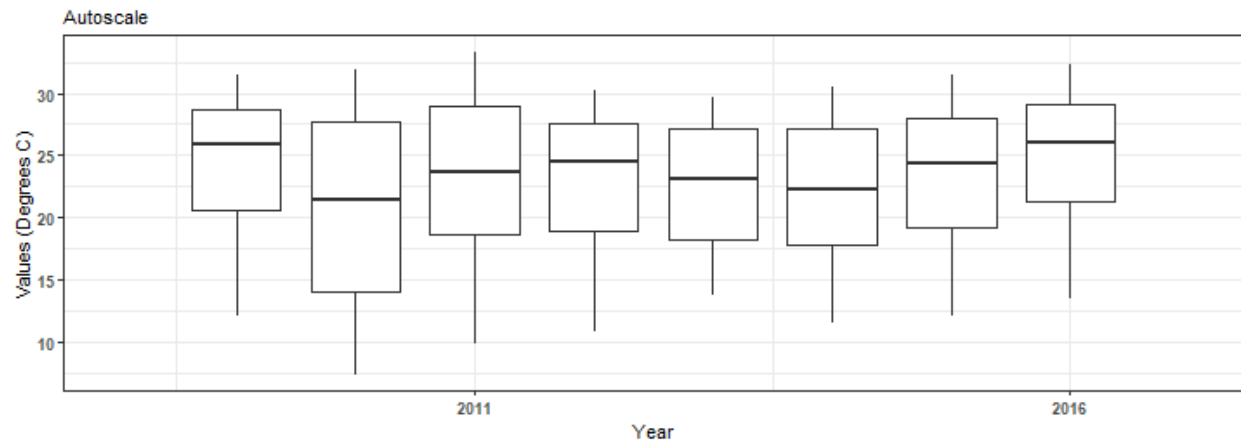


# Summary Box Plots for Big Bend Seagrasses Aquatic Preserve 471 | Big Bend Seagrasses Aquatic Preserves Continuous Water Quality Monitoring | BBSSW

By Year & Month

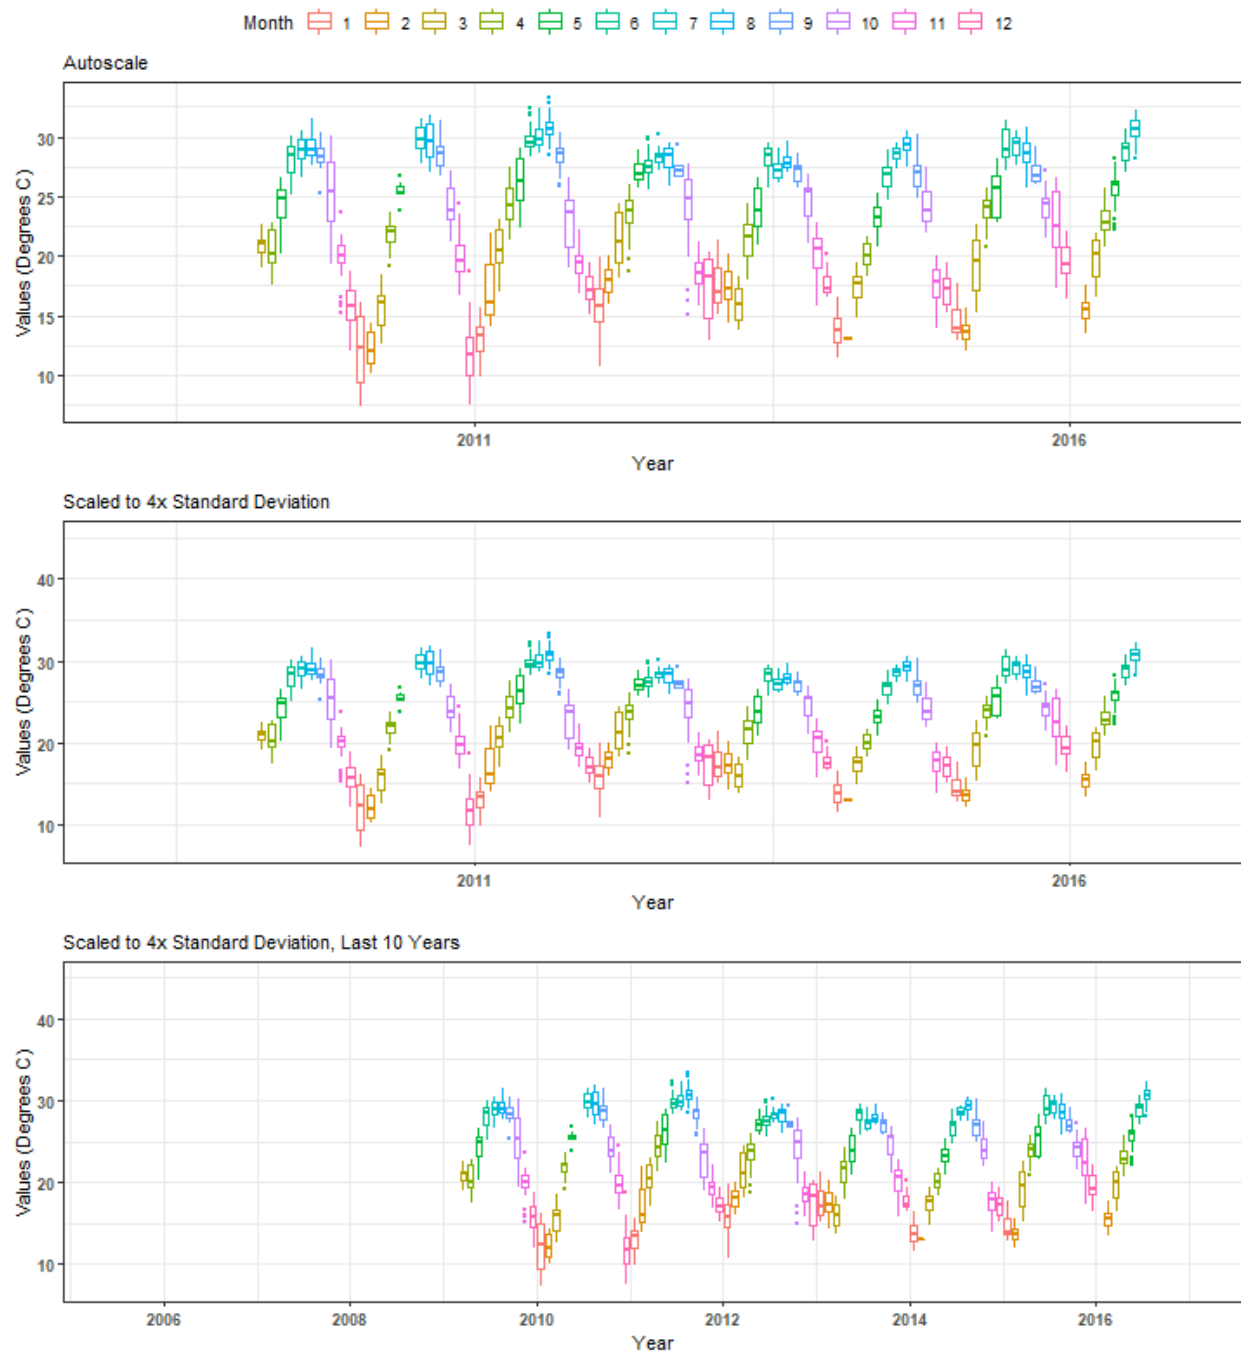




# Summary Box Plots for Big Bend Seagrasses Aquatic Preserve 471 | Big Bend Seagrasses Aquatic Preserves Continuous Water Quality Monitoring | BBSSW

By Month

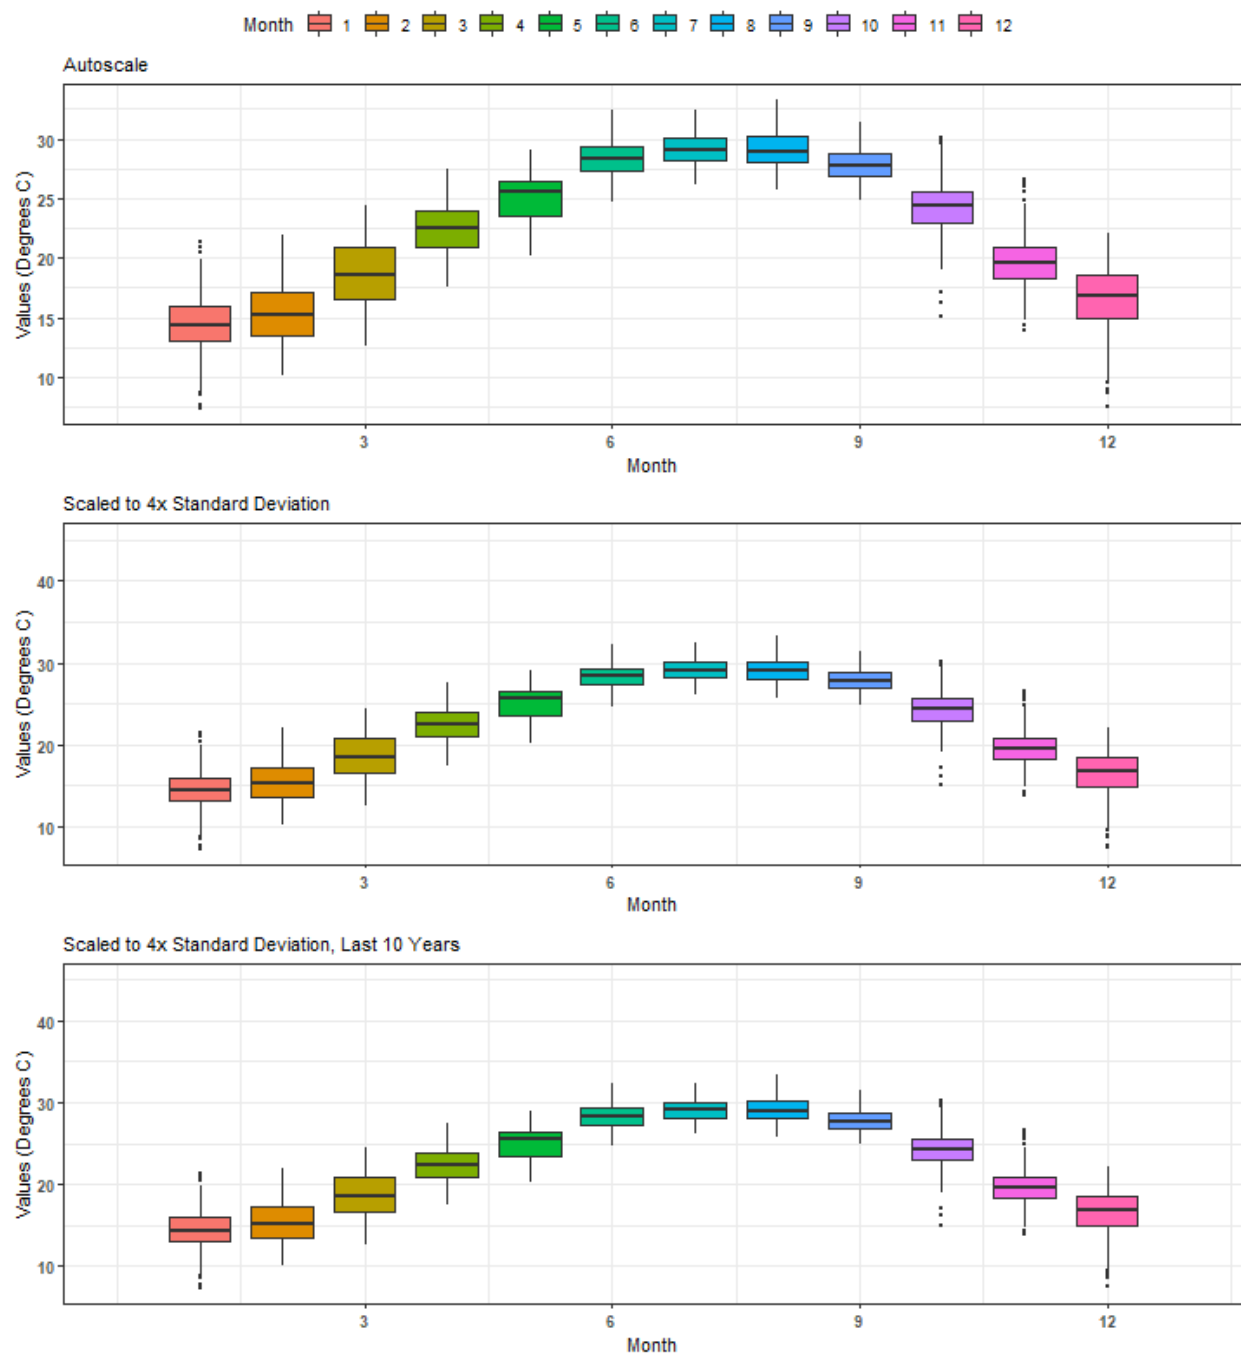


# Summary Box Plots for Fort Pickens State Park Aquatic Preserve 505 | Pensacola Bay Water Quality Monitoring Program | P09

By Year

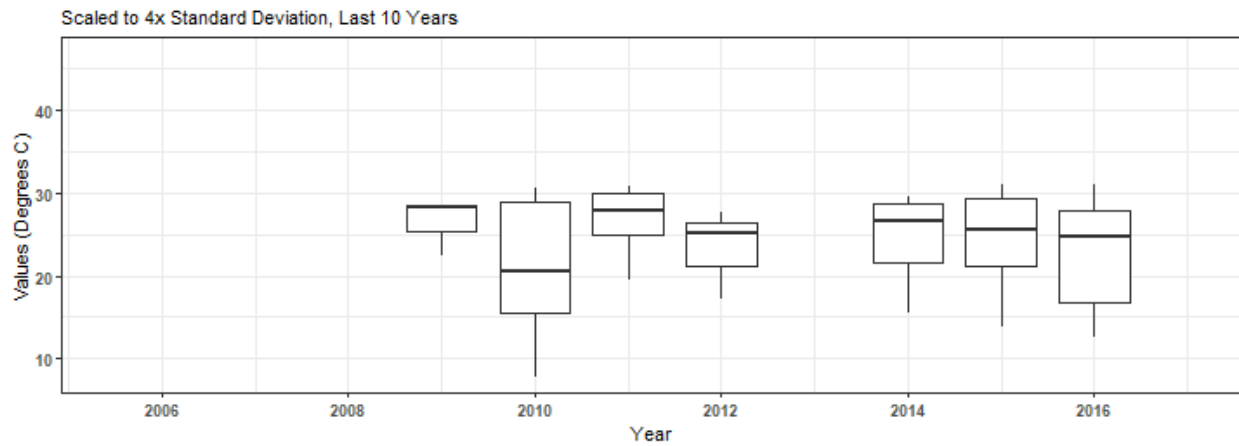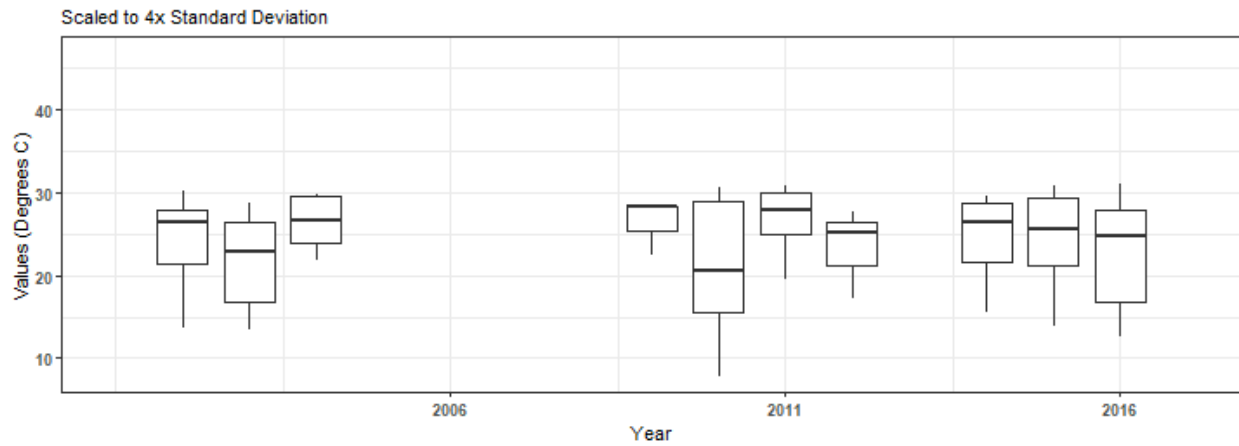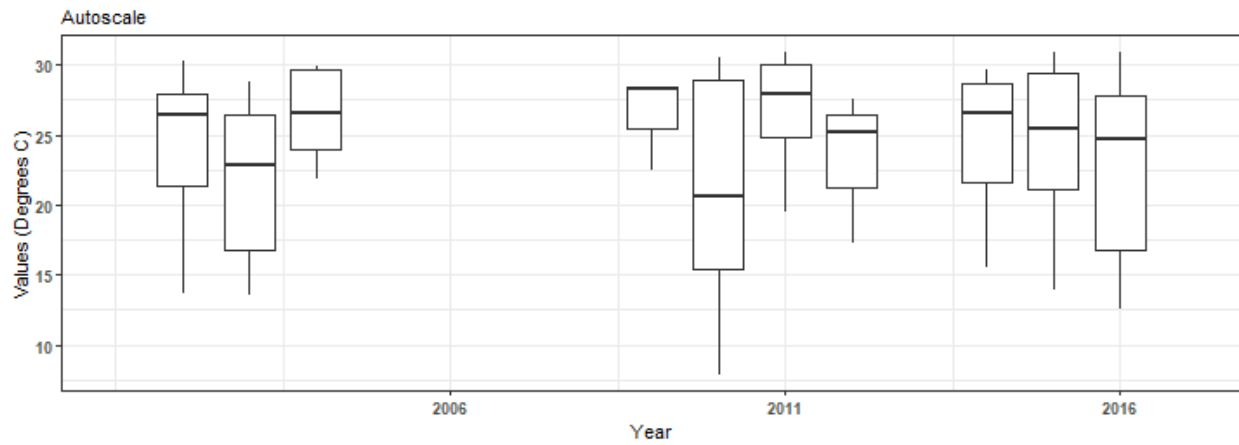

# Summary Box Plots for Fort Pickens State Park Aquatic Preserve 505 | Pensacola Bay Water Quality Monitoring Program | P09


By Year & Month

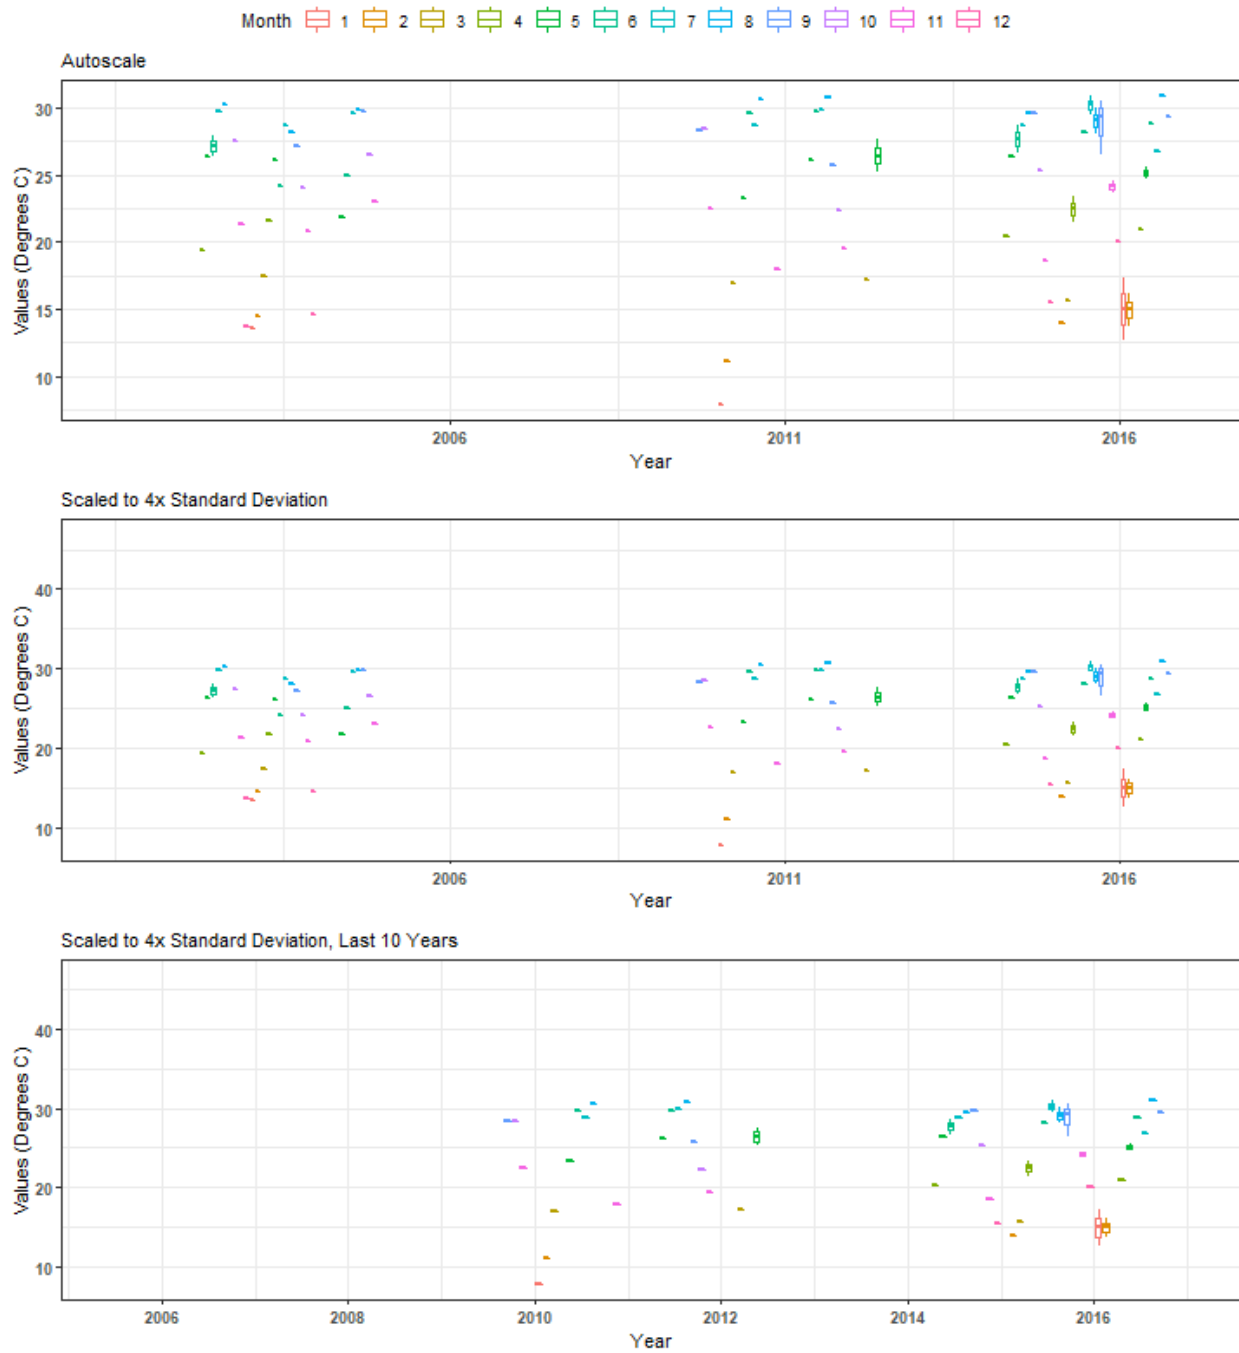






# Summary Box Plots for Fort Pickens State Park Aquatic Preserve 505 | Pensacola Bay Water Quality Monitoring Program | P09

By Month

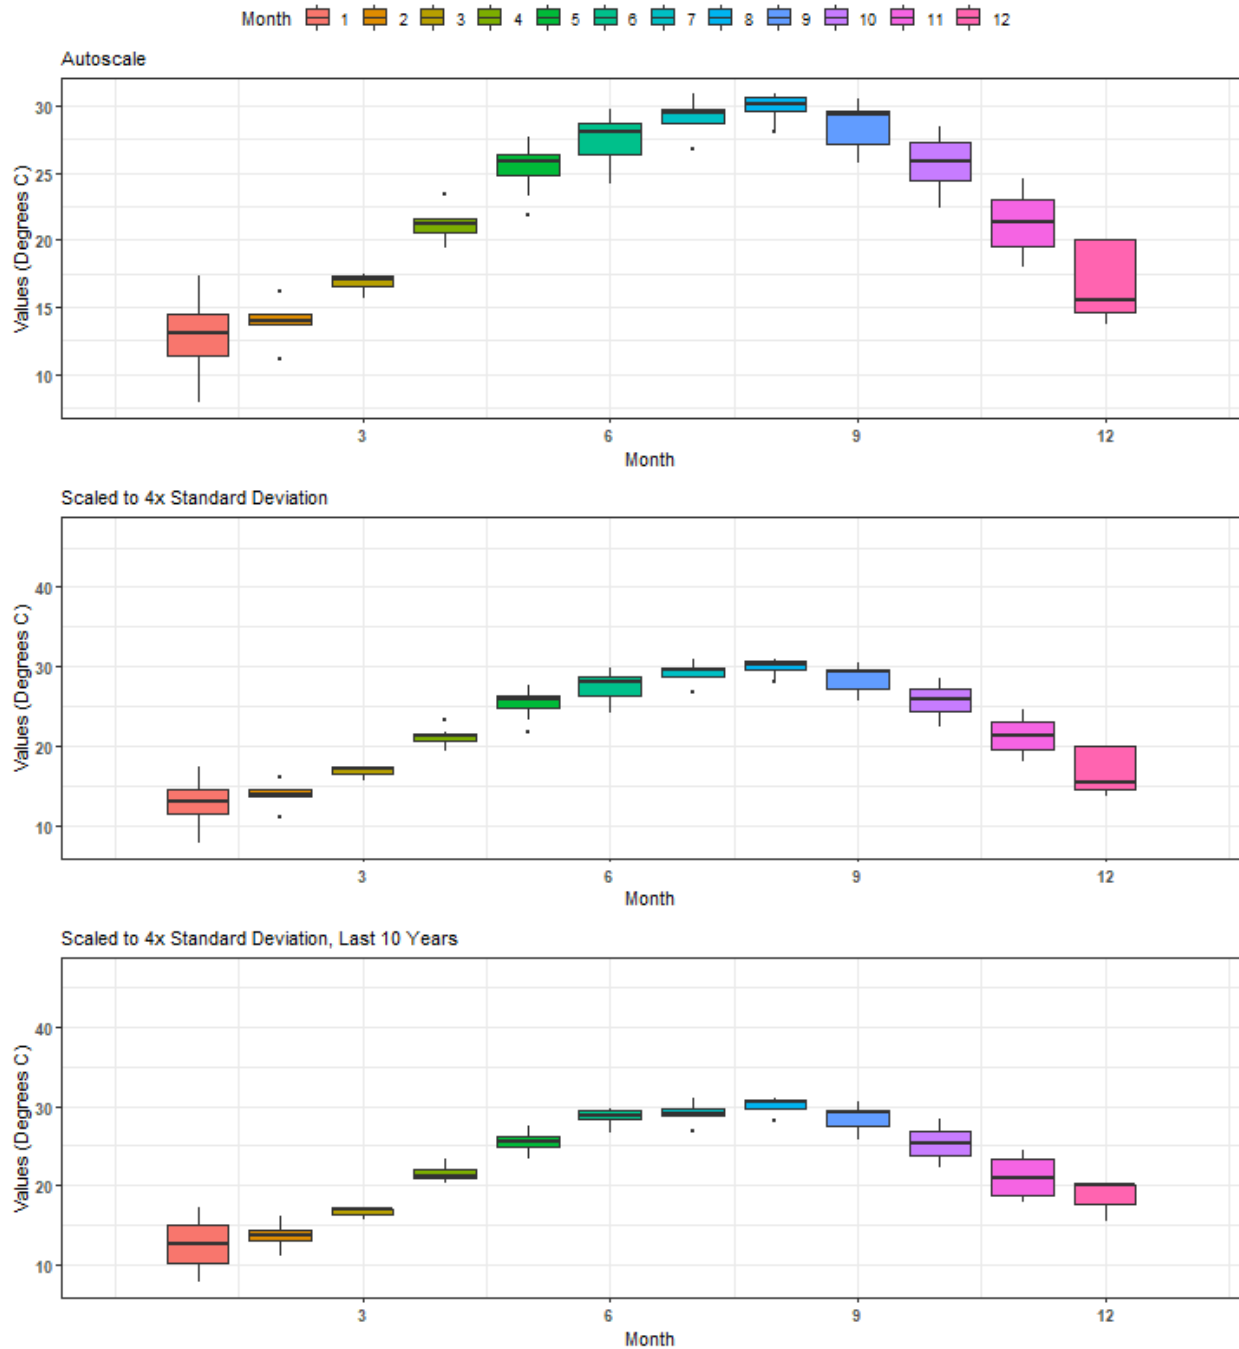


# Summary Box Plots for Nature Coast Aquatic Preserve 471 | Big Bend Seagrasses Aquatic Preserves Continuous Water Quality Monitoring | BBSHS

By Year

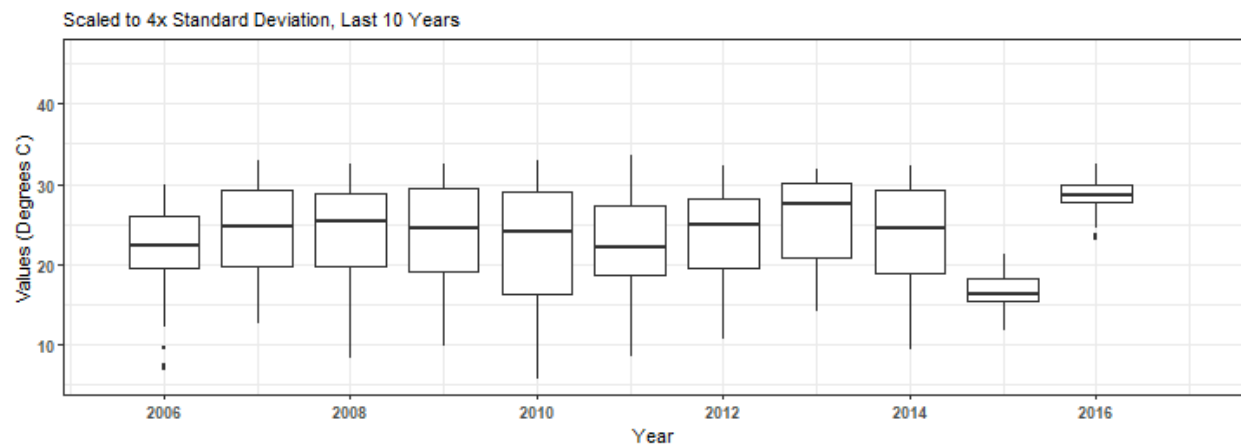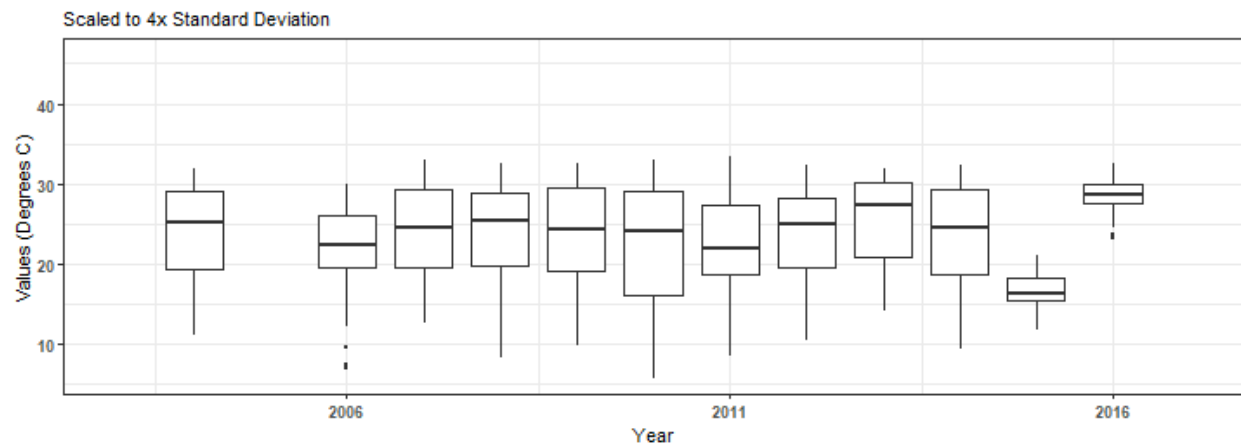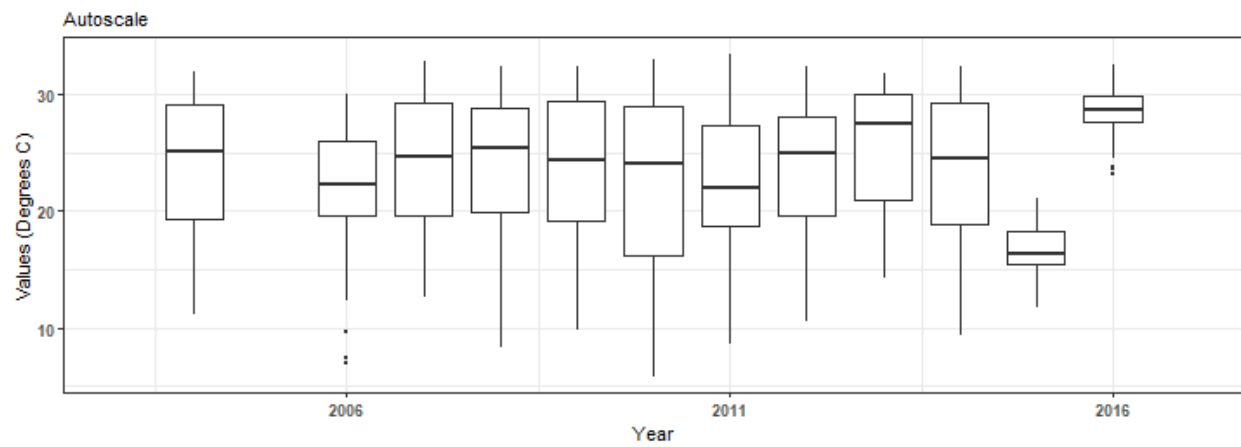


# Summary Box Plots for Nature Coast Aquatic Preserve 471 | Big Bend Seagrasses Aquatic Preserves Continuous Water Quality Monitoring | BBSHS

By Year & Month

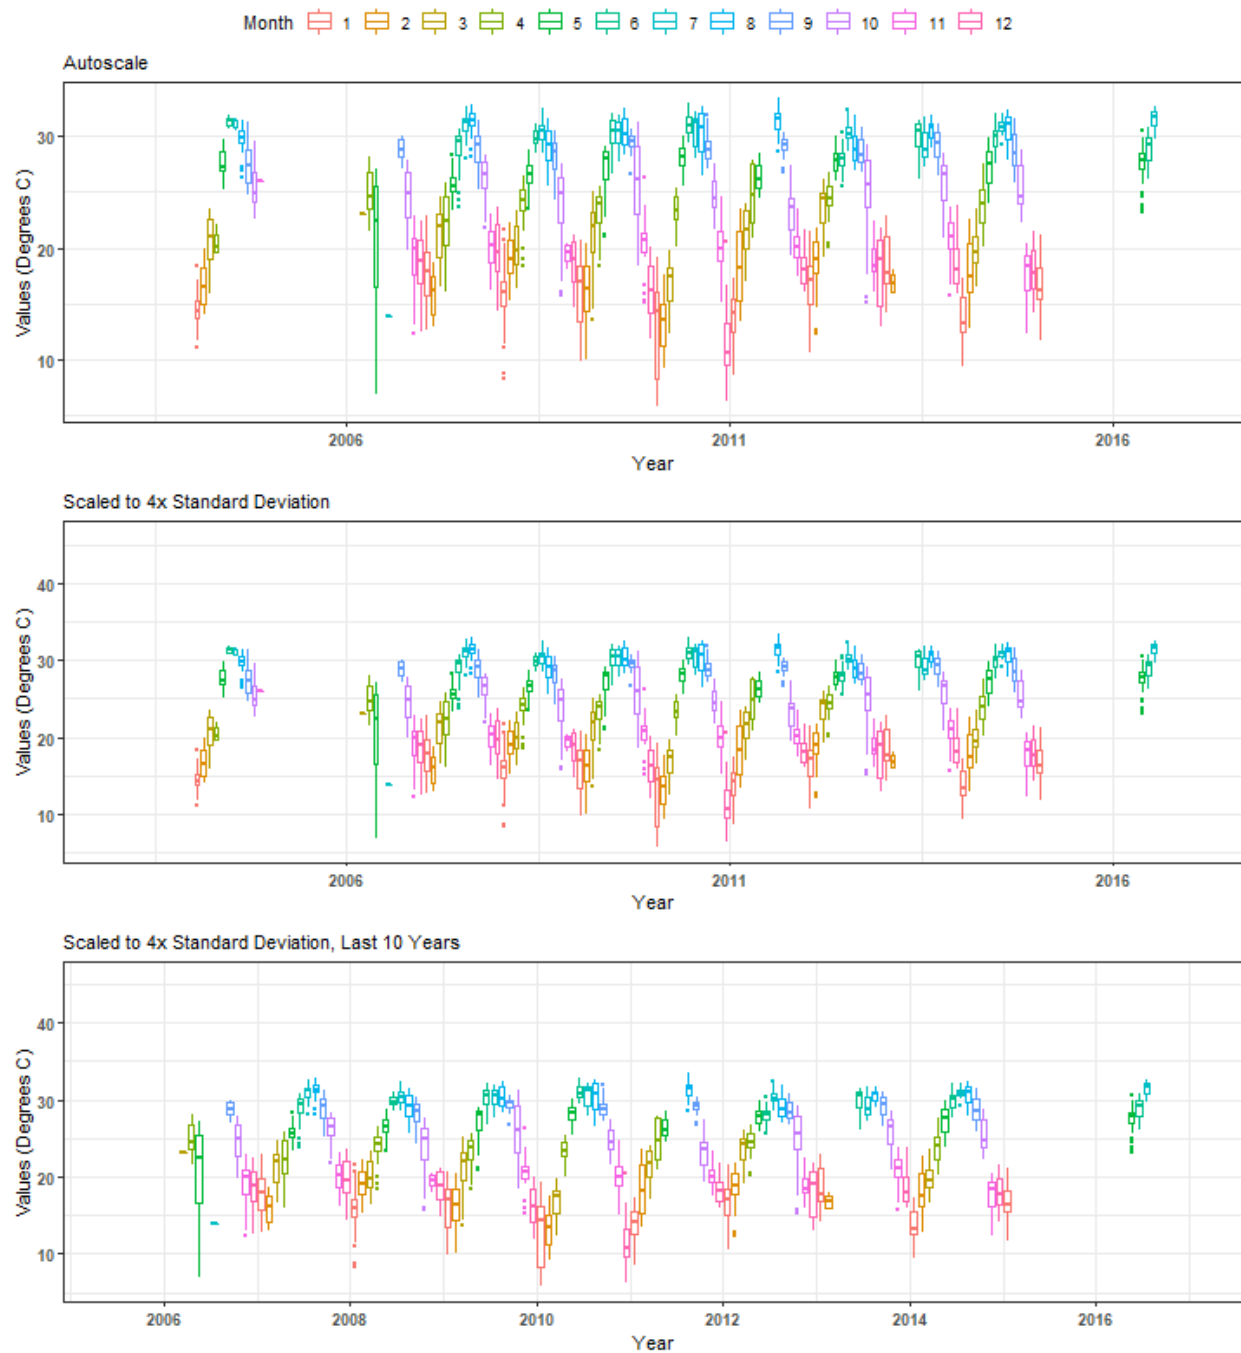


# Summary Box Plots for Nature Coast Aquatic Preserve 471 | Big Bend Seagrasses Aquatic Preserves Continuous Water Quality Monitoring | BBSHS

By Month

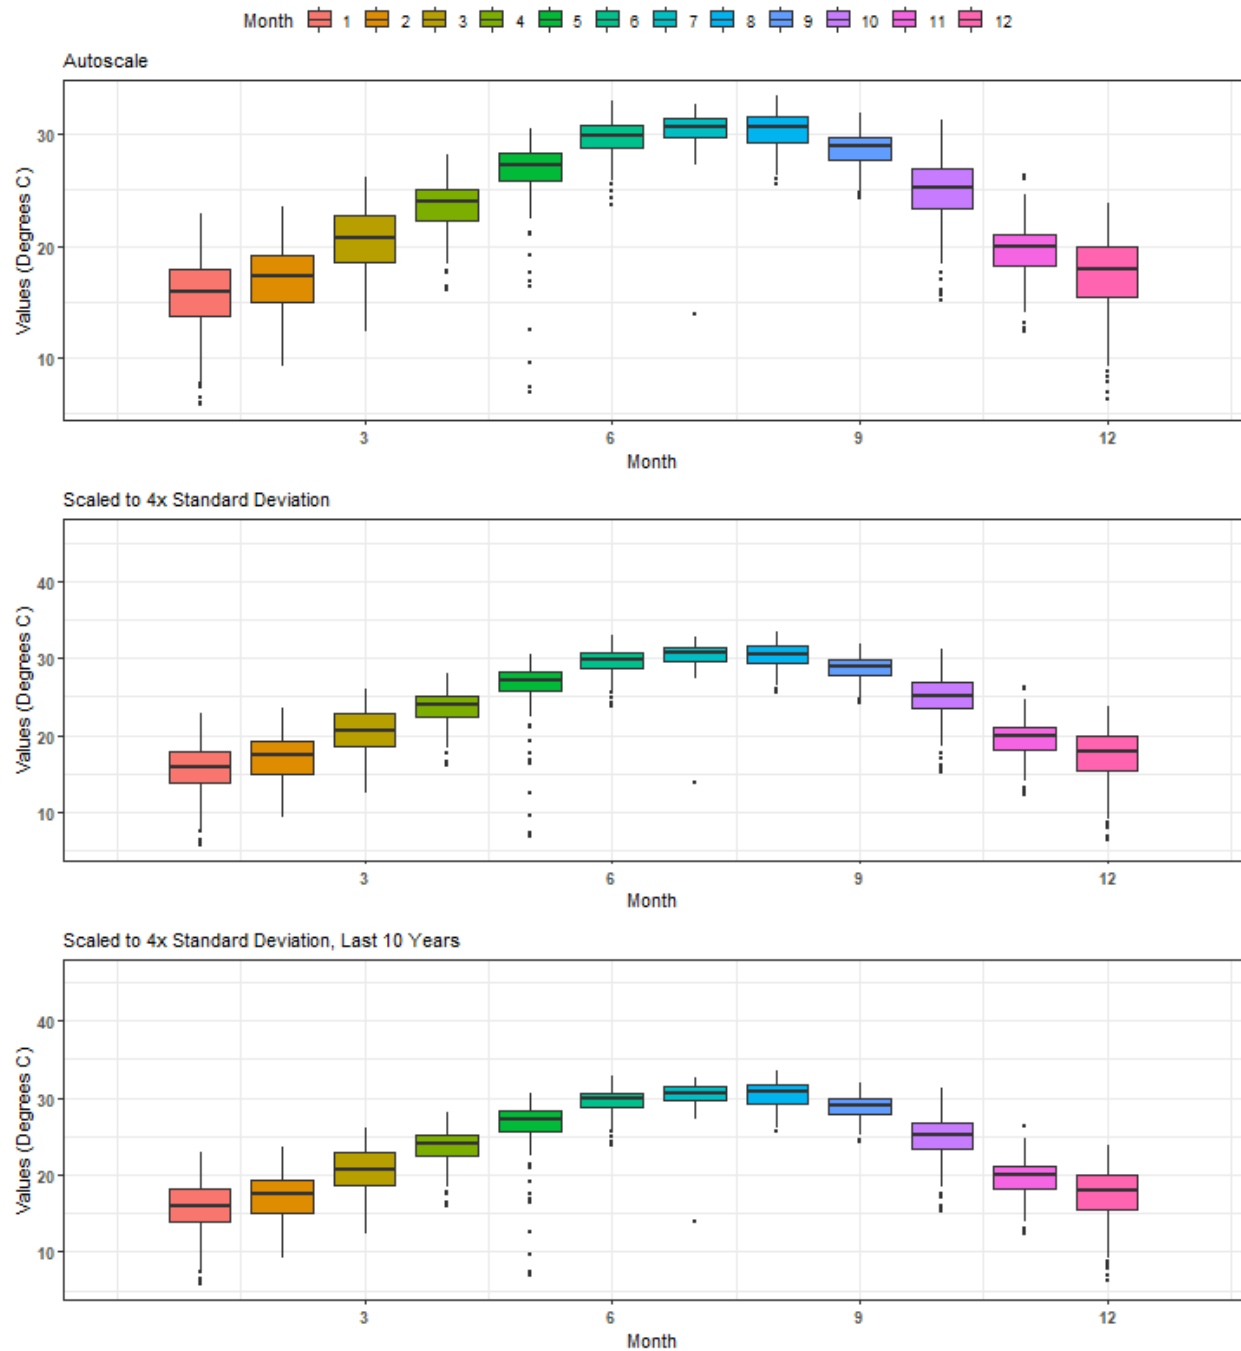


**Summary Box Plots for St. Joseph Bay Aquatic Preserve  
468 | Central Panhandle Aquatic Preserves Continuous Water Quality Monitoring | CPRH**

By Year

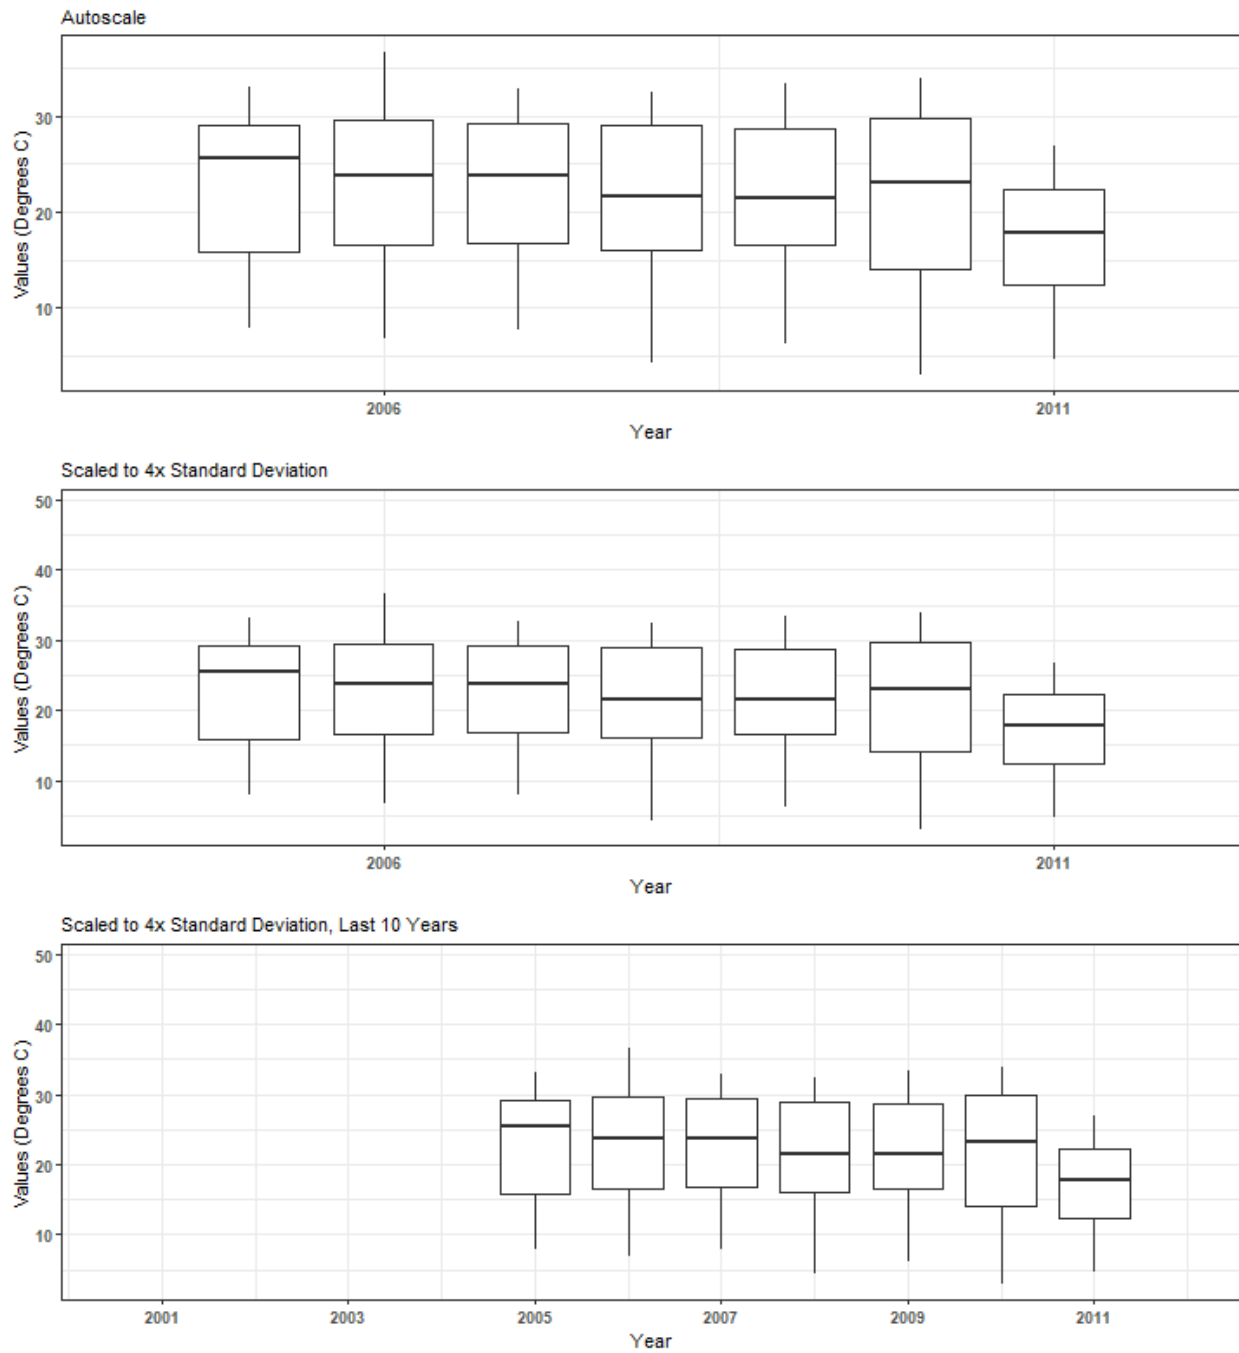


**Summary Box Plots for St. Joseph Bay Aquatic Preserve**  
**468 | Central Panhandle Aquatic Preserves Continuous Water Quality Monitoring | CPRH**  
 By Year & Month

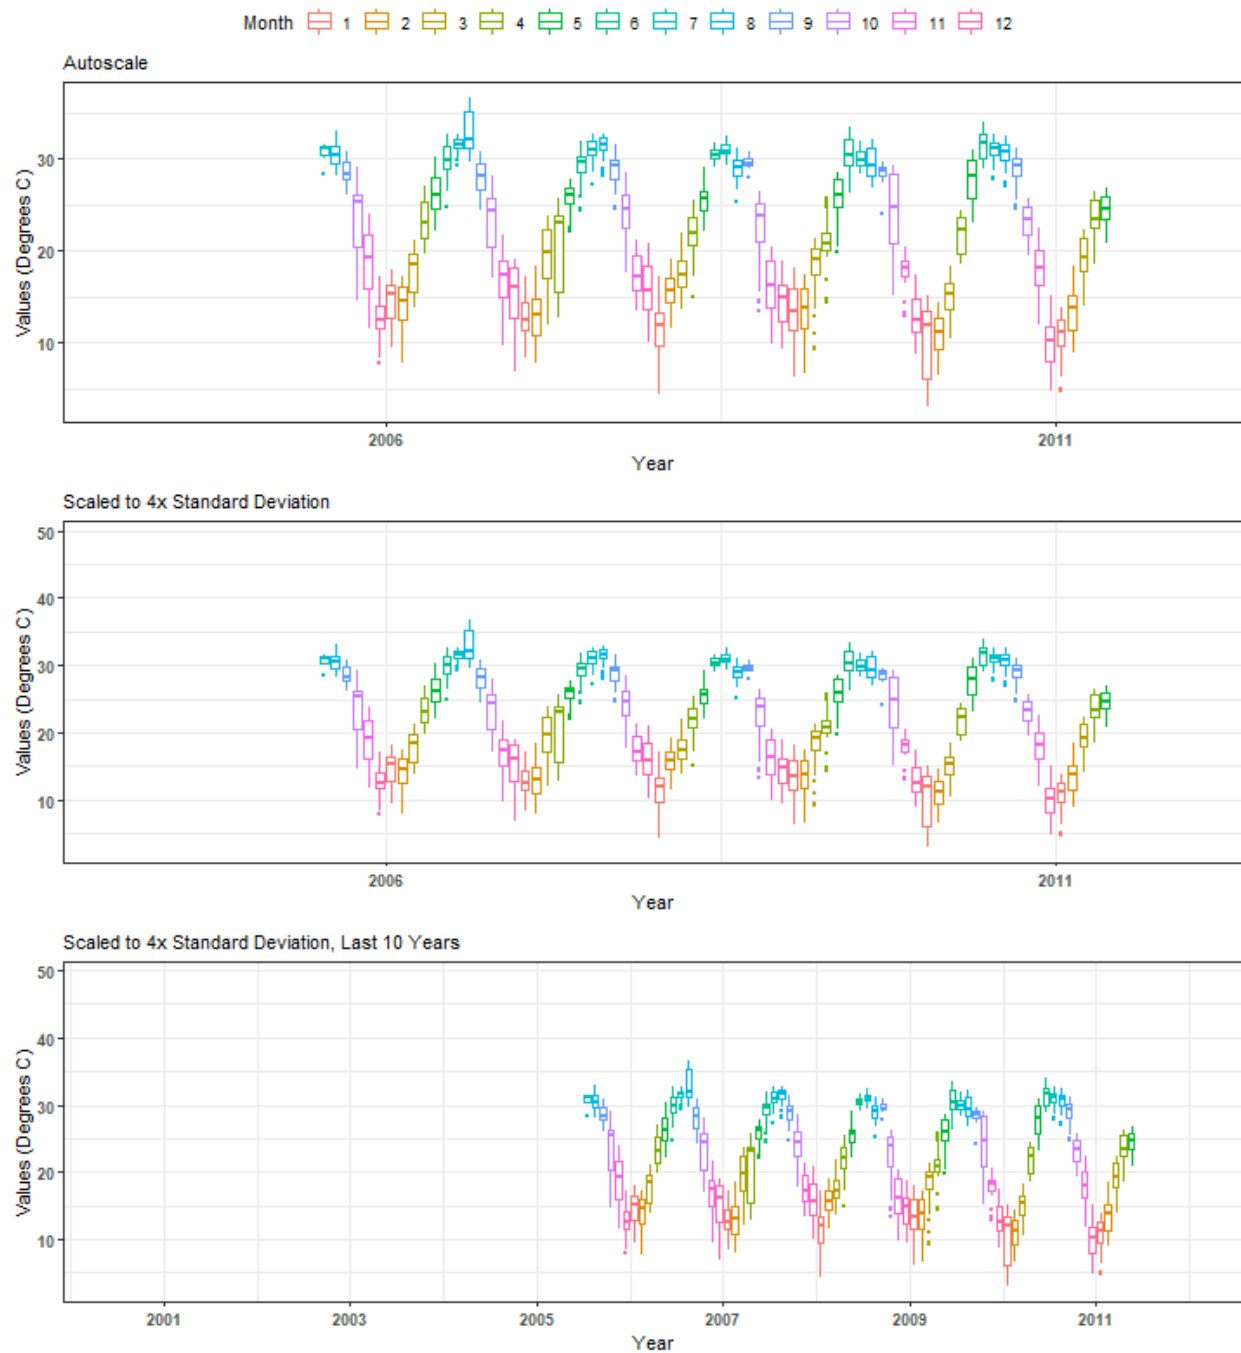




# Summary Box Plots for St. Joseph Bay Aquatic Preserve 468 | Central Panhandle Aquatic Preserves Continuous Water Quality Monitoring | CPRH

By Month

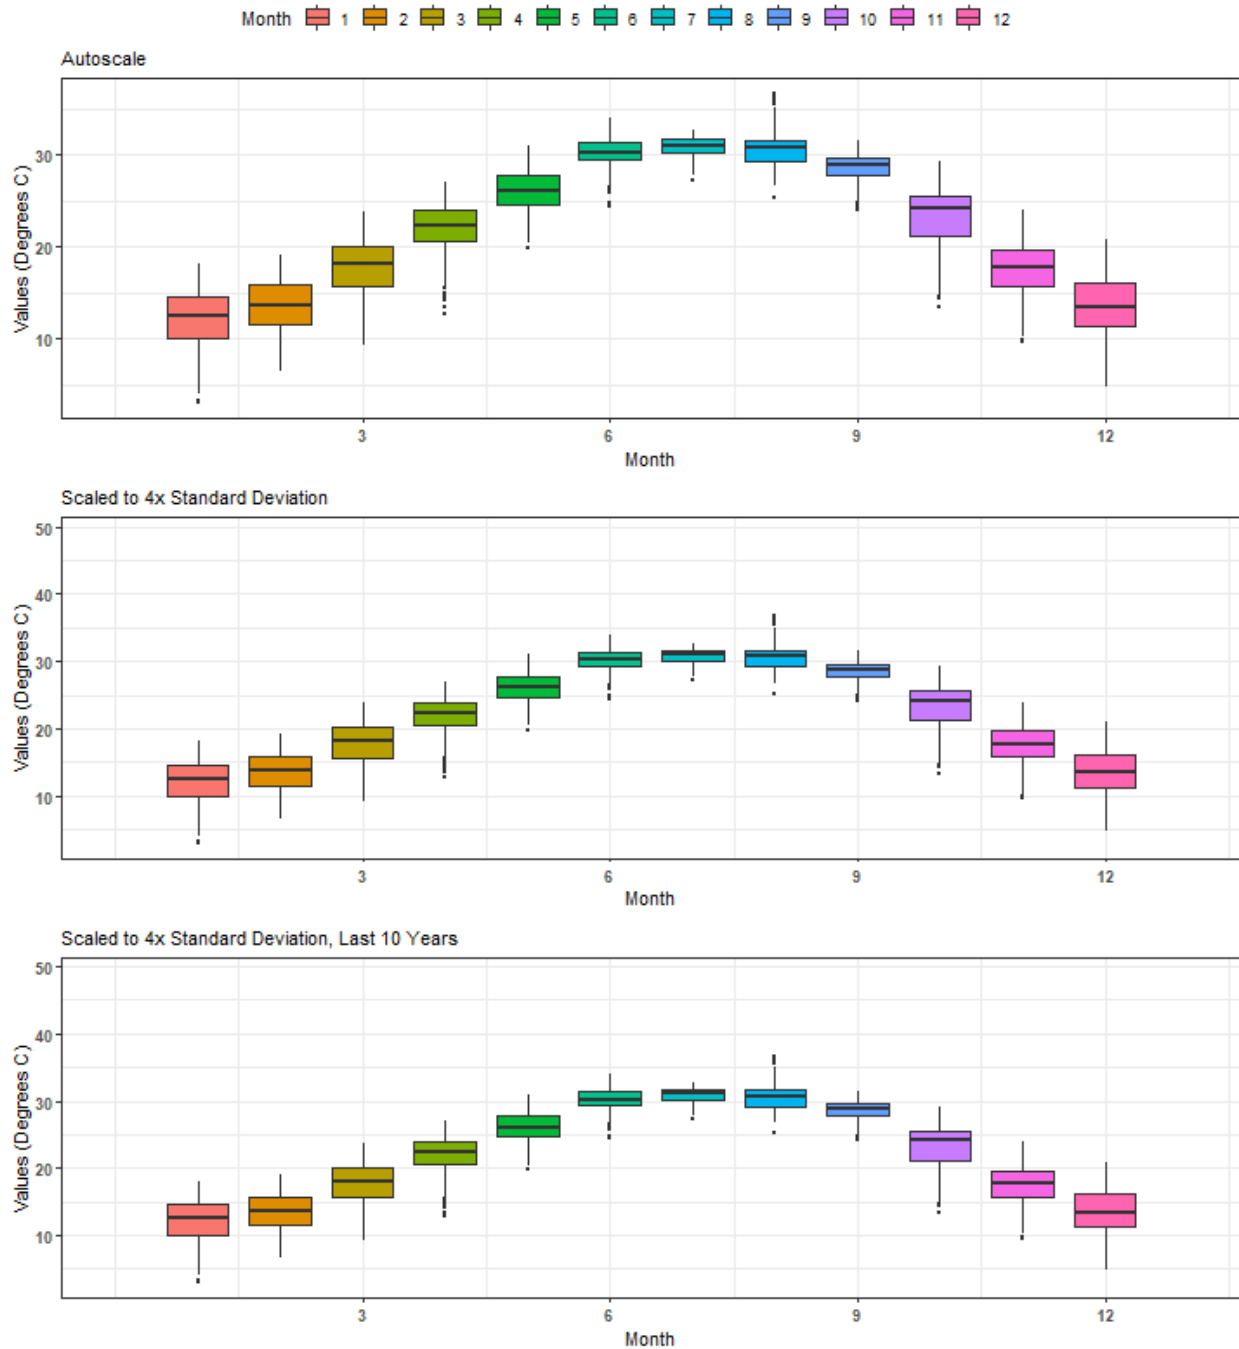

# Summary Box Plots for Yellow River Marsh Aquatic Preserve 467 | Yellow River Marsh Aquatic Preserve Continuous Water Quality Monitoring | YRMAP1


By Year

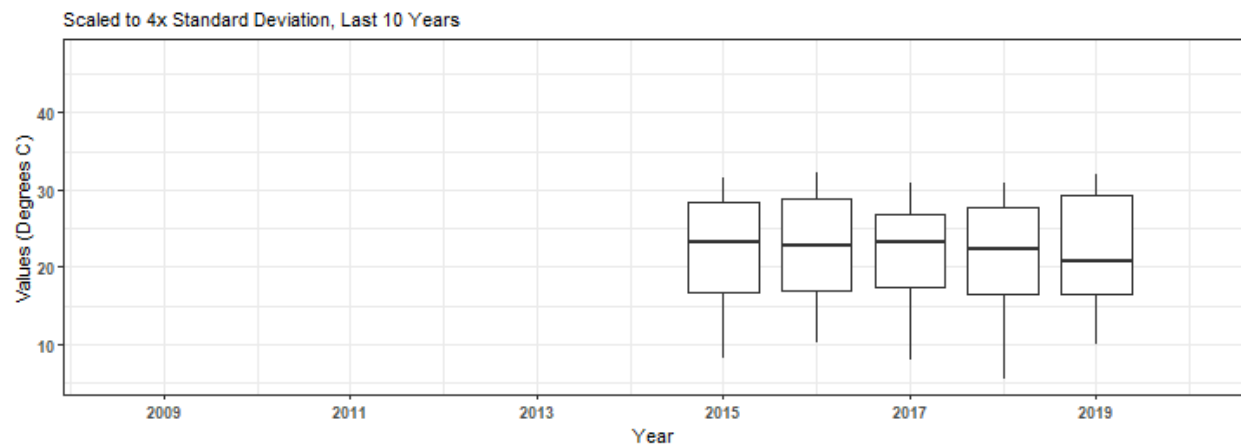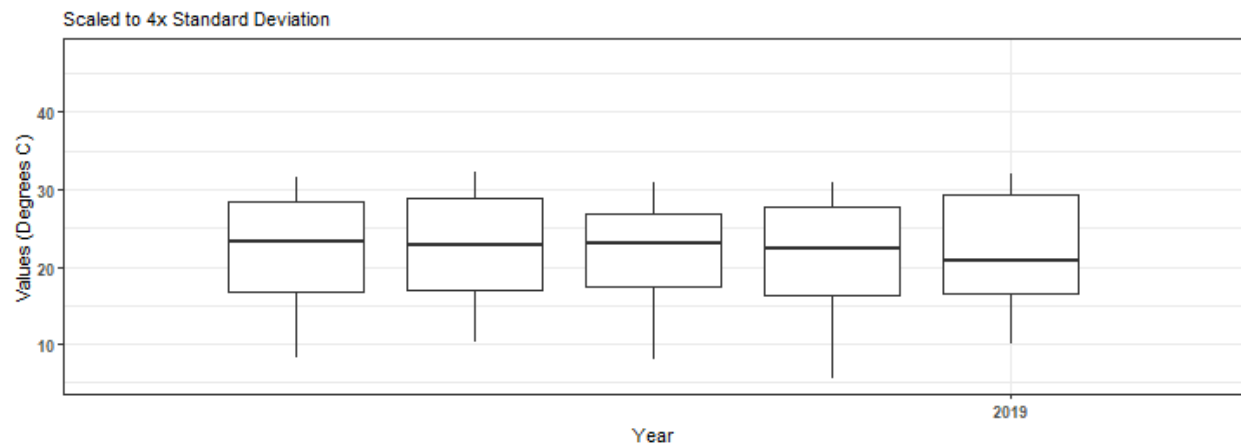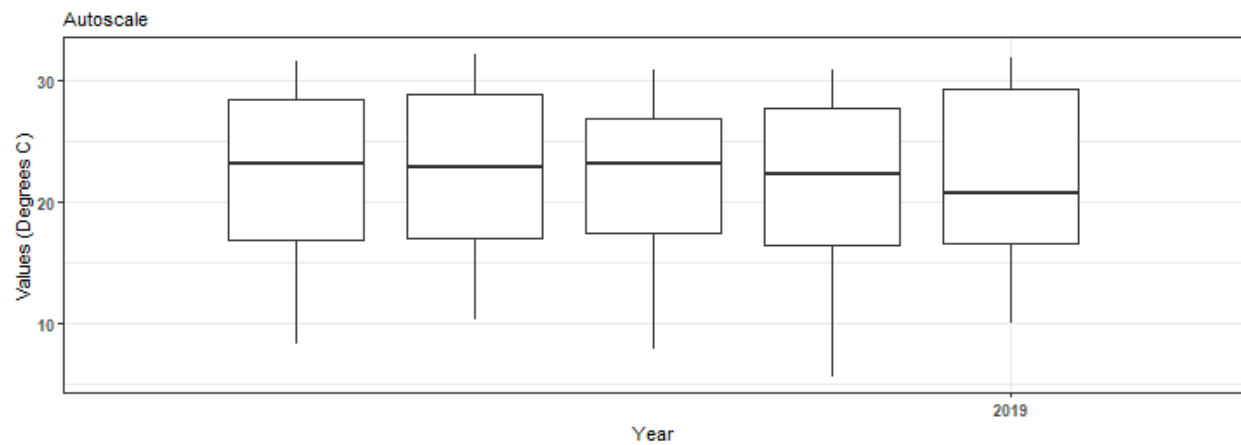




# Summary Box Plots for Yellow River Marsh Aquatic Preserve 467 | Yellow River Marsh Aquatic Preserve Continuous Water Quality Monitoring | YRMAP1

By Year & Month

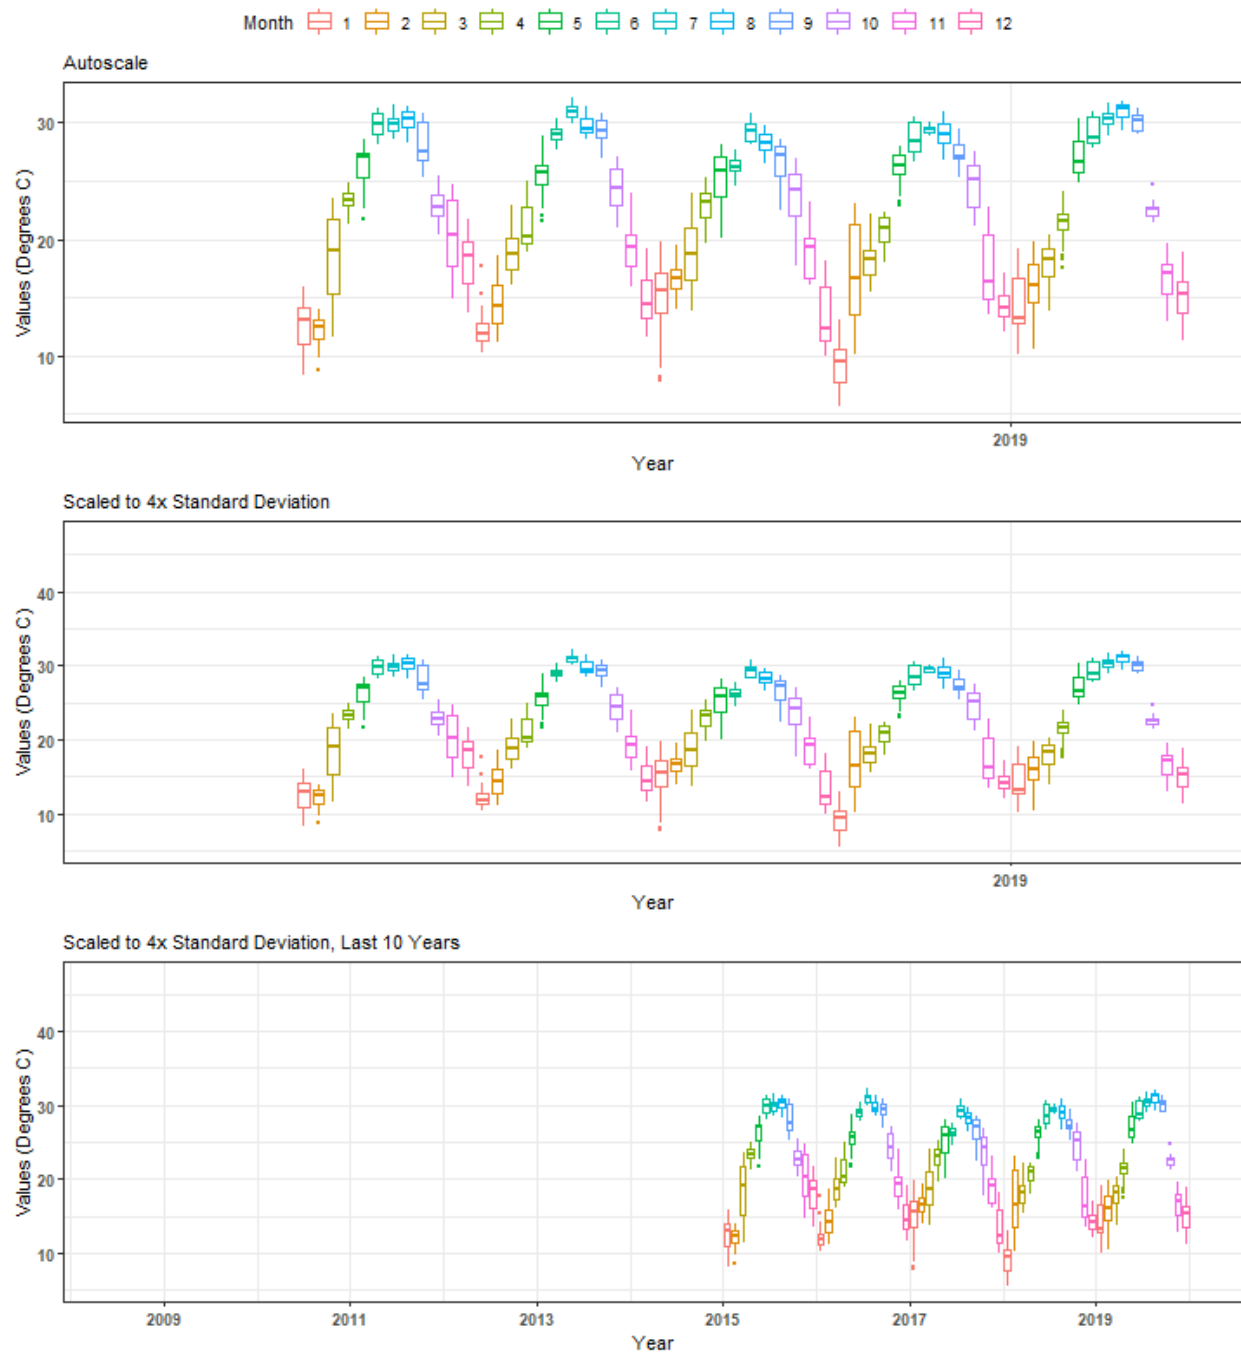




# Summary Box Plots for Yellow River Marsh Aquatic Preserve 467 | Yellow River Marsh Aquatic Preserve Continuous Water Quality Monitoring | YRMAP1

By Month

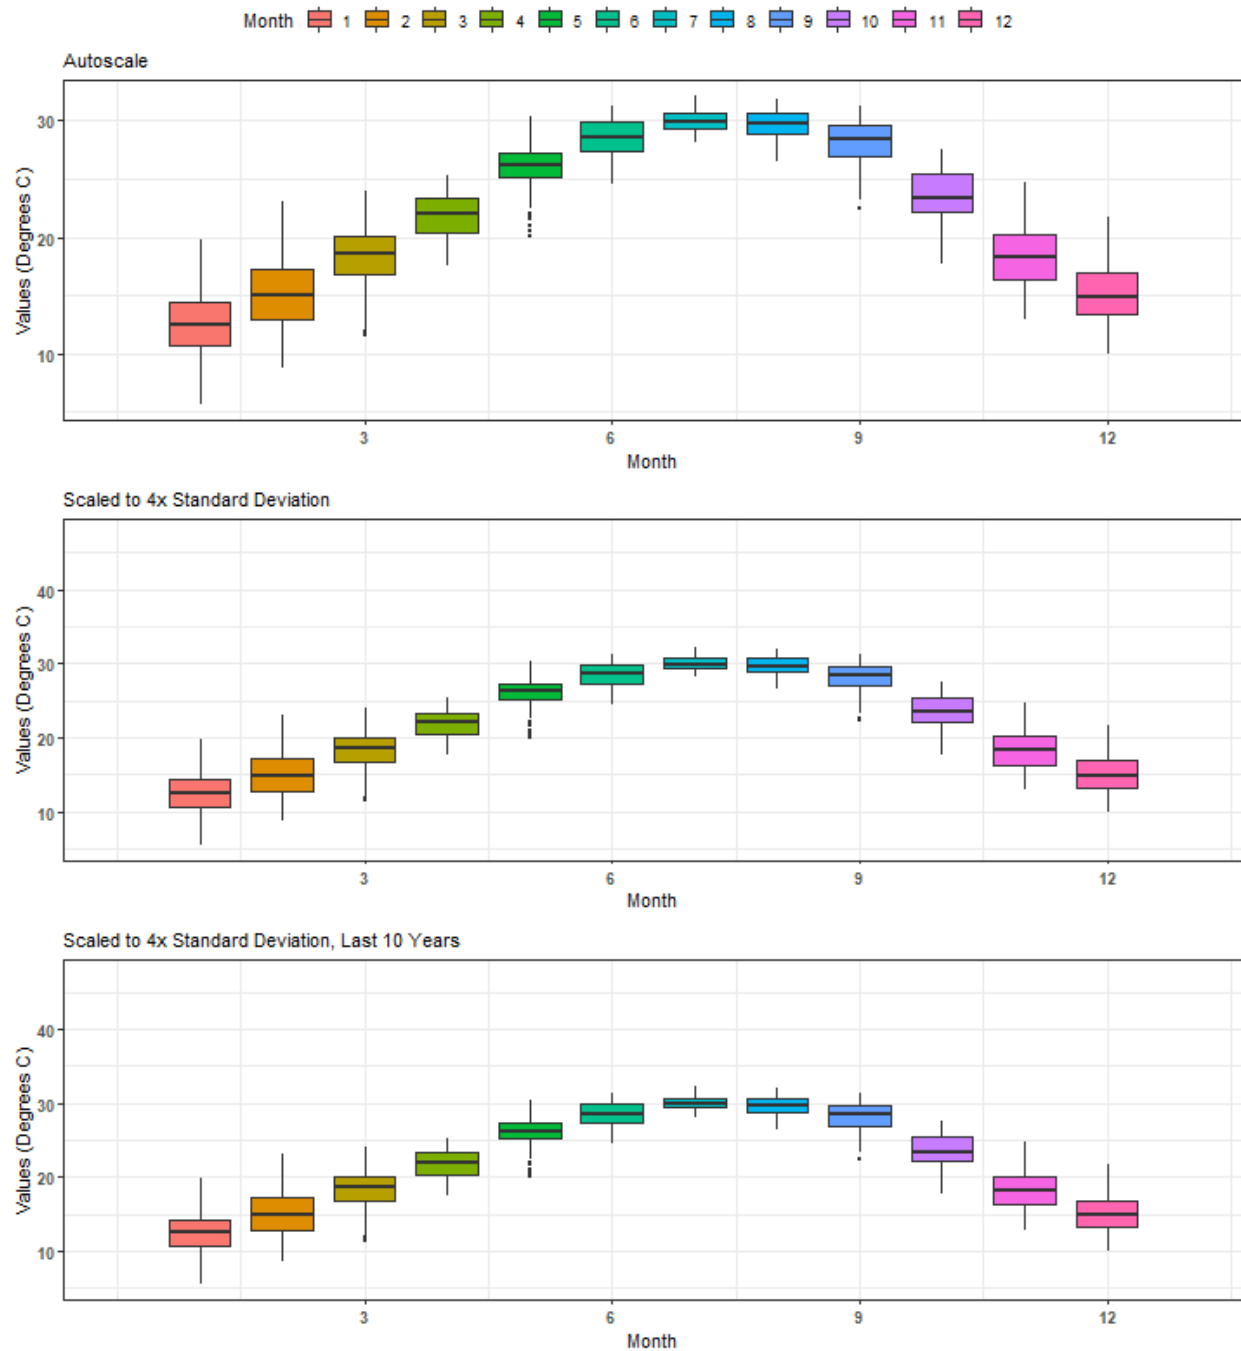


# Summary Box Plots for Yellow River Marsh Aquatic Preserve 505 | Pensacola Bay Water Quality Monitoring Program | P11

By Year

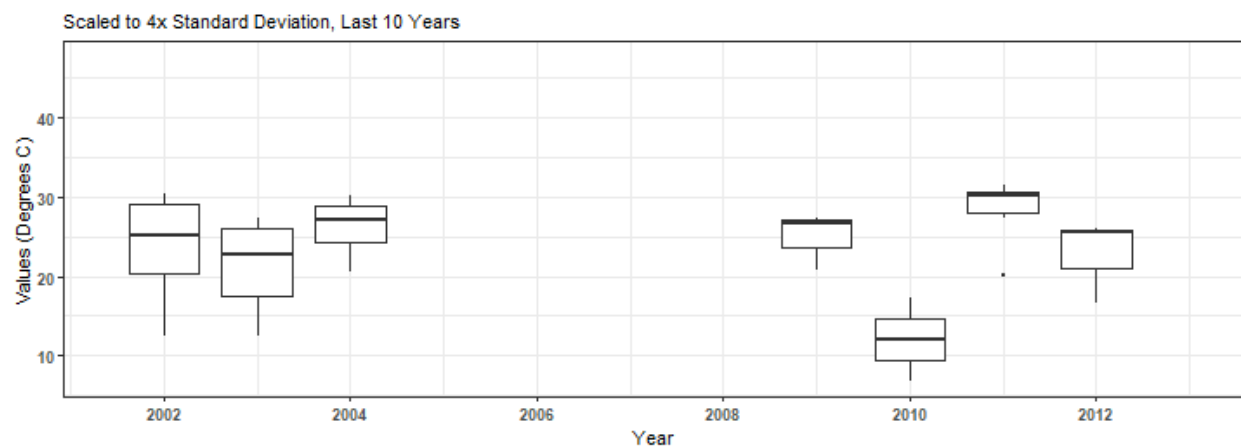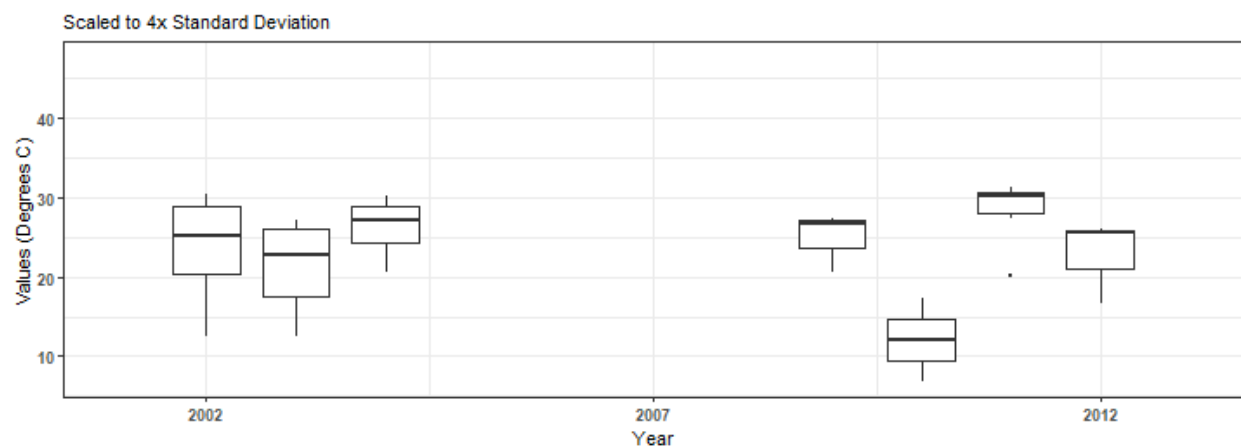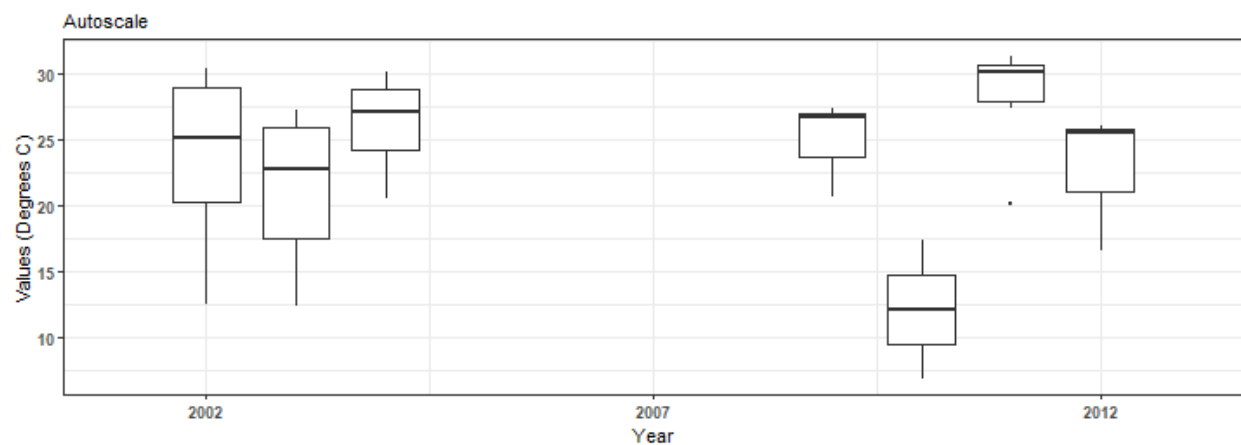

# Summary Box Plots for Yellow River Marsh Aquatic Preserve 505 | Pensacola Bay Water Quality Monitoring Program | P11

By Year & Month

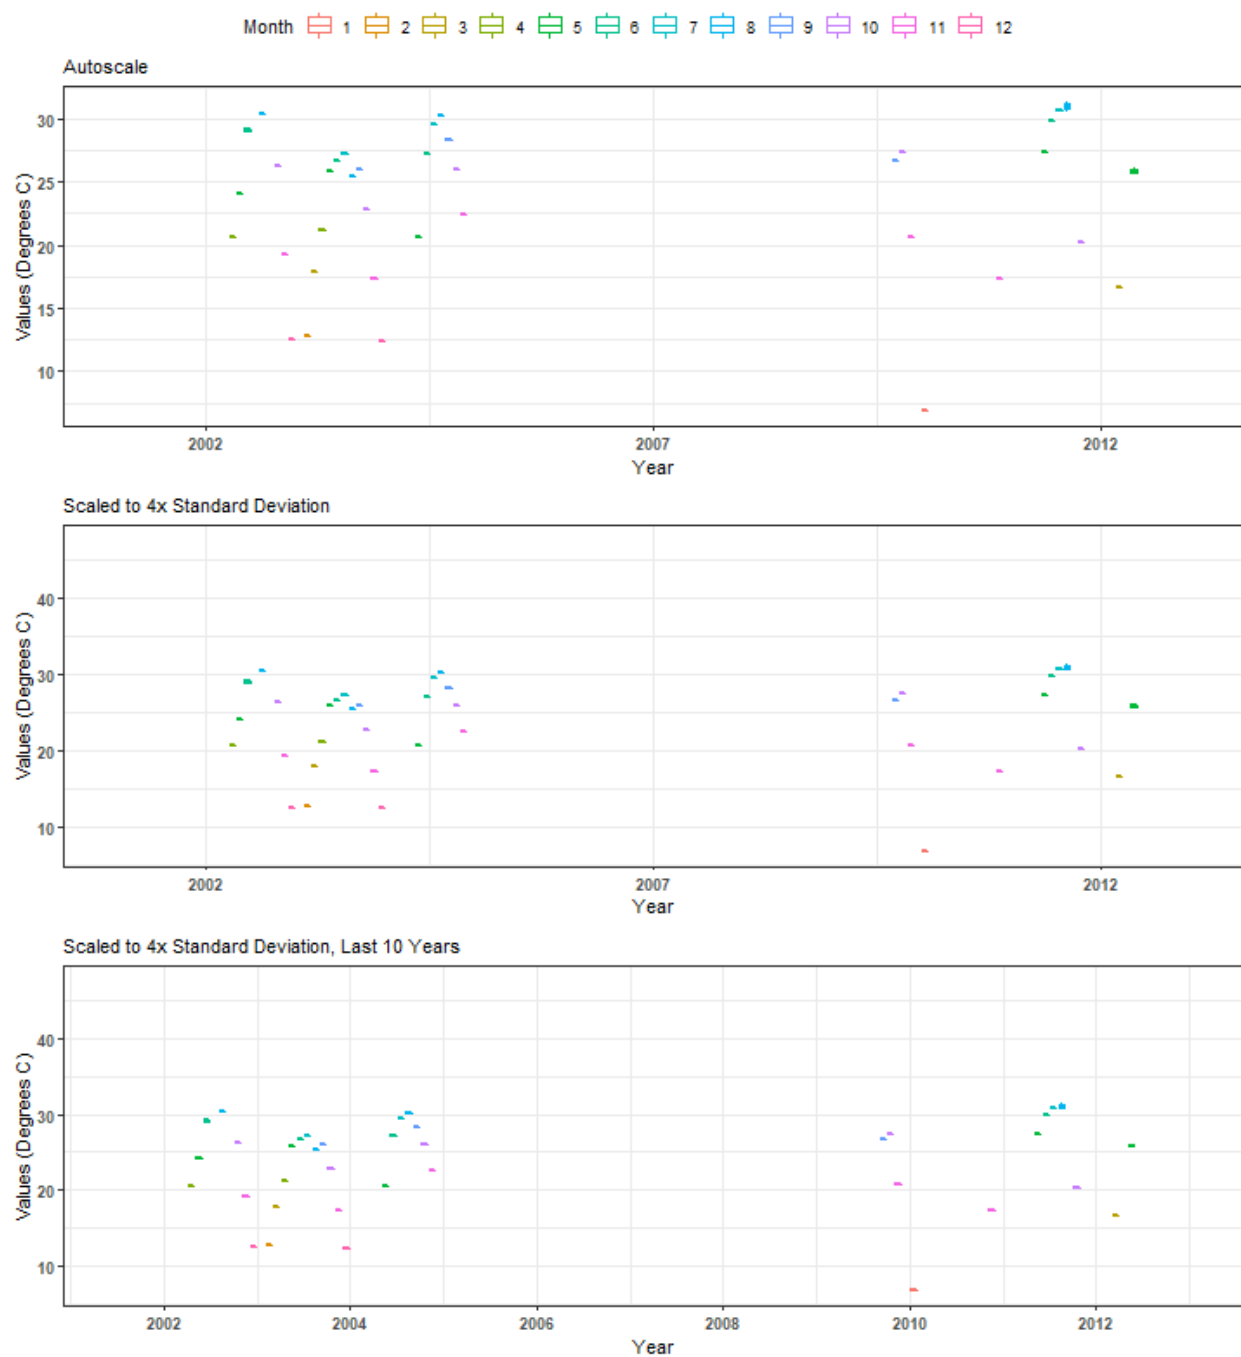

# Summary Box Plots for Yellow River Marsh Aquatic Preserve 505 | Pensacola Bay Water Quality Monitoring Program | P11

By Month

