

[illegible]


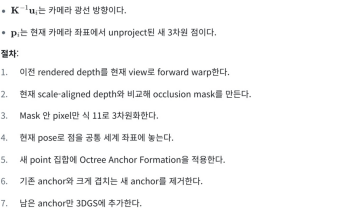


Figure 18. **More Qualitative comparison on the Free dataset [61].** We compare our method with state-of-the-art approaches including CoNeRF [39], LocalRF [39], CF-3DGS [14], and MAS3R [27] combined with Scaffold-GS [36]. CF-3DGS fails due to memory constraints (OOM), and other baseline methods exhibit artifacts or blurry reconstructions. In contrast, our method produces results closest to ground truth, demonstrating clearer details, accurate geometry, and visually consistent rendering, particularly under challenging scene structures and complex camera trajectories. ^{***} Initialized with MAS3R poses, then jointly optimized.