


Task 2.3

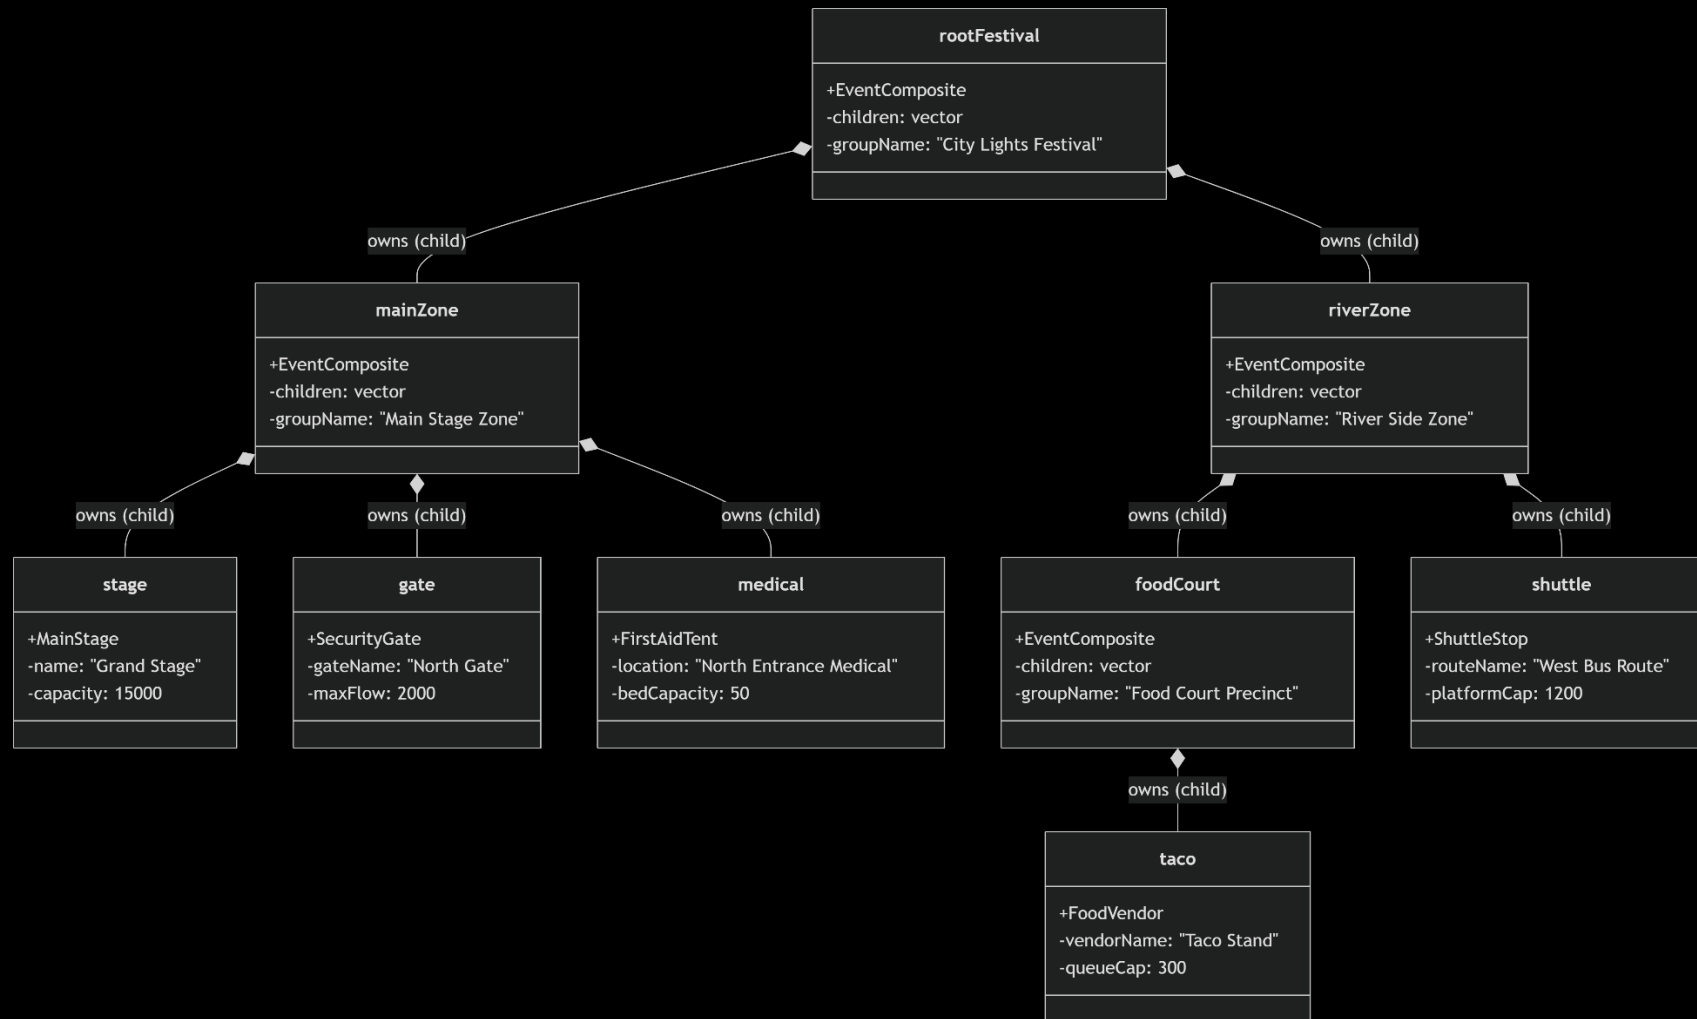

Task 2.4

The complete owned subtree is released exactly once due to the ownership policy implemented in the Eventcomposite class. When the root object is deleted, the destructor is called and the destructors iterates through its children vector and deletes all the child objects. Due to every object being an event composite, it recursively deletes all its children. Ownership rules for transferring object between composite is , the owner is a parent, it gets detached from old parent with remove() then attached onto new parent with the add(), since we used the remove and added function there will not be any double deletion