PyCodeKG: Deterministic Code Navigation via Knowledge Graphs, Semantic Indexing, and Grounded Context Packing

Eric G. Suchanek, PhD
Flux-Frontiers, Liberty Township OH

https://github.com/Flux-Frontiers/pycode_kg

Abstract

PyCodeKG constructs a deterministic, auditable knowledge graph from a Python codebase using static analysis. Structural relationships—definitions, calls, imports, and inheritance—and data-flow relationships—variable reads, writes, and attribute accesses—are extracted directly from the Python abstract syntax tree and stored in SQLite. A vector index over the same nodes, built with sentence-transformer embeddings and stored in LanceDB, provides semantic retrieval without replacing or overriding the structural record.

The system is organized into four core layers—a pure AST extractor (`CodeGraph`), a relational graph store (`GraphStore`), a semantic vector index (`SemanticIndex`), and an orchestrator (`PyCodeKG`)—plus a `KGModule` extensibility SDK that abstracts the full build/query/pack pipeline behind a two-method interface so the infrastructure can be reused for any knowledge graph domain. A built-in CLI exposes the full pipeline directly; adapter layers (MCP server, Streamlit visualizer, 3-D PyVista graph) make the same capabilities available to IDE-integrated AI agents and interactive exploration workflows.

The design treats program structure as ground truth and uses semantic embeddings strictly as an acceleration layer. The result is a searchable, traceable representation of a codebase that supports precise navigation, contextual snippet extraction, and downstream reasoning grounded against the source.

PyCodeKG is independently useful without a language model: the built-in graph explorer and hybrid query tools provide direct structural navigation and visualization of any Python codebase. When coupled with a downstream language model for synthesis, PyCodeKG additionally constitutes a form of knowledge-graph-augmented generation (KG-RAG). It differs fundamentally from the LLM-constructed graph approach of Microsoft GraphRAG [2]: the knowledge graph is *derived* from formal syntax rather than *inferred* from natural language, making it structurally correct by construction rather than probabilistically approximate. We term this *Structural KG-RAG*.

1 Introduction

As Python systems grow, answering basic architectural questions becomes surprisingly hard. Where is this configuration value actually set? Which functions participate in the connection lifecycle? Where is this service called, and under what conditions? Text search finds strings; IDE symbol lookup finds definitions. Neither tells you much about the shape of the system.

Large language models offer a different kind of help—they can reason about code semantically—but they are not grounded in the source tree. Without a structural substrate, they may confuse function signatures, misrepresent call relationships, or describe code that does not exist. The problem is not intelligence; it is the absence of a reliable structural anchor.

PyCodeKG addresses this by building that substrate first. The Python AST is parsed deterministically, producing a graph of nodes (modules, classes, functions, methods) and typed edges (CONTAINS, CALLS,

IMPORTS, INHERITS). That graph is stored in SQLite, which is the authoritative record. Semantic embeddings are then built on top of it—not instead of it—so that natural-language queries can find relevant entry points without inventing structure that is not there.

A *snippet*, as used throughout this paper, is a source-grounded code excerpt extracted at a verified file path and exact line span, annotated with node metadata, and suitable for direct LLM consumption.

This approach is deliberately inverted relative to systems such as Microsoft GraphRAG [2], which use an LLM to *construct* a knowledge graph from unstructured text. In PyCodeKG, the LLM has no role in graph construction: the graph is extracted from formal syntax, and the LLM's role is to *reason against* the resulting source-grounded context. Section 14 develops this contrast in detail.

2 Design Principles

Five principles govern the design:

1. **Structure is authoritative.** The AST-derived graph is the source of truth. Embeddings are derived from it and can be discarded and rebuilt at any time without loss.
2. **Semantics accelerate, never decide.** Vector search identifies candidate entry points. Graph traversal determines what is actually returned. The two phases are explicit and separable.
3. **Everything is traceable.** Every node carries a file path and line span. Every edge may carry evidence—a line number and expression text from the call site. Nothing is inferred without a source location.
4. **Determinism over heuristics.** Identical input produces identical output. There are no probabilistic components in the structural layer.
5. **Composable artifacts.** SQLite, LanceDB, Markdown, and JSON are independent outputs. Any downstream consumer—a human, an agent, a CI pipeline—can use whichever format suits it.

3 Architecture

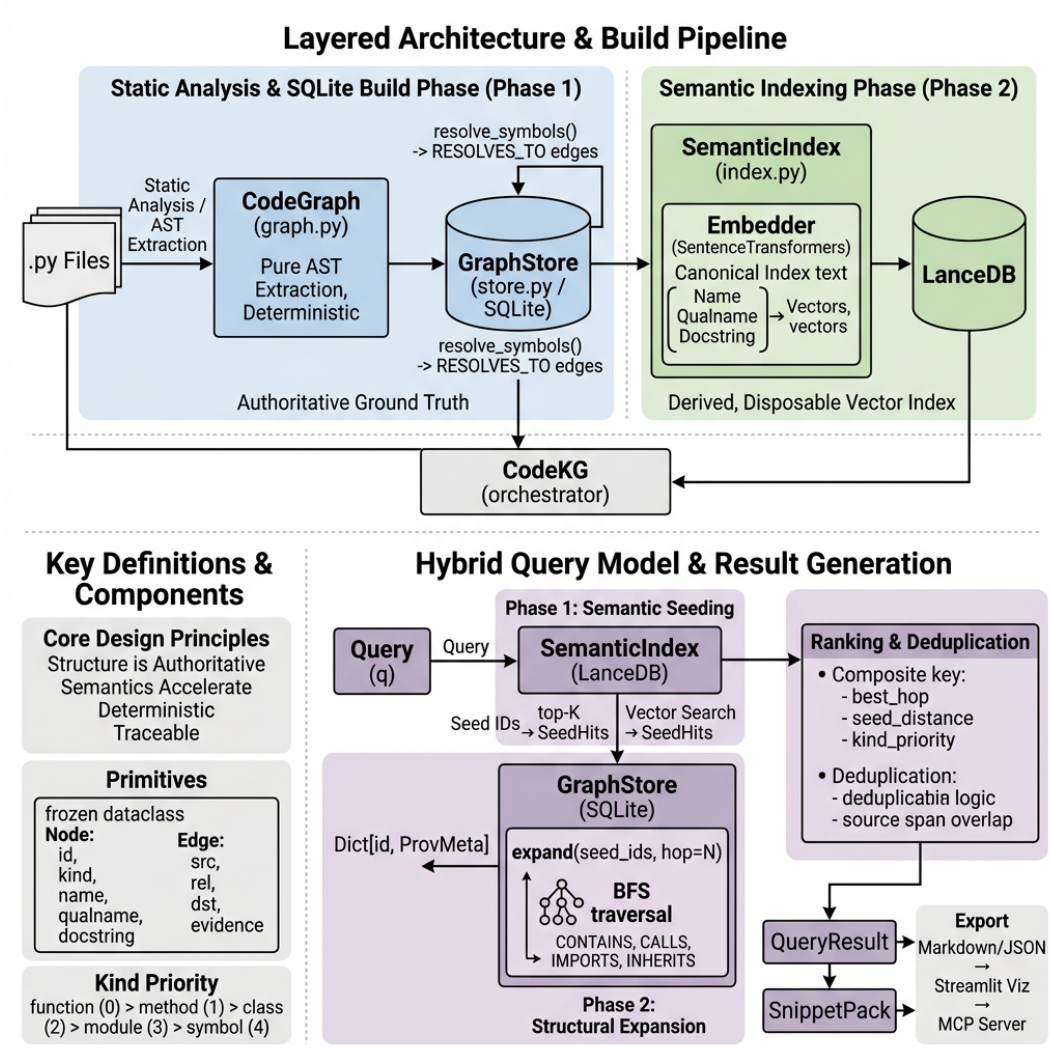

Figure 1: PyCodeKG layered architecture and build pipeline. Phase 1 (left) performs static AST extraction into SQLite; Phase 2 (centre) builds the LanceDB semantic index; the hybrid query model (right) seeds from the vector index and expands structurally through the graph to produce ranked, source-grounded results.

The implementation is organized into six layers plus a companion data-flow extraction module. Each layer has a single responsibility and depends only on layers below it.

3.1 Layer 1 — Primitives (`pycodekg.py`)

Two frozen dataclasses and one extraction function form the foundation.

`Node` carries: `id` (stable, deterministic), `kind`, `name`, `qualname`, `module_path`, `lineno`, `end_lineno`, and `docstring`.

`Edge` carries: `src`, `rel`, `dst`, and optional `evidence` (a JSON object, typically `{lineno, expr}`).

`extract_repo(repo_root)` walks all `.py` files and runs two deterministic AST passes. Pass 1 extracts

definitions and emits `CONTAINS`, `IMPORTS`, and `INHERITS` edges. Pass 2 extracts the call graph, emitting `CALLS` edges with call-site evidence. Unresolved call targets become `sym:` symbol nodes.

Supported node kinds: `module`, `class`, `function`, `method`, `symbol`. Structural edge relations: `CONTAINS`, `CALLS`, `IMPORTS`, `INHERITS`. A fifth structural relation, `RESOLVES_TO`, is added in a post-build step by `GraphStore.resolve_symbols()` (see Section 3.4). Data-flow edge relations: `READS`, `WRITES`, `ATTR_ACCESS` (emitted by `PyCodeKGVisitor`; see Section 3.2).

3.2 Data-Flow Visitor (`visitor.py`)

`PyCodeKGVisitor` extends `ast.NodeVisitor` to capture intra-function data-flow relationships that the structural pass in `pycodekg.py` does not record. Where `extract_repo` answers *what exists and how it is called*, `PyCodeKGVisitor` answers *what each function reads and writes*.

The visitor maintains a scope stack and a per-scope variable registry. On entering a function or method, all parameter names—positional, keyword-only, variadic, and keyword-variadic—are seeded into the local variable set. Default argument expressions are attributed to the *enclosing* scope rather than the function being defined, matching Python's evaluation semantics. `async def` nodes are handled identically to `def`.

Three data-flow edge types are emitted:

- `READS` — emitted for every variable name loaded in an assignment right-hand side, call argument, keyword argument value, or default expression. Records where data enters a computation.
- `WRITES` — emitted for every assignment target. Records where a variable is defined or updated within a scope.
- `ATTR_ACCESS` — emitted when a named object is accessed via attribute notation (`obj.attr`), connecting the object's variable node to a node representing the accessed attribute within the same scope.

All edges carry a source line number extracted from the originating AST node. The visitor is invoked per file and produces nodes and edges compatible with the `GraphStore` schema via `finalize()`.

3.3 Layer 2 — `CodeGraph` (`graph.py`)

`CodeGraph` wraps `extract_repo` with lazy caching. The `.nodes` and `.edges` properties trigger extraction on first access; `extract(force=True)` re-runs from scratch. No I/O, no persistence, no embeddings—pure AST extraction with a clean object interface.

3.4 Layer 3 — `GraphStore` (`store.py`)

`GraphStore` manages the SQLite `nodes` and `edges` tables and provides the traversal primitives used by the query layer.

- `write(nodes, edges, wipe=False)` — persist a complete graph via upsert.
- `node(id)` — fetch a single node dict by stable identifier.
- `query_nodes(kinds=None, module=None)` — filtered node list.
- `edges_within(node_ids)` — edges with both endpoints in the given set.
- `expand(seed_ids, hop=1, rels=...)` — BFS expansion returning `Dict[str, ProvMeta]`.
- `resolve_symbols()` — post-build step that name-matches every `sym:` stub against all first-party definitions and writes `RESOLVES_TO` edges. Idempotent; called automatically after each build.
- `callers_of(node_id, rel="CALLS")` — two-phase reverse lookup: (1) direct incoming `rel` edges and (2) callers through `sym:` stubs via `RESOLVES_TO`. Returns deduplicated caller node dicts.
- `stats()` — node and edge counts by kind and relation.

ProvMeta records best_hop (minimum hop distance from any seed) and via_seed (the originating seed node ID). This provenance is used downstream for ranking.

3.5 Layer 4 — SemanticIndex (index.py)

SemanticIndex reads nodes from a GraphStore, constructs a canonical text document for each (name plus docstring), embeds them in batches using a pluggable Embedder backend, and stores the vectors in LanceDB. The search(query, k) method returns a ranked list of SeedHit objects carrying node ID, embedding distance, and rank.

The Embedder abstract class defines embed_texts(texts) and embed_query(query). The default implementation, SentenceTransformerEmbedder, uses BAAI/bge-small-en-v1.5 via the sentence-transformers library (384-dimensional embeddings). The model is overridable via the CODEKG_MODEL environment variable or the -model CLI flag.

The vector index is derived from SQLite and is fully disposable. Deleting and rebuilding it does not affect the structural record.

3.6 Layer 5 — KGModule SDK (module/)

KGModule (module/base.py) is an abstract base class that packages the complete build/query/pack/snapshot pipeline so domain authors can reuse it for any knowledge graph domain by implementing exactly two abstract methods: make_extractor() and kind(). All generic infrastructure—SQLite persistence, LanceDB indexing, hybrid query, snippet packing, symbol resolution, and snapshot management—is inherited rather than reimplemented.

KGExtractor (module/extractor.py) defines the domain-specific extraction protocol: node_kinds(), edge_kinds(), and an extract() generator that yields NodeSpec and EdgeSpec objects. NodeSpec/EdgeSpec are thin, v0-locked intermediates that map cleanly onto the Node/Edge primitives.

PyCodeKGExtractor is the Python-AST-backed implementation used by PyCodeKG. Any other knowledge graph domain (*e.g.*, TypeScript, documentation corpora, metabolic pathways) can reuse the full infrastructure by subclassing KGModule and providing its own KGExtractor.

3.7 Orchestrator — PyCodeKG (kg.py)

PyCodeKG is a concrete KGModule subclass. It provides the Python-AST-specific extraction layer via PyCodeKGExtractor and delegates all generic infrastructure to the base class. The public API it inherits includes:

- build(wipe=False) — full pipeline: AST extraction, SQLite persistence, symbol resolution, LanceDB indexing.
- build_graph(wipe=False) — AST extraction and SQLite persistence; resolve_symbols() is called via the post-build hook.
- build_index(wipe=False) — LanceDB indexing only (graph must already exist).
- query(q, k=8, hop=1, ...) — hybrid query returning a QueryResult.
- pack(q, k=8, hop=1, ...) — hybrid query with snippet extraction returning a SnippetPack.
- callers(node_id, rel="CALLS") — precise fan-in lookup delegating to GraphStore.callers_of().
- stats() / node(id) — graph metrics and single-node fetch.

Layer properties (graph, store, embedder, index) are lazy. PyCodeKG supports the context manager protocol for clean resource management. Result types (BuildStats, QueryResult, SnippetPack) are defined in module/types.py and re-exported from kg.py for backwards compatibility.

3.8 Layer 6 — Analysis and Ranking

Structural Importance Ranking (SIR). `StructuralImportanceRanker` (`analysis/centrality.py`) runs a deterministic weighted PageRank over the sym-stub-resolved graph. Edge weights are tuned by relation type (CALLS > INHERITS > IMPORTS > CONTAINS); cross-module edges receive a 1.5× boost; private symbols are penalized 0.85× post-convergence. Scores are normalized to sum to 1.0. `aggregate_module_scores()` rolls node scores up to per-module totals, weighting class nodes at 1.2×.

Bridge centrality. `compute_bridge_centrality()` (`analysis/bridge.py`) ranks modules by the number of unique modules they interact with (call or import), identifying orchestrator and hub modules.

Framework node detection. `detect_framework_nodes()` (`analysis/framework_detector.py`) combines a normalized SIR score (0.6×) with a normalized connectivity score (0.4×) to identify modules that are both structurally central *and* highly connected—the architectural hubs most likely to be relied on by many other components.

CodeRank. `compute_coderank()` (`ranking/coderank.py`) runs a global weighted PageRank over CALLS, IMPORTS, and INHERITS edges, producing a stable per-node importance score. `query_ranked()` combines semantic seed scores with CodeRank centrality (0.25×) and graph proximity (0.15×) for a final hybrid ranking; a personalized PageRank mode (`mode="ppr"`) is also available. Both modes emit per-node `why` explanations.

3.9 Snapshot System (`snapshots.py`)

`SnapshotManager` captures a timestamped record of graph metrics—node and edge counts, docstring coverage, and critical-issue counts—keyed by the git tree hash at capture time. Snapshots are stored as JSON under `.pycodekg/snapshots/` and indexed in a manifest. The `diff_snapshots()` method computes $b - a$ deltas across any two snapshot keys, supporting temporal comparisons across builds and releases. Snapshot capture is automated via the pre-commit git hook installed by `pycodekg install-hooks`.

4 Core Data Model

4.1 Nodes

Each node represents a concrete program element extracted from the source tree. The stable identifier is constructed deterministically from kind, module path, and qualified name—for example, `fn:src/code_kg/store.py:GraphStore.expand`. This means node IDs are stable across rebuilds as long as the source structure does not change.

4.2 Edges

Edges encode two categories of typed relationships.

Structural edges are extracted by `extract_repo`: `CALLS` edges carry evidence—a JSON object with the call-site line number and expression text—making it possible to determine not just that function A calls function B, but exactly where and in what syntactic context. `CONTAINS`, `IMPORTS`, and `INHERITS` edges record the definition hierarchy, module dependencies, and class lineage respectively. A fifth structural relation, `RESOLVES_TO`, is added in a post-build step by `GraphStore.resolve_symbols()`: each `sym:` stub node produced for an unresolved call target is linked to all matching first-party definitions, enabling cross-module fan-in queries (see Section 9).

Data-flow edges are extracted by `PyCodeKGVisitor`: `READS` edges connect a per-scope variable node to the computation in which it is consumed; `WRITES` edges record assignment targets; `ATTR_ACCESS` edges

record attribute accesses on named objects. All three carry a source line number. Together they capture how data moves through a function body without requiring execution or type inference.

5 Build Pipeline

5.1 Static Analysis

`CodeGraph.extract()` invokes `extract_repo()`, which performs two deterministic AST passes over all `.py` files. Pass 1 extracts the definition graph. Pass 2 extracts the call graph with evidence. The resulting nodes and edges are persisted to SQLite via `GraphStore.write()`. A post-build step, `GraphStore.resolve_symbols()`, then name-matches every `sym:` stub against first-party definitions and writes `RESOLVES_TO` edges (see Section 9). This phase uses no embeddings and no language models.

5.2 Semantic Indexing

`SemanticIndex.build(store)` reads `module`, `class`, `function`, and `method` nodes from SQLite, constructs a canonical text document for each, embeds them in configurable batches, and upserts the vectors into LanceDB. Symbol nodes are excluded from the index by default.

Both phases are idempotent. `pycodekg build` wipes existing data by default; pass `-no-wipe` to perform an upsert instead. The lower-level `build-sqlite` and `build-lancedb` subcommands default to upsert and accept `-wipe` to clear first.

6 Hybrid Query Model

Queries execute in two explicit, separable phases.

Semantic seeding. The query string is embedded and used to retrieve a ranked list of `SeedHit` objects from LanceDB. These nodes serve as conceptual entry points into the graph—the places where the query's meaning most closely matches the codebase's vocabulary.

Structural expansion. `GraphStore.expand()` performs BFS from the seed node IDs, following selected edge types up to a configurable hop limit. Each reachable node is annotated with its minimum hop distance and originating seed via `ProvMeta`. The expansion is bounded and deterministic.

The two phases are independent. Changing the embedding model affects which seeds are selected; changing the hop count or edge filter affects how far the graph is traversed from those seeds. Both can be tuned independently.

Reranking. After expansion, a configurable reranking step reorders the result set. The default `hybrid` mode blends vector similarity (0.7) with lexical overlap on node name, qualified name, module path, and docstring (0.3), giving correct answers even when the embedding alone is weak on exact identifiers. A `semantic` mode uses vector score only; a `legacy` mode restores the original hop-first ordering for reproducibility. Edge provenance (confidence and resolution metadata for inferred `RESOLVES_TO` links) can be attached to results by passing `include_edge_provenance=True`.

7 Ranking and Deduplication

Retrieved nodes are ranked by a composite key: hop distance from seed, reranked score (or embedding distance in legacy mode), node kind priority (functions and methods before classes before modules before symbols), and node ID for tie-breaking. The ranking is fully deterministic given fixed inputs and a fixed `rerank_mode`.

In `pack()`, nodes are additionally deduplicated by file and source span. A node whose computed span overlaps an already-retained span in the same file is discarded. A configurable cap (`max_nodes`) limits the total result set. This prevents large modules from dominating the output when many nodes from the same file are retrieved.

8 Snippet Packing

For retained nodes, `PyCodeKG.pack()` extracts source-grounded snippets using the recorded `module_path`, `lineno`, and `end_lineno`. A configurable context window (`context` lines, default 5) is added around each definition span. A per-snippet line cap (`max_lines`, default 160) prevents very large definitions from overwhelming the output. File reads are cached per query. All path resolution goes through a path-traversal-safe join that rejects any path escaping the repository root.

The resulting `SnippetPack` provides `to_markdown()`, `to_json()`, and `save(path, fmt)` methods. The Markdown output includes line numbers, making it suitable for direct ingestion by language models or agents that need to reason about specific source locations.

9 Caller Lookup (Fan-In)

A common and practically important query is *fan-in*: given a function, which other functions call it? A naive approach—reversing `CALLS` edges—fails for imported functions. When the AST visitor encounters a call whose target cannot be resolved at walk time (an imported name or an attribute access), it emits a `CALLS` → `sym:Foo` stub rather than a `CALLS` → `fn:...` edge. The result is that the definition node has zero incoming `CALLS` edges from other modules; callers and definitions inhabit disconnected subgraphs.

`GraphStore.resolve_symbols()` addresses this at build time. After `write()` persists the AST-extracted graph, it name-matches every `sym:` stub against all first-party definitions and writes a `RESOLVES_TO` edge for each match. The step is idempotent and runs automatically at the end of `build_graph()`.

`GraphStore.callers_of(node_id)` then performs a two-phase reverse lookup:

1. **Direct reverse** — all nodes with an incoming `CALLS` edge targeting `node_id`.
2. **Stub reverse** — all `sym:` stubs that `RESOLVES_TO` `node_id`, plus all nodes with a `CALLS` edge to each such stub.

Results are deduplicated and returned as node dicts. `PyCodeKG.callers()` delegates to this method, and the `callers` MCP tool exposes it to agents:

```
# Python API
callers = kg.callers("fn:src/auth/jwt.py:JWTValidator.validate")

# MCP tool
callers("fn:src/auth/jwt.py:JWTValidator.validate")
# -> {"node_id": ..., "caller_count": 7, "callers": [...]}
```

10 Result Types

Three structured result types are defined in `kg.py`:

- `BuildStats` — returned by all build methods; carries node and edge counts, indexed row count, and embedding dimension.

- `QueryResult` — returned by `query()`; carries the ranked node list, edges within the result set, and query metadata. Provides `to_dict()`, `to_json()`, and `print_summary()`.
- `SnippetPack` — returned by `pack()`; extends the query result with source snippets attached to each node. Provides `to_markdown()`, `to_json()`, and `save()`.

11 MCP Server

`mcp_server.py` wraps `PyCodeKG` as a Model Context Protocol server. It is one of several agent adapters; because the CLI covers the same capabilities, the MCP server is not architecturally necessary—an agent with shell access can invoke `pycodekg` subcommands directly. It is included for integrations that prefer a structured tool interface (Claude Desktop, Cursor, Kilo Code, GitHub Copilot). The server is strictly read-only; no tool modifies the graph.

Seventeen tools are exposed, organized in four groups:

Core query. `graph_stats()` returns node and edge counts by kind and relation. `query_codebase(q, k, hop, rels, min_score, max_per_module, paths, rerank_mode, include_edge_provenance)` performs hybrid semantic + structural search with configurable reranking (hybrid, semantic, or legacy modes). `pack_snippets(...)` adds source-grounded snippets to the query result. `get_node(node_id, include_edges)` fetches a single node; passing `include_edges=True` returns outgoing edges and callers in one round-trip. `callers(node_id, rel, paths)` performs fan-in lookup with optional path-prefix filtering.

Structural analysis. `analyze_repo()` runs the full nine-phase architectural analysis pipeline (complexity, coupling, docstring coverage, orphan detection, circular dependencies, module cohesion) and returns Markdown. `explain(node_id, limit)` returns a natural-language description of a node: its kind, location, callers, callees, and docstring—useful for orientation before reading source. `list_nodes(module_path, kind)` enumerates all nodes in a module.

Ranking and centrality. `centrality(top, kinds, group_by)` computes Structural Importance Ranking (SIR) as a weighted PageRank; results can be grouped by node or module. `bridge_centrality(top, include_imports)` ranks modules by unique inter-module interactions. `framework_nodes(top)` identifies modules that are both structurally central (high SIR) and highly connected (high bridge score). `rank_nodes(top, rels, persist_metric)` computes global CodeRank. `query_ranked(q, k, mode, top)` blends semantic seeds with CodeRank centrality and graph proximity; supports hybrid and personalized-PageRank modes. `explain_rank(node_id, q)` reports score components for a specific node.

Snapshots. `snapshot_list(limit)` lists all stored snapshots in reverse chronological order. `snapshot_show(key)` returns full metrics for one snapshot. `snapshot_diff(key_a, key_b)` returns $b - a$ deltas across two snapshots.

The server is started via the `pycodekg-mcp` entry point and communicates over `stdio` or `sse`.

12 CLI Entry Points

All commands are available as `pycodekg` *`subcommand`* via the main dispatcher or as standalone `pycodekg-`*`name`* entry points. Both forms are equivalent.

Command	Purpose
`pycodekg build`	AST extraction → SQLite + LanceDB (wipes by default; `-no-wipe` to pres
`pycodekg build-sqlite`	AST extraction → SQLite only
`pycodekg build-lancedb`	SQLite → LanceDB vector index
`pycodekg update`	Incremental update (add/remove changed files)
`pycodekg query`	Hybrid query (JSON output)
`pycodekg pack`	Hybrid query + snippet pack (Markdown or JSON)
`pycodekg analyze`	Full architectural analysis (Markdown report)
`pycodekg centrality`	Structural Importance Ranking (SIR)
`pycodekg architecture`	Architecture summary
`pycodekg snapshot save|list|show|diff`	Temporal snapshot management
`pycodekg viz`	Launch the Streamlit graph explorer
`pycodekg viz3d`	Launch the 3-D PyVista knowledge-graph visualizer
`pycodekg viz-timeline`	Interactive temporal metrics visualization
`pycodekg install-hooks`	Install pre-commit git hook for auto-snapshots
`pycodekg mcp`	Start the MCP server

13 End-to-End Workflow

1. `CodeGraph.extract()` — deterministic AST pass over the repository.
2. `GraphStore.write()` — persist nodes and edges to SQLite.
3. `SemanticIndex.build()` — embed nodes and store vectors in LanceDB.
4. `SemanticIndex.search()` — semantic seeding from a natural-language query.
5. `GraphStore.expand()` — structural BFS expansion with provenance.
6. Deterministic ranking and span-based deduplication.
7. Snippet extraction and `SnippetPack` assembly.

Steps 1–3 are the build pipeline, run once (or on demand after code changes). Steps 4–7 execute on every query, typically in under a second for codebases up to several hundred thousand lines.

14 Comparison with LLM-Constructed Knowledge Graphs

The most directly relevant prior work is GraphRAG, introduced by Edge et al. [2] at Microsoft Research. GraphRAG represents the dominant paradigm in graph-augmented retrieval: an LLM is used to extract entities and relationships from unstructured text documents, those entities are organized into a community hierarchy using graph partitioning, and community-level summaries are pregenerated to support downstream question answering over large corpora.

PyCodeKG and GraphRAG share a surface resemblance—both augment retrieval with a knowledge graph—but differ in the origin, correctness guarantees, and intended use of that graph.

14.1 Graph Construction: Inferred vs. Derived

In GraphRAG, the knowledge graph is *inferred* by an LLM from natural language text. Entity extraction is probabilistic: the model may miss entities, conflate similar ones, hallucinate relationships, or produce inconsistent descriptions across documents. The graph is only as reliable as the extraction prompt and the LLM's comprehension of each text unit.

In PyCodeKG, the knowledge graph is *derived* from the Python abstract syntax tree. Every node corresponds to a syntactically verified program element; every edge corresponds to a verified syntactic relationship. A `CALLS` edge from function A to function B exists because a call expression to B was found in the body of A at the recorded line number. The structural layer uses no LLM and contains no probabilistic components. The structural graph is correct by construction.

14.2 The Inversion of the LLM Role

This distinction reverses the role of the language model in the overall pipeline:

- In GraphRAG, the LLM *constructs* the knowledge graph. The graph is a product of LLM inference; its correctness is bounded by LLM accuracy and is not independently verifiable.
- In PyCodeKG, the LLM *consumes* the knowledge graph. The graph is a product of static analysis; the LLM receives source-grounded snippets with exact file paths and line numbers and reasons against them.

The consequence is a hard boundary on hallucination. In GraphRAG, errors introduced during graph construction propagate silently into query results—the system has no mechanism to detect that an extracted relationship is wrong. In PyCodeKG, every structural claim is verifiably correct by construction: each node ID encodes its file path and qualified name, and each snippet is extracted from the actual source at the recorded line span.

14.3 Call-Site Evidence

GraphRAG edges carry natural-language descriptions of relationships (e.g., "Entity A collaborates with Entity B in the context of…"), generated by the LLM and approximate. PyCodeKG `CALLS` edges carry machine-verifiable evidence: the exact line number and expression text of the call site, extracted directly from the AST. This enables a class of query that GraphRAG cannot support: *where exactly is this function called, and in what syntactic context?*

14.4 Different Problem Domains

The two systems address different problems and are not in direct competition.

GraphRAG targets *global sensemaking* over unstructured text corpora. Its design optimizes for questions like "What are the main themes in this document collection?" and scales to corpora exceeding one million tokens. It is appropriate when the input is natural language and the goal is synthesis across many documents.

PyCodeKG targets *structural navigation* of a formal, syntax-governed artifact. It is designed for questions like "Which functions participate in the authentication flow?", "Where is this configuration value read, and which callers depend on it?", and "What is the call graph rooted at this entry point?" It is precise where GraphRAG is approximate, because the input is code—a deterministic, machine-readable artifact—not prose.

14.5 Structural KG-RAG

When PyCodeKG is coupled with a downstream language model for synthesis, the combined system constitutes knowledge-graph-augmented generation (KG-RAG). The specific flavor, however, is stronger than the general case. Because the knowledge graph is formally derived rather than LLM-inferred, the synthesis stage operates against a *provably correct structural substrate*. Every piece of context passed to the LLM carries a verified file path, exact line span, and—for call relationships—a machine-extracted call-site expression. The LLM's claims are checkable: a node ID such as `fn:src/auth/jwt.py:JWTValidator.validate` at line 47 is a precise, stable, inspectable address.

We term this *Structural KG-RAG*: knowledge-graph-augmented generation in which the graph is derived from formal syntax rather than inferred from natural language, and every piece of retrieved context has deterministic provenance traceable to the source. Table 1 summarizes the key distinctions.

Table 1: GraphRAG vs. PyCodeKG (Structural KG-RAG)

Property	GraphRAG [2]	PyCodeKG
Graph source	LLM extraction from text	AST (formal syntax)
Graph correctness	Probabilistic	Deterministic
Edge content	NL relationship description	Typed + call-site evidence
Data-flow edges	None	READS, WRITES, ATTR_ACCESS
Provenance	Document reference	File path + exact line span
LLM role	Builds the graph	Reasons against the graph
Hallucination risk	Present in graph construction	Bounded to synthesis only
Input domain	Unstructured text	Python source code
Query focus	Global sensemaking	Structural navigation
LLM required to build?	Yes	No

15 Conclusion

PyCodeKG shows that useful, auditable code understanding does not require a language model in the loop for graph construction. Static analysis produces a precise structural record; semantic embeddings make that record navigable with natural language. Keeping the two layers explicit and separable means each can be evaluated, debugged, and improved independently.

The layered architecture—`CodeGraph`, `GraphStore`, `SemanticIndex`, `KGModule`, `PyCodeKG`—cleanly separates concerns and makes the system straightforward to extend. The `KGModule` SDK reduces the cost of building a new domain knowledge graph to implementing two abstract methods; the DocKG documentation corpus analyzer and the metabolic pathway KG are direct products of this design. Analysis and ranking layers (`StructuralImportanceRanker`, CodeRank, framework-node detection) provide structural importance signals that are independent of semantic search and complement it. Temporal snapshots give teams an auditable record of how the codebase structure evolves across releases.

Agent access to these capabilities is available via the CLI directly; the MCP server and other adapters are thin wrappers that expose the same pipeline to integration environments that prefer a structured tool interface.

The broader lesson is about where to place trust in an AI-assisted development workflow. Systems that use an LLM to construct the knowledge substrate introduce probabilistic error at the foundation, which propagates unchecked into every downstream reasoning step. PyCodeKG inverts this: the structural substrate is built from a deterministic formal process, and the LLM is positioned where it is most effective—synthesizing and explaining a context pack whose every line is verified against the source. The result is a form of Structural KG-RAG that combines the navigability of natural-language queries with the correctness guarantees of static analysis.

References

[1] Michael Günther, Jackmin Ong, Isabelle Mohr, Alaeddine Abdessalem, Tanguy Abel, Mohammad Kalim Akram, Susana Guzman, Georgios Mastrapas, Saba Sturua, Bo Wang, Maximilian Werk, Nan Wang, and

Han Xiao. Jina embeddings 3: A frontier multilingual embedding model. *arXiv preprint arXiv:2409.10173*, 2024. https://arxiv.org/abs/2409.10173

[2] Darren Edge, Ha Trinh, Newman Cheng, Joshua Bradley, Alex Chao, Apurva Mody, Steven Truitt, and Jonathan Larson. From local to global: A graph RAG approach to query-focused summarization. *arXiv preprint arXiv:2404.16130*, 2024. https://arxiv.org/abs/2404.16130