

Apache2

▼ A- Installation de apache2

1- Mettre à jour la machine

```
debian@debian:~$ sudo apt update
...
debian@debian:~$ sudo apt upgrade
```

2- Renommez la machine apache2


```
debian@debian:~$ hostnamectl set-hostname apache2
```

3- Installation du paquet apache2

```
debian@debian:~$ sudo apt install apache2 -y
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
```

4- Test de l'installation

```
debian@debian:~$ hostname -i
fe80::20c:29ff:fe96:aade%ens33 192.168.154.129
```

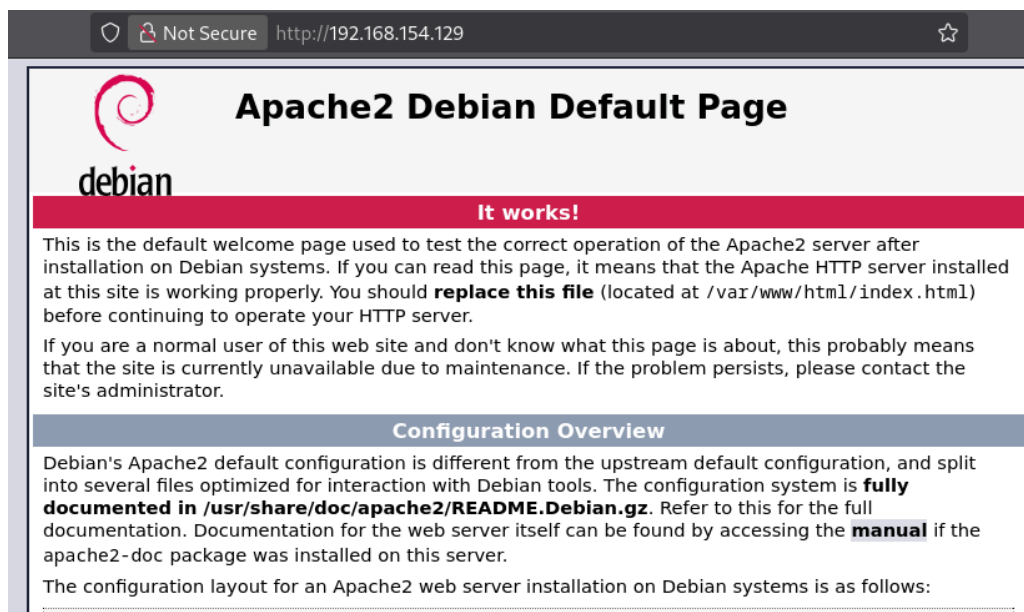

5- Comprendre l'arborescence des fichier d'apache2 Localiser les fichiers

```
debian@debian:~$ whereis apache2
apache2: /usr/sbin/apache2 /usr/lib/apache2 /etc/apache2 /usr/share/apache2 /usr/share/man/man8/apache2.8.gz
```

a- Explorer le fichier apache2.conf

```
debian@debian:/etc/apache2$ cat apache2.conf

# It is split into several files forming the configuration hierarchy outlined
# below, all located in the /etc/apache2/ directory:
#
#       /etc/apache2/
#       |-- apache2.conf
#       |   `-- ports.conf
#       |-- mods-enabled
#       |   |-- *.load
#       |   |-- *.conf
#       |-- conf-enabled
#       |   |-- *.conf
#       `-- sites-enabled
#           |-- *.conf
#
```

b- le contexte directory

```
debian@debian:/etc/apache2$ ls -al
total 96
drwxr-xr-x  8 root root 4096 Dec  1 04:12 .
drwxr-xr-x 121 root root 12288 Dec  1 04:11 ..
-rw-r--r--  1 root root 7178 Jul 29 16:18 apache2.conf
drwxr-xr-x  2 root root 4096 Dec  1 04:12 conf-available
drwxr-xr-x  2 root root 4096 Dec  1 04:12 conf-enabled
-rw-r--r--  1 root root 1782 Jul 29 16:18 envvars
-rw-r--r--  1 root root 31063 Jul 17 11:59 magic
drwxr-xr-x  2 root root 12288 Dec  1 04:12 mods-available
drwxr-xr-x  2 root root 4096 Dec  1 04:12 mods-enabled
-rw-r--r--  1 root root 274 Jul 29 16:18 ports.conf
drwxr-xr-x  2 root root 4096 Dec  1 04:12 sites-available
drwxr-xr-x  2 root root 4096 Dec  1 04:12 sites-enabled
```

6- Les mods d'Apache2 et leur gestion le processus

```
debian@debian:~$ ps aux | grep apach[e]
root      22439  0.0  0.1  6716 3284 ?        Ss   04:12   0:00 /usr/sbin/apache2 -k start
www-data  22440  0.0  0.2 1212788 5004 ?        Sl   04:12   0:00 /usr/sbin/apache2 -k start
www-data  22441  0.0  0.3 1212860 6116 ?        Sl   04:12   0:00 /usr/sbin/apache2 -k start
www-data  22522  0.0  0.0   3416   160 ?        Ss   04:12   0:00 /usr/bin/htcacheclean -d 120 -p /var/cache/apache2/mod_cache_disk -l 300M -n

debian@debian:~$ ps aux --forest | grep apach[e]
root      22439  0.0  0.1  6716 3284 ?        Ss   04:12   0:00 /usr/sbin/apache2 -k start
www-data  22440  0.0  0.2 1212788 5004 ?        Sl   04:12   0:00 \_ /usr/sbin/apache2 -k start
www-data  22441  0.0  0.3 1212860 6116 ?        Sl   04:12   0:00 \_ /usr/sbin/apache2 -k start
www-data  22522  0.0  0.0   3416   160 ?        Ss   04:12   0:00 /usr/bin/htcacheclean -d 120 -p /var/cache/apache2/mod_cache_disk -l 300M -n
```

a- Les trois mods apache2 mpm_event, mpm_worker et mpm_perfork

```
debian@debian:/etc/apache2$ ls mods-enabled/
access_compat.load  authn_file.load  autoindex.load  env.load  mpm_event.load  setenvif.conf
alias.conf          authz_core.load  deflate.conf     filter.load  negotiation.conf  setenvif.load
alias.load          authz_host.load  deflate.load     mime.conf   negotiation.load  status.conf
auth_basic.load     authz_user.load  dir.conf        mime.load   reqtimeout.conf  status.load
authn_core.load     autoindex.conf   dir.load        mpm_event.conf  reqtimeout.load
```

```

debian@debian:~$ sudo a2query -M
[sudo] password for debian:
event
debian@debian:~$ █

```

b- Activation et désactivation manuelle des mods/--

i- Activation et désactivation manuelle des mod mpm

- Je supprime le module mpm_event

```

debian@debian:~$ cd /etc/apache2/mods-enabled/
debian@debian:/etc/apache2/mods-enabled$ rm mpm_event.conf mpm_event.load
rm: cannot remove 'mpm_event.conf': Permission denied
rm: cannot remove 'mpm_event.load': Permission denied
debian@debian:/etc/apache2/mods-enabled$ sudo rm mpm_event.conf mpm_event.load
debian@debian:/etc/apache2/mods-enabled$ █

```

- Je redémarre le service apache2 et je vérifie que les processus sont arrêter

```

debian@debian:/etc/apache2/mods-enabled$ sudo service apache2 restart
Job for apache2.service failed because the control process exited with error code.
See "systemctl status apache2.service" and "journalctl -xeu apache2.service" for details.
debian@debian:/etc/apache2/mods-enabled$ sudo ps aux --forest | grep apach[e]
www-data 22522 0.0 0.0 3416 160 ? Ss 04:12 0:00 /usr/bin/htcacheclean -d 120 -p /var/cache/apache2/mod_cache_disk -l 300M -n

```

▼ Je crée les liens symboliques, je redémarre le service apache2 et je vérifie que les processus sont démarrés

In -s [fichier cible] [Nom de fichier symbolique] teams

```

debian@debian:/etc/apache2/mods-enabled$ sudo ln -s ../mods-available/mpm_prefork.conf
debian@debian:/etc/apache2/mods-enabled$ sudo ln -s ../mods-available/mpm_prefork.load
debian@debian:/etc/apache2/mods-enabled$ sudo systemctl restart apache2
debian@debian:/etc/apache2/mods-enabled$ sudo ps aux --forest | grep apach[e]
www-data 22522 0.0 0.0 3416 160 ? Ss 04:12 0:00 /usr/bin/htcacheclean -d 120 -p /var/cache/apache2/mod_cache_disk -l 300M -n
root      23186 0.0 0.2 6428 4452 ? Ss 04:42 0:00 /usr/sbin/apache2 -k start
www-data 23187 0.0 0.2 7848 4240 ? S 04:42 0:00 \_ /usr/sbin/apache2 -k start
www-data 23188 0.0 0.2 7848 4272 ? S 04:42 0:00 \_ /usr/sbin/apache2 -k start
www-data 23189 0.0 0.2 7848 4272 ? S 04:42 0:00 \_ /usr/sbin/apache2 -k start
www-data 23190 0.0 0.2 7848 4268 ? S 04:42 0:00 \_ /usr/sbin/apache2 -k start
www-data 23191 0.0 0.2 7848 4268 ? S 04:42 0:00 \_ /usr/sbin/apache2 -k start

```

ii- Activation et désactivation de mods mpm avec script

```

debian@debian:/etc/apache2/mods-enabled$ sudo a2dismod mpm_prefork
Module mpm_prefork disabled.
To activate the new configuration, you need to run:
systemctl restart apache2
debian@debian:/etc/apache2/mods-enabled$ sudo systemctl restart apache2
Job for apache2.service failed because the control process exited with error code.
See "systemctl status apache2.service" and "journalctl -xeu apache2.service" for details.
debian@debian:/etc/apache2/mods-enabled$ sudo a2enmod mpm_event
Considering conflict mpm_worker for mpm_event:
Considering conflict mpm_prefork for mpm_event:
Enabling module mpm_event.
To activate the new configuration, you need to run:
systemctl restart apache2
debian@debian:/etc/apache2/mods-enabled$ sudo systemctl restart apache2
debian@debian:/etc/apache2/mods-enabled$ sudo ps aux --forest | grep apach[e]
www-data 22522 0.0 0.0 3416 160 ? Ss 04:12 0:00 /usr/bin/htcacheclean -d 120 -p /var/cache/apache2/mod_cache_disk -l 300M -n
root      23291 0.0 0.2 6716 4652 ? Ss 04:47 0:00 /usr/sbin/apache2 -k start
www-data 23292 0.0 0.5 1212780 11112 ? S1 04:47 0:00 \_ /usr/sbin/apache2 -k start
www-data 23293 0.0 0.3 1212780 7024 ? S1 04:47 0:00 \_ /usr/sbin/apache2 -k start

```

iii- Détermination du pid des processus

```

debian@debian:/var/run/apache2$ cat apache2.pid
23291

```

```
debian@debian:~$ pidof apache2
23293 23292 23291
```

```
debian@debian:~$ sudo ps aux --forest | grep apach[e]
www-data  22522  0.0  0.0  3416  160 ?        Ss   04:12   0:00 /usr/bin/htcacheclean -d 120 -p /var/cache/apache2/mod_cache_disk -l 300M -n
root      23291  0.0  0.2  6716  4652 ?        Ss   04:47   0:00 /usr/sbin/apache2 -k start
www-data  23292  0.0  0.5 1212780 11112 ?        Sl   04:47   0:00 \_ /usr/sbin/apache2 -k start
www-data  23293  0.0  0.3 1212780 7024 ?         Sl   04:47   0:00 \_ /usr/sbin/apache2 -k start
```

Alexis DE JESUS