Study Guide: Introduction to Finite Element Methods

Hans Petter Langtangen 1,2

 $^1{\rm Center}$ for Biomedical Computing, Simula Research Laboratory $^2{\rm Department}$ of Informatics, University of Oslo

Oct 23, 2013

Contents

1	Why	y finite elements?	1
	1.1	Domain for flow around a dolphin	2
	1.2	The flow	3
	1.3	Basic ingredients of the finite element method	3
	1.4	Our learning strategy	3
2	App	proximation in vector spaces	4
	2.1	Approximation set-up	4
	2.2	How to determine the coefficients?	5
	2.3	Approximation of planar vectors; problem	5
	2.4	Approximation of planar vectors; vector space terminology	6
	2.5	The least squares method; principle	6
	2.6	The least squares method; calculations	6
	2.7	The projection (or Galerkin) method	6
	2.8	Approximation of general vectors	7
	2.9	The least squares method	7
	2.10	The projection (or Galerkin) method	7
3	App	proximation of functions	7
	3.1	The least squares method	8
	3.2	The projection (or Galerkin) method	8
	3.3	Example: linear approximation; problem	8
	3.4	Example: linear approximation; solution	9
	3.5	Example: linear approximation; plot	9
	3.6		10
	3.7	Implementation of the least squares method; code	10
	3.8	Implementation of the least squares method; plotting	10
	3.9	Implementation of the least squares method; application	10
	3.10		11
	3.11	Perfect approximation; the general result	12

	3.12	Perfect approximation; proof of the general result	12
		Finite-precision/numerical computations	12
		Ill-conditioning (1)	13
	3.15	Ill-conditioning (2)	13
		Fourier series approximation; problem and code	13
	3.17	Fourier series approximation; plot	14
	3.18	Fourier series approximation; improvements	14
	3.19	Fourier series approximation; final results	14
	3.20	Orthogonal basis functions	15
		The collocation or interpolation method; ideas and math	15
		The collocation or interpolation method; implementation	15
		, 11 0 1 v	16
		Lagrange polynomials; motivation and ideas	16
		Lagrange polynomials; formula and code	16
		Lagrange polynomials; successful example	17
		Lagrange polynomials; a less successful example	17
		Lagrange polynomials; oscillatory behavior	17
		Lagrange polynomials; remedy for strong oscillations	18
		Lagrange polynomials; recalculation with Chebyshev nodes	19
	3.31	Lagrange polynomials; less oscillations with Chebyshev nodes	19
4	Fini	te element basis functions	20
	4.1	The basis functions have so far been global: $\psi_i(x) \neq 0$ almost everywhere	20
	4.2	In the finite element method we use basis functions with local support	20
	4.3	The linear combination of hat functions is a piecewise linear function	21
	4.4	Elements and nodes	21
	4.5	Example on elements with two nodes (P1 elements)	22
	4.6	Illustration of two basis functions on the mesh	22
	4.7	Example on elements with three nodes (P2 elements)	23
	4.8	Some corresponding basis functions (P2 elements)	23
	4.9	Examples on elements with four nodes per element (P3 elements)	24
		Some corresponding basis functions (P3 elements)	24
		The numbering does not need to be regular from left to right	25
		Interpretation of the coefficients c_i	25
		Properties of the basis functions	25
		How to construct quadratic φ_i (P2 elements)	26
		Example on linear φ_i (P1 elements)	26
	4.16	Example on cubic φ_i (P3 elements)	27
5	Calo	culating the linear system for c_i	27
	5.1	Computing a specific matrix entry (1)	27
	5.2	Computing a specific matrix entry (2)	28
	5.3	Calculating a general row in the matrix; figure	28
	5.4	Calculating a general row in the matrix; details	29
	5.5	Calculation of the right-hand side	29
	5.6	Specific example with two elements; linear system and solution	29
	5.7	Specific example with two elements; plot	30
	5.8	Specific example: what about four elements?	30

6	Assembly of elementwise computations				
	6.1	Split the integrals into elementwise integrals	30		
	6.2	The element matrix	31		
	6.3	Illustration of the matrix assembly: regularly numbered P1 elements	31		
	6.4	Illustration of the matrix assembly: regularly numbered P3 elements	32		
	6.5	Illustration of the matrix assembly: irregularly numbered P1 elements	33		
	6.6	Assembly of the right-hand side	33		
7	Map	oping to a reference element	33		
	7.1	Affine mapping	34		
	7.2	Integral transformation	34		
	7.3	Advantages of the reference element	34		
	7.4	Standardized basis functions for P1 elements	34		
	7.5	Standardized basis functions for P2 elements	34		
	7.6	Integration over a reference element; element matrix	35		
	7.7	Integration over a reference element; element vector	35		
	7.8	Tedious calculations! Let's use symbolic software	35		
		·			
8	Imp	lementation	36		
	8.1	Compute finite element basis functions in the reference element	36		
	8.2	Compute the element matrix	36		
	8.3	Example on symbolic vs numeric element matrix $\dots \dots \dots \dots$.	37		
	8.4	Compute the element vector	37		
	8.5	Fallback on numerical integration if symbolic integration fails $\dots \dots \dots$	37		
	8.6	Linear system assembly and solution	38		
	8.7	Linear system solution	38		
	8.8	Example on computing symbolic approximations $\dots \dots \dots \dots$.	38		
	8.9	Example on computing numerical approximations	38		
	8.10	The structure of the coefficient matrix \hdots	39		
		General result: the coefficient matrix is sparse	39		
		Exemplifying the sparsity for P2 elements	40		
		Matrix sparsity pattern for regular/random numbering of P1 elements	40		
		Matrix sparsity pattern for regular/random numbering of P3 elements	40		
		Sparse matrix storage and solution	41		
		Approximate $f \sim x^9$ by various elements; code	41		
	8.17	Approximate $f \sim x^9$ by various elements; plot	42		
9	Comparison of finite element and finite difference approximation 4				
	9.1	$Interpolation/collocation\ with\ finite\ elements\ \dots\dots\dots\dots\dots\dots\dots\dots\dots\dots\dots$	42		
	9.2	How does finite elements compare with finite differences?	43		
	9.3	Expressing the left-hand side in finite difference operator notation $\ \ldots \ \ldots \ \ldots$	43		
	9.4	Treating the right-hand side; Trapezoidal rule	43		
	9.5	Treating the right-hand side; Simpson's rule	44		
	9.6	Finite element approximation vs finite differences	44		
	9.7	Making finite elements behave as finite differences	44		
10	Lim	itations of the nodes and element concepts	45		

11	A governalized alament concept	45
11	A generalized element concept	45 45
	11.1 The concept of a finite element	$\frac{45}{45}$
	11.2 Implementation; basic data structures	
	11.3 Implementation; example with P2 elements	46
	11.4 Implementation; example with P0 elements	46
	11.5 Example on doing the algorithmic steps	46
	11.6 Approximating a parabola by P0 elements	47
	11.7 Computing the error of the approximation; principles	47
	11.8 Computing the error of the approximation; details	47
	11.9 How does the error depend on h and d ?	48
	11.10Cubic Hermite polynomials; definition	48
	11.11Cubic Hermite polynomials; derivation	48
12	Numerical integration	49
	12.1 The Midpoint rule	49
	12.2 Newton-Cotes rules	49
	12.3 Gauss-Legendre rules with optimized points	50
	12.6 Gauss-Legendre ruies with optimized points	50
13	Approximation of functions in 2D	50
	13.1 2D basis functions as tensor products of 1D functions	51
	13.2 Tensor products	51
	13.3 Double or single index?	51
	13.4 Example on 2D (bilinear) basis functions; formulas	51
	13.5 Example on 2D (bilinear) basis functions; plot	52
	13.6 Implementation; principal changes to the 1D code	52
	13.7 Implementation; 2D integration	52
	13.8 Implementation; 2D basis functions	52
	13.9 Implementation; application	53
	13.10Implementation; trying a perfect expansion	53
	13.11Generalization to 3D	53
1 1	Fig. 4 al	۲.
14	Finite elements in 2D and 3D	53
	14.1 Examples on cell types	54
	14.2 Rectangular domain with 2D P1 elements	54
	14.3 Deformed geometry with 2D P1 elements	54
	14.4 Rectangular domain with 2D Q1 elements	55
	14.5 Basis functions over triangles in the physical domain	55
	14.6 Basic features of 2D P1 elements	56
	14.7 Linear mapping of reference element onto general triangular cell	57
	14.8 φ_i : pyramid shape, composed of planes	57
	14.9 Element matrices and vectors	58
	14.10Basis functions over triangles in the reference cell	58
	14.112D P1, P2, P3, P4, P5, and P6 elements	58
	14.12P1 elements in 1D, 2D, and 3D	59
	14.13P2 elements in 1D, 2D, and 3D	59
	14.14Affine mapping of the reference cell; formula	59
	14.15 Affine mapping of the reference cell; figure	60
	14.16 Isoparametric mapping of the reference cell	60
	14.17Computing integrals	60 60


	14.18Remark on going from 1D to 2D/3D	6
15	Differential equation models	6
	15.1 Abstract differential equation	6
	15.2 Abstract boundary conditions	62
	15.3 Reminder about notation	62
	15.4 Residual-minimizing principles	6
	15.5 The least squares method	6
	15.6 The Galerkin method	6
	15.7 The Method of Weighted Residuals	6
	15.8 Terminology: test and Trial Functions	6
	15.9 The collocation method	6
16	Examples on using the principles	6
	16.1 The first model problem	6
	16.2 Boundary conditions	6
	16.3 The least squares method; principle	6
	16.4 The least squares method; equation system	6
	16.5 Orthogonality of the basis functions gives diagonal matrix	6
	16.6 Least squares method; solution	6
	16.7 The Galerkin method; principle	6
	16.8 The Galerkin method; solution	6
	16.9 The collocation method	6
	16.10Comparison of the methods	6
17	Useful techniques	6
	17.1 Integration by parts	6
	17.2 Boundary function; principles	6
	17.3 Boundary function; example	6
	17.4 Abstract notation for variational formulations	6
	17.5 Example on abstract notation	6
	17.6 Bilinear and linear forms	6
	17.7 The linear system associated with abstract form	6
	17.8 Equivalence with minimization problem	7
18	Examples on variational formulations	7
	18.1 Variable coefficient; problem	7
	18.2 Variable coefficient; variational formulation (1)	7
	18.3 Variable coefficient; variational formulation (2)	7
	18.4 Variable coefficient; abstract notation	7
	18.5 Variable coefficient; linear system	7
	18.6 First-order derivative in the equation and boundary condition; problem	7

1 Why finite elements?


- Can with ease solve PDEs in domains with *complex geometry*
- Can with ease provide higher-order approximations

• Has (in simpler stationary problems) a rigorus mathematical analysis framework (not much considered here)

1.1 Domain for flow around a dolphin

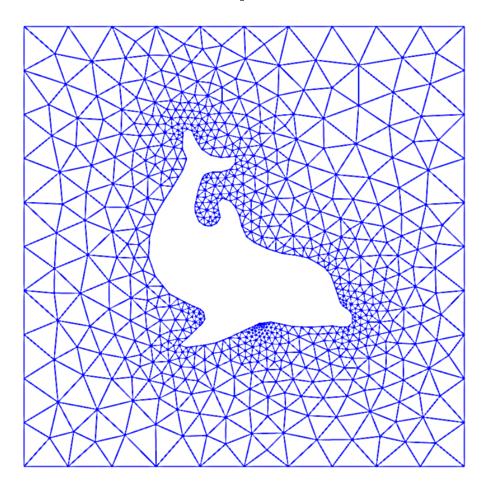

1.2 The flow

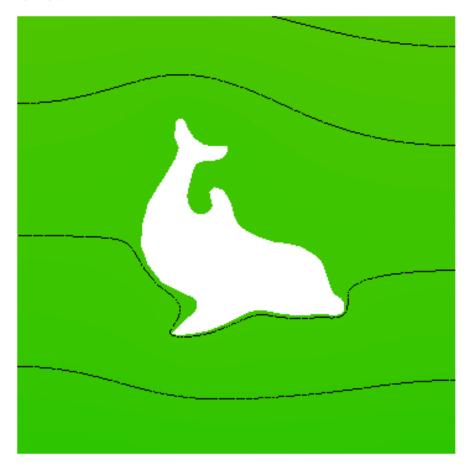

1.3 Basic ingredients of the finite element method


- \bullet Transform the PDE problem to a $variational\ form$
- Define function approximation over finite elements
- Use a machinery to derive *linear systems*
- Solve linear systems

1.4 Our learning strategy

- Start with approximation of functions, not PDEs
- ullet Introduce finite element approximations
- See later how this is applied to PDEs

Reason: the finite element method has many concepts and a jungle of details. This strategy minimizes the mixing of ideas, concepts, and technical details.

2 Approximation in vector spaces

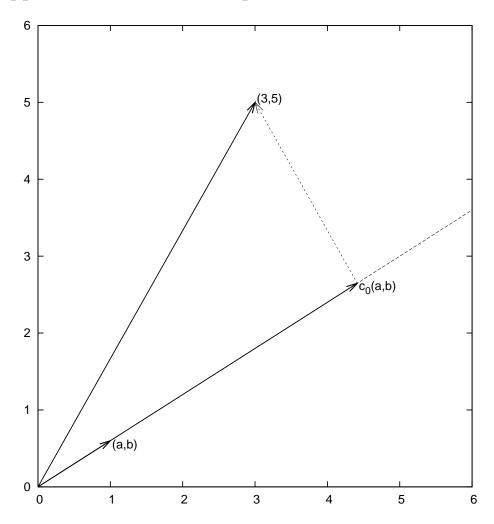

2.1 Approximation set-up

General idea of finding an approximation u(x) to some given f(x):

$$u(x) = \sum_{i=0}^{N} c_i \psi_i(x) \tag{1}$$

where

- $\psi_i(x)$ are prescribed functions
- c_i , i = 0, ..., N are unknown coefficients to be determined

2.2 How to determine the coefficients?

We shall address three approaches:

- $\bullet\,$ The least squares method
- The projection (or Galerkin) method
- The interpolation (or collocation) method


Underlying motivation for our notation.

Our mathematical framework for doing this is phrased in a way such that it becomes easy to understand and use the FEniCS^a software package for finite element computing.

 $^a\mathtt{http://fenicsproject.org}$

2.3 Approximation of planar vectors; problem

Given a vector $\mathbf{f} = (3, 5)$, find an approximation to \mathbf{f} directed along a given line.

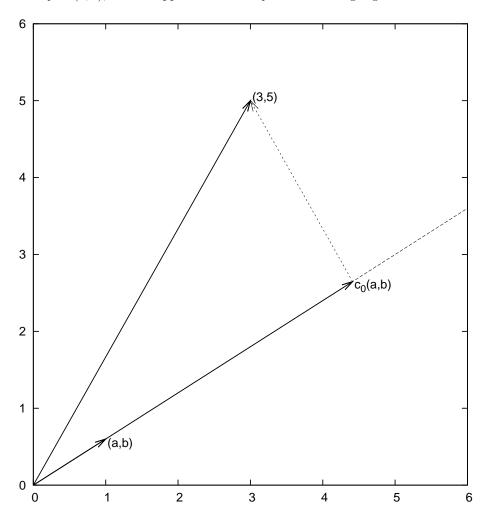

2.4 Approximation of planar vectors; vector space terminology

$$V = \operatorname{span} \{ \psi_0 \} \tag{2}$$

- ψ_0 is a basis vector in the space V
- Seek $\mathbf{u} = c_0 \boldsymbol{\psi}_0 \in V$
- Determine c_0 such that u is the "best" approximation to f
- Visually, "best" is obvious

Define

- the error e = f u
- the (Eucledian) scalar product of two vectors: (u, v)
- the norm of e: $||e|| = \sqrt{(e,e)}$

2.5 The least squares method; principle

- Idea: find c_0 such that ||e|| is minimized
- Actually, we always minimize $E = ||e||^2$

$$\frac{\partial E}{\partial c_0} = 0$$

2.6 The least squares method; calculations

$$E(c_0) = (\mathbf{e}, \mathbf{e}) = (\mathbf{f}, \mathbf{f}) - 2c_0(\mathbf{f}, \psi_0) + c_0^2(\psi_0, \psi_0)$$
(3)

$$\frac{\partial E}{\partial c_0} = -2(\mathbf{f}, \psi_0) + 2c_0(\psi_0, \psi_0) = 0 \tag{4}$$

$$c_0 = \frac{(\boldsymbol{f}, \boldsymbol{\psi}_0)}{(\boldsymbol{\psi}_0, \boldsymbol{\psi}_0)} \tag{5}$$

$$c_0 = \frac{3a + 5b}{a^2 + b^2} \tag{6}$$

Observation for later: the vanishing derivative (4) can be alternatively written as

$$(\boldsymbol{e}, \boldsymbol{\psi}_0) = 0 \tag{7}$$

2.7 The projection (or Galerkin) method

- Backgrund: minimizing $||e||^2$ implies that e is orthogonal to any vector v in the space V (visually clear, but can easily be computed too)
- Alternative idea: demand (e, v) = 0, $\forall v \in V$
- Equivalent statement: $(e, \psi_0) = 0$ (see notes for why)
- Insert $e = f c_0 \psi_0$ and solve for c_0
- Same equation for c_0 and hence same solution as in the least squares method

Approximation of general vectors

Given a vector f, find an approximation $u \in V$:

$$V = \operatorname{span} \{ \boldsymbol{\psi}_0, \dots, \boldsymbol{\psi}_N \}$$

- We have a set of linearly independent basis vectors ψ_0, \dots, ψ_N
- Any $\boldsymbol{u} \in V$ can then be written as $\boldsymbol{u} = \sum_{j=0}^{N} c_j \boldsymbol{\psi}_j$

The least squares method

Idea: find c_0, \ldots, c_N such that $E = ||e||^2$ is minimized, e = f - u.

$$E(c_0, \dots, c_N) = (\boldsymbol{e}, \boldsymbol{e}) = (\boldsymbol{f} - \sum_j c_j \boldsymbol{\psi}_j, \boldsymbol{f} - \sum_j c_j \boldsymbol{\psi}_j)$$

$$= (\boldsymbol{f}, \boldsymbol{f}) - 2 \sum_{j=0}^N c_j (\boldsymbol{f}, \boldsymbol{\psi}_j) + \sum_{p=0}^N \sum_{q=0}^N c_p c_q (\boldsymbol{\psi}_p, \boldsymbol{\psi}_q)$$

$$\frac{\partial E}{\partial c_i} = 0, \quad i = 0, \dots, N$$

After some work we end up with a linear system

$$\sum_{j=0}^{N} A_{i,j} c_j = b_i, \quad i = 0, \dots, N$$
 (8)

$$A_{i,j} = (\psi_i, \psi_j)$$

$$b_i = (\psi_i, \mathbf{f})$$

$$(10)$$

$$b_i = (\boldsymbol{\psi}_i, \boldsymbol{f}) \tag{10}$$

The projection (or Galerkin) method 2.10

Can be shown that minimizing ||e|| implies that e is orthogonal to all $v \in V$:

$$(\boldsymbol{e}, \boldsymbol{v}) = 0, \quad \forall \boldsymbol{v} \in V$$

which implies that e most be orthogonal to each basis vector:

$$(\boldsymbol{e}, \boldsymbol{\psi}_i) = 0, \quad i = 0, \dots, N \tag{11}$$

This orthogonality condition is the principle of the projection (or Galerkin) method. Leads to the same linear system as in the least squares method.

Approximation of functions 3

Let V be a function space spanned by a set of basis functions ψ_0, \ldots, ψ_N ,

$$V = \operatorname{span} \{\psi_0, \dots, \psi_N\}$$

Find $u \in V$ as a linear combination of the basis functions:

$$u = \sum_{j \in I} c_j \psi_j, \quad I = \{0, 1, \dots, N\}$$
 (12)

3.1 The least squares method

- Extend the ideas from the vector case: minimize the (square) norm of the error.
- What norm? $(f,g) = \int_{\Omega} f(x)g(x) dx$

$$E = (e, e) = (f - u, f - u) = (f(x) - \sum_{j \in I} c_j \psi_j(x), f(x) - \sum_{j \in I} c_j \psi_j(x))$$
(13)

$$E(c_0, \dots, c_N) = (f, f) - 2\sum_{j \in I} c_j(f, \psi_i) + \sum_{p \in I} \sum_{q \in I} c_p c_q(\psi_p, \psi_q)$$
(14)

$$\frac{\partial E}{\partial c_i} = 0, \quad i = \in I$$

After computations identical to the vector case, we get a linear system

$$\sum_{j=I}^{N} A_{i,j} c_j = b_i, \quad i \in I$$

$$\tag{15}$$

$$A_{i,j} = (\psi_i, \psi_j)$$

$$b_i = (f, \psi_i)$$
(16)
$$(17)$$

$$b_i = (f, \psi_i) \tag{17}$$

The projection (or Galerkin) method

As before, minimizing (e, e) is equivalent to the projection (or Galerkin) method

$$(e, v) = 0, \quad \forall v \in V \tag{18}$$

which means, as before,

$$(e, \psi_i) = 0, \quad i \in I \tag{19}$$

With the same algebra as in the multi-dimensional vector case, we get the same linear system as arose from the least squares method.

Example: linear approximation; problem 3.3

Approximate a parabola $f(x) = 10(x-1)^2 - 1$ by a straight line.

$$V = \operatorname{span}\{1, x\}$$

That is, $\psi_0(x) = 1$, $\psi_1(x) = x$, and N = 1. We seek

$$u = c_0 \psi_0(x) + c_1 \psi_1(x) = c_0 + c_1 x$$

3.4 Example: linear approximation; solution

$$A_{0,0} = (\psi_0, \psi_0) = \int_1^2 1 \cdot 1 \, dx = 1 \tag{20}$$

$$A_{0,1} = (\psi_0, \psi_1) = \int_1^2 1 \cdot x \, dx = 3/2 \tag{21}$$

$$A_{1,0} = A_{0,1} = 3/2 (22)$$

$$A_{1,1} = (\psi_1, \psi_1) = \int_1^2 x \cdot x \, dx = 7/3 \tag{23}$$


$$b_1 = (f, \psi_0) = \int_1^2 (10(x-1)^2 - 1) \cdot 1 \, dx = 7/3 \tag{24}$$

$$b_2 = (f, \psi_1) = \int_1^2 (10(x-1)^2 - 1) \cdot x \, dx = 13/3 \tag{25}$$

Solution of 2x2 linear system:

$$c_0 = -38/3, \quad c_1 = 10, \quad u(x) = 10x - \frac{38}{3}$$
 (26)

3.5 Example: linear approximation; plot

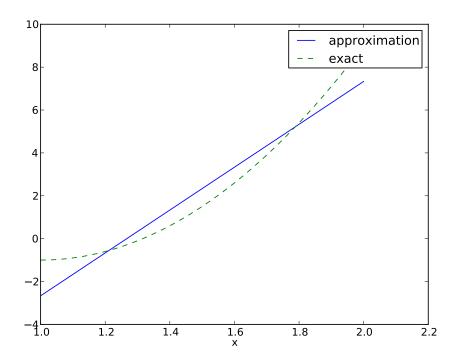

3.6 Implementation of the least squares method; ideas

Consider symbolic computation of the linear system, where

- f(x) is given as a sympy expression f (involving the symbol x),
- psi is a list of $\{\psi_i\}_{i\in I}$,
- ullet Omega is a 2-tuple/list holding the domain Ω

Carry out the integrations, solve the linear system, and return $u(x) = \sum_{j} c_{j} \psi_{j}(x)$

3.7 Implementation of the least squares method; code

```
import sympy as sm
def least_squares(f, psi, Omega):
    N = len(psi) - 1
    A = sm.zeros((N+1, N+1))
    b = sm.zeros((N+1, 1))
    x = sm.Symbol('x')
    for i in range(N+1):
        for j in range(i, N+1):
    A[i,j] = sm.integrate(psi[i]*psi[j],
                                     (x, Omega[0], Omega[1]))
             A[j,i] = A[i,j]
        b[i,0] = sm.integrate(psi[i]*f, (x, Omega[0], Omega[1]))
    c = A.LUsolve(b)
    u = 0
    for i in range(len(psi)):
        u += c[i,0]*psi[i]
    return u
```

Observe: symmetric coefficient matrix so we can halve the integrations.

3.8 Implementation of the least squares method; plotting

Compare f and u visually:


```
def comparison_plot(f, u, Omega, filename='tmp.pdf'):
    x = sm.Symbol('x')
    # Turn f and u to ordinary Python functions
    f = sm.lambdify([x], f, modules="numpy")
    u = sm.lambdify([x], u, modules="numpy")
    resolution = 401  # no of points in plot
    xcoor = linspace(Omega[0], Omega[1], resolution)
    exact = f(xcoor)
    approx = u(xcoor)
    plot(xcoor, approx)
    hold('on')
    plot(xcoor, exact)
    legend(['approximation', 'exact'])
    savefig(filename)
```

All code in module approx1D.py¹

3.9 Implementation of the least squares method; application

¹http://tinyurl.com/jvzzcfn/fem/approx1D.py

```
>>> from approx1D import *
>>> x = sm.Symbol('x')
>>> f = 10*(x-1)**2-1
>>> u = least_squares(f=f, psi=[1, x], Omega=[1, 2])
>>> comparison_plot(f, u, Omega=[1, 2])
```

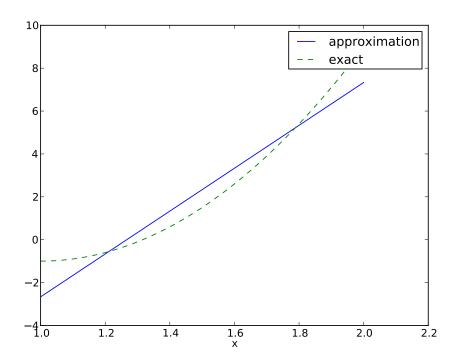

3.10 Perfect approximation; parabola approximating parabola

- What if we add $\psi_2 = x^2$ to the space V?
- That is, approximating a parabola by any parabola?
- $\bullet \ \mbox{(Hopefully we get the exact parabola!)}$

```
>>> from approx1D import *
>>> x = sm.Symbol('x')
>>> f = 10*(x-1)**2-1
>>> u = least_squares(f=f, psi=[1, x, x**2], Omega=[1, 2])
>>> print u
10*x**2 - 20*x + 9
>>> print sm.expand(f)
10*x**2 - 20*x + 9
```

3.11 Perfect approximation; the general result

- What if we use $\psi_i(x) = x^i$ for i = 0, ..., N = 40?
- The output from least_squares is $c_i = 0$ for i > 2

General result.

If $f \in V$, least squares and projection/Galerkin give u = f.

3.12 Perfect approximation; proof of the general result

If $f \in V$, $f = \sum_{j \in I} d_j \psi_j$, for some $\{d_i\}_{i \in I}$. Then

$$b_i = (f, \psi_i) = \sum_{j \in I} d_j(\psi_j, \psi_i) = \sum_{j \in I} d_j A_{i,j}$$

The linear system $\sum_{i} A_{i,j} c_j = b_i$, $i \in I$, is then

$$\sum_{j \in I} c_j A_{i,j} = \sum_{j \in I} d_j A_{i,j}, \quad i \in I$$

which implies that $c_i = d_i$ for $i \in I$ and u is identical to f.

3.13 Finite-precision/numerical computations

The previous computations were symbolic. What if we solve the linear system numerically with standard arrays?

exact	sympy	numpy32	numpy64
9	9.62	5.57	8.98
-20	-23.39	-7.65	-19.93
10	17.74	-4.50	9.96
0	-9.19	4.13	-0.26
0	5.25	2.99	0.72
0	0.18	-1.21	-0.93
0	-2.48	-0.41	0.73
0	1.81	-0.013	-0.36
0	-0.66	0.08	0.11
0	0.12	0.04	-0.02
0	-0.001	-0.02	0.002


- Column 2: sympy.mpmath.fp.matrix and sympy.mpmath.fp.lu_solve
- Column 3: numpy arrays with numpy.float32 entries
- Column 4: numpy arrays with numpy.float64 entries

3.14 Ill-conditioning (1)

Observations:

- Significant round-off errors in the numerical computations (!)
- But if we plot the approximations they look good (!)

Problem: The basis functions x^i become almost linearly dependent for large N.

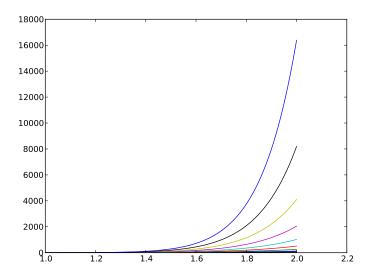

3.15 Ill-conditioning (2)

- Almost linearly dependent basis functions give almost singular matrices
- Such matrices are said to be *ill conditioned*, and Gaussian elimination is severely affected by round-off errors
- The basis $1, x, x^2, x^3, x^4, \dots$ is a bad basis
- Polynomials are fine as basis, but the more orthogonal they are, $(\psi_i, \psi_j) \approx 0$, the better

3.16 Fourier series approximation; problem and code


Consider


$$V = \operatorname{span} \left\{ \sin \pi x, \sin 2\pi x, \dots, \sin (N+1)\pi x \right\}$$

```
N = 3
from sympy import sin, pi
psi = [sin(pi*(i+1)*x) for i in range(N+1)]
f = 10*(x-1)**2 - 1
Omega = [0, 1]
u = least_squares(f, psi, Omega)
comparison_plot(f, u, Omega)
```

3.17 Fourier series approximation; plot

N=3 vs N=11:





3.18 Fourier series approximation; improvements


- Considerably improvement by N = 11
- But always discrepancy of f(0) u(0) = 9 at x = 0, because all the $\psi_i(0) = 0$ and hence u(0) = 0
- \bullet Possible remedy: add a term that leads to correct boundary values


$$u(x) = f(0)(1-x) + xf(1) + \sum_{j \in I} c_j \psi_j(x)$$
(27)

The extra term ensures u(0) = f(0) and u(1) = f(1) and is a strikingly good help to get a good approximation!

3.19 Fourier series approximation; final results

N = 3 vs N = 11:





3.20 Orthogonal basis functions

This choice of sine functions as basis functions is popular because

- the basis functions are orthogonal: $(\psi_i, \psi_j) = 0$
- implying that $A_{i,j}$ is a diagonal matrix
- implying that we can solve for $c_i = 2 \int_0^1 f(x) \sin((i+1)\pi x) dx$

In general for an orthogonal basis, $A_{i,j}$ is diagonal and we can easily solve for c_i :

$$c_i = \frac{b_i}{A_{i,i}} = \frac{(f, \psi_i)}{(\psi_i, \psi_i)}$$

3.21 The collocation or interpolation method; ideas and math

Here is another idea for approximating f(x) by $u(x) = \sum_{j} c_{j} \psi_{j}$:

- Force $u(x_i) = f(x_i)$ at some selected collocation points $\{x_i\}_{i \in I}$
- \bullet Then *u* interpolates *f*
- The method is known as interpolation or collocation

$$u(x_i) = \sum_{i \in I} c_j \psi_j(x_i) = f(x_i) \quad i \in I, N$$
(28)

This is a linear system with no need for integration:

$$\sum_{j \in I} A_{i,j} c_j = b_i, \quad i \in I \tag{29}$$

$$A_{i,j} = \psi_j(x_i) \tag{30}$$

$$b_i = f(x_i) \tag{31}$$

No symmetric matrix: $\psi_j(x_i) \neq \psi_i(x_j)$ in general

3.22 The collocation or interpolation method; implementation


points holds the interpolation/collocation points


```
def interpolation(f, psi, points):
    N = len(psi) - 1
    A = sm.zeros((N+1, N+1))
    b = sm.zeros((N+1, 1))
    x = sm.Symbol('x')
# Turn psi and f into Python functions
    psi = [sm.lambdify([x], psi[i]) for i in range(N+1)]
    f = sm.lambdify([x], f)
    for i in range(N+1):
        for j in range(N+1):
            A[i,j] = psi[j](points[i])
        b[i,0] = f(points[i])
    c = A.LUsolve(b)
    u = 0
    for i in range(len(psi)):
        u += c[i,0]*psi[i](x)
    return u
```

3.23 The collocation or interpolation method; approximating a parabola by linear functions

- Potential difficulty: how to choose x_i ?
- The results are sensitive to the points!

(4/3, 5/3) vs (1, 2):





3.24 Lagrange polynomials; motivation and ideas

Motivation:

- The interpolation/collocation method avoids integration
- With a diagonal matrix $A_{i,j} = \psi_j(x_i)$ we can solve the linear system by hand

The Lagrange interpolating polynomials ψ_j have the property that

$$\psi_i(x_j) = \delta_{ij}, \quad \delta_{ij} = \begin{cases} 1, & i = j \\ 0, & i \neq j \end{cases}$$

Hence, $c_i = f(x_i)$ and

$$u(x) = \sum_{i \in I} f(x_i)\psi_i(x) \tag{32}$$


- Lagrange polynomials and interpolation/collocation look convenient
- Lagrange polynomials are very much used in the finite element method


3.25 Lagrange polynomials; formula and code

$$\psi_i(x) = \prod_{i=0}^{N} \frac{x - x_j}{x_i - x_j} = \frac{x - x_0}{x_i - x_0} \cdots \frac{x - x_{i-1}}{x_i - x_{i-1}} \frac{x - x_{i+1}}{x_i - x_{i+1}} \cdots \frac{x - x_N}{x_i - x_N}$$
(33)


```
def Lagrange_polynomial(x, i, points):
    p = 1
    for k in range(len(points)):
        if k != i:
        p *= (x - points[k])/(points[i] - points[k])
    return p
```


3.26 Lagrange polynomials; successful example






3.27 Lagrange polynomials; a less successful example





3.28 Lagrange polynomials; oscillatory behavior

12 points, degree 11, plot of two of the Lagrange polynomials - note that they are zero at all points except one.

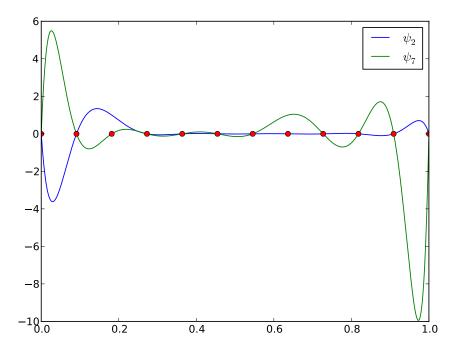

Problem: strong oscillations near the boundaries for larger N values.


3.29 Lagrange polynomials; remedy for strong oscillations


The oscillations can be reduced by a more clever choice of interpolation points, called the $Chebyshev\ nodes$:

$$x_i = \frac{1}{2}(a+b) + \frac{1}{2}(b-a)\cos\left(\frac{2i+1}{2(N+1)}pi\right), \quad i = 0..., N$$
 (34)

on an interval [a, b].


3.30 Lagrange polynomials; recalculation with Chebyshev nodes






3.31 Lagrange polynomials; less oscillations with Chebyshev nodes

12 points, degree 11, plot of two of the Lagrange polynomials - note that they are zero at all points except one.

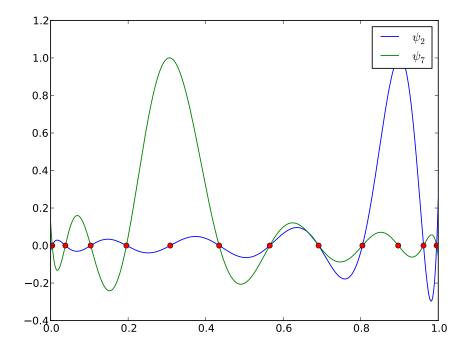


4 Finite element basis functions

4.1 The basis functions have so far been global: $\psi_i(x) \neq 0$ almost everywhere

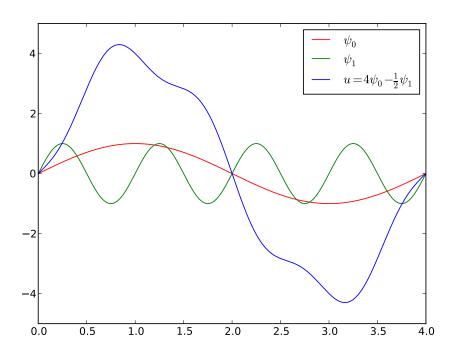


4.2 In the finite element method we use basis functions with local support

- Local support: $\psi_i(x) \neq 0$ for x in a small subdomain of Ω
- Typically hat-shaped
- u(x) based on these ψ_i is a piecewise polynomial defined over many (small) subdomains
- We introduce φ_i as the name of these finite element hat functions (and for now choose $\psi_i = \varphi_i$)



4.3 The linear combination of hat functions is a piecewise linear function

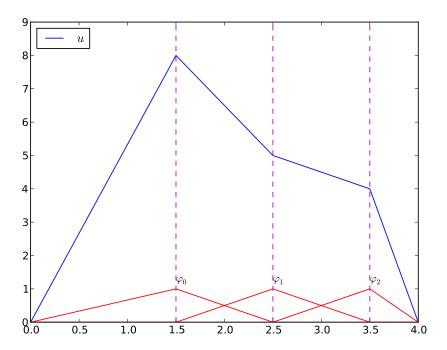

4.4 Elements and nodes


Split Ω into non-overlapping subdomains called *elements*:

$$\Omega = \Omega^{(0)} \cup \dots \cup \Omega^{(N_e)} \tag{35}$$

On each element, introduce points called *nodes*: x_0, \ldots, x_{N_n}


- The finite element basis functions are named $\varphi_i(x)$
- $\varphi_i = 1$ at node i and 0 at all other nodes
- φ_i is a Lagrange polynomial on each element
- For nodes at the boundary between two elements, φ_i is made up of a Lagrange polynomial over each element

4.5 Example on elements with two nodes (P1 elements)

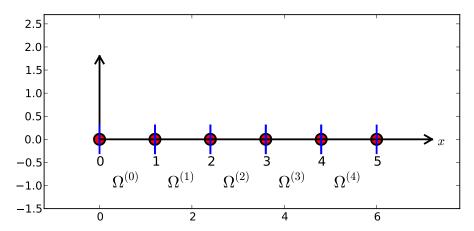


Data structure: nodes holds coordinates or nodes, elements holds the node numbers in each element

4.6 Illustration of two basis functions on the mesh

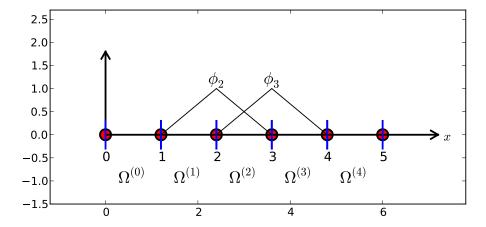


4.7 Example on elements with three nodes (P2 elements)

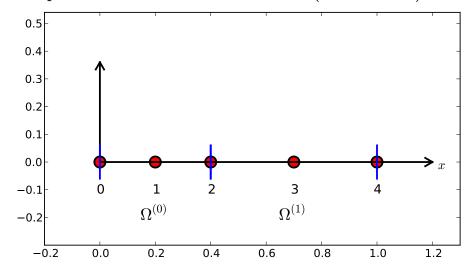

nodes = [0, 0.125, 0.25, 0.375, 0.5, 0.625, 0.75, 0.875, 1.0] elements = [[0, 1, 2], [2, 3, 4], [4, 5, 6], [6, 7, 8]]

4.8 Some corresponding basis functions (P2 elements)

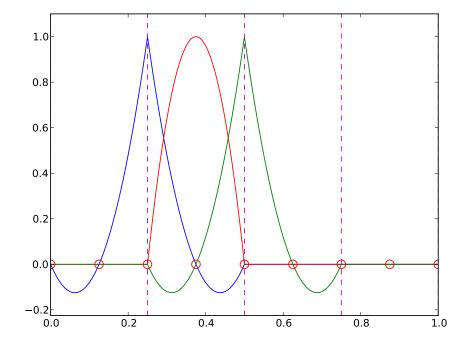


4.9 Examples on elements with four nodes per element (P3 elements)


```
2.5
 2.0
 1.5
 1.0
 0.5
 0.0
                0 1 2
                                                           9
                            3
                                     5
                                           6
                                                     8
                                                               10 11 12
-0.5
                   \Omega^{(0)}
                                \Omega^{(1)}
                                                                \Omega^{(3)}
                                                \Omega^{(2)}
-1.0
-1.5
                 0
                                                        4
                                                                            6
```

```
d = 3  # d+1 nodes per element
num_elements = 4
num_nodes = num_elements*d + 1
nodes = [i*0.5 for i in range(num_nodes)]
elements = [[i*d+j for j in range(d+1)] for i in range(num_elements)]
```

4.10 Some corresponding basis functions (P3 elements)

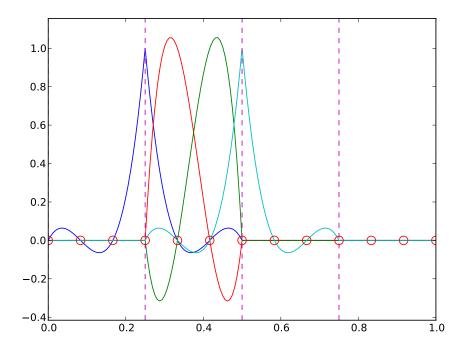

4.11 The numbering does not need to be regular from left to right

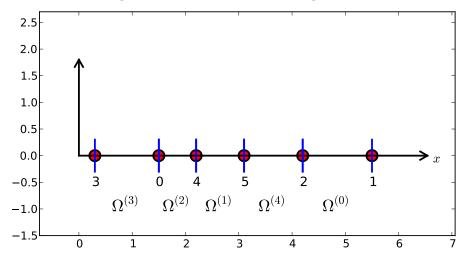

4.12 Interpretation of the coefficients c_i

Important property: c_i is the value of u at node i, x_i :


$$u(x_i) = \sum_{j \in I} c_j \varphi_j(x_i) = c_i \varphi_i(x_i) = c_i$$
(36)

because $\varphi_j(x_i) = 0$ if $i \neq j$


4.13 Properties of the basis functions

- $\varphi_i(x) \neq 0$ only on those elements that contain global node i
- $\varphi_i(x)\varphi_j(x)\neq 0$ if and only if i and j are global node numbers in the same element

Since $A_{i,j} = \int \varphi_i \varphi_j dx$, most of the elements in the coefficient matrix will be zero




4.14 How to construct quadratic φ_i (P2 elements)




- 1. Associate Lagrange polynomials with the nodes in an element
- 2. When the polynomial is 1 on the element boundary, combine it with the polynomial in the neighboring element

4.15 Example on linear φ_i (P1 elements)




$$\varphi_{i}(x) = \begin{cases} 0, & x < x_{i-1} \\ (x - x_{i-1})/h & x_{i-1} \le x < x_{i} \\ 1 - (x - x_{i})/h, & x_{i} \le x < x_{i+1} \\ 0, & x \ge x_{i+1} \end{cases}$$
(37)

4.16 Example on cubic φ_i (P3 elements)



5 Calculating the linear system for c_i

5.1 Computing a specific matrix entry (1)




 $A_{2,3}=\int_{\Omega}\varphi_{2}\varphi_{3}dx\colon\,\varphi_{2}\varphi_{3}\neq0$ only over element 2. There,

$$\varphi_3(x) = (x - x_2)/h, \quad \varphi_2(x) = 1 - (x - x_2)/h$$


$$A_{2,3} = \int_{\Omega} \varphi_2 \varphi_3 \, dx = \int_{x_2}^{x_3} \left(1 - \frac{x - x_2}{h} \right) \frac{x - x_2}{h} \, dx = \frac{h}{6}$$

5.2 Computing a specific matrix entry (2)

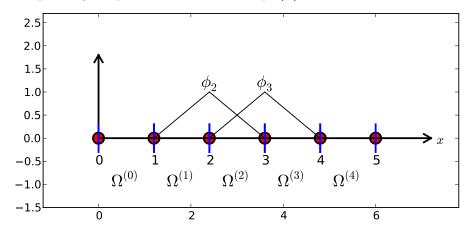

$$A_{2,2} = \int_{x_1}^{x_2} \left(\frac{x - x_1}{h} \right)^2 dx + \int_{x_2}^{x_3} \left(1 - \frac{x - x_2}{h} \right)^2 dx = \frac{h}{3}$$

5.3 Calculating a general row in the matrix; figure

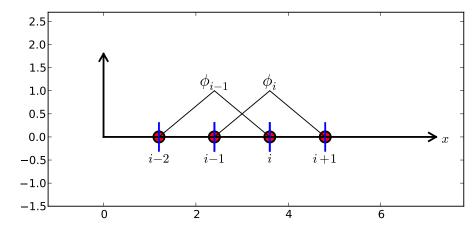


$$A_{i,i-1} = \int_{\Omega} \varphi_i \varphi_{i-1} \, \mathrm{d}x = ?$$

5.4 Calculating a general row in the matrix; details

$$\begin{split} A_{i,i-1} &= \int_{\Omega} \varphi_i \varphi_{i-1} \, \mathrm{d}x \\ &= \underbrace{\int_{x_{i-1}}^{x_{i-1}} \varphi_i \varphi_{i-1} \, \mathrm{d}x}_{\varphi_i = 0} + \underbrace{\int_{x_{i-1}}^{x_i} \varphi_i \varphi_{i-1} \, \mathrm{d}x}_{\varphi_i = 1} + \underbrace{\int_{x_i}^{x_{i+1}} \varphi_i \varphi_{i-1} \, \mathrm{d}x}_{\varphi_{i-1} = 0} \\ &= \underbrace{\int_{x_{i-1}}^{x_i} \underbrace{\left(\frac{x - x_i}{h}\right)}_{\varphi_i(x)} \underbrace{\left(1 - \frac{x - x_{i-1}}{h}\right)}_{\varphi_{i-1}(x)} \, \mathrm{d}x = \frac{h}{6} \end{split}$$

- $A_{i,i+1} = A_{i,i-1}$ due to symmetry
- $A_{i,i} = h/3$ (same calculation as for $A_{2,2}$)
- $A_{0,0} = A_{N,N} = h/3$ (only one element)

5.5 Calculation of the right-hand side

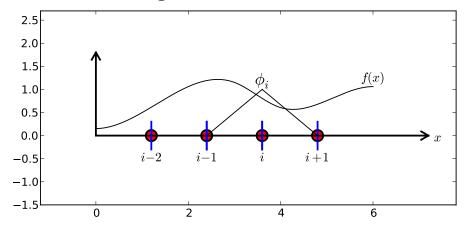

$$b_{i} = \int_{\Omega} \varphi_{i}(x) f(x) dx = \int_{x_{i-1}}^{x_{i}} \frac{x - x_{i-1}}{h} f(x) dx + \int_{x_{i}}^{x_{i+1}} \left(1 - \frac{x - x_{i}}{h}\right) f(x) dx$$
(38)

Need a specific f(x) to do more...


5.6 Specific example with two elements; linear system and solution

- f(x) = x(1-x) on $\Omega = [0,1]$
- ullet Two equal-sized elements [0,0.5] and [0.5,1]


$$A = \frac{h}{6} \begin{pmatrix} 2 & 1 & 0 \\ 1 & 4 & 1 \\ 0 & 1 & 2 \end{pmatrix}, \quad b = \frac{h^2}{12} \begin{pmatrix} 2 - 3h \\ 12 - 14h \\ 10 - 17h \end{pmatrix}$$
$$c_0 = \frac{h^2}{6}, \quad c_1 = h - \frac{5}{6}h^2, \quad c_2 = 2h - \frac{23}{6}h^2$$

5.7 Specific example with two elements; plot

$$u(x) = c_0 \varphi_0(x) + c_1 \varphi_1(x) + c_2 \varphi_2(x)$$

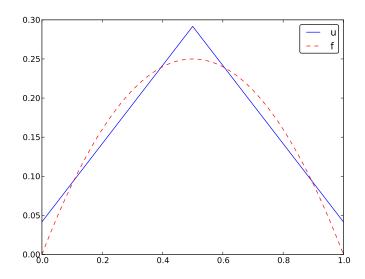

5.8 Specific example: what about four elements?

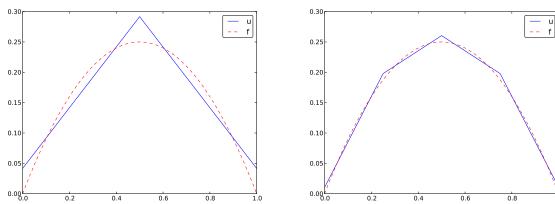

6 Assembly of elementwise computations

6.1 Split the integrals into elementwise integrals

$$A_{i,j} = \int_{\Omega} \varphi_i \varphi_j dx = \sum_{e} \int_{\Omega^{(e)}} \varphi_i \varphi_j dx, \quad A_{i,j}^{(e)} = \int_{\Omega^{(e)}} \varphi_i \varphi_j dx$$
 (39)

Important:

• $A_{i,j}^{(e)} \neq 0$ if and only if i and j are nodes in element e (otherwise no overlap between the basis functions)

 $\bullet\,$ all the nonzero elements in $A^{(e)}_{i,j}$ are collected in an $\mathit{element\ matrix}$


6.2 The element matrix

$$\tilde{A}^{(e)} = \{\tilde{A}^{(e)}_{r,s}\}, \quad \tilde{A}^{(e)}_{r,s} = \int_{\Omega^{(e)}} \varphi_{q(e,r)} \varphi_{q(e,s)} dx, \quad r, s \in I_d = \{0, \dots, d\}$$

- \bullet r, s run over local node numbers in an element; i, j run over global node numbers
- i = q(e, r): mapping of local node number r in element e to the global node number i (math equivalent to i=elements[e][r])
- Add $\tilde{A}_{r,s}^{(e)}$ into the global $A_{i,j}$ (assembly)

$$A_{q(e,r),q(e,s)} := A_{q(e,r),q(e,s)} + \tilde{A}_{r,s}^{(e)}, \quad r,s \in I_d$$
(40)


6.3 Illustration of the matrix assembly: regularly numbered P1 elements

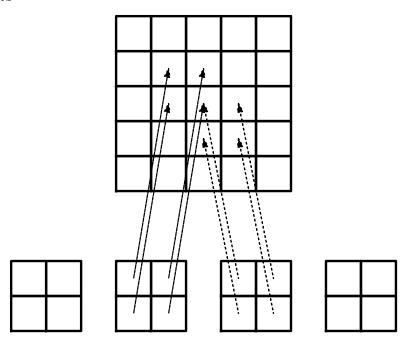

Animation²

²http://tinyurl.com/k3sdbuv/pub/mov-fem/fe_assembly.html


6.4 Illustration of the matrix assembly: regularly numbered P3 elements

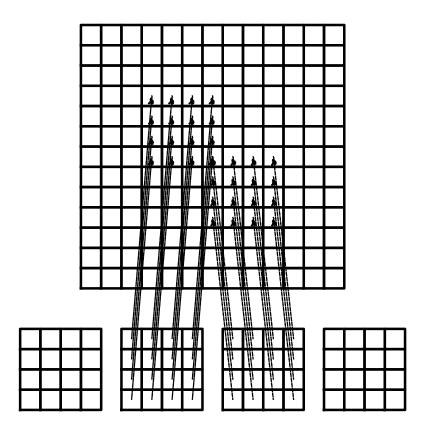

 ${\rm Animation^3}$

 $^{^3 \}verb|http://tinyurl.com/k3sdbuv/pub/mov-fem/fe_assembly.html|$

6.5 Illustration of the matrix assembly: irregularly numbered P1 elements

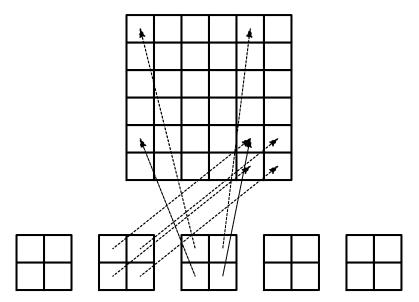

Animation⁴

6.6 Assembly of the right-hand side

$$b_i = \int_{\Omega} f(x)\varphi_i(x)dx = \sum_{e} \int_{\Omega^{(e)}} f(x)\varphi_i(x)dx, \quad b_i^{(e)} = \int_{\Omega^{(e)}} f(x)\varphi_i(x)dx \tag{41}$$

Important:

- $b_i^{(e)} \neq 0$ if and only if global node i is a node in element e (otherwise $\varphi_i = 0$)
- The d+1 nonzero $b_i^{(e)}$ can be collected in an element vector $\tilde{b}_r^{(e)} = \{\tilde{b}_r^{(e)}\}, r \in I_d$

Assembly:

$$b_{q(e,r)} := b_{q(e,r)} + \tilde{b}_r^{(e)}, \quad r, s \in I_d$$
 (42)

7 Mapping to a reference element

Instead of computing

$$\tilde{A}_{r,s}^{(e)} = \int_{\Omega^{(e)}} \varphi_{q(e,r)}(x) \varphi_{q(e,s)}(x) dx = \int_{x_L}^{x_R} \varphi_{q(e,r)}(x) \varphi_{q(e,s)}(x) dx$$

we now map $[x_L, x_R]$ to a standardized reference element domain [-1, 1] with local coordinate X

 $^{^4}$ http://tinyurl.com/k3sdbuv/pub/mov-fem/fe_assembly.html

7.1 Affine mapping

$$x = \frac{1}{2}(x_L + x_R) + \frac{1}{2}(x_R - x_L)X \tag{43}$$

or rewritten as

$$x = x_m + \frac{1}{2}hX, \qquad x_m = (x_L + x_R)/2$$
 (44)

7.2 Integral transformation

Reference element integration: just change integration variable from x to X. Introduce local basis function

$$\tilde{\varphi}_r(X) = \varphi_{q(e,r)}(x(X)) \tag{45}$$

$$\tilde{A}_{r,s}^{(e)} = \int_{\Omega^{(e)}} \varphi_{q(e,r)}(x) \varphi_{q(e,s)}(x) dx = \int_{-1}^{1} \tilde{\varphi}_r(X) \tilde{\varphi}_s(X) \underbrace{\frac{dx}{dX}}_{\det J = h/2} dX = \int_{-1}^{1} \tilde{\varphi}_r(X) \tilde{\varphi}_s(X) \det J dX$$

$$(46)$$

$$\tilde{b}_r^{(e)} = \int_{\Omega^{(e)}} f(x)\varphi_{q(e,r)}(x)dx = \int_{-1}^1 f(x(X))\tilde{\varphi}_r(X)\det J\,dX \tag{47}$$

7.3 Advantages of the reference element

- Always the same domain for integration: [-1, 1]
- We only need formulas for $\tilde{\varphi}_r(X)$ over one element (no piecewise polynomial definition)
- $\tilde{\varphi}_r(X)$ is the same for all elements: no dependence on element length and location, which is "factored out" in the mapping and det J

7.4 Standardized basis functions for P1 elements

$$\tilde{\varphi}_0(X) = \frac{1}{2}(1 - X)$$
 (48)

$$\tilde{\varphi}_1(X) = \frac{1}{2}(1+X)$$
 (49)

7.5 Standardized basis functions for P2 elements

P2 elements:

$$\tilde{\varphi}_0(X) = \frac{1}{2}(X - 1)X\tag{50}$$

$$\tilde{\varphi}_1(X) = 1 - X^2 \tag{51}$$

$$\tilde{\varphi}_2(X) = \frac{1}{2}(X+1)X\tag{52}$$

Easy to generalize to arbitrary order!

7.6 Integration over a reference element; element matrix

P1 elements and f(x) = x(1-x).

$$\tilde{A}_{0,0}^{(e)} = \int_{-1}^{1} \tilde{\varphi}_{0}(X)\tilde{\varphi}_{0}(X)\frac{h}{2}dX
= \int_{-1}^{1} \frac{1}{2}(1-X)\frac{1}{2}(1-X)\frac{h}{2}dX = \frac{h}{8}\int_{-1}^{1}(1-X)^{2}dX = \frac{h}{3}$$

$$\tilde{A}_{1,0}^{(e)} = \int_{-1}^{1} \tilde{\varphi}_{1}(X)\tilde{\varphi}_{0}(X)\frac{h}{2}dX
= \int_{-1}^{1} \frac{1}{2}(1+X)\frac{1}{2}(1-X)\frac{h}{2}dX = \frac{h}{8}\int_{-1}^{1}(1-X^{2})dX = \frac{h}{6}$$

$$\tilde{A}_{0,1}^{(e)} = \tilde{A}_{1,0}^{(e)}$$

$$\tilde{A}_{1,1}^{(e)} = \int_{-1}^{1} \tilde{\varphi}_{1}(X)\tilde{\varphi}_{1}(X)\frac{h}{2}dX$$

$$= \int_{-1}^{1} \frac{1}{2}(1+X)\frac{1}{2}(1+X)\frac{h}{2}dX = \frac{h}{8}\int_{-1}^{1}(1+X)^{2}dX = \frac{h}{3}$$

$$(56)$$

7.7 Integration over a reference element; element vector

$$\tilde{b}_{0}^{(e)} = \int_{-1}^{1} f(x(X))\tilde{\varphi}_{0}(X) \frac{h}{2} dX
= \int_{-1}^{1} (x_{m} + \frac{1}{2}hX)(1 - (x_{m} + \frac{1}{2}hX)) \frac{1}{2}(1 - X) \frac{h}{2} dX
= -\frac{1}{24}h^{3} + \frac{1}{6}h^{2}x_{m} - \frac{1}{12}h^{2} - \frac{1}{2}hx_{m}^{2} + \frac{1}{2}hx_{m}$$

$$\tilde{b}_{1}^{(e)} = \int_{-1}^{1} f(x(X))\tilde{\varphi}_{1}(X) \frac{h}{2} dX
= \int_{-1}^{1} (x_{m} + \frac{1}{2}hX)(1 - (x_{m} + \frac{1}{2}hX)) \frac{1}{2}(1 + X) \frac{h}{2} dX
= -\frac{1}{24}h^{3} - \frac{1}{6}h^{2}x_{m} + \frac{1}{12}h^{2} - \frac{1}{2}hx_{m}^{2} + \frac{1}{2}hx_{m}$$
(58)

 x_m : element midpoint.

7.8 Tedious calculations! Let's use symbolic software

```
>>> import sympy as sm
>>> x, x_m, h, X = sm.symbols('x x_m h X')
>>> sm.integrate(h/8*(1-X)**2, (X, -1, 1))
h/3
>>> sm.integrate(h/8*(1+X)*(1-X), (X, -1, 1))
h/6
>>> x = x_m + h/2*X
>>> b_0 = sm.integrate(h/4*x*(1-x)*(1-X), (X, -1, 1))
>>> print b_0
-h**3/24 + h**2*x_m/6 - h**2/12 - h*x_m**2/2 + h*x_m/2
```

Can printe out in LATEX too (convenient for copying into reports):

```
>>> print sm.latex(b_0, mode='plain')
- \frac{1}{24} h^{3} + \frac{1}{6} h^{2} x_{m}
- \frac{1}{12} h^{2} - \frac{1}{2} h x_{m}^{2}
+ \frac{1}{2} h x_{m}
```

8 Implementation

- Coming functions appear in fe_approx1D.py⁵
- Functions can operate in symbolic or numeric mode
- The code documents all steps in finite element calculations!

8.1 Compute finite element basis functions in the reference element

Let $\tilde{\varphi}_r(X)$ be a Lagrange polynomial of degree d:

```
import sympy as sm
import numpy as np
def phi_r(r, X, d):
    if isinstance(X, sm.Symbol):
        h = sm.Rational(1, d) # node spacing
nodes = [2*i*h - 1 for i in range(d+1)]
    else:
         \mbox{\tt\#} assume \mbox{\tt X} is numeric: use floats for nodes
         nodes = np.linspace(-1, 1, d+1)
    return Lagrange_polynomial(X, r, nodes)
def Lagrange_polynomial(x, i, points):
    p = 1
    for k in range(len(points)):
         if k != i:
             p *= (x - points[k])/(points[i] - points[k])
    return p
def basis(d=1):
    """Return the complete basis."""
    X = sm.Symbol('X')
    phi = [phi_r(r, X, d) for r in range(d+1)]
    return phi
```

8.2 Compute the element matrix

```
def element_matrix(phi, Omega_e, symbolic=True):
    n = len(phi)
    A_e = sm.zeros((n, n))
    X = sm.Symbol('X')
    if symbolic:
        h = sm.Symbol('h')
    else:
        h = Omega_e[1] - Omega_e[0]
    detJ = h/2  # dx/dX
    for r in range(n):
        for s in range(r, n):
```

⁵http://tinyurl.com/jvzzcfn/fem/fe_approx1D.py

```
A_e[r,s] = sm.integrate(phi[r]*phi[s]*detJ, (X, -1, 1))
A_e[s,r] = A_e[r,s]
return A_e
```

8.3 Example on symbolic vs numeric element matrix

```
>>> from fe_approx1D import *
>>> phi = basis(d=1)
>>> phi
[1/2 - X/2, 1/2 + X/2]
>>> element_matrix(phi, Omega_e=[0.1, 0.2], symbolic=True)
[h/3, h/6]
[h/6, h/3]
>>> element_matrix(phi, Omega_e=[0.1, 0.2], symbolic=False)
[0.033333333333333333, 0.016666666666667]
[0.0166666666666667, 0.0333333333333333]
```

8.4 Compute the element vector

```
def element_vector(f, phi, Omega_e, symbolic=True):
    n = len(phi)
    b_e = sm.zeros((n, 1))
    # Make f a function of X
    X = sm.Symbol('X')
    if symbolic:
        h = sm.Symbol('h')
    else:
        h = Omega_e[1] - Omega_e[0]
    x = (Omega_e[0] + Omega_e[1])/2 + h/2*X # mapping
    f = f.subs('x', x) # substitute mapping formula for x
    detJ = h/2 # dx/dX
    for r in range(n):
        b_e[r] = sm.integrate(f*phi[r]*detJ, (X, -1, 1))
    return b_e
```

Note f.subs('x', x): replace x by x(X) such that f contains X

8.5 Fallback on numerical integration if symbolic integration fails

- Element matrix: only polynomials and sympy always succeeds
- Element vector: $\int f \tilde{\varphi} dx$ can fail (sympy then returns an Integral object instead of a number)

```
def element_vector(f, phi, Omega_e, symbolic=True):
    ...
    I = sm.integrate(f*phi[r]*detJ, (X, -1, 1)) # try...
    if isinstance(I, sm.Integral):
        h = Omega_e[1] - Omega_e[0] # Ensure h is numerical
        detJ = h/2
        integrand = sm.lambdify([X], f*phi[r]*detJ)
        I = sm.mpmath.quad(integrand, [-1, 1])
    b_e[r] = I
    ...
```

8.6 Linear system assembly and solution

8.7 Linear system solution

```
if symbolic:
    c = A.LUsolve(b)  # sympy arrays, symbolic Gaussian elim.
else:
    c = np.linalg.solve(A, b)  # numpy arrays, numerical solve
```

Note: the symbolic computation of A and b and the symbolic solution can be very tedious.

8.8 Example on computing symbolic approximations

```
>>> h, x = sm.symbols('h x')
>>> nodes = [0, h, 2*h]
>>> elements = [[0, 1], [1, 2]]
>>> phi = basis(d=1)
>>> f = x*(1-x)
>>> A, b = assemble(nodes, elements, phi, f, symbolic=True)
>>> A
[h/3, h/6, 0]
[h/6, 2*h/3, h/6]
[h/3,
        h/6, h/3]
[ 0,
>>> b
       h**2/6 - h**3/12]
        h**2 - 7*h**3/6]
[5*h**2/6 - 17*h**3/12]
>>> c = A.LUsolve(b)
>>> c
                                    h**2/6]
[12*(7*h**2/12 - 35*h**3/72)/(7*h)]
[ 7*(4*h**2/7 - 23*h**3/21)/(2*h)]
```

8.9 Example on computing numerical approximations

```
>>> nodes = [0, 0.5, 1]
>>> elements = [[0, 1], [1, 2]]
>>> phi = basis(d=1)
>>> x = sm.Symbol('x')
>>> f = x*(1-x)
>>> A, b = assemble(nodes, elements, phi, f, symbolic=False)
```

8.10 The structure of the coefficient matrix

```
>>> d=1; N_e=8; Omega=[0,1] # 8 linear elements on [0,1]
>>> phi = basis(d)
>>> f = x*(1-x)
>>> nodes, elements = mesh_symbolic(N_e, d, Omega)
>>> A, b = assemble(nodes, elements, phi, f, symbolic=True)
>>> A
[h/3,
        h/6,
               h/6,
                         0,
                                0,
[h/6, 2*h/3,
                                        0,
                                                            0]
                       h/6,
                                        0,
  0,
                                0,
                                                            0]
        h/6, 2*h/3,
                                               0,
          Ο,
               h/6, 2*h/3,
                              h/6,
                                        Ο,
                                               Ο,
                                                            0]
   0,
          0,
                  0,
                       h/6, 2*h/3,
                                      h/6,
                                               0,
                                                            0]
[
                  0,
                        Ο,
                              h/6, 2*h/3,
                                                            0]
                                0,
                         0,
   0,
          0,
                  0,
                                      h/6, 2*h/3,
                                                     h/6,
                                                            0]
   0,
          0,
                  0,
                         0,
                                0,
                                        0,
Ε
                                             h/6, 2*h/3, h/6]
                         0,
                                               0,
Г
   0,
          Ο,
                  Ο,
                                0,
                                        Ο,
                                                    h/6, h/3]
```

Note: do this by hand to understand what is going on!

8.11 General result: the coefficient matrix is sparse

- Sparse = most of the entries are zeros
- Below: P1 elements


8.12 Exemplifying the sparsity for P2 elements


$$A = \frac{h}{30} \begin{pmatrix} 4 & 2 & -1 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ 2 & 16 & 2 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ -1 & 2 & 8 & 2 & -1 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & 2 & 16 & 2 & 0 & 0 & 0 & 0 & 0 \\ 0 & 0 & -1 & 2 & 8 & 2 & -1 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & 2 & 16 & 2 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 & -1 & 2 & 8 & 2 & -1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 2 & 16 & 2 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & 2 & 16 & 2 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0 & 0 & 0 & -1 & 2 & 4 & 0 \end{pmatrix}$$

$$(60)$$

8.13 Matrix sparsity pattern for regular/random numbering of P1 elements

- Left: number nodes and elements from left to right
- Right: number nodes and elements arbitrarily







8.14 Matrix sparsity pattern for regular/random numbering of P3 elements

44

- Left: number nodes and elements from left to right
- Right: number nodes and elements arbitrarily





8.15 Sparse matrix storage and solution

The minimum storage requirements for the coefficient matrix $A_{i,j}$:

- P1 elements: only 3 nonzero entires per row
- P2 elements: only 5 nonzero entires per row
- P3 elements: only 7 nonzero entires per row
- It is important to utilize sparse storage and sparse solvers
- In Python: scipy.sparse package


8.16 Approximate $f \sim x^9$ by various elements; code

Compute a mesh with N_e elements, basis functions of degree d, and approximate a given symbolic expression f(x) by a finite element expansion $u(x) = \sum_j c_j \varphi_j(x)$:

```
import sympy as sm
from fe_approx1D import approximate
x = sm.Symbol('x')

approximate(f=x*(1-x)**8, symbolic=False, d=1, N_e=4)
approximate(f=x*(1-x)**8, symbolic=False, d=2, N_e=2)
approximate(f=x*(1-x)**8, symbolic=False, d=1, N_e=8)
approximate(f=x*(1-x)**8, symbolic=False, d=2, N_e=4)
```

8.17 Approximate $f \sim x^9$ by various elements; plot

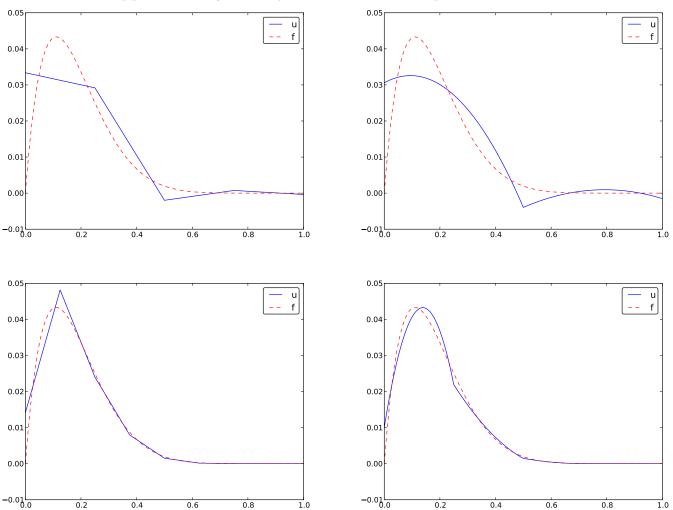

9 Comparison of finite element and finite difference approximation

- Finite difference approximation of a function f(x): simply choose $u_i = f(x_i)$ (interpolation)
- Galerkin/projection and least squares method: must derive and solve a linear system
- What is *really* the difference in u?

9.1 Interpolation/collocation with finite elements

Let $\{x_i\}_{i\in I}$ be the nodes in the mesh. Collocation means

$$u(x_i) = f(x_i), \quad i \in I, \tag{61}$$

which translates to

$$\sum_{j \in I} c_j \varphi_j(x_i) = f(x_i),$$

but $\varphi_i(x_i) = 0$ if $i \neq j$ so the sum collapses to one term $c_i \varphi_i(x_i) = c_i$, and we have the result

$$c_i = f(x_i) \tag{62}$$

Same result as the standard finite difference approach, finite elements define u also between the x_i points

9.2 How does finite elements compare with finite differences?

- Scope: work with P1 elements
- Use projection/Galerkin or least squares (equivalent)
- Interpret the resulting linear system as finite difference equations

The P1 finite element machinery results in a linear system where equation no i is

$$\frac{h}{6}(u_{i-1} + 4u_i + u_{i+1}) = (f, \varphi_i)$$
(63)

Note:

- We have used u_i for c_i to simplify notation with finite differences
- The finite difference counterpart is just $u_i = f_i$

9.3 Expressing the left-hand side in finite difference operator notation

Rewrite the left-hand side of finite element equation no i:

$$h(u_i - \frac{1}{6}(-u_{i-1} + 2u_i - u_{i+1})) = [h(u - \frac{h^2}{6}D_x D_x u)]_i$$
(64)

This is the standard finite difference approximation of

$$h(u - \frac{h^2}{6}u'')$$

9.4 Treating the right-hand side; Trapezoidal rule

$$(f,\varphi_i) = \int_{x_{i-1}}^{x_i} f(x) \frac{1}{h} (x - x_{i-1}) dx + \int_{x_i}^{x_{i+1}} f(x) \frac{1}{h} (1 - (x - x_i)) dx$$

Cannot do much unless we specialize f or use numerical integration.

Trapezoidal rule using the nodes:

$$(f,\varphi_i) = \int_{\Omega} f\varphi_i dx \approx h \frac{1}{2} (f(x_0)\varphi_i(x_0) + f(x_N)\varphi_i(x_N)) + h \sum_{j=1}^{N-1} f(x_j)\varphi_i(x_j)$$

 $\varphi_i(x_j) = \delta_{ij}$, so this formula collapses to one term:

$$(f, \varphi_i) \approx hf(x_i), \quad i = 1, \dots, N - 1.$$
 (65)

Same result as in collocation (interpolation) and the finite difference method!

9.5 Treating the right-hand side; Simpson's rule

$$\int_{\Omega} g(x)dx \approx \frac{h}{6} \left(g(x_0) + 2 \sum_{j=1}^{N-1} g(x_j) + 4 \sum_{j=0}^{N-1} g(x_{j+\frac{1}{2}}) + f(x_{2N}) \right),$$

Our case: $g = f\varphi_i$. The sums collapse because $\varphi_i = 0$ at most of the points.

$$(f, \varphi_i) \approx \frac{h}{3} (f_{i-\frac{1}{2}} + f_i + f_{i+\frac{1}{2}})$$
 (66)

Conclusions:

- While the finite difference method just samples f at x_i , the finite element method applies an average of f around x_i
- On the left-hand side we have a term $\sim hu''$, and u'' also contribute to smoothing
- There is some inherent smoothing in the finite element method

9.6 Finite element approximation vs finite differences

With Trapezoidal integration of (f, φ_i) , the finite element metod essentially solve

$$u + \frac{h^2}{6}u'' = f, \quad u'(0) = u'(L) = 0,$$
 (67)

by the finite difference method

$$[u + \frac{h^2}{6} D_x D_x u = f]_i \tag{68}$$

With Simpson integration of (f, φ_i) we essentially solve

$$[u + \frac{h^2}{6} D_x D_x u = \bar{f}]_i, (69)$$

where

$$\bar{f}_i = \frac{1}{3}(f_{i-1/2} + f_i + f_{i+1/2})$$

Note: as $h \to 0$, $hu'' \to 0$ and $\bar{f}_i \to f_i$.

9.7 Making finite elements behave as finite differences

- Can we adjust the finite element method so that we do not get the extra hu'' smoothing term and averaging of f?
- This is important in time-dependent problems to incorporate good properties of finite differences into finite elements

Result:

- Compute all integrals by the Trapezoidal method and P1 elements
- Specifically, the coefficient matrix becomes diagonal ("lumped") no linear system (!)
- Loss of accuracy? The Trapezoidal rule has error $\mathcal{O}(h^2)$, the same as the approximation error in P1 elements

10 Limitations of the nodes and element concepts

So far,

- Nodes: points for defining φ_i and compute u values
- Elements: subdomain (containing a few nodes)
- This is a common notion of nodes and elements

One problem:

- Our algorithms need nodes at the element boundaries
- This is often not desirable, so we need to throw the nodes and elements arrays away and find a more generalized element concept

11 A generalized element concept

- We introduce cell for the subdomain that we up to now called element
- A cell has *vertices* (interval end points)
- Nodes are, almost as before, points where we want to compute unknown functions
- Degrees of freedom is what the c_j represent (usually function values at nodes)

11.1 The concept of a finite element

- $1.\ a\ reference\ cell\ in\ a\ local\ reference\ coordinate\ system$
- 2. a set of basis functions $\tilde{\varphi}_i$ defined on the cell
- 3. a set of degrees of freedom (e.g., function values) that uniquely determine the basis functions such that $\tilde{\varphi}_i = 1$ for degree of freedom number i and $\tilde{\varphi}_i = 0$ for all other degrees of freedom
- 4. a mapping between local and global degree of freedom numbers (dof map)
- 5. a geometric mapping of the reference cell onto to cell in the physical domain: [-1,1] \Rightarrow $[x_L, x_R]$


11.2 Implementation; basic data structures

- Cell vertex coordinates: vertices equals nodes for P1 elements
- Element vertices: cell[e][r] holds global vertex number of local vertex no r in element e (same as elements for P1 elements)
- dof_map[e,r] maps local dof r in element e to global dof number (same as elements for Pd elements)

The assembly process applies dof_map (no more elements list!):

```
A[dof_map[e][r], dof_map[e][s]] += A_e[r,s]
b[dof_map[e][r]] += b_e[r]
```

11.3 Implementation; example with P2 elements

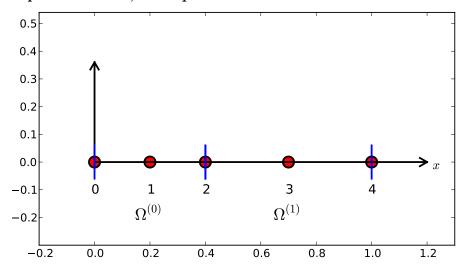

```
vertices = [0, 0.4, 1]
cells = [[0, 1], [1, 2]]
dof_map = [[0, 1, 2], [1, 2, 3]]
```

11.4 Implementation; example with P0 elements

Example: Same mesh, but u is piecewise constant in each cell (P0 element). Same vertices and cells, but

```
dof_map = [[0], [1], [2]]
```

May think of nodes in the middle of each element.

```
We will hereafter work with cells, vertices, and dof_map.
```

11.5 Example on doing the algorithmic steps


```
# Use modified fe_approx1D module
from fe_approx1D_numint import *

x = sm.Symbol('x')
f = x*(1 - x)

N_e = 10
# Create mesh
vertices, cells, dof_map = mesh_uniform(N_e, d=3, Omega=[0,1])

# Create basis functions on the mesh
phi = [basis(len(dof_map[e])-1) for e in range(N_e)]
```

11.6 Approximating a parabola by P0 elements

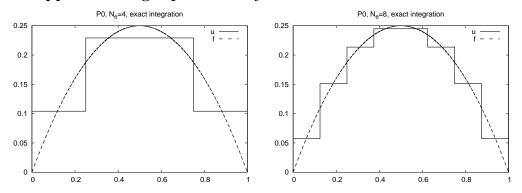

The approximate function automates the steps in the previous slide:

```
from fe_approx1D_numint import *
x=sm.Symbol("x")
for N_e in 4, 8:
    approximate(x*(1-x), d=0, N_e=N_e, Omega=[0,1])
```

11.7 Computing the error of the approximation; principles

$$L^2$$
 error: $||e||_{L^2} = \left(\int_{\Omega} e^2 dx\right)^{1/2}$

Accurate approximation of the integral:

- Sample u(x) at many points in each element
- u_glob does this and returns x and u
- Use the Trapezoidal rule based on the samples

11.8 Computing the error of the approximation; details

Note.

We need a version of the Trapezoidal rule valid for non-uniformly spaced points:

$$\int_{\Omega} g(x)dx \approx \sum_{j=0}^{n-1} \frac{1}{2} (g(x_j) + g(x_{j+1}))(x_{j+1} - x_j)$$

11.9 How does the error depend on h and d?

Theory and experiments show that the least squares or projection/Galerkin method in combination with Pd elements of equal length h has an error

$$||e||_{L^2} = Ch^{d+1} (70)$$

where C depends on f, but not on h or d.

11.10 Cubic Hermite polynomials; definition

• Can we construct $\varphi_i(x)$ with continuous derivatives? Yes!

Consider a reference cell [-1,1]. We introduce two nodes, X=-1 and X=1. The degrees of freedom are

- 0: value of function at X = -1
- 1: value of first derivative at X = -1
- 2: value of function at X = 1
- 3: value of first derivative at X = 1

Derivatives as unknowns ensure the same $\varphi'_i(x)$ value at nodes and thereby continuous derivatives.

11.11 Cubic Hermite polynomials; derivation

4 constraints on $\tilde{\varphi}_r$ (1 for dof r, 0 for all others):

- $\tilde{\varphi}_0(X_{(0)}) = 1$, $\tilde{\varphi}_0(X_{(1)}) = 0$, $\tilde{\varphi}'_0(X_{(0)}) = 0$, $\tilde{\varphi}'_0(X_{(1)}) = 0$
- $\tilde{\varphi}'_1(X_{(0)}) = 1$, $\tilde{\varphi}'_1(X_{(1)}) = 0$, $\tilde{\varphi}_1(X_{(0)}) = 0$, $\tilde{\varphi}_1(X_{(1)}) = 0$
- $\tilde{\varphi}_2(X_{(1)}) = 1$, $\tilde{\varphi}_2(X_{(0)}) = 0$, $\tilde{\varphi}'_2(X_{(0)}) = 0$, $\tilde{\varphi}'_2(X_{(1)}) = 0$
- $\tilde{\varphi}_3'(X_{(1)}) = 1$, $\tilde{\varphi}_3'(X_{(0)}) = 0$, $\tilde{\varphi}_3(X_{(0)}) = 0$, $\tilde{\varphi}_3(X_{(1)}) = 0$

This gives 4 linear, coupled equations for each $\tilde{\varphi}_r$ to determine the 4 coefficients in the cubic polynomial. Result:

$$\tilde{\varphi}_0(X) = 1 - \frac{3}{4}(X+1)^2 + \frac{1}{4}(X+1)^3 \tag{71}$$

$$\tilde{\varphi}_1(X) = -(X+1)(1 - \frac{1}{2}(X+1))^2 \tag{72}$$

$$\tilde{\varphi}_2(X) = \frac{3}{4}(X+1)^2 - \frac{1}{2}(X+1)^3 \tag{73}$$

$$\tilde{\varphi}_3(X) = -\frac{1}{2}(X+1)(\frac{1}{2}(X+1)^2 - (X+1)) \tag{74}$$

(75)

12 Numerical integration

- $\int_{\Omega} f \varphi_i dx$ must in general be computed by numerical integration
- Numerical integration is often used for the matrix too

Common form:

$$\int_{-1}^{1} g(X)dX \approx \sum_{j=0}^{M} w_j \bar{X}_j,\tag{76}$$

where

- \bar{X}_j are integration points
- w_i are integration weights
- Different rules correspond to different choices of points and weights

12.1 The Midpoint rule

Simplest possibility: the Midpoint rule,

$$\int_{-1}^{1} g(X)dX \approx 2g(0), \quad \bar{X}_{0} = 0, \ w_{0} = 2, \tag{77}$$

Exact for linear integrands

12.2 Newton-Cotes rules

- Idea: use a fixed, uniformly distributed set of points
- The points often coincides with nodes
- Very useful for making $\varphi_i \varphi_j = 0$ and get diagonal ("mass") matrices ("lumping").

The Trapezoidal rule:

$$\int_{-1}^{1} g(X)dX \approx g(-1) + g(1), \quad \bar{X}_{0} = -1, \ \bar{X}_{1} = 1, \ w_{0} = w_{1} = 1,$$
 (78)

Simpson's rule:

$$\int_{-1}^{1} g(X)dX \approx \frac{1}{3} \left(g(-1) + 4g(0) + g(1) \right), \tag{79}$$

where

$$\bar{X}_0 = -1, \ \bar{X}_1 = 0, \ \bar{X}_2 = 1, \ w_0 = w_2 = \frac{1}{3}, \ w_1 = \frac{4}{3}$$
 (80)

12.3 Gauss-Legendre rules with optimized points

- Optimize the location of points to get higher accuracy
- Gauss-Legendre rules (quadrature) adjust points and weights to integrate polynomials exactly

$$M = 1: \quad \bar{X}_0 = -\frac{1}{\sqrt{3}}, \ \bar{X}_1 = \frac{1}{\sqrt{3}}, \ w_0 = w_1 = 1$$
 (81)

$$M = 2: \quad \bar{X}_0 = -\sqrt{\frac{3}{5}}, \ \bar{X}_0 = 0, \ \bar{X}_2 = \sqrt{\frac{3}{5}}, \ w_0 = w_2 = \frac{5}{9}, \ w_1 = \frac{8}{9}$$
 (82)

- M = 1: integrates 3rd degree polynomials exactly
- M=2: integrates 5th degree polynomials exactly
- In general, M-point rule integrates a polynomial of degree 2M + 1 exactly.

See numint.py⁶ for a large collection of Gauss-Legendre rules.

13 Approximation of functions in 2D

Extensibility of 1D ideas.

All the concepts and algorithms developed for approximation of 1D functions f(x) can readily be extended to 2D functions f(x,y) and 3D functions f(x,y,z). Key formulas stay the same.

Inner product in 2D:

$$(f,g) = \int_{\Omega} f(x,y)g(x,y)dxdy \tag{83}$$

Least squares and project/Galerkin lead to a linear system

$$\sum_{j \in I} A_{i,j} c_j = b_i, \quad i \in I$$
$$A_{i,j} = (\psi_i, \psi_j)$$
$$b_i = (f, \psi_i)$$

Challenge: How to construct 2D basis functions $\psi_i(x,y)$?

⁶http://tinyurl.com/jvzzcfn/fem/numint.py

13.1 2D basis functions as tensor products of 1D functions

Use a 1D basis for x variation and a similar for y variation:

$$V_x = \operatorname{span}\{\hat{\psi}_0(x), \dots, \hat{\psi}_{N_x}(x)\}$$
(84)

$$V_y = \text{span}\{\hat{\psi}_0(y), \dots, \hat{\psi}_{N_y}(y)\}$$
 (85)

The 2D vector space can be defined as a tensor product $V = V_x \otimes V_y$ with basis functions

$$\psi_{p,q}(x,y) = \hat{\psi}_p(x)\hat{\psi}_q(y) \quad p \in I_x, q \in I_y.$$

13.2 Tensor products

Given two vectors $a = (a_0, \ldots, a_M)$ and $b = (b_0, \ldots, b_N)$, their outer tensor product, also called the dyadic product, is $p = a \otimes b$, defined through

$$p_{i,j} = a_i b_j, \quad i = 0, \dots, M, \ j = 0, \dots, N.$$

Note: p has two indices (as matrix or two-dimensional array)

2D basis as tensor product of 1D spaces:

$$\psi_{p,q}(x,y) = \hat{\psi}_p(x)\hat{\psi}_q(y), \quad p \in I_x, q \in I_y$$

13.3 Double or single index?

The 2D basis can employ a double index and double sum:

$$u = \sum_{p \in I_x} \sum_{q \in I_y} c_{p,q} \psi_{p,q}(x,y)$$

Or just a single index:

$$u = \sum_{i \in I} c_j \psi_i(x, y)$$

with

$$\psi_i(x,y) = \hat{\psi}_p(x)\hat{\psi}_q(y), \quad i = pN_y + q \text{ or } i = qN_x + p$$

13.4 Example on 2D (bilinear) basis functions; formulas

In 1D we use the basis

$$\{1, x\}$$

2D tensor product (all combinations):

$$\psi_{0,0} = 1$$
, $\psi_{1,0} = x$, $\psi_{0,1} = y$, $\psi_{1,1} = xy$


or with a single index:

$$\psi_0 = 1, \quad \psi_1 = x, \quad \psi_2 = y, \quad \psi_3 = xy$$

See notes for details of a hand-calculation.

13.5 Example on 2D (bilinear) basis functions; plot

Quadratic $f(x,y) = (1+x^2)(1+2y^2)$ (left), bilinear u (right):

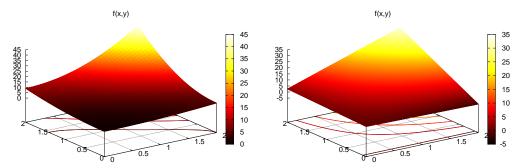

13.6 Implementation; principal changes to the 1D code

Very small modification of approx1D.py:

- Omega = [[0, L_x], [0, L_y]]
- Symbolic integration in 2D
- Construction of 2D (tensor product) basis functions

13.7 Implementation; 2D integration

13.8 Implementation; 2D basis functions

Tensor product of 1D "Taylor-style" polynomials x^i :

⁷http://tinyurl.com/jvzzcfn/fem/fe_approx2D.py

13.9 Implementation; application

```
f(x,y) = (1+x^2) * (1+2y^2)
```

```
>>> from approx2D import *
>>> f = (1+x**2)*(1+2*y**2)
>>> psi = taylor(x, y, 1, 1)
>>> Omega = [[0, 2], [0, 2]]
>>> u = least_squares(f, psi, Omega)
>>> print u
8*x*y - 2*x/3 + 4*y/3 - 1/9
>>> print sm.expand(f)
2*x**2*y**2 + x**2 + 2*y**2 + 1
```

13.10 Implementation; trying a perfect expansion

Add higher powers to the basis such that $f \in V$:

```
>>> psi = taylor(x, y, 2, 2)
>>> u = least_squares(f, psi, Omega)
>>> print u
2*x**2*y**2 + x**2 + 2*y**2 + 1
>>> print u-f
0
```

Expected: u = f when $f \in V$

13.11 Generalization to 3D

Key idea:

$$V = V_x \otimes V_y \otimes V_z$$

Repeated outer tensor product of multiple vectors.

$$a^{(q)} = (a_0^{(q)}, \dots, a_{N_q}^{(q)}, q = 0, \dots, m$$

$$p = a^{(0)} \otimes \dots \otimes a^{(m)}$$

$$p_{i_0, i_1, \dots, i_m} = a_{i_1}^{(0)} a_{i_1}^{(1)} \cdots a_{i_m}^{(m)}$$

$$\begin{split} \psi_{p,q,r}(x,y,z) &= \hat{\psi}_p(x) \hat{\psi}_q(y) \hat{\psi}_r(z) \\ u(x,y,z) &= \sum_{p \in I_x} \sum_{q \in I_y} \sum_{r \in I_z} c_{p,q,r} \psi_{p,q,r}(x,y,z) \end{split}$$

14 Finite elements in 2D and 3D

The two great advantages of the finite element method:

- \bullet Can handle complex-shaped domains in 2D and 3D
- Can easily provide higher-order polynomials in the approximation

Finite elements in 1D: mostly for learning, insight, debugging

14.1 Examples on cell types


2D:


- \bullet triangles
- $\bullet \ \, {\rm quadrilaterals}$

3D:


- tetrahedra
- \bullet hexahedra

14.2 Rectangular domain with 2D P1 elements






14.3 Deformed geometry with 2D P1 elements




14.4 Rectangular domain with 2D Q1 elements

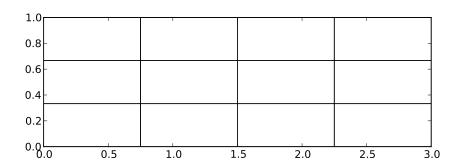

14.5 Basis functions over triangles in the physical domain


The P1 triangular 2D element: u is linear ax + by + c over each triangular cell

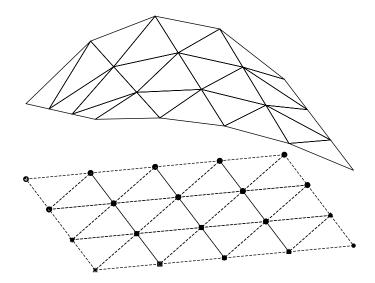

14.6 Basic features of 2D P1 elements


- $\varphi_r(X,Y)$ is a linear function over each element
- \bullet Cells = triangles
- \bullet Vertices = corners of the cells
- Nodes = vertices
- ullet Degrees of freedom = function values at the nodes

14.7 Linear mapping of reference element onto general triangular cell

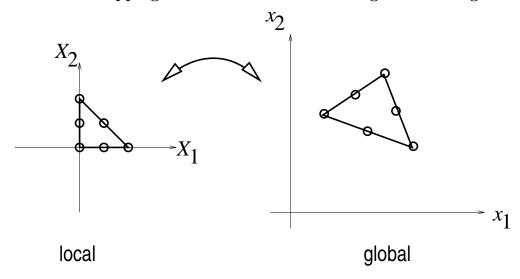

14.8 φ_i : pyramid shape, composed of planes


- $\varphi_i(X,Y)$ varies linearly over an element
- $\varphi_i = 1$ at vertex (node) i, 0 at all other vertices (nodes)

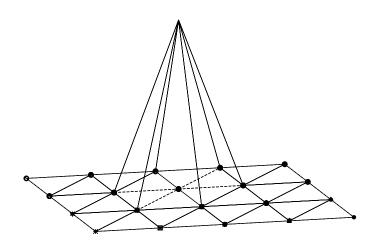

14.9 Element matrices and vectors

- As in 1D, the contribution from one cell to the matrix involves just a few numbers, collected in the element matrix and vector
- $\varphi_i \varphi_j \neq 0$ only if i and j are degrees of freedom (vertices/nodes) in the same element
- $\bullet\,$ The 2D P1 has a 3×3 element matrix

14.10 Basis functions over triangles in the reference cell




$$\tilde{\varphi}_0(X,Y) = 1 - X - Y \tag{86}$$

$$\tilde{\varphi}_1(X,Y) = X \tag{87}$$


$$\tilde{\varphi}_2(X,Y) = Y \tag{88}$$

Higher-degree $\tilde{\varphi}_r$ introduce more nodes (dof = node values)


14.11 2D P1, P2, P3, P4, P5, and P6 elements



14.12 P1 elements in 1D, 2D, and 3D



14.13 P2 elements in 1D, 2D, and 3D



- \bullet Interval, triangle, tetrahedron: simplex element (plural quick-form: simplices)
- ullet Side of the cell is called face
- ullet Thetrahedron has also edges

14.14 Affine mapping of the reference cell; formula

Mapping of local $\boldsymbol{X}=(X,Y)$ coordinates in the reference cell to global, physical $\boldsymbol{x}=(x,y)$ coordinates:


$$\boldsymbol{x} = \sum_{r} \tilde{\varphi}_{r}^{(1)}(\boldsymbol{X}) \boldsymbol{x}_{q(e,r)} \tag{89}$$

where

- \bullet r runs over the local vertex numbers in the cell
- x_i are the (x, y) coordinates of vertex i
- $\tilde{\varphi}_r^{(1)}$ are P1 basis functions

This mapping preserves the straight/planar faces and edges.

14.15 Affine mapping of the reference cell; figure

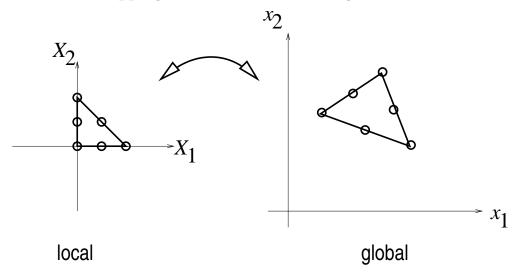


14.16 Isoparametric mapping of the reference cell

Idea: Use the basis functions of the element (not only the P1 functions) to map the element

$$\boldsymbol{x} = \sum_{r} \tilde{\varphi}_{r}(\boldsymbol{X}) \boldsymbol{x}_{q(e,r)} \tag{90}$$

Advantage: higher-order polynomial basis functions now map the reference cell to a $\it curved$ triangle or tetrahedron.

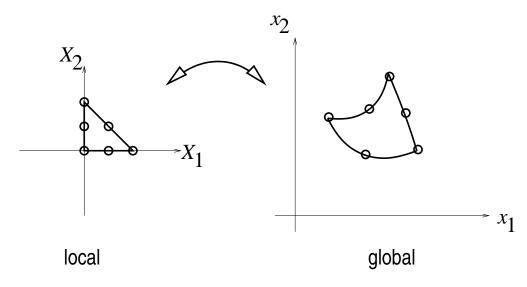

14.17 Computing integrals

Integrals must be transformed from $\Omega^{(e)}$ (physical cell) to $\tilde{\Omega}^r$ (reference cell):

$$\int_{\Omega^{(e)}} \varphi_i(\boldsymbol{x}) \varphi_j(\boldsymbol{x}) \, \mathrm{d}\boldsymbol{x} = \int_{\tilde{\Omega}^r} \tilde{\varphi}_i(\boldsymbol{X}) \tilde{\varphi}_j(\boldsymbol{X}) \, \mathrm{det} \, J \, \, \mathrm{d}\boldsymbol{X}$$
 (91)

$$\int_{\Omega^{(e)}} \varphi_i(\boldsymbol{x}) f(\boldsymbol{x}) \, \mathrm{d}\boldsymbol{x} = \int_{\tilde{\Omega}^r} \tilde{\varphi}_i(\boldsymbol{X}) f(\boldsymbol{x}(\boldsymbol{X})) \, \mathrm{det} \, J \, \, \mathrm{d}\boldsymbol{X}$$
(92)

where dx = dxdy or dx = dxdydz and det J is the determinant of the Jacobian of the mapping x(X).

$$J = \begin{bmatrix} \frac{\partial x}{\partial X} & \frac{\partial x}{\partial Y} \\ \frac{\partial y}{\partial X} & \frac{\partial y}{\partial Y} \end{bmatrix}, \quad \det J = \frac{\partial x}{\partial X} \frac{\partial y}{\partial Y} - \frac{\partial x}{\partial Y} \frac{\partial y}{\partial X}$$
(93)

Affine mapping (89): det $J=2\Delta, \Delta=$ cell volume !slide

14.18 Remark on going from 1D to 2D/3D

Finite elements in 2D and 3D builds on the same *ideas* and *concepts* as in 1D, but there is simply much more to compute because the specific mathematical formulas in 2D and 3D are more complicated and the book keeping with dof maps also gets more complicated. The manual work is tedious, lengthy, and error-prone so automation by the computer is a must.

15 Differential equation models

Our aim is to extend the ideas for approximating f by u, or solving

$$u = f$$

to real differential equations.

Three methods:

- 1. least squares
- 2. Galerkin/projection
- 3. collocation (interpolation)

Method 2 will be totally dominating!

15.1 Abstract differential equation

$$\mathcal{L}(u) = 0, \quad x \in \Omega \tag{94}$$

Examples:

$$\mathcal{L}(u) = \frac{d^2u}{dx^2} - f(x),\tag{95}$$

$$\mathcal{L}(u) = \frac{d}{dx} \left(\alpha(x) \frac{du}{dx} \right) + f(x), \tag{96}$$

$$\mathcal{L}(u) = \frac{d}{dx} \left(\alpha(u) \frac{du}{dx} \right) - au + f(x), \tag{97}$$

$$\mathcal{L}(u) = \frac{d}{dx} \left(\alpha(u) \frac{du}{dx} \right) + f(u, x) \tag{98}$$

15.2 Abstract boundary conditions

$$\mathcal{B}_0(u) = 0, \ x = 0, \quad \mathcal{B}_1(u) = 0, \ x = L$$
 (99)

Examples:

$$\mathcal{B}_i(u) = u - g,$$
 Dirichlet condition (100)

$$\mathcal{B}_i(u) = -\alpha \frac{du}{dx} - g,$$
 Neumann condition (101)

$$\mathcal{B}_{i}(u) = -\alpha \frac{du}{dx} - h(u - g),$$
 Robin condition (102)

15.3 Reminder about notation

- $u_e(x)$ is the symbol for the exact solution of $\mathcal{L}(u_e) = 0$
- \bullet u(x) denotes an approximate solution
- $V = \operatorname{span}\{\psi_0(x), \dots, \psi_N(x)\}$: we seek $u \in V$
- V has basis $\{\psi_i\}_{i\in I}$
- $I = \{0, \dots, N\}$ is an index set
- $u(x) = \sum_{j \in I} c_j \psi_j(x)$
- Inner product: $(u, v) = \int_{\Omega} uv \, dx$
- Norm: $||u|| = \sqrt{(u,u)}$

15.4 Residual-minimizing principles

- When solving u = f we knew the error e = f u and could use principles for minimizing the error
- When solving $\mathcal{L}(u_e) = 0$ we do not know u_e and cannot work with the error $e = u_e u_e$
- \bullet We only have the error in the equation: the residual R

Inserting $u = \sum_{j} c_{j} \psi_{j}$ in $\mathcal{L} = 0$ gives a residual

$$R = \mathcal{L}(u) = \mathcal{L}(\sum_{j} c_{j} \psi_{j}) \neq 0$$
(103)

Goal: minimize R wrt $\{c_i\}_{i\in I}$ (and hope it makes a small e too)

$$R = R(c_0, \dots, c_N; x)$$

15.5 The least squares method

Idea: minimize

$$E = ||R||^2 = (R, R) = \int_{\Omega} R^2 dx \tag{104}$$

Minimization wrt $\{c_i\}_{i\in I}$ implies

$$\frac{\partial E}{\partial c_i} = \int_{\Omega} 2R \frac{\partial R}{\partial c_i} dx = 0 \quad \Leftrightarrow \quad (R, \frac{\partial R}{\partial c_i}) = 0, \quad i \in I$$
 (105)

N+1 equations for N+1 unknowns $\{c_i\}_{i\in I}$

15.6 The Galerkin method

Idea: make R orthogonal to V,

$$(R, v) = 0, \quad \forall v \in V \tag{106}$$

This implies

$$(R, \psi_i) = 0, \quad i \in I, \tag{107}$$

N+1 equations for N+1 unknowns $\{c_i\}_{i\in I}$

15.7 The Method of Weighted Residuals

Generalization of the Galerkin method: demand R orthogonal to some space W, possibly $W \neq V$:

$$(R, v) = 0, \quad \forall v \in W \tag{108}$$

If $\{w_0, \ldots, w_N\}$ is a basis for W:

$$(R, w_i) = 0, \quad i \in I \tag{109}$$

- N+1 equations for N+1 unknowns $\{c_i\}_{i\in I}$
- Weighted residual with $w_i = \partial R/\partial c_i$ gives least squares

15.8 Terminology: test and Trial Functions

- ψ_j used in $\sum_j c_j \psi_j$: trial function
- ψ_i or w_i used as weight in Galerkin's method: test function

15.9 The collocation method


Idea: demand R = 0 at N + 1 points

$$R(x_i; c_0, \dots, c_N) = 0, \quad i \in I$$
 (110)

Note: The collocation method is a weighted residual method with delta functions as weights

property of
$$\delta(x)$$
: $\int_{\Omega} f(x)\delta(x-x_i)dx = f(x_i), \quad x_i \in \Omega$ (111)

$$0 = \int_{\Omega} R(x; c_0, \dots, c_N) \delta(x - x_i) dx = R(x_i; c_0, \dots, c_N)$$

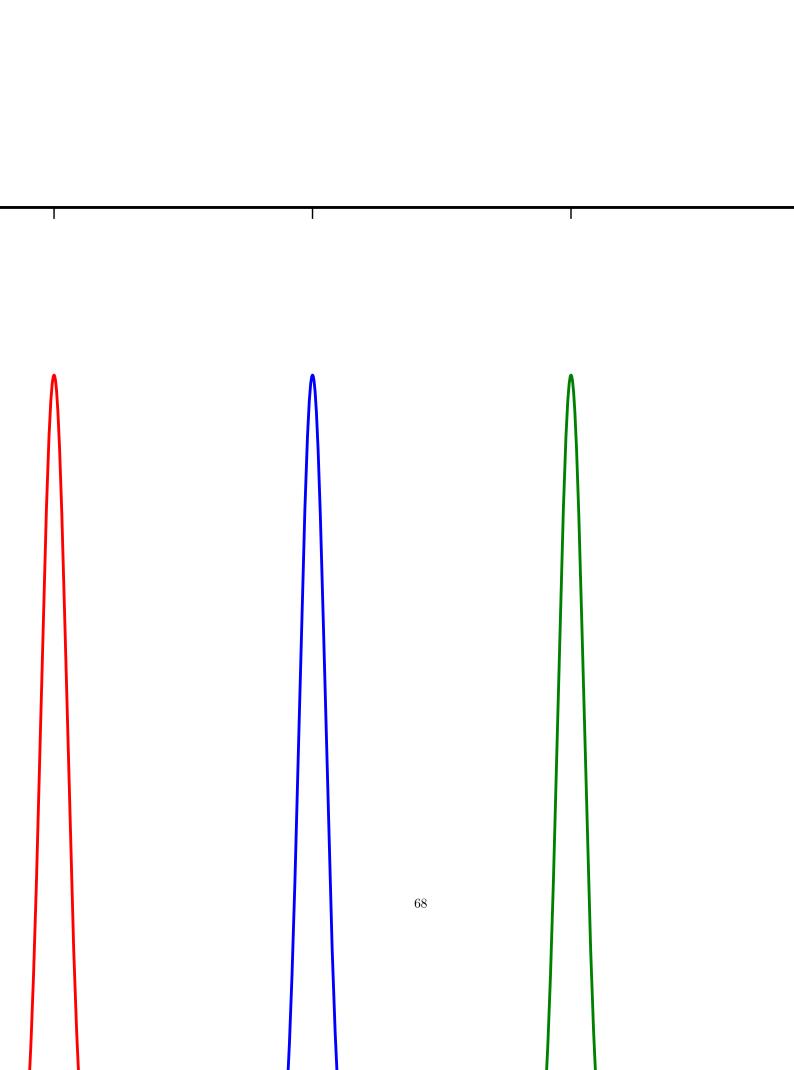

16 Examples on using the principles

Goal.

Exemplify the least squares, Galerkin, and collocation methods in a simple 1D problem with global basis functions.

16.1 The first model problem

$$-u''(x) = f(x), \quad x \in \Omega = [0, L], \quad u(0) = 0, \ u(L) = 0$$
(112)

Basis functions:

$$\psi_i(x) = \sin\left((i+1)\pi\frac{x}{L}\right), \quad i \in I \tag{113}$$

The residual:

$$R(x; c_0, \dots, c_N) = u''(x) + f(x),$$

$$= \frac{d^2}{dx^2} \left(\sum_{j \in I} c_j \psi_j(x) \right) + f(x),$$

$$= -\sum_{j \in I} c_j \psi_j''(x) + f(x)$$
(114)

16.2 Boundary conditions

Since u(0) = u(L) = 0 we must ensure that all $\psi_i(0) = \psi_i(L) = 0$. Then

$$u(0) = \sum_{j} c_{j} \psi_{j}(0) = 0, \quad u(L) = \sum_{j} c_{j} \psi_{j}(L)$$

- \bullet u known: Dirichlet boundary condition
- u' known: Neumann boundary condition
- Must have $\psi_i = 0$ where Dirichlet conditions apply

16.3 The least squares method; principle

$$(R, \frac{\partial R}{\partial c_i}) = 0, \quad i \in I$$

$$\frac{\partial R}{\partial c_i} = \frac{\partial}{\partial c_i} \left(\sum_{j \in I} c_j \psi_j''(x) + f(x) \right) = \psi_i''(x)$$
(115)

Because:

$$\frac{\partial}{\partial c_i} \left(c_0 \psi_0'' + c_1 \psi_1'' + \dots + c_{i-1} \psi_{i-1}'' + c_i \psi_i'' + c_{i+1} \psi_{i+1}'' + \dots + c_N \psi_N'' \right) = \psi_i''$$

16.4 The least squares method; equation system

$$(\sum_{j} c_{j} \psi_{j}'' + f, \psi_{i}'') = 0, \quad i \in I,$$
(116)

Rearrangement:

$$\sum_{i \in I} (\psi_i'', \psi_j'') c_j = -(f, \psi_i''), \quad i \in I$$
(117)

This is a linear system

$$\sum_{i \in I} A_{i,j} c_j = b_i, \quad i \in I,$$

with

$$A_{i,j} = (\psi_i'', \psi_j'')$$

$$= \pi^4 (i+1)^2 (j+1)^2 L^{-4} \int_0^L \sin\left((i+1)\pi \frac{x}{L}\right) \sin\left((j+1)\pi \frac{x}{L}\right) dx$$

$$= \begin{cases} \frac{1}{2} L^{-3} \pi^4 (i+1)^4 & i=j\\ 0, & i \neq j \end{cases}$$
(118)

$$b_i = -(f, \psi_i'') = (i+1)^2 \pi^2 L^{-2} \int_0^L f(x) \sin\left((i+1)\pi \frac{x}{L}\right) dx$$
 (119)

16.5 Orthogonality of the basis functions gives diagonal matrix Useful property:

$$\int_{0}^{L} \sin\left((i+1)\pi\frac{x}{L}\right) \sin\left((j+1)\pi\frac{x}{L}\right) dx = \delta ij, \quad \Rightarrow (\psi_{i}^{"}, \psi_{j}^{"}) = \delta_{ij}, \quad \delta_{ij} = \begin{cases} \frac{1}{2}L & i=j\\ 0, & i\neq j \end{cases}$$
(120)

With diagonal $A_{i,j}$ we can easily solve for c_i :

$$c_i = \frac{2L}{\pi^2(i+1)^2} \int_0^L f(x) \sin\left((i+1)\pi \frac{x}{L}\right) dx$$
 (121)

16.6 Least squares method; solution

Let's sympy do the work (f(x) = 2):

```
from sympy import *
import sys

i, j = symbols('i j', integer=True)
x, L = symbols('x L')
f = 2
a = 2*L/(pi**2*(i+1)**2)
c_i = a*integrate(f*sin((i+1)*pi*x/L), (x, 0, L))
c_i = simplify(c_i)
print c_i
```

$$c_{i} = 4 \frac{L^{2} \left((-1)^{i} + 1 \right)}{\pi^{3} \left(i^{3} + 3i^{2} + 3i + 1 \right)}$$

$$u(x) = \sum_{k=0}^{N/2} \frac{8L^{2}}{\pi^{3} (2k+1)^{3}} \sin \left((2k+1)\pi \frac{x}{L} \right).$$
(122)

- Fast decay: $c_2 = c_0/27$, $c_4 = c_0/125$
- Only one term might be good enough

$$u(x) \approx \frac{8L^2}{\pi^3} \sin\left(\pi \frac{x}{L}\right) .$$

16.7 The Galerkin method; principle

$$(u'' + f, v) = 0, \quad \forall v \in V,$$

or

$$(u'', v) = -(f, v), \quad \forall v \in V \tag{123}$$

This is a variational formulation of the differential equation problem.

 $\forall v \in V$ means for all basis functions:

$$\left(\sum_{i \in I} c_j \psi_j'', \psi_i\right) = -(f, \psi_i), \quad i \in I$$
(124)

16.8 The Galerkin method; solution

Since $\psi_i'' \propto \psi_i$, Galerkin's method gives the same linear system and the same solution as the least squares method (in this particular example).

16.9 The collocation method

R=0 or the differential equation must be satisfied at N+1 points:

$$-\sum_{j\in I} c_j \psi_j''(x_i) = f(x_i), \quad i \in I$$
(125)

This is a linear system $\sum_{i} A_{i,j} = b_i$ with entries

$$A_{i,j} = -\psi_j''(x_i) = (j+1)^2 \pi^2 L^{-2} \sin\left((j+1)\pi \frac{x_i}{L}\right), \quad b_i = 2$$

Choose: $N = 0, x_0 = L/2$

$$c_0 = 2L^2/\pi^2$$

16.10 Comparison of the methods

- Exact solution: u(x) = x(L x)
- Galerkin or least squares (N=0): $u(x)=8L^2\pi^{-3}\sin(\pi x/L)$
- Collocation method (N=0): $u(x) = 2L^2\pi^{-2}\sin(\pi x/L)$.
- Max error in Galerkin/least sq.: $-0.008L^2$
- Max error in collocation: $0.047L^2$

17 Useful techniques

17.1 Integration by parts

Second-order derivatives will hereafter be integrated by parts

$$\int_{0}^{L} u''(x)v(x)dx = -\int_{0}^{L} u'(x)v'(x)dx + [vu']_{0}^{L}$$

$$= -\int_{0}^{L} u'(x)v'(x)dx + u'(L)v(L) - u'(0)v(0)$$
(126)

Motivation:

- Lowers the order of derivatives
- Gives more symmetric forms (incl. matrices)
- Enables easy handling of Neumann boundary conditions
- Finite element basis functions φ_i have discontinuous derivatives (at cell boundaries) and are not suited for terms with φ_i''

17.2 Boundary function; principles

- What about nonzero Dirichlet conditions?
- E.g. u(L) = D
- Problem: $u(L) = \sum_{j} c_{j} \psi_{j}(L) = 0$ always
- Remedy: $u(x) = B(x) + \sum_{j} c_j \psi_j(x)$
- Construct B such that B(0) = u(0), B(L) = u(L)
- No restrictions of how B(x) varies in the interior of Ω

17.3 Boundary function; example

$$u(0) = C$$
 and $u(L) = D$. Choose

$$B(x) = L^{-1}(C(L-x) + Dx): B(0) = C, B(L) = D$$

$$u(x) = L^{-1}(C(L-x) + Dx) + \sum_{j \in I} c_j \psi_j(x), (127)$$

$$u(0) = C, \quad u(L) = 0$$

17.4 Abstract notation for variational formulations

The finite element literature (and much FEniCS documentation) applies an abstract notation for the variational formulation: *Find $(u - B) \in V$ such that

$$a(u, v) = L(v) \quad \forall v \in V$$

17.5 Example on abstract notation

Given a variational formulation for -u'' = f:

$$\int_{\Omega} u'v'dx = \int_{\Omega} fvdx \quad \text{or} \quad (u',v') = (f,v) \quad \forall v \in V$$

Abstract formulation: finn $(u - B) \in V$ such that

$$a(u, v) = L(v) \quad \forall v \in V$$

We identify

$$a(u, v) = (u', v'), L(v) = (f, v)$$

17.6 Bilinear and linear forms

- a(u, v) is a bilinear form
- L(v) is a linear form

Linear form means

$$L(\alpha_1 v_1 + \alpha_2 v_2) = \alpha_1 L(v_1) + \alpha_2 L(v_2),$$

Bilinear form means

$$a(\alpha_1 u_1 + \alpha_2 u_2, v) = \alpha_1 a(u_1, v) + \alpha_2 a(u_2, v),$$

$$a(u, \alpha_1 v_1 + \alpha_2 v_2) = \alpha_1 a(u, v_1) + \alpha_2 a(u, v_2)$$

In nonlinear problems: Find $(u - B) \in V$ such that $F(u; v) = 0 \ \forall v \in V$

17.7 The linear system associated with abstract form

$$a(u, v) = L(v) \quad \forall v \in V$$

is equivalent to

$$a(u, \psi_i) = L(\psi_i) \quad i \in I$$

Insert $u = \sum_{j} c_{j} \psi_{j}$ and use linearity:

$$\sum_{j \in I} a(\psi_j, \psi_i) c_j = L(\psi_i) \quad i \in I$$

This is a linear system

$$\sum_{j \in I} A_{i,j} c_j = b_i, \quad i \in I$$

with

$$A_{i,j} = a(\psi_j, \psi_i)$$
$$b_i = L(\psi_i)$$

17.8 Equivalence with minimization problem

If a(u, v) = a(v, u),

$$a(u, v) = L(v) \quad \forall v \in V,$$

is equivalent to minimizing the functional

$$F(v) = \frac{1}{2}a(v,v) - L(v)$$

over all functions $v \in V$. That is,

$$F(u) \le F(v) \quad \forall v \in V$$
.

- Much used in the early days of finite elements
- Still much used in structural analysis and elasticity
- Not as general as Galerkin's method (since a(u, v) = a(v, u))

18 Examples on variational formulations

Goal.

Derive variational formulations for many prototype differential equations in 1D that include

- variable coefficints
- mixed Dirichlet and Neumann conditions
- nonlinear coefficients

18.1 Variable coefficient; problem

$$-\frac{d}{dx}\left(\alpha(x)\frac{du}{dx}\right) = f(x), \quad x \in \Omega = [0, L], \ u(0) = C, \ u(L) = D.$$
 (128)

- Variable coefficient $\alpha(x)$
- Nonzero Dirichlet conditions at x = 0 and x = L
- Must have $\psi_i(0) = \psi_i(L) = 0$
- $V = \operatorname{span}\{\psi_0, \dots, \psi_N\}$
- $v \in V$: v(0) = v(L) = 0

$$u(x) = B(x) + \sum_{i \in I} c_i \psi_i(x)$$

$$B(x) = C + \frac{1}{L}(D - C)x$$

18.2 Variable coefficient; variational formulation (1)

$$R = -\frac{d}{dx} \left(a \frac{du}{dx} \right) - f$$

Galerkin's method:

$$(R, v) = 0, \quad \forall v \in V,$$

or with integrals:

$$\int_{\Omega} \left(\frac{d}{dx} \left(\alpha \frac{du}{dx} \right) - f \right) v \, \mathrm{d}x = 0, \quad \forall v \in V.$$

18.3 Variable coefficient; variational formulation (2)

Integration by parts:

$$-\int_{\Omega} \frac{d}{dx} \left(\alpha(x) \frac{du}{dx} \right) v \, dx = \int_{\Omega} \alpha(x) \frac{du}{dx} \frac{dv}{dx} \, dx - \left[\alpha \frac{du}{dx} v \right]_{0}^{L}.$$

Boundary terms vanish since v(0) = v(L) = 0

Variational formulation.

Find $(u - B) \in V$ such that

$$\int_{\Omega} \alpha(x) \frac{du}{dx} \frac{dv}{dx} dx = \int_{\Omega} f(x)v dx, \quad \forall v \in V,$$

Compact notation:

$$(\alpha u', v') = (f, v), \quad \forall v \in V$$

18.4 Variable coefficient; abstract notation

$$a(u, v) = L(v) \quad \forall v \in V,$$

$$a(u, v) = (\alpha u', v'), \quad L(v) = (f, v)$$

18.5 Variable coefficient; linear system

 $v = \psi_i$ and $u = B + \sum_j c_j \psi_j$:

$$(\alpha B' + \alpha \sum_{i \in I} c_j \psi'_j, \psi'_i) = (f, \psi_i), \quad i \in I.$$

Reorder to form linear system:

$$\sum_{j \in I} (\alpha \psi'_j, \psi'_i) c_j = (f, \psi_i) + (a(D - C)L^{-1}, \psi'_i), \quad i \in I.$$

This is $\sum_{j} A_{i,j} c_j = b_i$ with

$$A_{i,j} = (a\psi'_j, \psi'_i) = \int_{\Omega} \alpha(x)\psi'_j(x), \psi'_i(x) dx,$$

$$b_i = (f, \psi_i) + (a(D - C)L^{-1}, \psi'_i) = \int_{\Omega} \left(f(x)\psi_i(x) + \alpha(x)\frac{D - C}{L}\psi'_i(x) \right) dx.$$

18.6 First-order derivative in the equation and boundary condition; problem

[[[

Index

```
approximation
    by sines, 13
    collocation, 15
    of functions, 7
    of general vectors, 7
cells list, 45
collocation method (approximation), 15
dof map, 45
dof_map list, 45
edges, 59
faces, 59
finite element, definition, 45
Galerkin method, 7
Gauss-Legendre quadrature, 50
integration by parts, 68
isoparametric mapping, 60
Lagrange (interpolating) polynomial, 16
lumped mass matrix, 44
mapping of reference cells
    isoparametric mapping, 60
mass lumping, 44
mass matrix, 44
Midpoint rule, 49
numerical integration
    Midpoint rule, 49
    Simpson's rule, 49
    Trapezoidal rule, 49
projection, 7
simplex elements, 59
simplices, 59
Simpson's rule, 49
sparse matrices, 41
test function, 63
test space, 63
Trapezoidal rule, 49
trial function, 63
trial space, 63
vertices list, 45
```