




```
<script>
import { TweenLite, Elastic } from 'gsap'
export default {
 data () {
    return {
      points: [],
     numberOfPoints: 25,
  computed: {
    lines () {
      const temp = []
      this.points.map((i, index) => {
        if (index -1 >= 0) {
          temp.push({
            from: [index * 10, this.points[index - 1]],
            to: [index * 10 + 10, this.points[index]]
          })
      return temp
 methods: {
    generatePoints () { "
    },
    newSet () {
      const previousPoints = this.points.slice()
      const newPoints = this.generatePoints()
      TweenLite.defaultEase = Elastic.easeOut.config(1, 0.3)
      TweenLite.to(previousPoints, 2, newPoints)
      newPoints.onUpdate = () => {
        previousPoints.forEach((i, index) => {
          this.$set(this.points, index, i)
        })
  },
  mounted () {
    this.points = this.generatePoints()
</script>
```



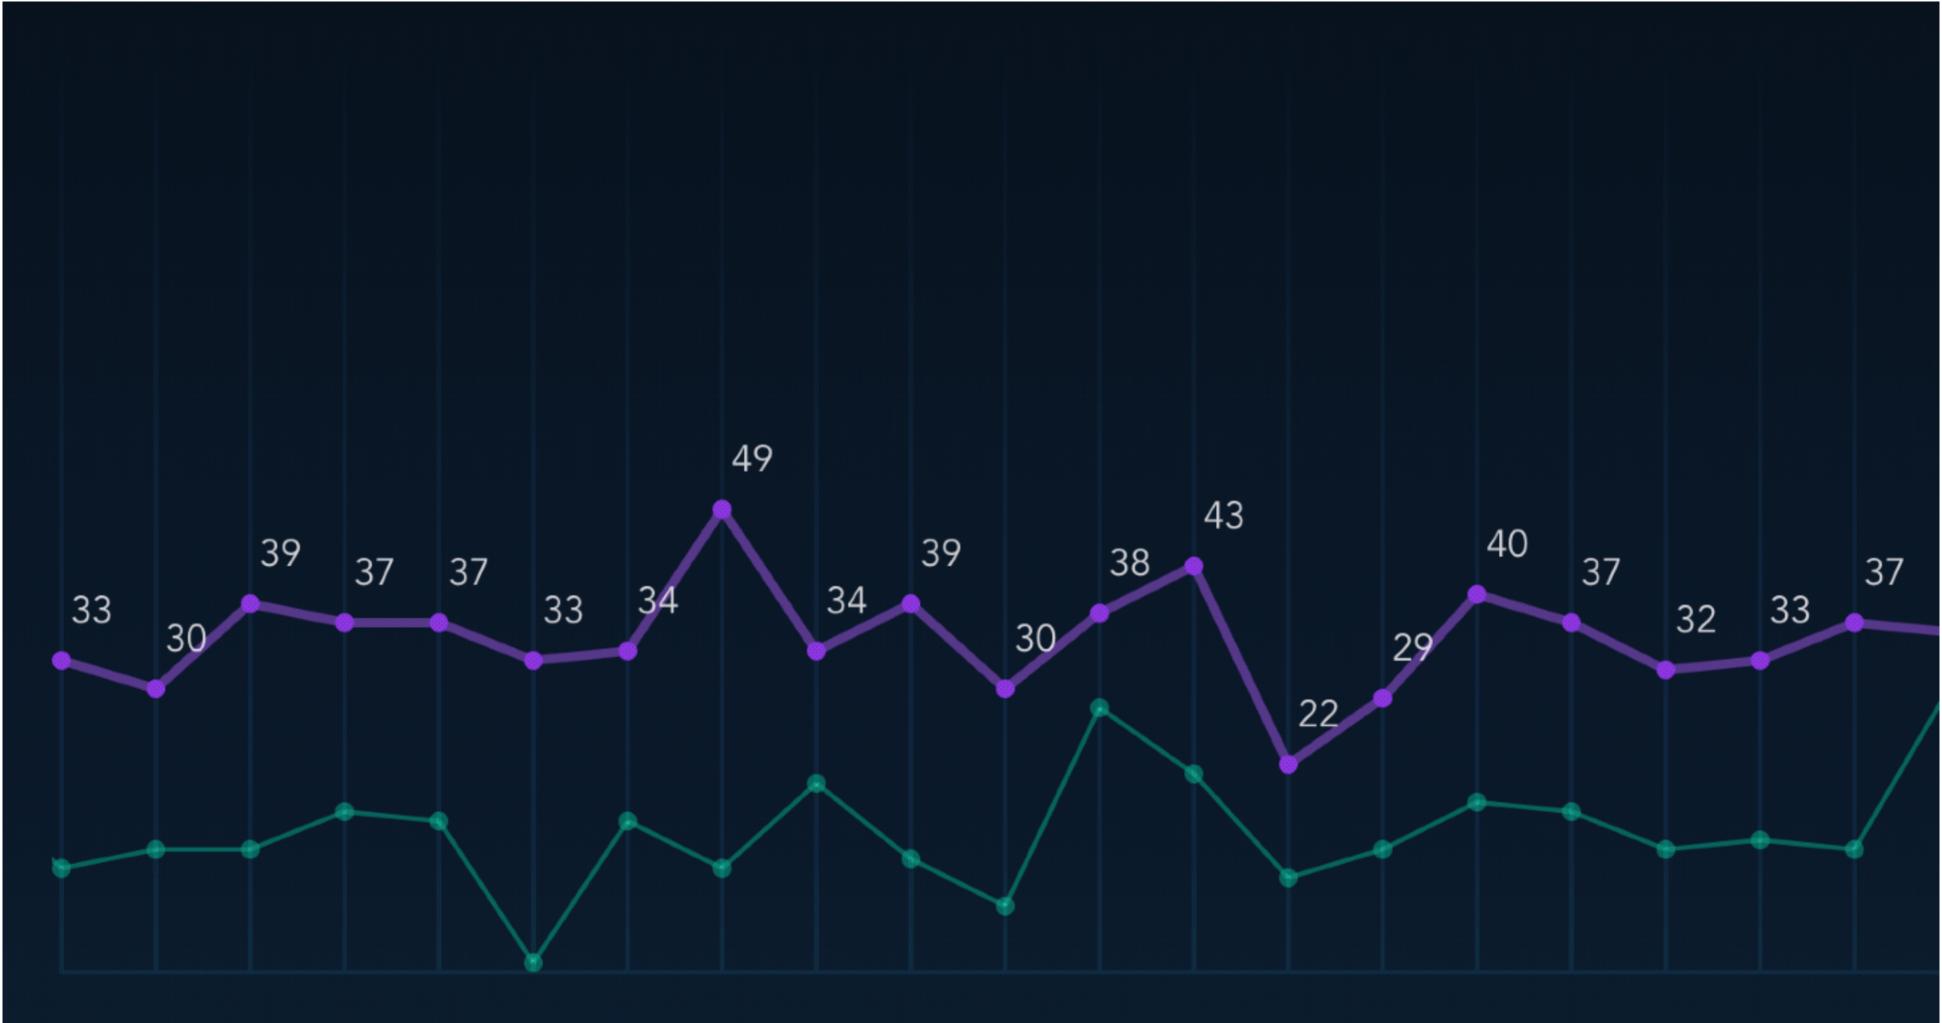

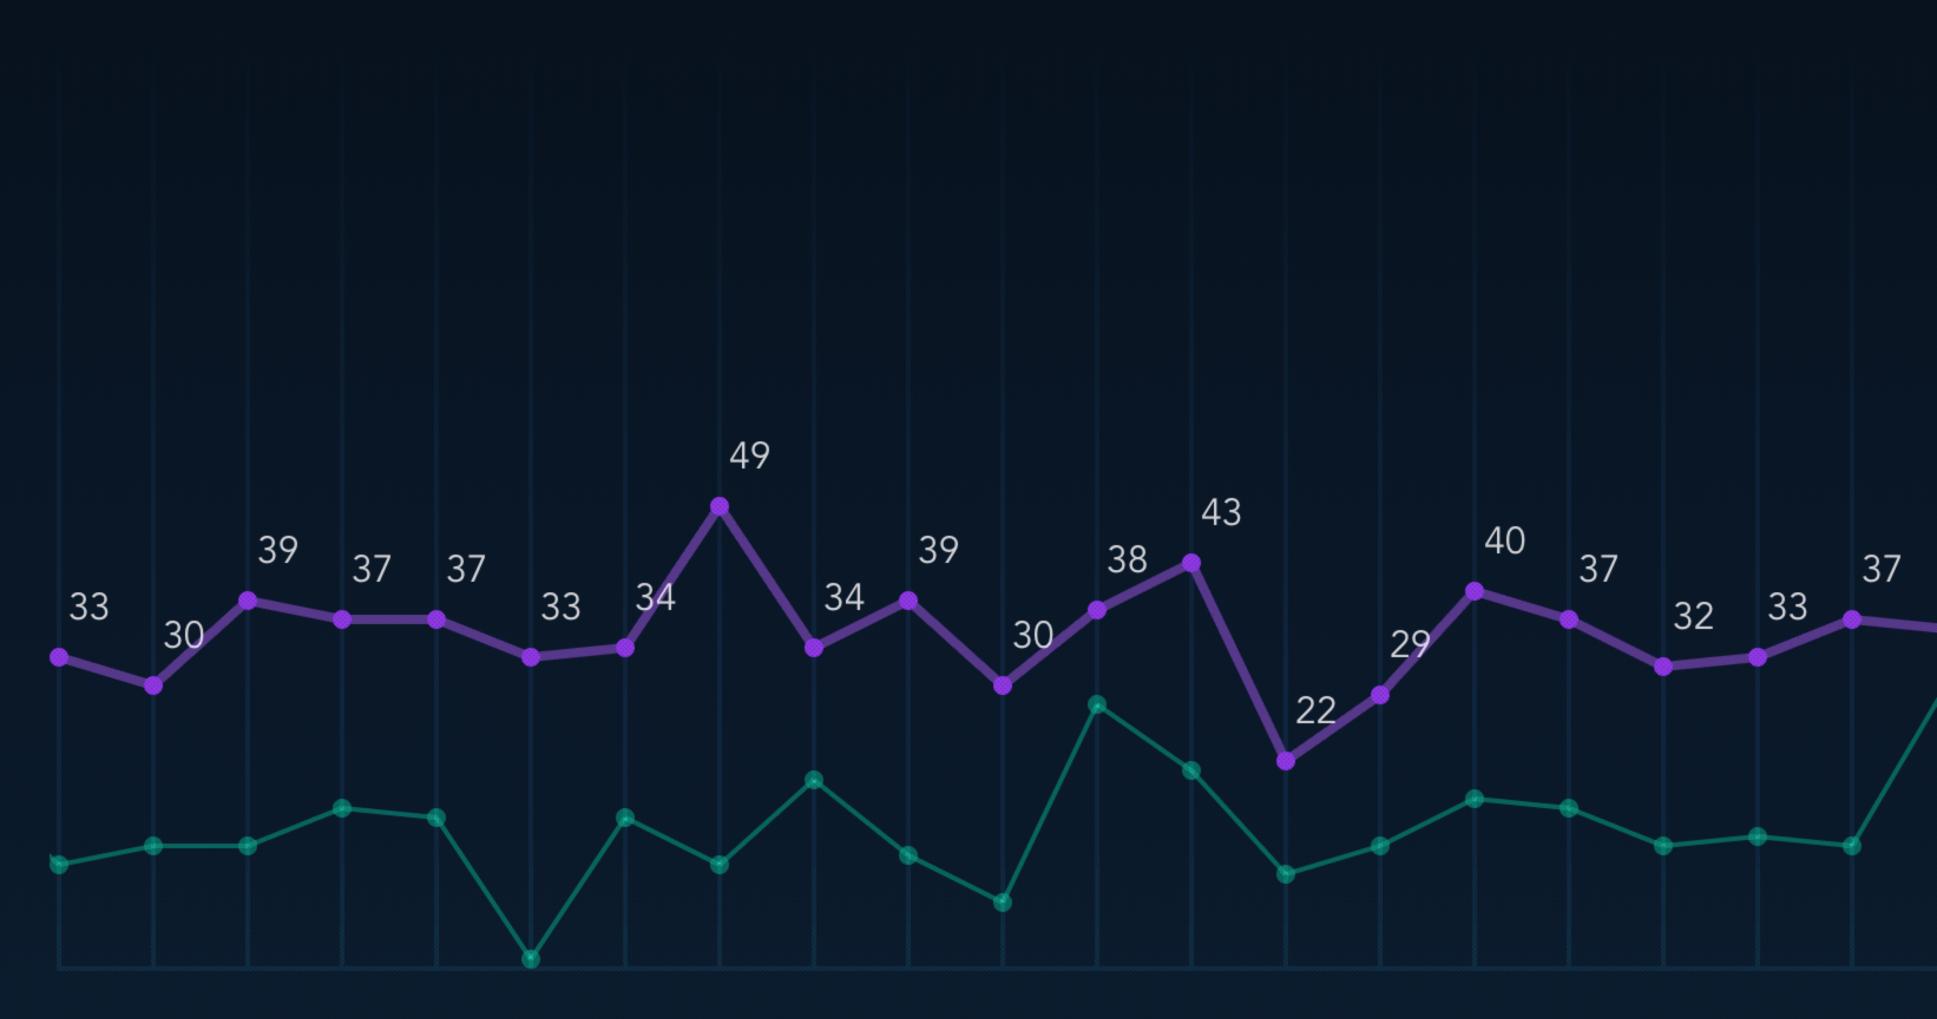

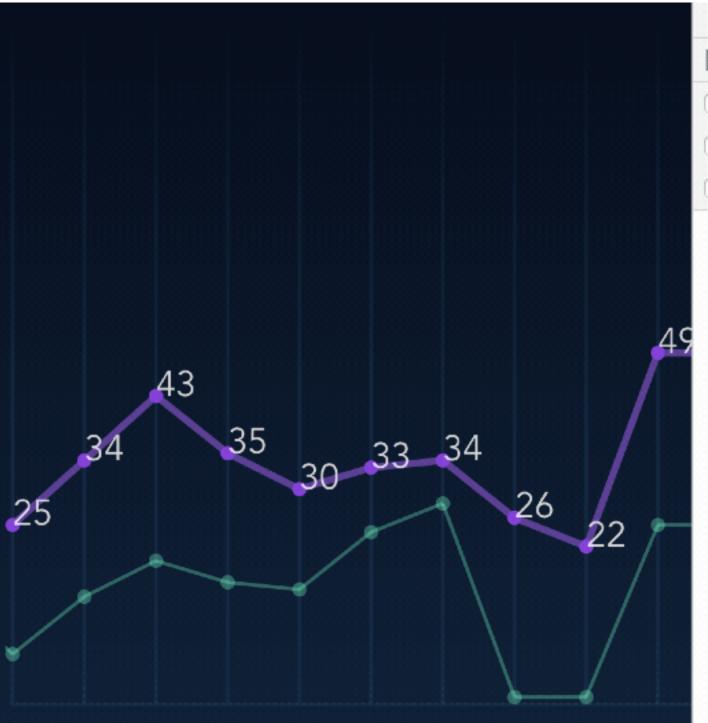

**NEW DATA SET** 

