localhost:8080/#/parent/1

PAGE
TRANSITIONS

home • **parent** • another

Nested routes

| Child 1

Child 2

Child 3

1

```pug
Parent.vue example2/src/components
1    <template lang="pug">
2     div
3      h2 Nested routes
4      ul.menu.menu--vertical
5        router-link.menu__item(
6          tag='li'
7          active-class='menu__item--active'
8          to='/parent/1'
9        )
10         a Child 1
11       router-link.menu__item(
12         tag='li'
13         active-class='menu__item--active'
14         to='/parent/2'
15       )
16         a Child 2
17       router-link.menu__item(
18         tag='li'
19         active-class='menu__item--active'
20         to='/parent/3'
21       )
22         a Child 3
23     .child-wrapper
24       transition(:name='transitionName')
25         router-view.child-view(:key='$route.path')
26   </template>
27
28   <script>
29   export default {
30     data () {
31       return {
32         transitionName: 'slide-up'
33       }
34     },
35     beforeRouteUpdate (to, from, next) {
36       console.log(to)
37       this.transitionName = to.params.child < from.params.child
38                             ? 'slide-down' : 'slide-up'
39       next()
40     }
41   }
42   </script>
43
```
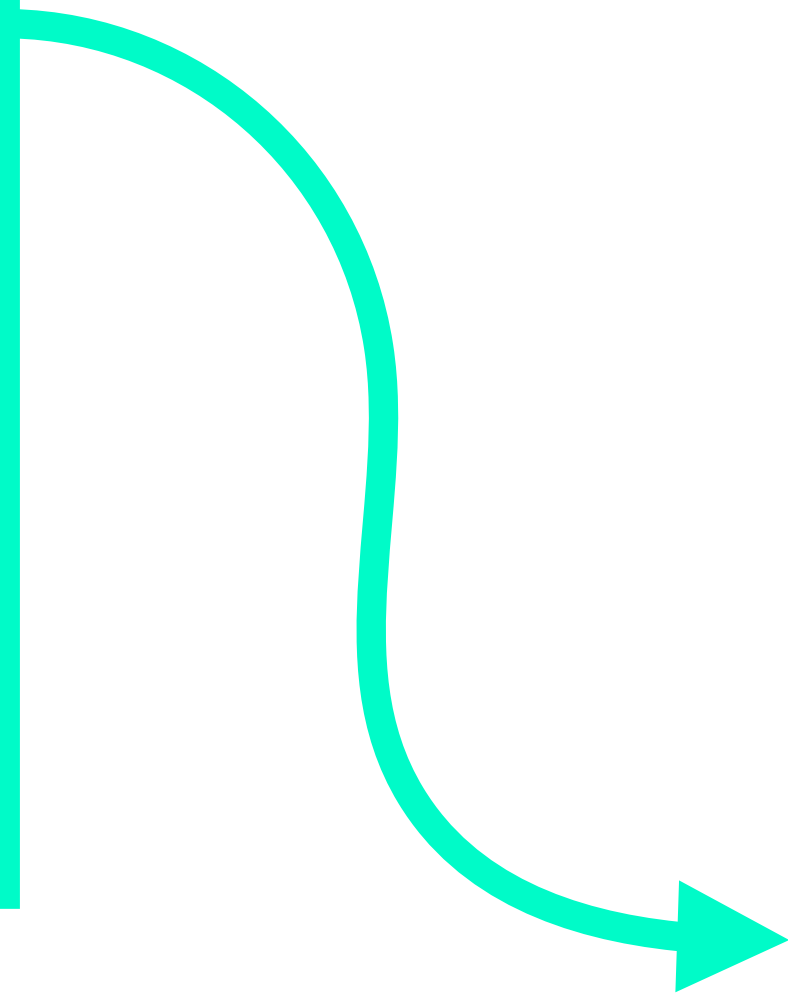
```css
.slide-up-enter,
.slide-down-leave-active {
  opacity: 0;
  transform: translate(0, 300px);
}

.slide-up-leave-active,
.slide-down-enter {
  opacity: 0;
  transform: translate(0, -300px);
}
```

PAGE
TRANSITIONS

home • parent • another

Nested routes

| Child 1

Child 2

Child 3

1

PAGE
TRANSITIONS

home • parent • another

Nested routes

| Child 1

Child 2

Child 3

1

▼ Parent.vue example2/src/components

```pug
<template lang="pug">
 div
  h2 Nested routes
  ul.menu.menu--vertical
    router-link.menu__item(
      tag='li'
      active-class='menu__item--active'
      to='/parent/1'
    )
      a Child 1
    router-link.menu__item(
      tag='li'
      active-class='menu__item--active'
      to='/parent/2'
    )
      a Child 2
    router-link.menu__item(
      tag='li'
      active-class='menu__item--active'
      to='/parent/3'
    )
      a Child 3
  .child-wrapper
    transition(:name='transitionName')
      router-view.child-view(:key='$route.path')
</template>

<script>
export default {
  data () {
    return {
      transitionName: 'slide-up'
    }
  },
  beforeRouteUpdate (to, from, next) {
    console.log(to)
    this.transitionName = to.params.child < from.params.child
                        ? 'slide-down' : 'slide-up'
    next()
  }
}
</script>
```

PAGE TRANSITIONS

Group Transitions

10	11	8	12
5	7	3	2
9	1	6	4

SHUFFLE!