



Foglight Dashboard & Report Customization

Kyle Wang

Quest™

QUEST CONFIDENTIAL AND PROPRIETARY

This document (the “Document”) contains confidential information, trade secrets, and intellectual property of Quest. You may not reverse engineer, copy, modify, publish, disclose or disseminate any part of the Document without written permission from Quest. You have the privilege to use the Document solely for your internal use and solely as necessary for you to benefit under the applicable agreement you have executed with Quest.

© 2017 Quest Software Inc.
ALL RIGHTS RESERVED.

This copyright notice does not imply publication of the Document or its contents.

Quest™, Foglight™, and the Quest logo are trademarks of Quest Software Inc. All other trademarks are property of their respective owners.

Course Objectives

- During this course we will cover:
 - Build a CIO Dashboard step by step.
 - Build a CIO Report step by step.



What is WCF

- WCF stands for Web Console Framework
- Can be very easy (Drag and Drop)
- Can be very powerful and flexible
 - Many Components to choose
 - Kinds of Renderers for rendering
 - Support Java/Groovy to do anything
 - Easy to bind Monitoring Data Model
 - ...

Preparation

Quest™



Preparation

Get Resources

- Get Resources from a Flash Disk or
- Download from Github:
https://github.com/Foglight/DevCamp2017/tree/master/CIO_Dashboard

Preparation

Assign Developer Role

The screenshot shows two windows from the Foglight User Management interface. The left window is the main dashboard, and the right window is a detailed view of user management.

Main Dashboard (Left):


- Navigation:** Shows sections like Bookmarks, Homes, Dashboards, and Users & Security.
- Users & Security Management:** A dashboard with sections for User Look Up, Manage Users, Groups, Roles, Password Policy Settings, Directory Services Settings, and User Session Settings.

User Management (Right):

- User Management Overview:** Shows 1 user, 4 groups, and 14 roles. A red box highlights the "Take on 9 roles" button.
- Role Selection:** A list of roles with checkboxes. The "Cartridge Developer" role is highlighted with a red box.

• Preparation

- Install cartridge “Topology-Helper-Tools-5_6_2.car”
- Install “CIO-Dashboard-Get-Started-1_0_0.car”.

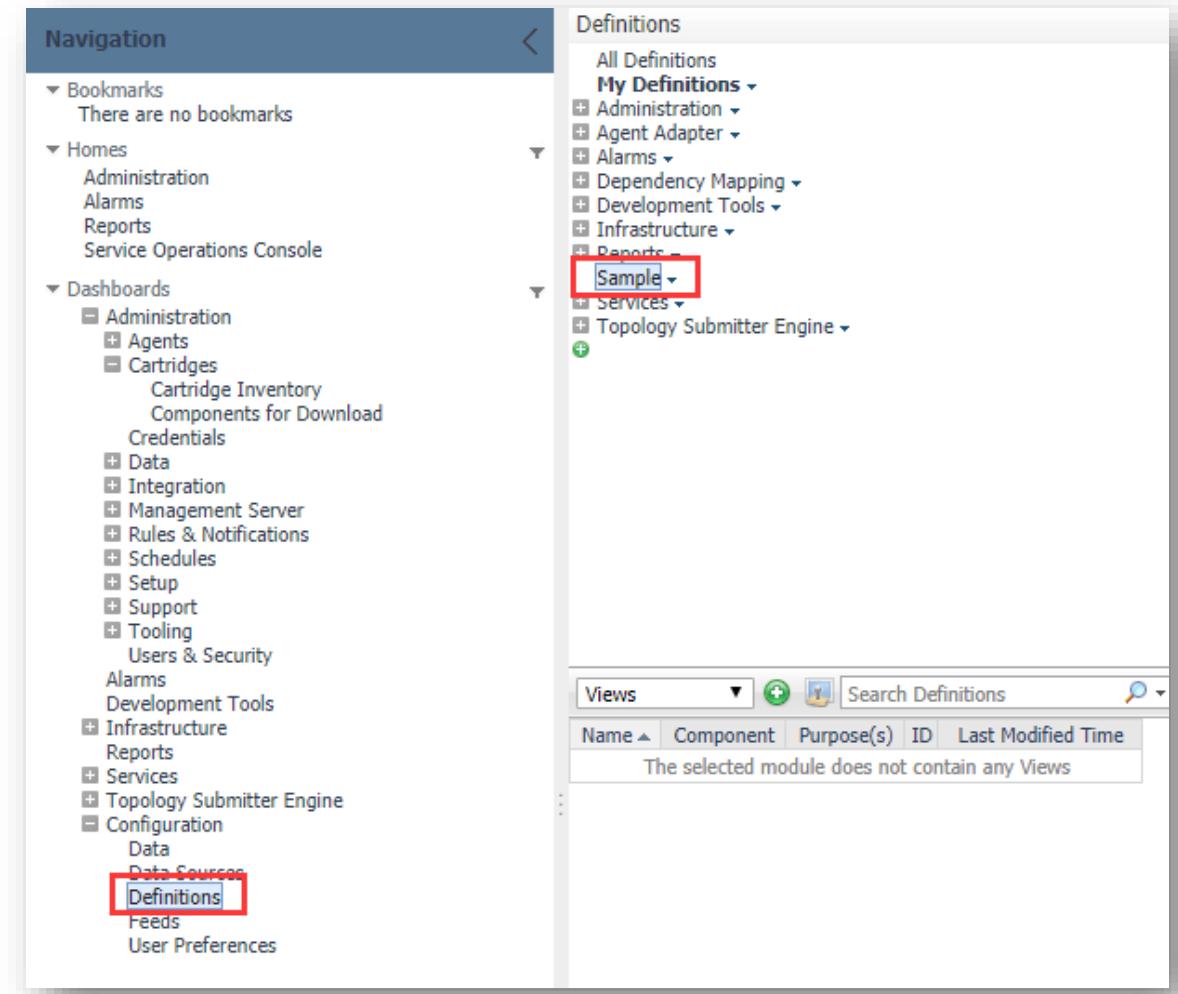

• Preparation

• Simulate Data and Verify

- Run function: Sample → Function → *Simulate Hosts* → Test

The screenshot displays two main windows from the Service Operations Console.

Left Window: A "Functions" list view. A new function named "Simulate Hosts" has been created and is highlighted with a red box. The "Edit" button is also highlighted with a red box.


Name	Type	Return Type	ID	Last Modified Time
Generated Hosts	Script	SampleList of Hosts	generatedHosts	10/10/17 10:10 PM
Group Host By OS Type	Script	SampleList of OSObjContainers	groupHostByOSType	10/10/17 10:30 AM
Location Data	Script	CommonList of Strings	locationData	5/19/16 10:20 AM
Retrieves Location Info	Script	SampleList of LocationInfo	retrieveLocationInfo	5/18/16 9:03 PM
Simulate Hosts	Script	MonitoringList of Hosts	simulateHosts	10/11/17 9:29 AM

Right Window: An "Infrastructure Environment" monitoring dashboard. It shows a summary of hosts across various operating systems (Windows, Linux, Solaris, AIX, ADX, HPUX) and provides real-time monitoring for CPU, Network, Memory, and Disk utilization. A specific host, "app-2", is highlighted with a red box in the legend and selected in the "Selected Service All Hosts" list.

Bottom Left: A "FAQs" section asking, "What are the hosts with highest memory utilization?"


- Preparation

- Enable preview functionality to use Map

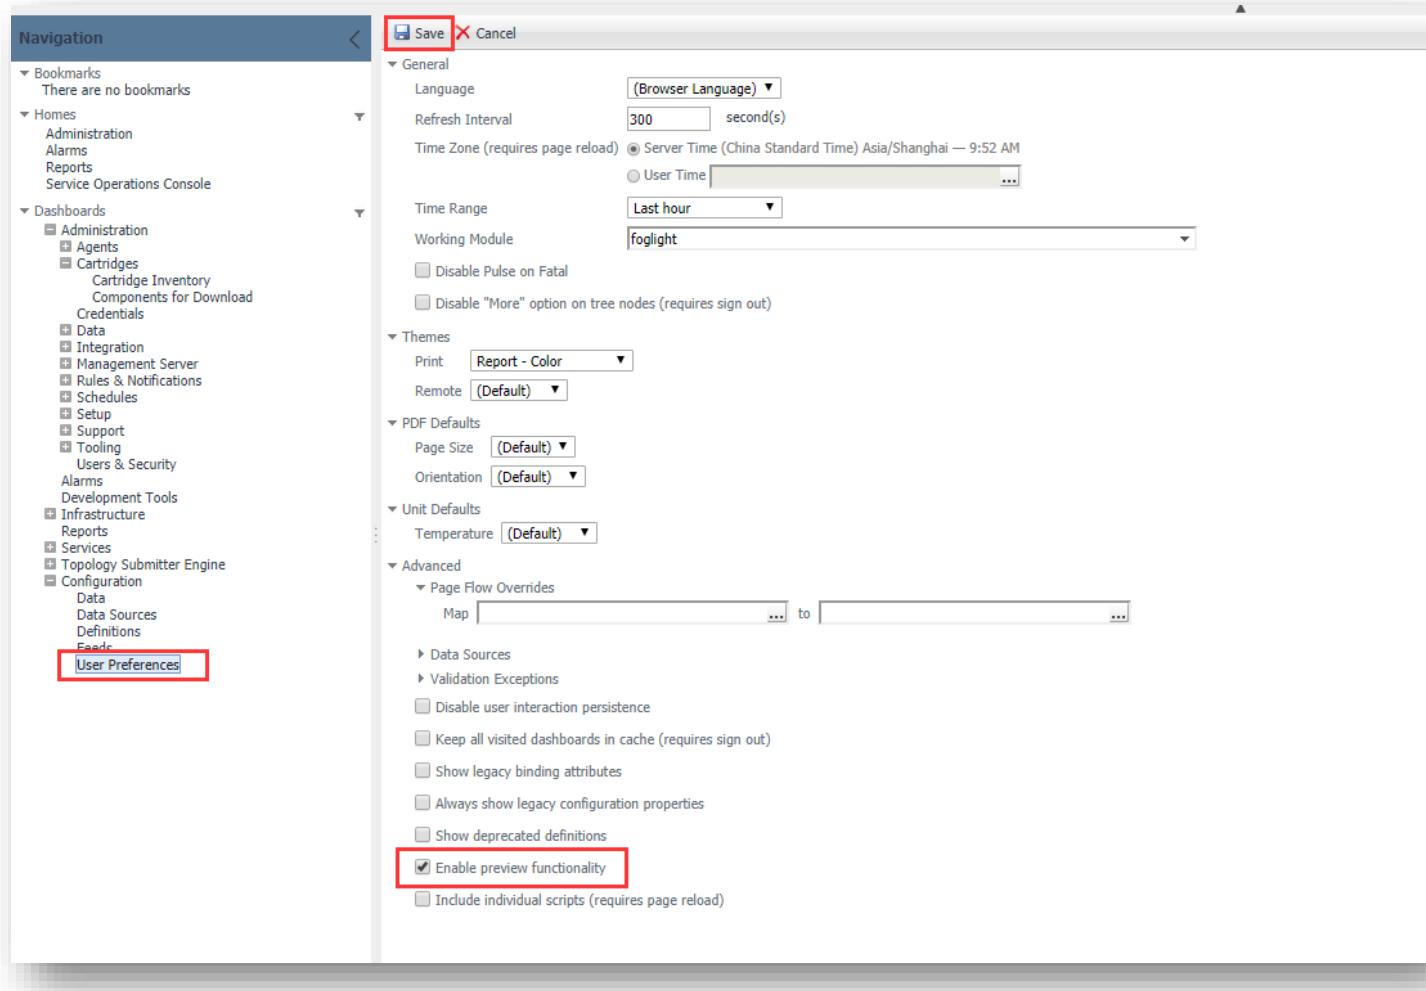

Use Case

- You have many hosts that have different applications running on.
- The applications belong to different tiers, Web, Database, App, etc.
- You want to know the health for each tier.
- Each tier is a service contains the hosts.

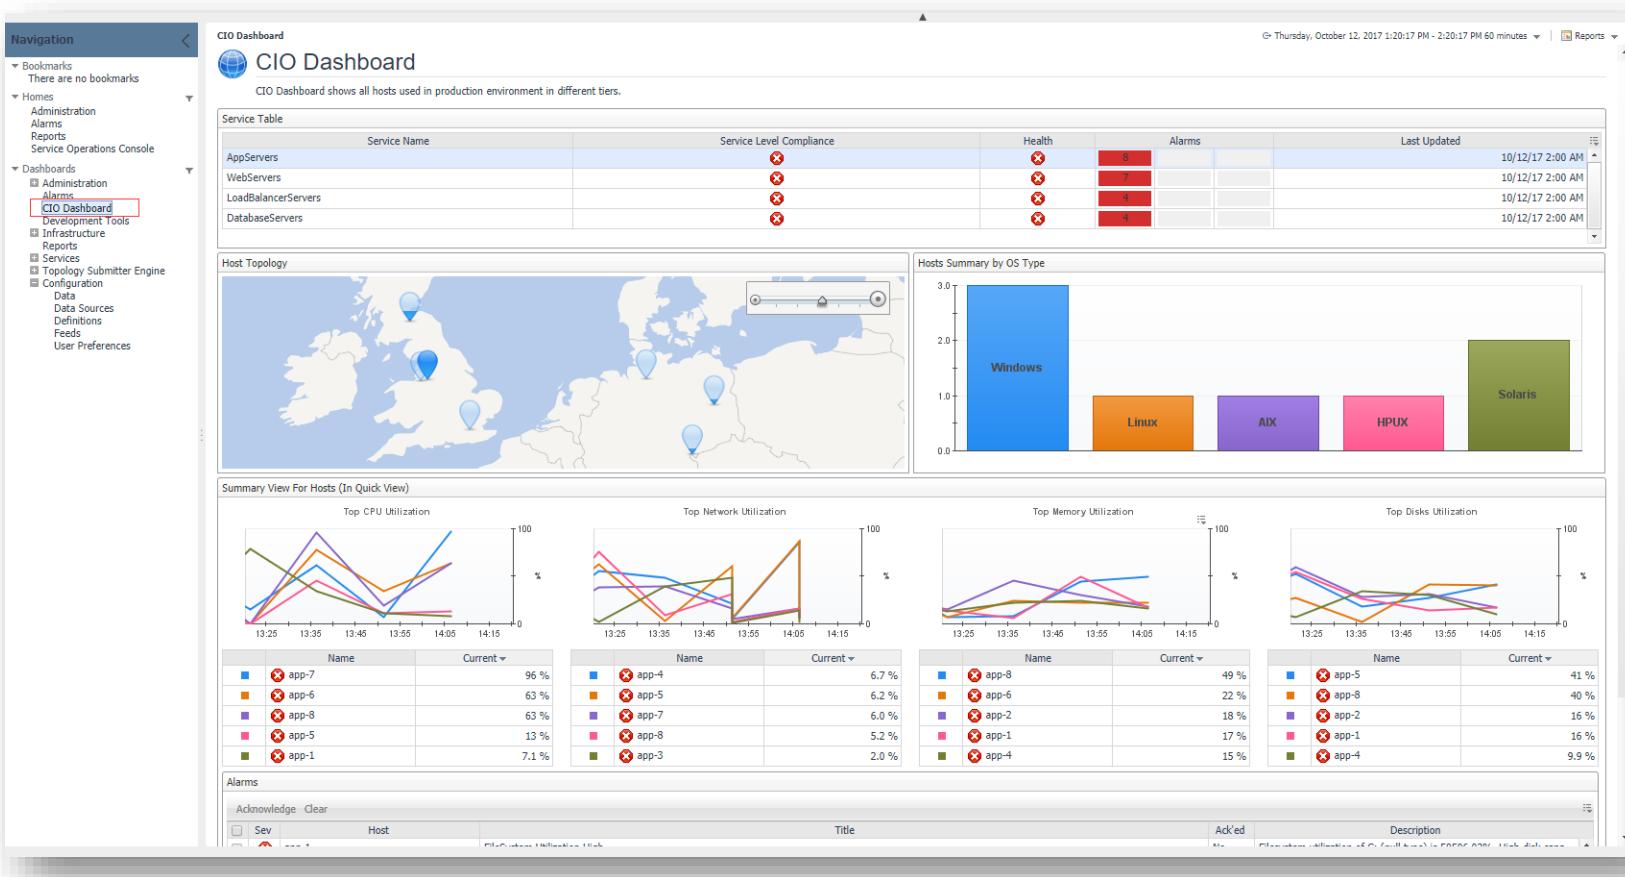

Build Services

Quest™



Lesson Objectives


- During this lesson we will cover:
 - Services Builder dashboard usage
 - Add root data for CIO dashboard



Build Services

Add a Category


- Add a Service Category named “*Production Environment*”

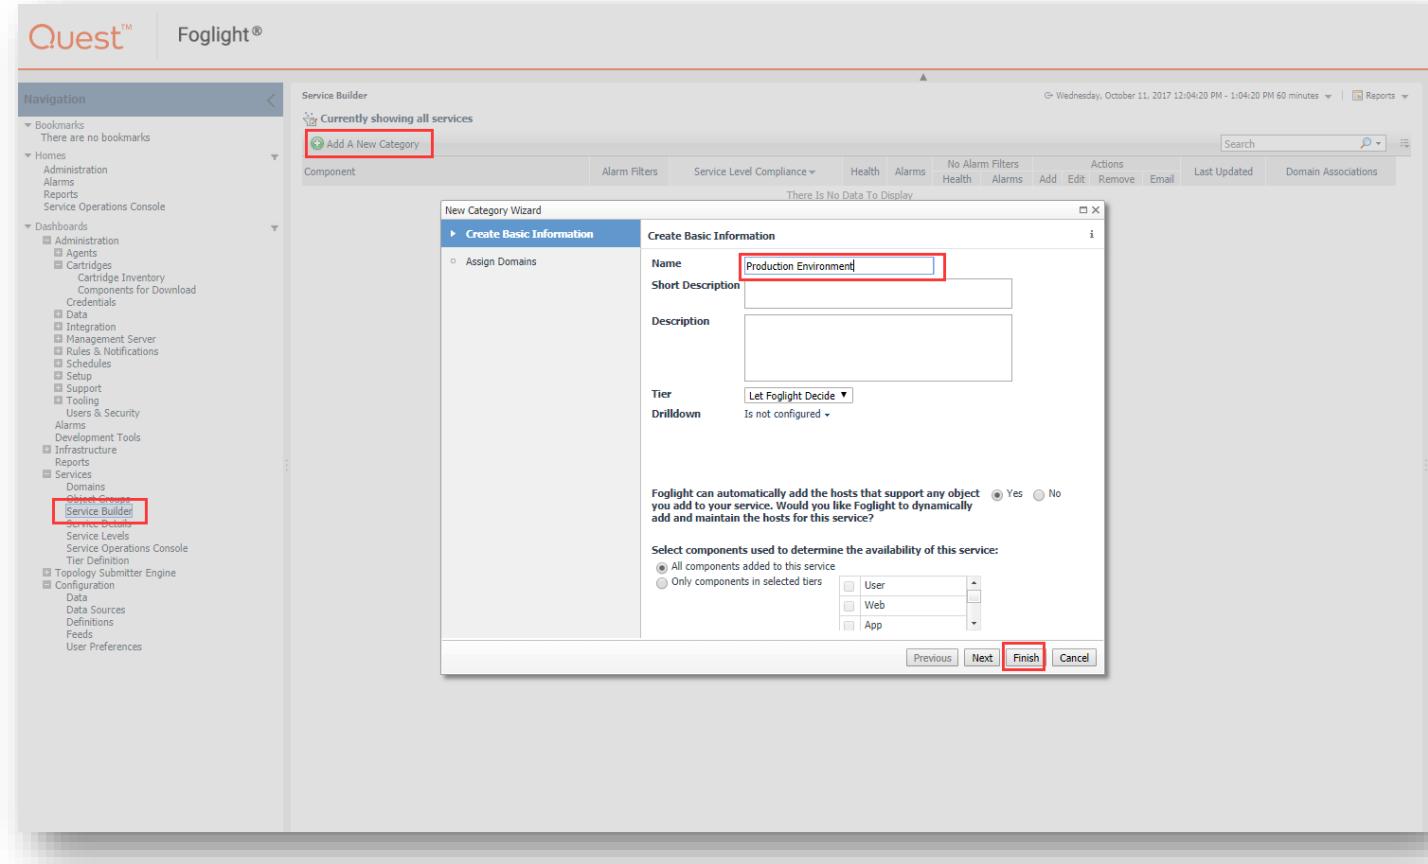

Build Services

Add Child Services


- WebServers
- LoadBalancerServers
- AppServers
- DatabaseServers

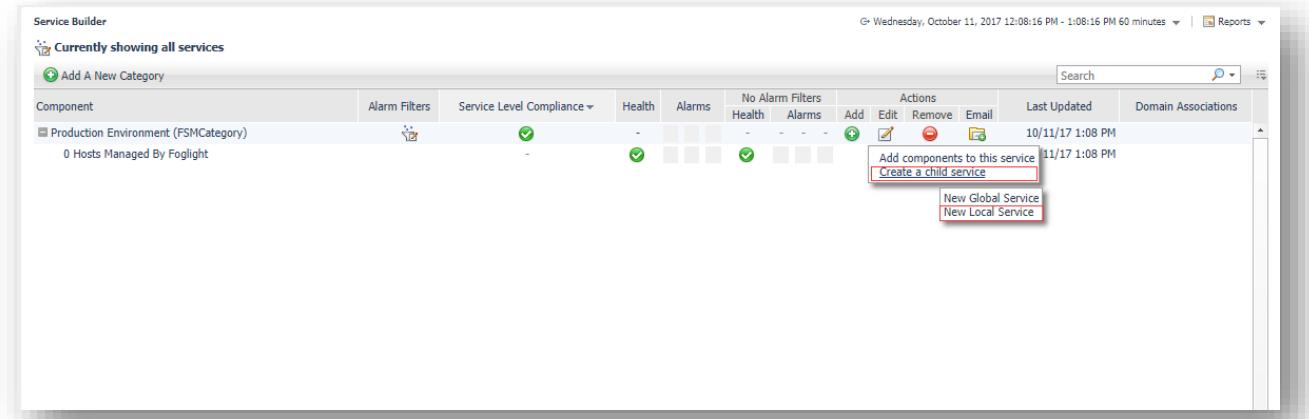

Build Services

Add Child Service Components

- WebServers
 - name like 'web-%'
- LoadBalancerServers
 - name like 'lb-%'
- AppServers
 - name like 'app-%'
- DatabaseServers
 - name like 'db-%'

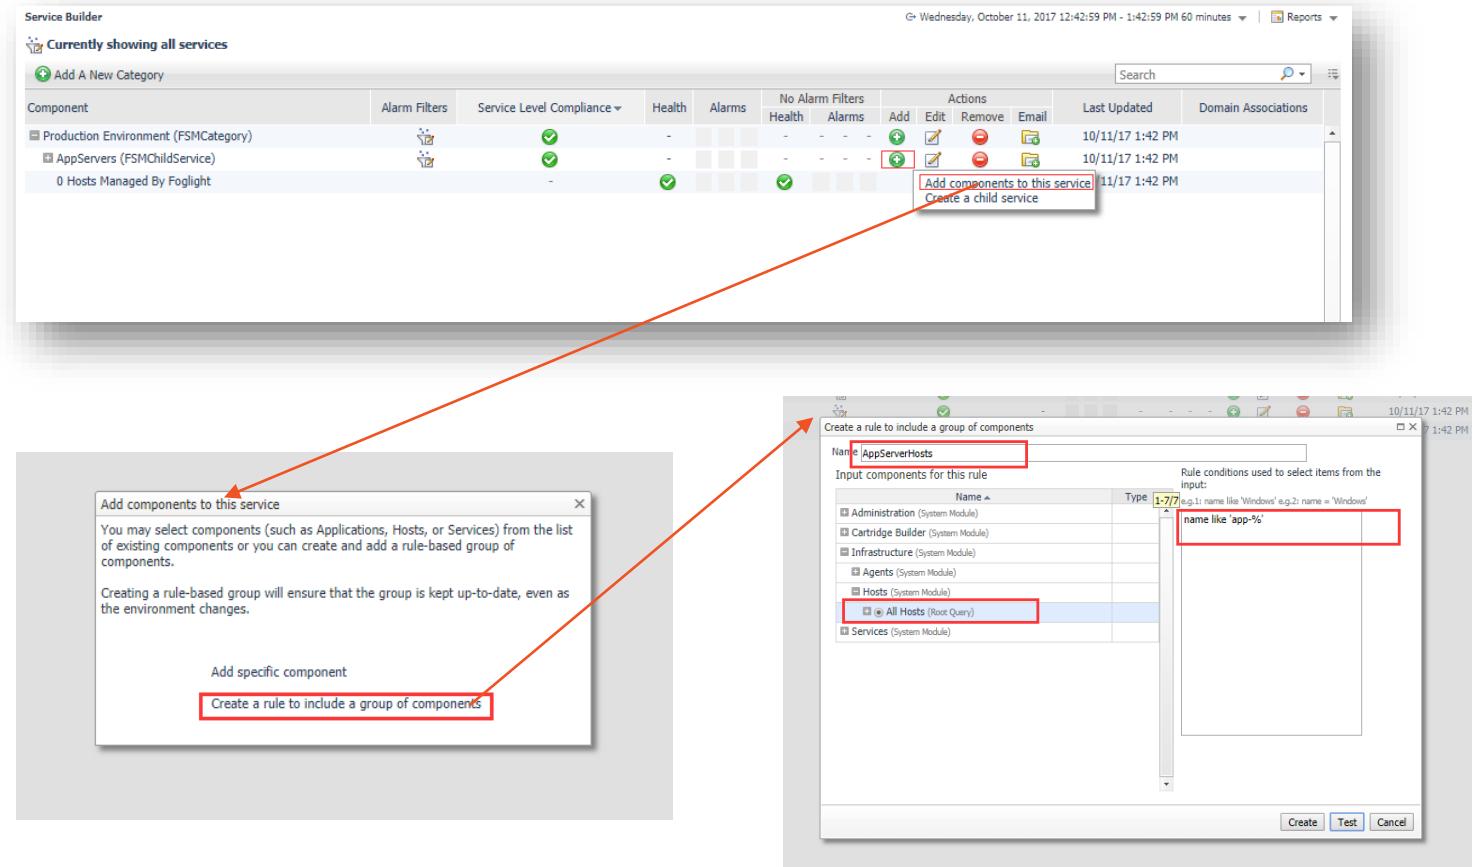

Build Service

The Whole Category Overview

Component	Alarm Filters	Service Level Compliance	Health	Alarms	No Alarm Filters		Actions				Last Updated	Domain Associations	
					Health	Alarms	Add	Edit	Remove	Email			
Production Environment (FSMCategory)			-	23	-	-					10/11/17 2:03 PM		
LoadBalancerServers (FSMChildService)			-	4	-	-					10/11/17 2:03 PM		
LoadBalancerServerHosts (FSMDynamicManagedCompo			-	4	4	4						10/11/17 2:03 PM	
+ 4 Hosts Managed By Foglight			-	4	4	4						10/11/17 2:03 PM	
WebServers (FSMChildService)			-	7	-	-					10/11/17 1:59 PM		
WebServerHosts (FSMDynamicManagedComponent)			-	7	7	7						10/11/17 1:59 PM	
+ 7 Hosts Managed By Foglight			-	7	7	7						10/11/17 1:59 PM	
AppServers (FSMChildService)			-	8	-	-					10/11/17 1:57 PM		
AppServerHosts (FSMDynamicManagedComponent)			-	8	8	8						10/11/17 1:57 PM	
+ 8 Hosts Managed By Foglight			-	8	8	8						10/11/17 1:57 PM	
DatabaseServers (FSMChildService)			-	4	-	-					10/11/17 2:04 PM		
DatabaseServerHosts (FSMDynamicManagedComponent)			-	4	4	4						10/11/17 2:04 PM	
+ 4 Hosts Managed By Foglight			-	4								10/11/17 2:04 PM	
0 Hosts Managed By Foglight			-									10/11/17 2:03 PM	

Make the Dashboard

Quest™



Lesson Objectives

- During this lesson we will cover:
 - How to add a Query
 - How to add a View
 - How to use Layout



Make Service Table

Quest™


Goal for Service Table

Service Table

G Wednesday, October 11, 2017 3:43:37 PM - 4:43:37 PM 60 minutes | Reports ▾

Service Name	Service Level Compliance	Health	Alarms			Last Updated
AppServers	✗	✗	8			10/11/17 1:57 PM
WebServers	✗	✗	7			10/11/17 1:59 PM
LoadBalancerServers	✗	✗	4			10/11/17 2:03 PM
DatabaseServers	✗	✗	4			10/11/17 2:04 PM

Add a Query

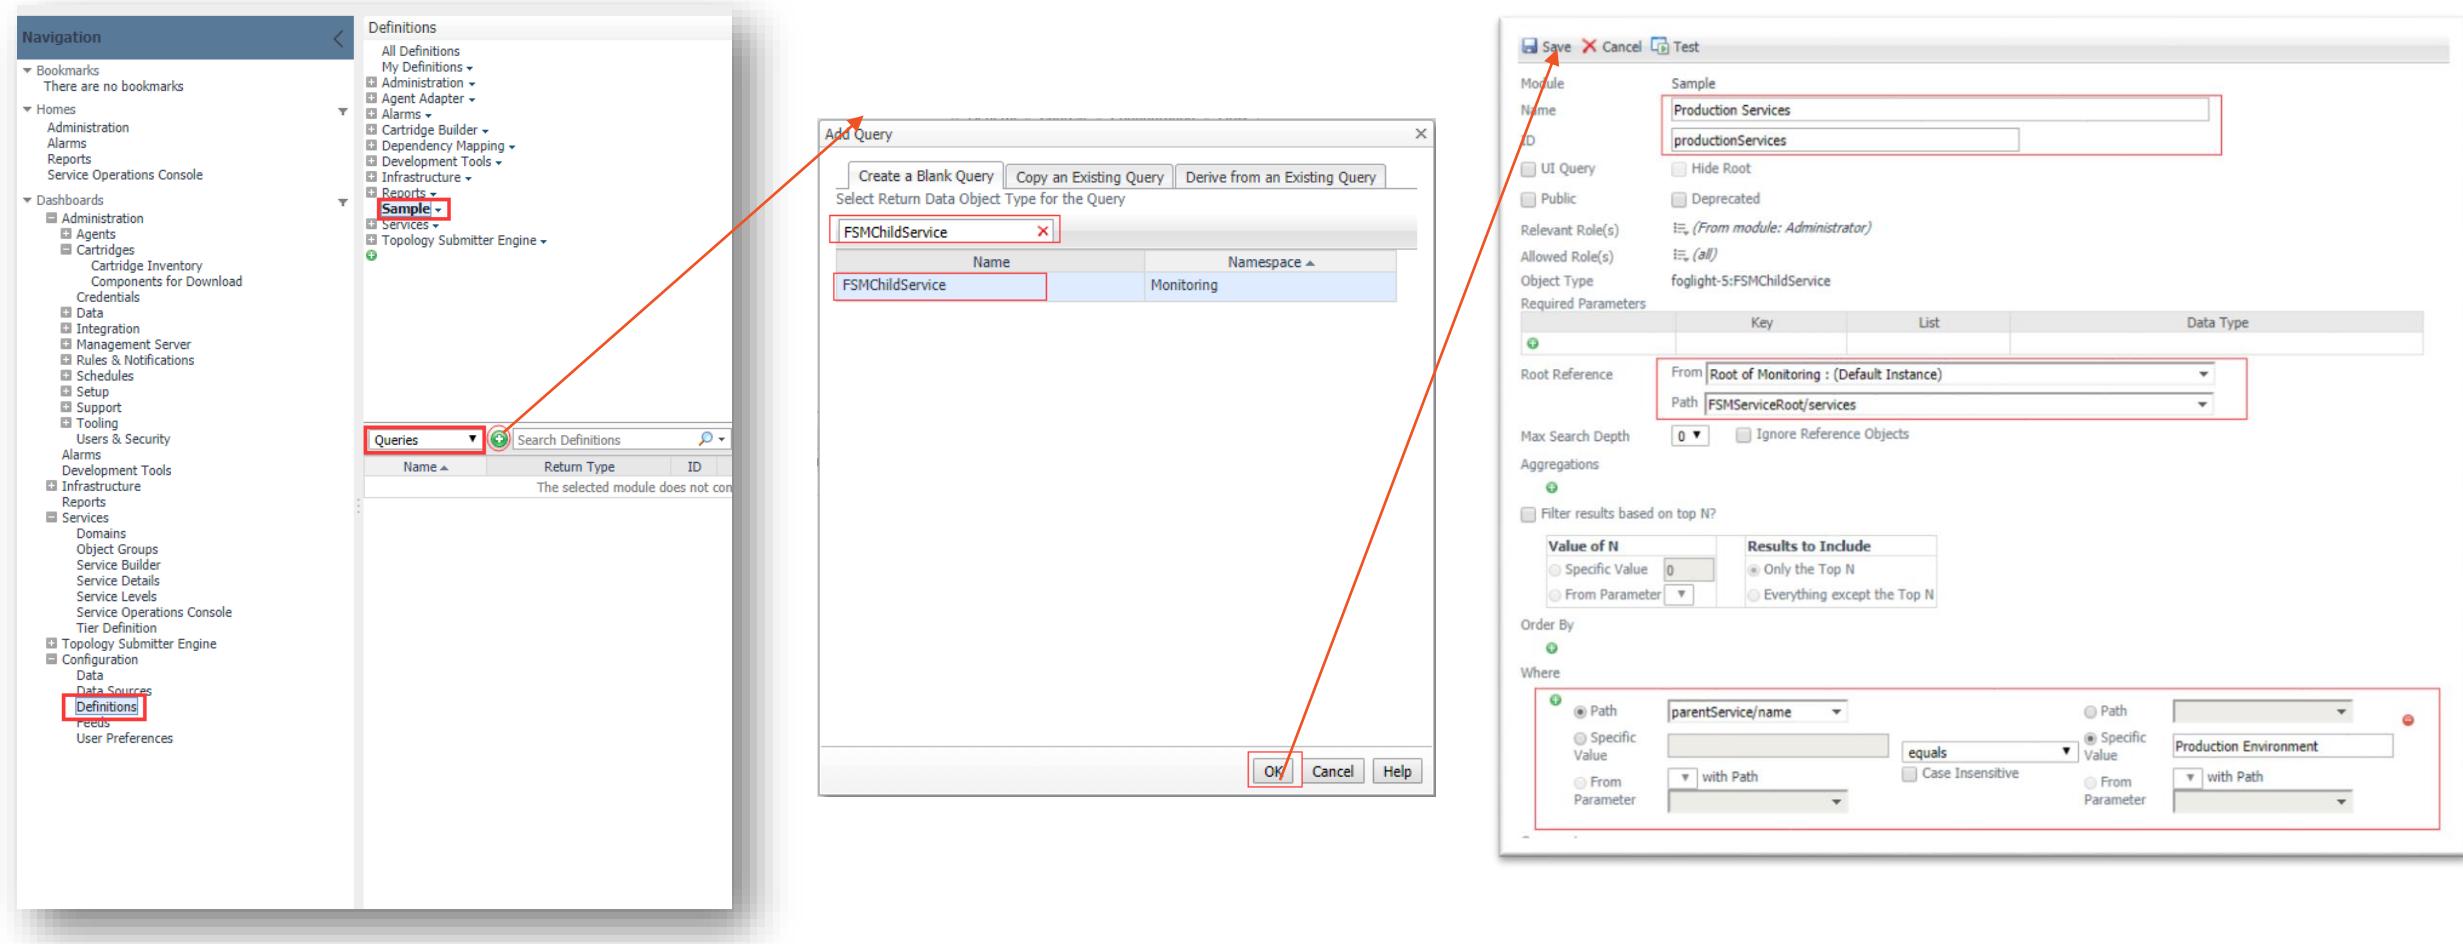

Add a Row-Oriented Table

The screenshot shows the Service Operations Console navigation pane on the left and the 'Add View' dialog on the right.

Navigation:

- Bookmarks
- Homes
- Dashboards
- Definitions
- Views
- Search Definitions

Definitions:

- All Definitions
- My Definitions
- Administration
- Agent Adapter
- Alarms
- Cartridge Builder
- Dependency Mapping
- Development Tools
- Infrastructure
- Reports
- Sample
- Services
- Topology Submitter Engine

Add View Dialog:

Row-Oriented Table


A red box highlights the 'Row-Oriented Table' option under 'Tables and Trees'.

Example:


Date	Time	Acked	Clear	Instance	Message
12/08/09	5:17PM	N	N	...	No agent framework clients are running on
12/08/09	5:17PM	N	N	...	No agent framework clients are running on
12/08/09	5:17PM	N	N	...	No agent framework clients are running on
12/08/09	5:17PM	N	N	...	No agent framework clients are running on
12/08/09	5:17PM	N	N	...	No agent framework clients are running on
12/08/09	5:17PM	N	N	...	No agent framework clients are running on
12/08/09	7:35PM	N	N	EventLog	NT Event Log: System EventLog The prev
12/08/09	7:35PM	N	N	EventLog	NT Event Log: System EventLog The prev
12/08/09	11:52 AM	N	N	EventLog	NT Event Log: System Windows Update Ag
12/08/09	9:40 AM	N	N	EventLog	NT Event Log: System W32Time 86400
12/08/09	9:55 PM	N	N	EventLog	NT Event Log: System W32Time 86400
12/08/09	9:55 PM	N	N	EventLog	NT Event Log: System Terville\Devices Di
12/08/09	10:29 AM	N	N	EventLog	NT Event Log: System Terville\Devices Di
12/08/09	10:29 AM	N	N	EventLog	NT Event Log: System Terville\Devices Di
12/08/09	10:29 AM	N	N	EventLog	NT Event Log: System Terville\Devices Di

OK button is highlighted with a red box.

General Setup for Table

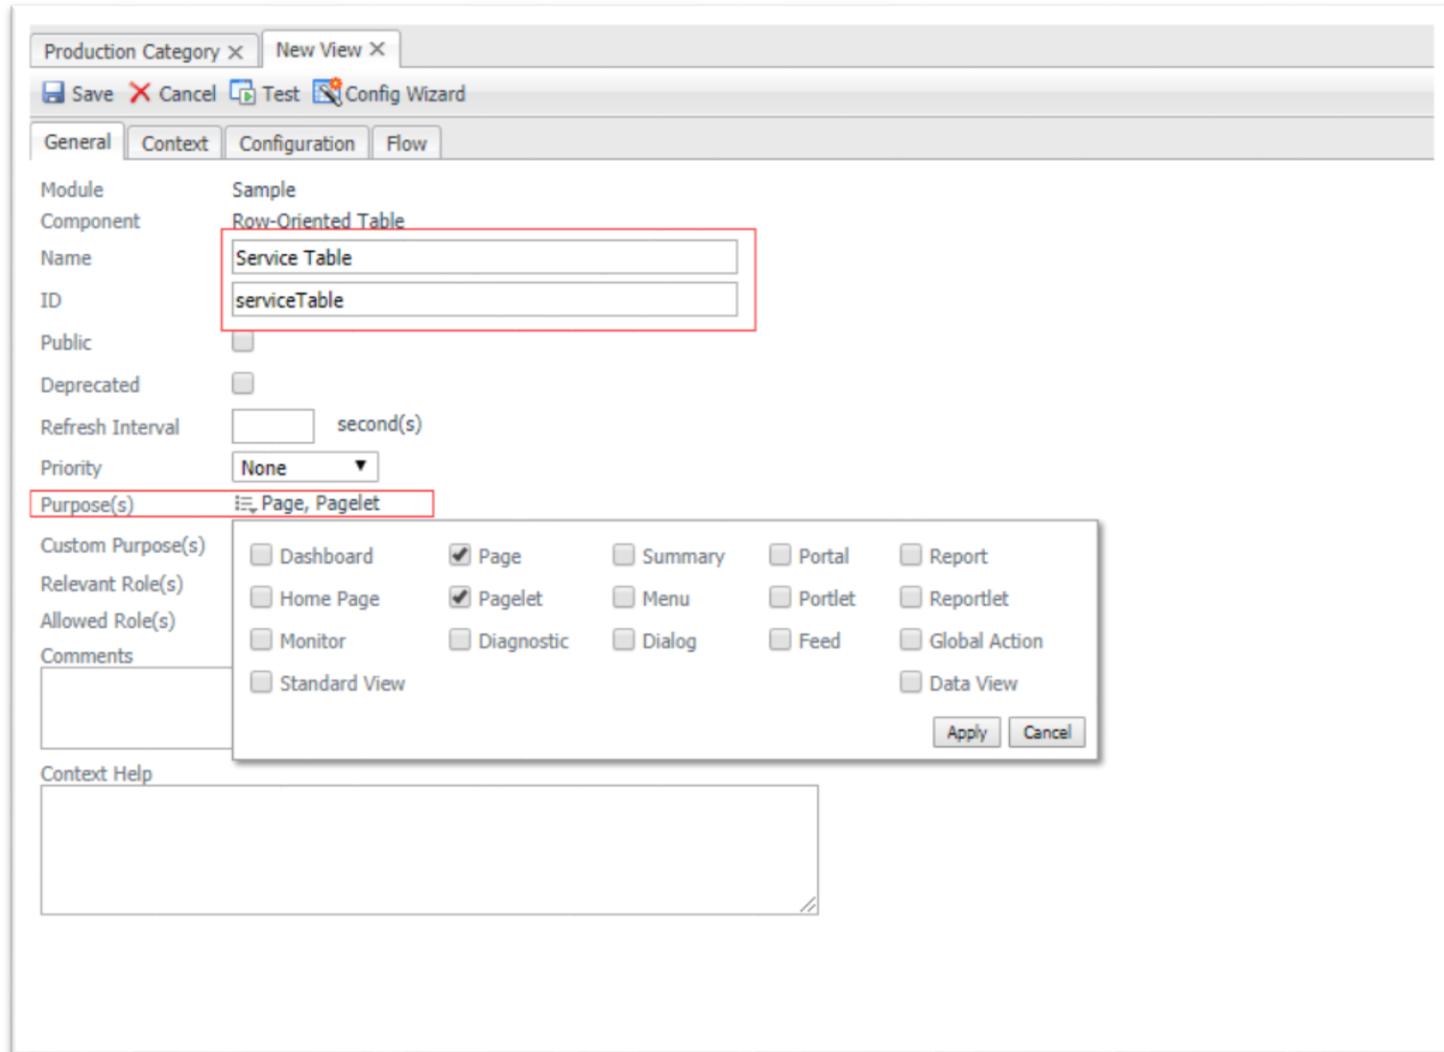

Context Setup for Table

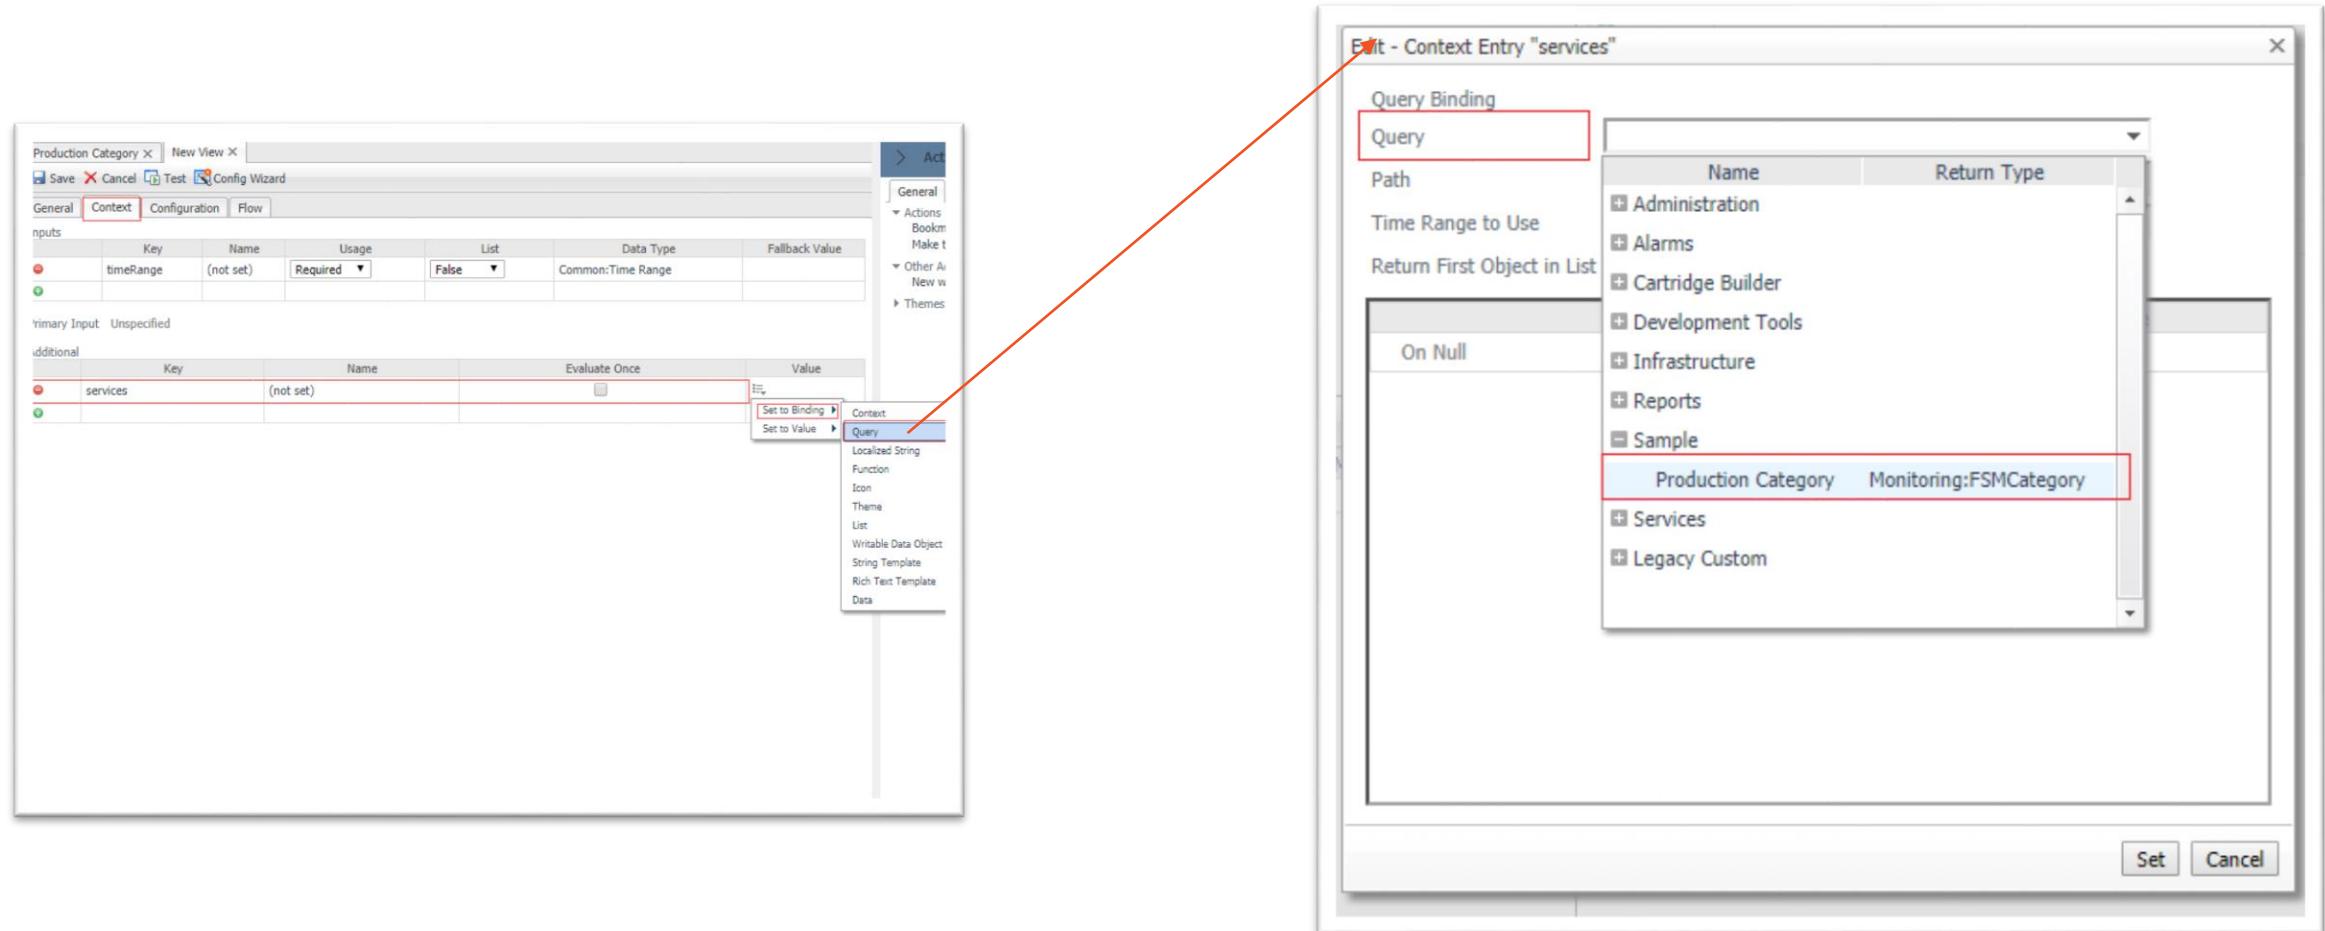

Configurations for Table

- Configure Rows
- Configure Columns
 - ID
 - Value
 - Header
 - Localized String is recommended

Columns		
Column		
Summary Row Value	Any(s)	
Csv Column Label	Any	
+ Stack Mode Configuration		
Value	Any(s)	<currentRow>/name
Tooltip	Any(s)	
Export Value	Any(s)	
Render Value	Any(s)	
Cell Data Availability		
Column Maximum Value	Number	
ID	String	name
Iterate Over	List of Anys	
Iterator Id Suffix	String	
No Wrap For Header	Boolean	
No Wrap For Cells	Boolean	
Selectable	Boolean	true
Dwellable	Boolean	true
Visible	Boolean	true
Visible In Customizer	Boolean	true
Visible in PDF	Boolean	true
Description	String	
Label	Any	
Filter Label	Any	
Header	Any	
Header Tooltip	Any	Set to Value ▶ Set to Binding ▶

Table Column Configurations

- Name
 - Value: name
 - Id: name
 - Header: Service Name
- Service Level Compliance
 - Value: aggregateStateSeverity
 - Id: SLAState
 - Header: Service Level Compliance
- FatalCount
 - Value: alarmAggregateFatalCount
 - Id: fatalCount
- CriticalCount
 - Value: alarmAggregateCriticalCount
 - Id: criticalCount
- WarningCount
 - Value: alarmAggregateWarningCount
 - Id: warningCount
- Health
 - Value: aggregateState
 - Id: health
 - Header: Health
- Last Updated
 - Value: lastUpdated
 - Id: lastUpdated
 - Header: Last Updated

Test Service Table

The screenshot shows a software interface with two main windows. On the left, a configuration dialog for a 'Service Table' is displayed. The 'Test' tab is selected. The 'Input Values' section contains a dropdown menu for 'Time Range' with 'Last hour...' selected. A red arrow points from the 'Results' button in this dropdown to the right-hand service table. The configuration grid includes properties like 'Rows' (List of Any), 'Stack Mode Configuration' (Boolean, true), and various alignment and border settings. On the right, a 'Service Table' report is shown with the following data:

Service Name	Service Level Compliance	alarmAggregateFatalCount	alarmAggregateCriticalCount	alarmAggregateWarningCount	Health	Last Updated
AppServers	✗	8			✗	10/11/17 1:57 PM
WebServers	✗	7			✗	10/11/17 1:59 PM
LoadBalancerServers	✗	4			✗	10/11/17 2:03 PM
DatabaseServers	✗	4			✗	10/11/17 2:04 PM

Improve Service Table


- Add alignment for some column
- Group fatalCount, criticalCount and warningCount as “Alarm”
- Change column order
- Add single row action(name: selectedService)

Service Name	Service Level Compliance	alarmAggregateFatalCount	alarmAggregateCriticalCount	alarmAggregateWarningCount	Health	Last Updated
AppServers	✗	6			✗	10/11/17 1:57 PM
WebServers	✗	7			✗	10/11/17 1:59 PM
LoadBalanceServers	✗	8			✗	10/11/17 2:03 PM
DatabaseServers	✗	9			✗	10/11/17 2:04 PM

Make Hosts Map

Quest™


Goal for Hosts Map

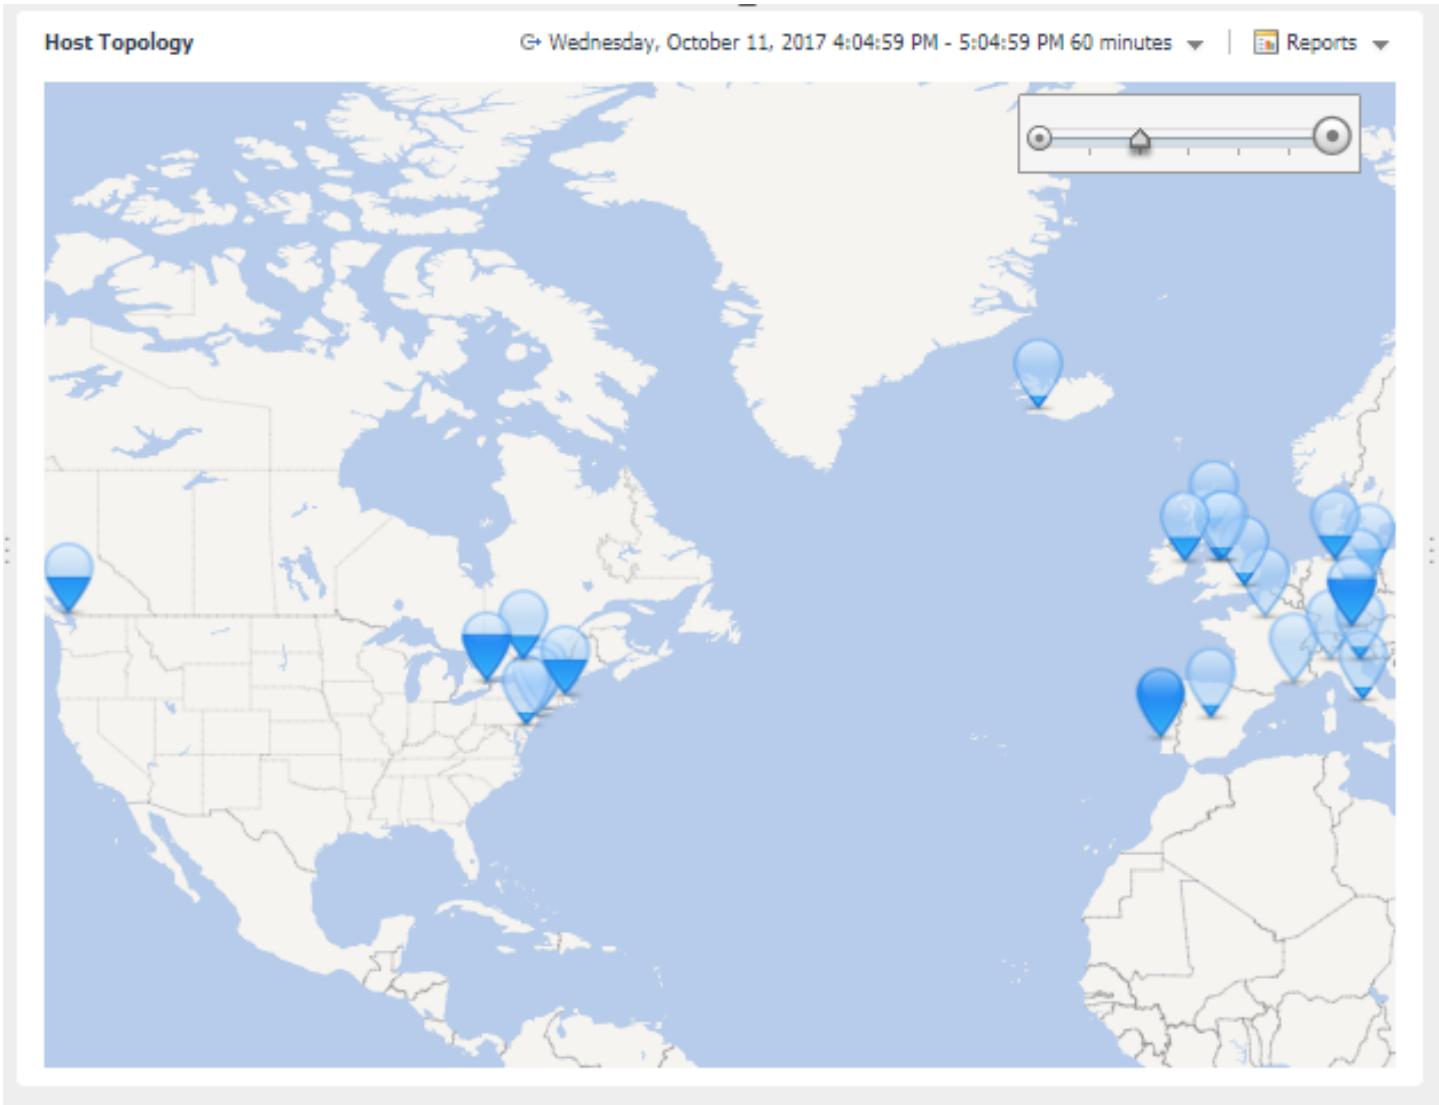

Add a Map Node Association


- Map Node Association

- Used to provide latitude, longitude and value for each node associated with Map Topology Component.

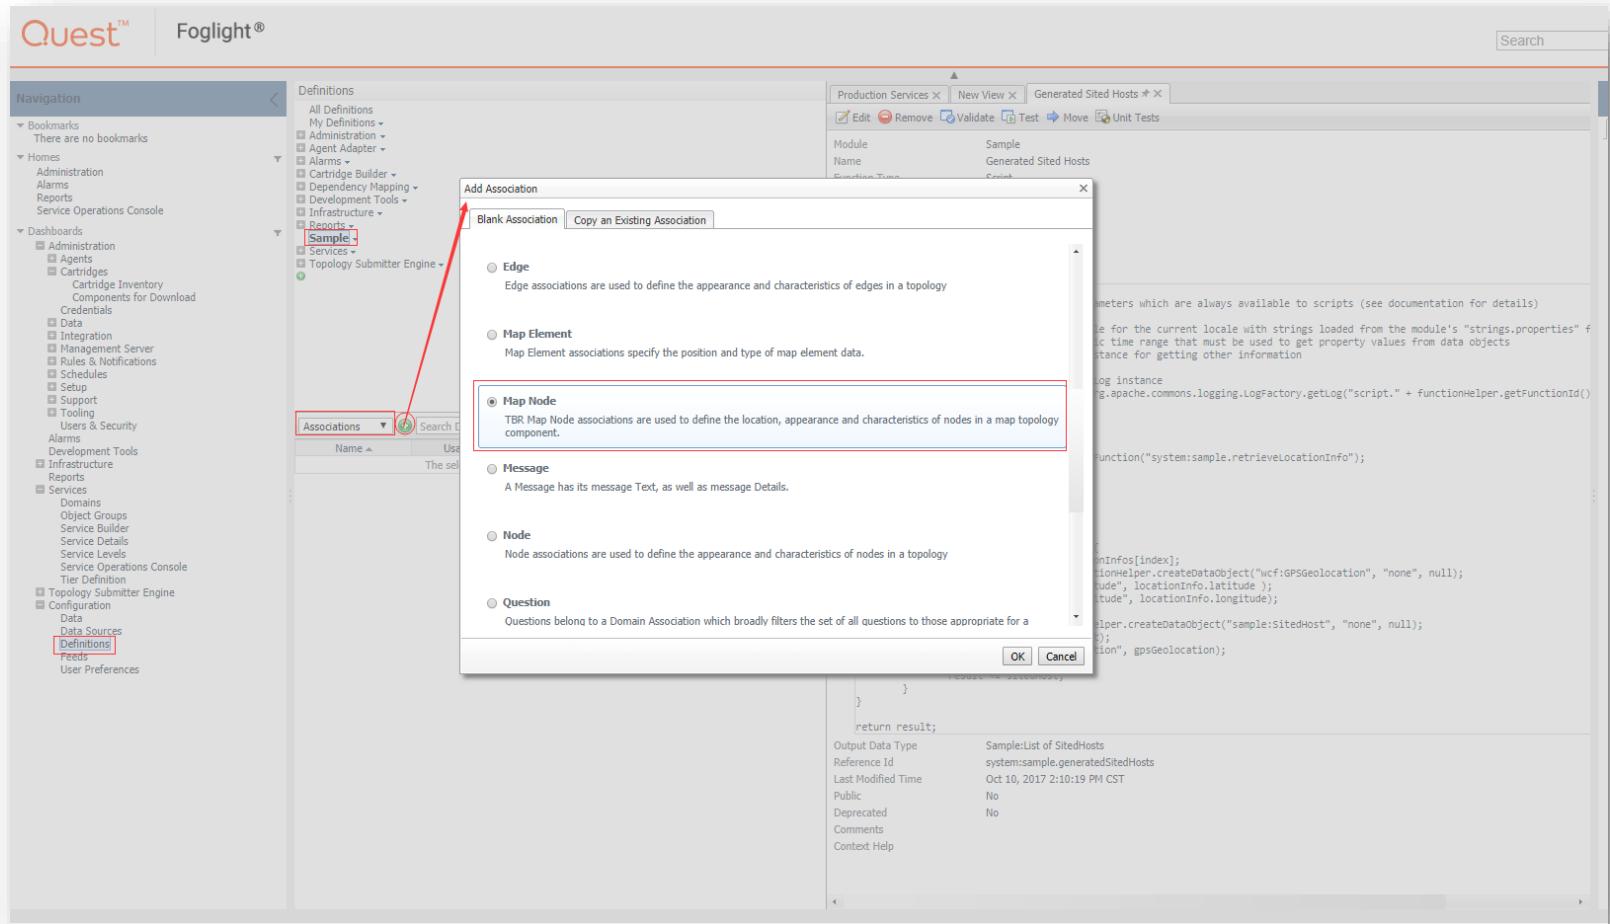

Configure Map Node Association

- Add a context with name “currentNode”, this is a convention.
- Tag is used to build the relationship with Map Topology.

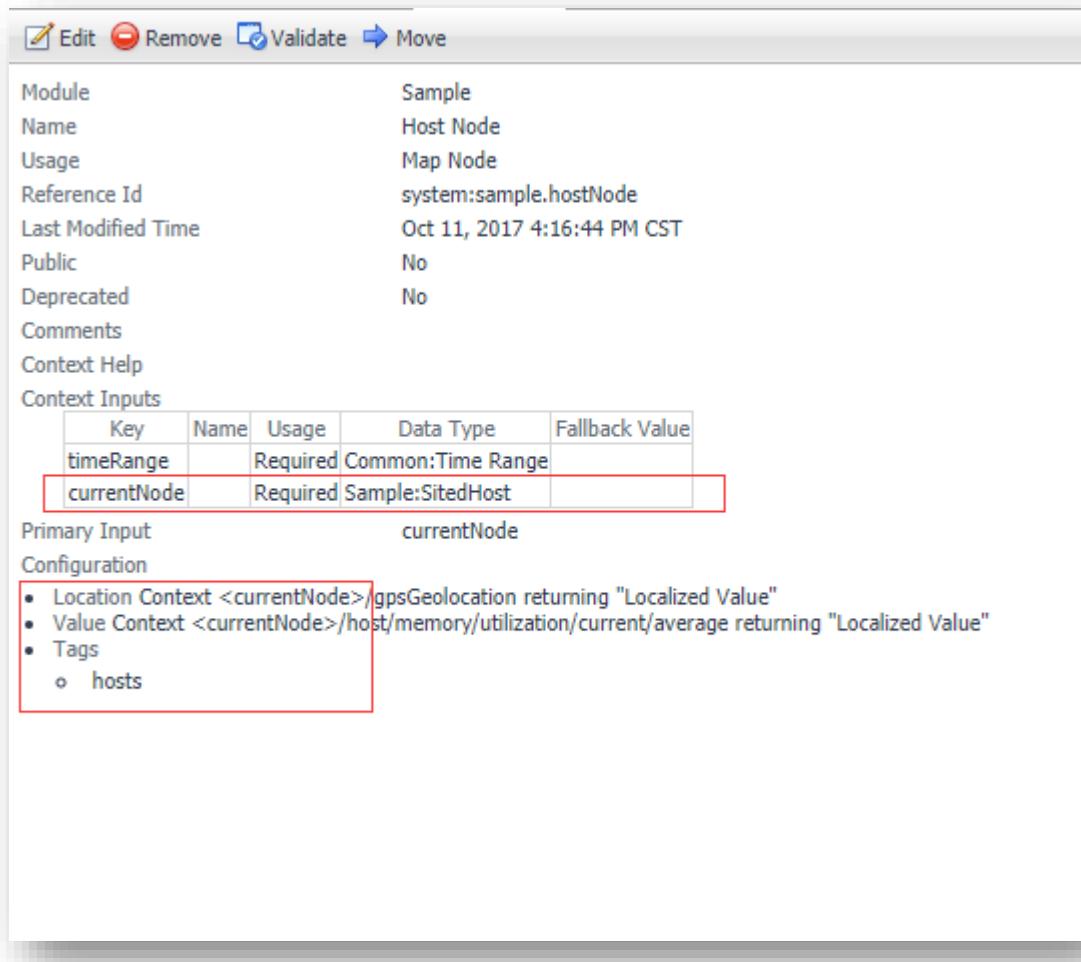

Add Types and Functions to Wrap Host with Geo Location

- We prepared the functions and types already.
- You could find them in *sample* module.

The screenshot shows the ServiceNow navigation bar and several open windows:

- Navigation Window:** Shows various system modules like Bookmarks, Homes, Dashboards, and Cartridges.
- Definitions Window:** Shows a tree view of definitions under "Definitions". A "Sample" node is expanded, showing "Generated Sited Hosts" and other service components.
- Functions Window:** Shows a list of functions defined in the "Sample" module:

Name	Type	Return Type	ID	Last Modified Time
Generated Sited Hosts	Script	Sample:List of SitedHosts	generatedSitedHosts	10/10/17 2:10 PM
Group Host By OS Type	Script	Sample:List of OSObjContainers	groupHostByOSType	10/10/17 10:30 AM
Location Data	Script	Common:List of Strings	locationData	5/19/16 10:20 AM
Retrieve Location Info	Script	Sample:List of LocationInfos	retrieveLocationInfo	5/18/16 9:03 PM
Simulate Hosts	Script	Monitoring:List of Hosts	simulateHosts	10/11/17 9:29 AM
- Module Definition Window:** Shows the configuration for the "Generated Sited Hosts" module, including parameters and script code.

Script Content (Generated Sited Hosts):

```
package system._sample._scripts;
// The following are special reserved parameters which are always available to scripts (see documentation for details)
// resourcebundle - the Java ResourceBundle for the current locale with strings loaded from the module's "strings.properties" file
// specificTimeRange - the current specific time range that must be used to get property values from data objects
// functionHelper - the FunctionHelper instance for getting other information
//
// Uncomment the following line to get a Log instance
// org.apache.commons.logging.Log log = org.apache.commons.logging.LogFactory.getLog("script." + functionHelper.getFunctionId())
if(!hosts) {
    return [];
}

def locationInfos = functionHelper.invokeFunction("system:sample.retrieveLocationInfo");
hosts.sort();
return it.name;
```

Output Data Type: Sample:List of SitedHosts

Reference Id: system:sample.generatedSitedHosts

Last Modified Time: Oct 10, 2017 2:10:19 PM CST


Public: No

Deprecated: No

Comments: No


Context Help: No

Add a Map Topology

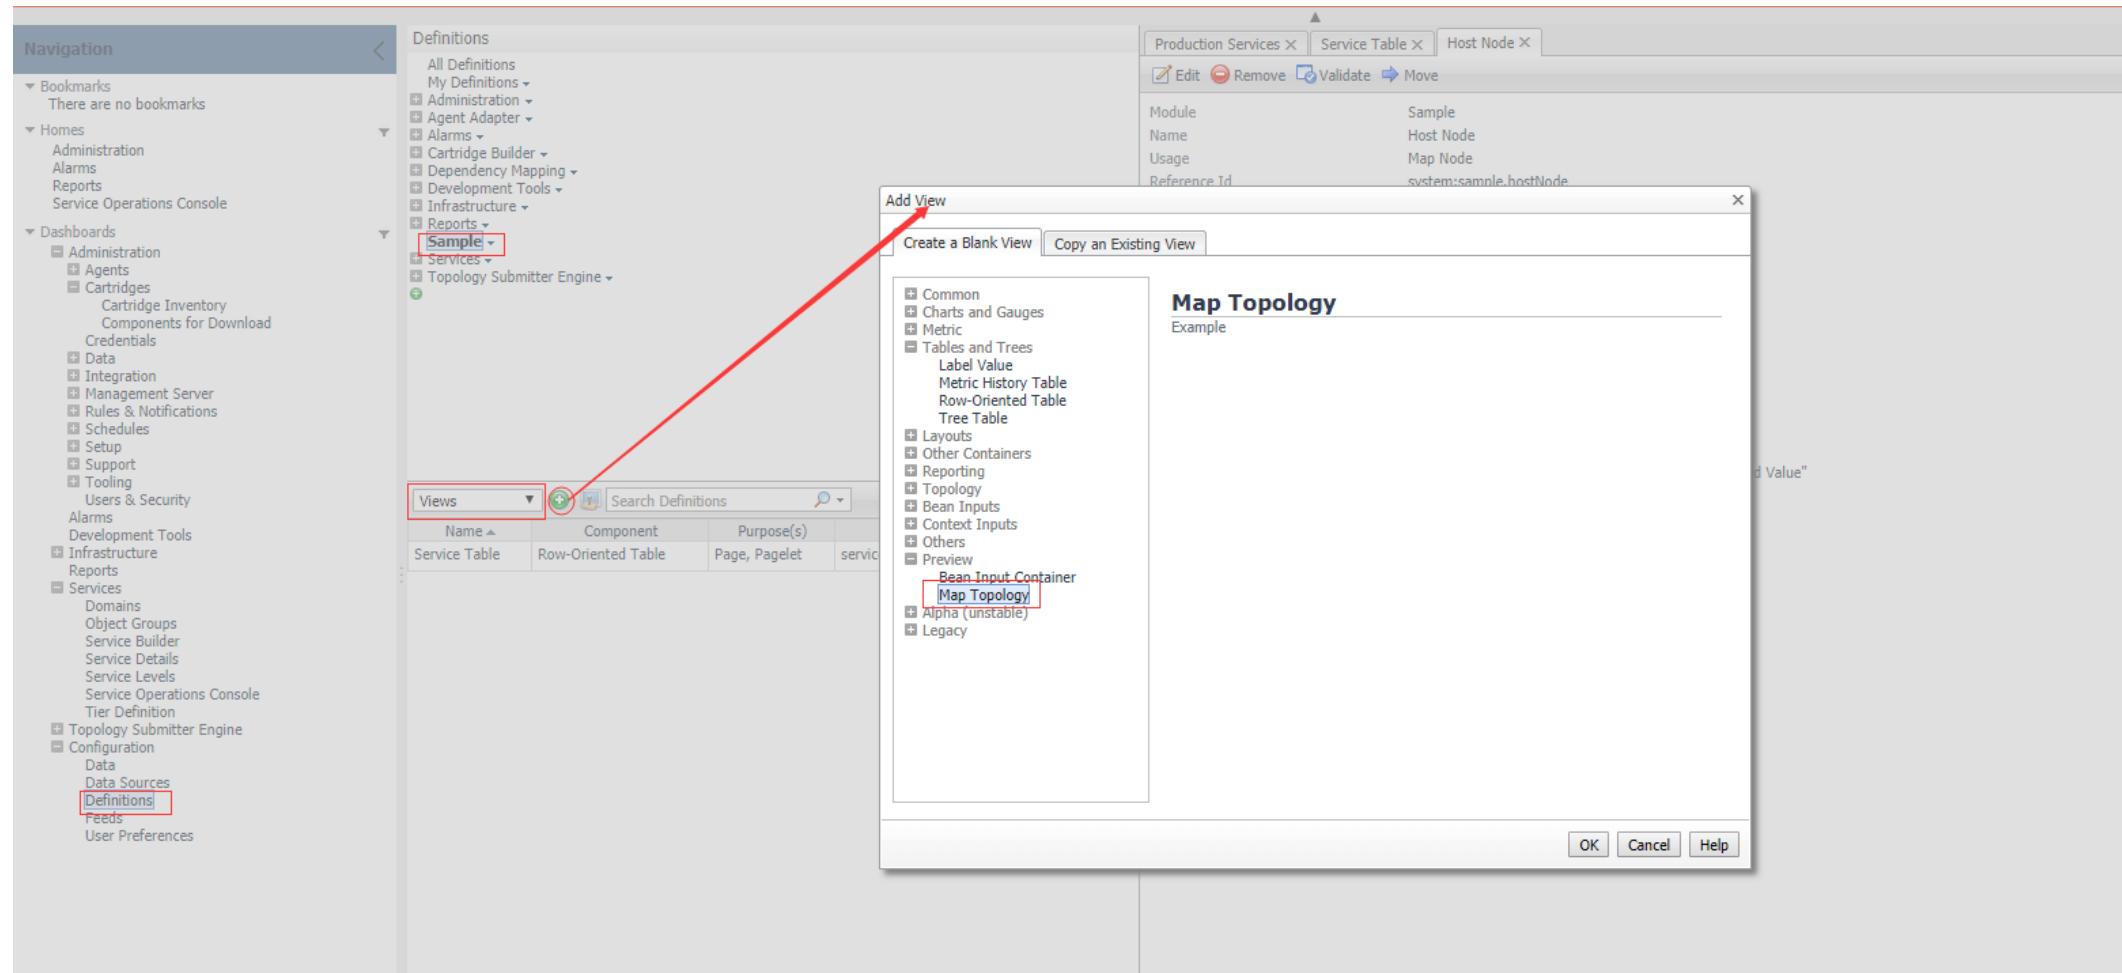

Configure the Map Topology


- Add context “hosts” as Input
- Invoke function “Generate Sited Hosts” to convert hosts to sitedHosts.
- Specify the tag which is the same with Map Node Association.
- Test after Save.

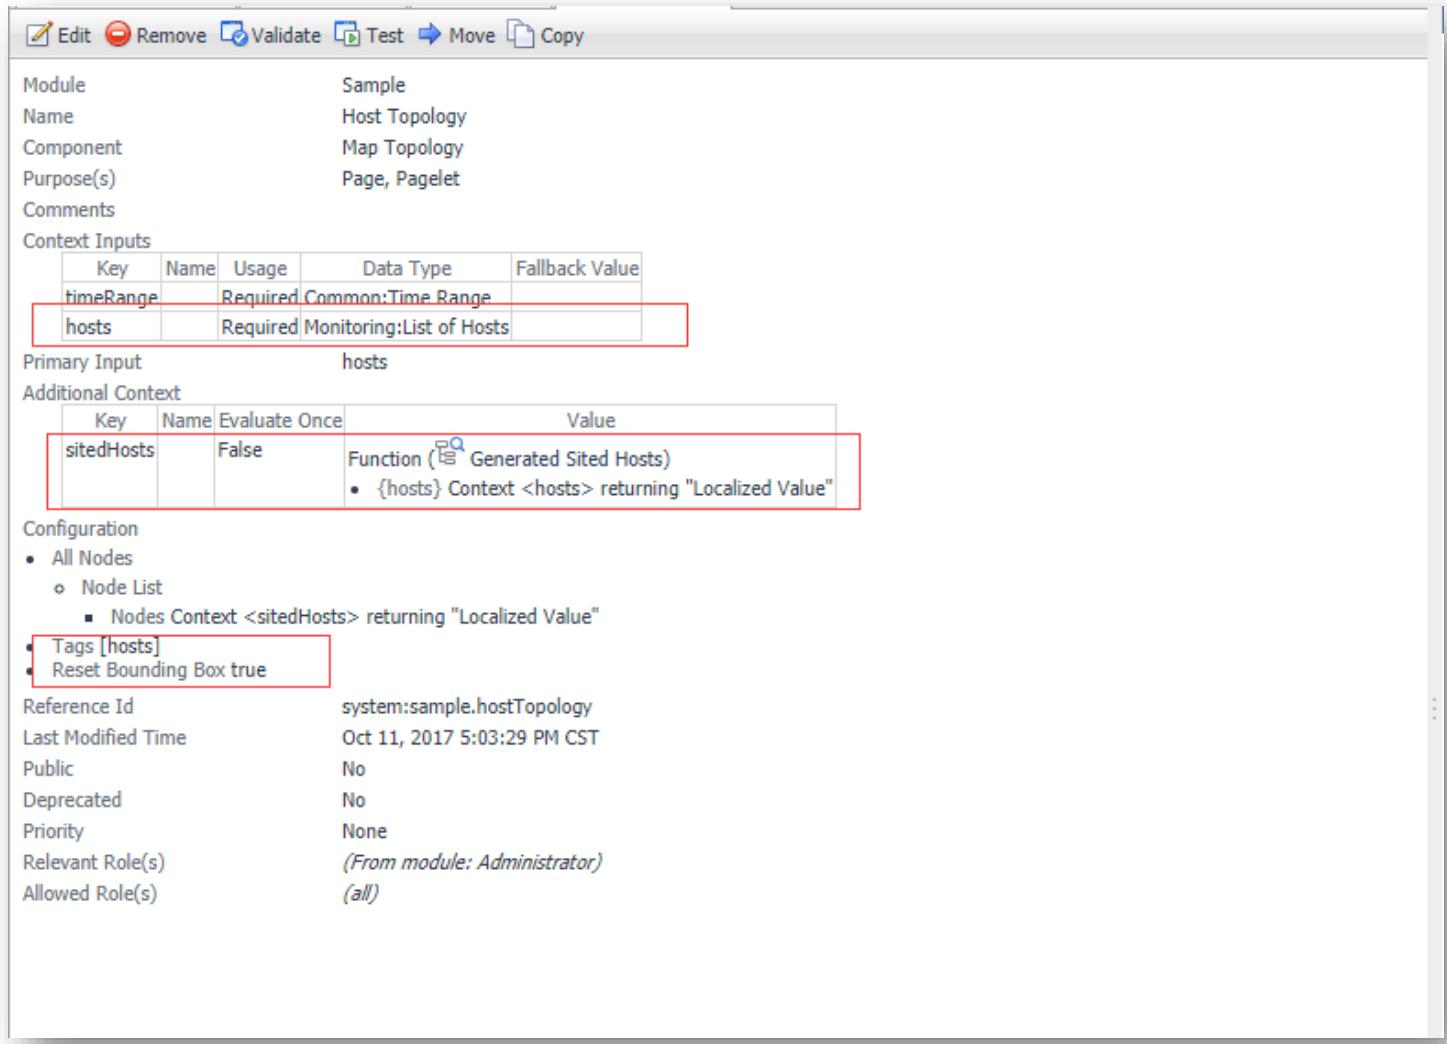

Make Hosts by OS Type Bar Chart

Quest™

Goal for Hosts by OS Type Bar Chart

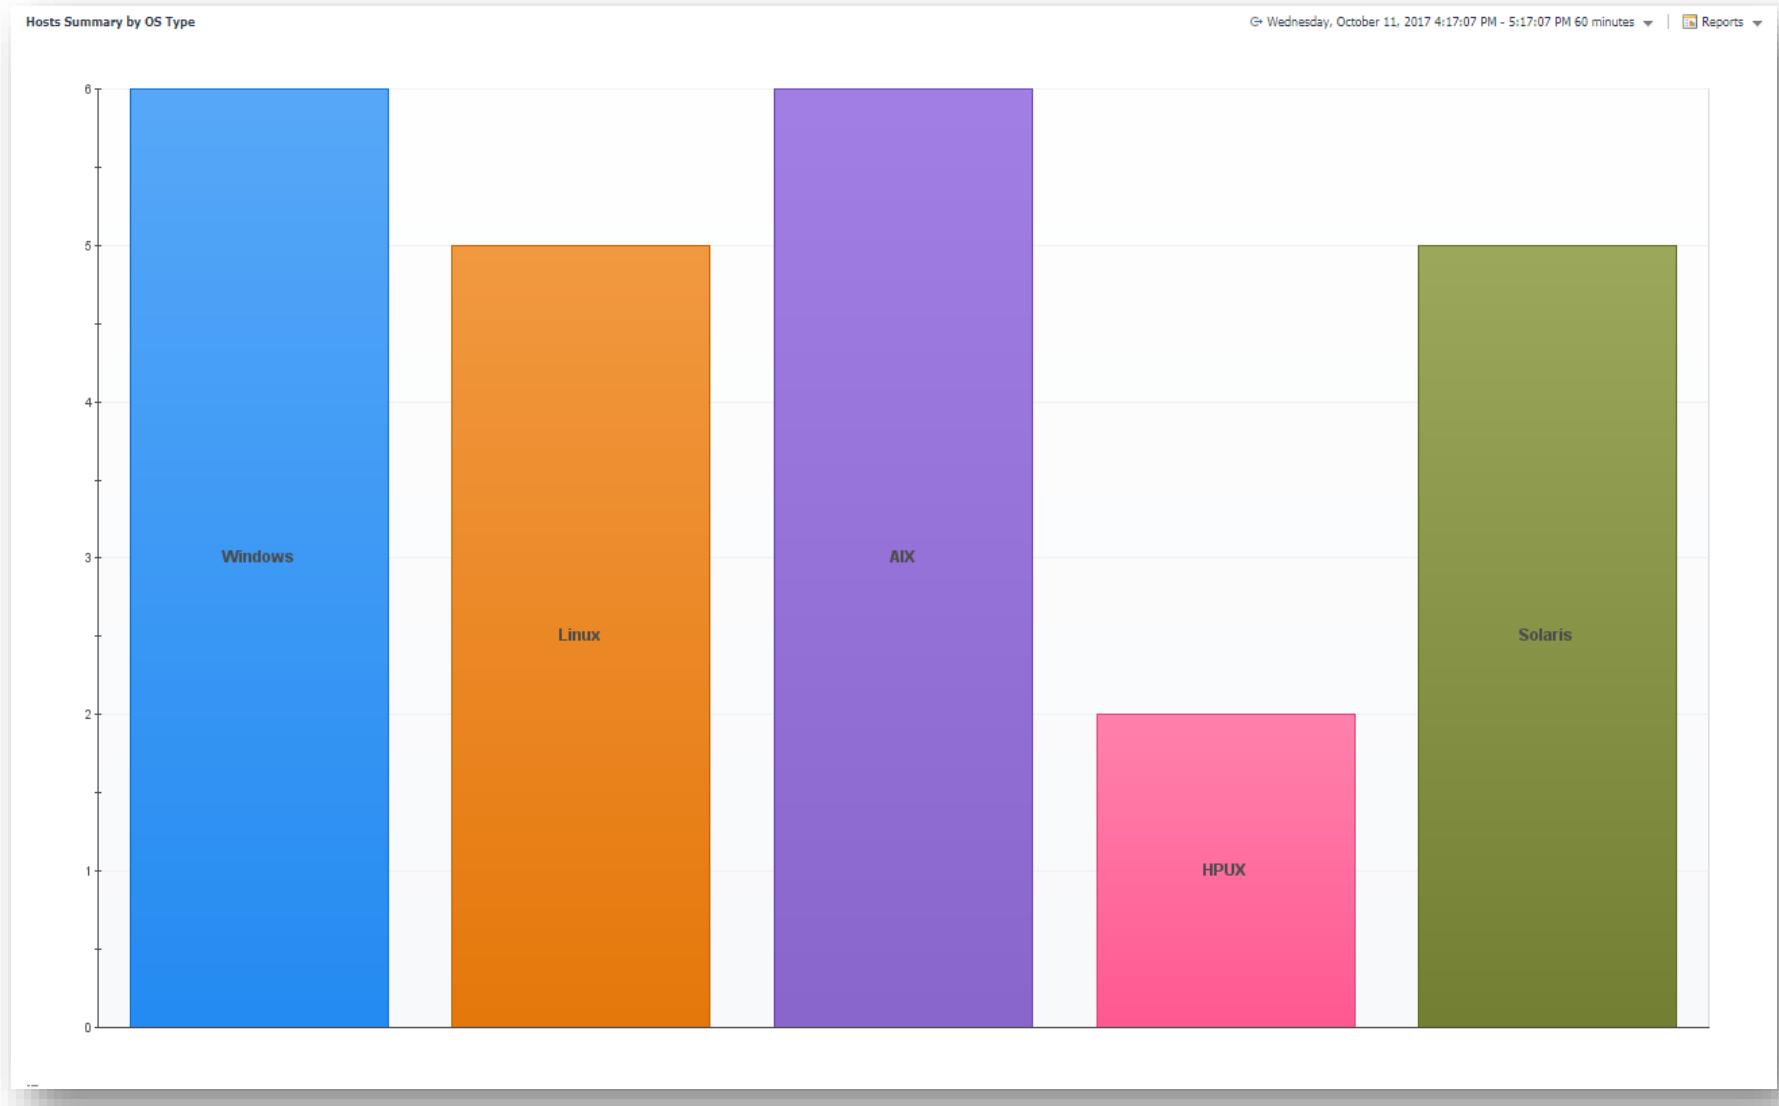

Add Type and Functions to Wrap Hosts by OS Types

- We prepared the functions and types already, could be used directly.

The screenshot shows the Foglight interface with the following details:

- Navigation:** The left sidebar shows various navigation options like Bookmarks, Homes, Dashboards, Administration, Reports, Service Operations Console, Data, Integration, Management Server, Rules & Notifications, Schedules, Setup, Support, Tooling, Users & Security, Alarms, Infrastructure, Reports, Services, Domains, Object Groups, Service Builder, Service Details, Service Lists, Service Operations Console, Tier Definition, Topology Submitter Engine, Configuration, Data, Data Sources, Definitions (which is selected), Feeds, and User Preferences.
- Definitions:** The main pane shows the "Definitions" section with a tree view of categories like All Definitions, My Definitions, Applications, Agent Adapter, Alarms, Cartridge Builder, Dependency Mapping, Development Tools, Infrastructure, Reports, Samples, Services, and Topology Submitter Engine. A "Sample" item is highlighted.
- Functions:** Below the definitions, there is a table titled "Functions" with the following data:

Name	Type	Return Type	ID	Last Modified Time
Generated Sited Hosts	Script	Sample:List of SitedHosts	generatedSitedHosts	10/10/17 2:10 PM
Group Host By OS Type	Script	Sample:List of OSObjContainers	groupHostByOSType	10/10/17 10:30 AM
Location Data	Group Host By OS Type	list of Strings	locationData	5/19/16 10:20 AM
Retrieve Location Info	Script	Sample:List of LocationInfos	retrieveLocationInfo	5/18/16 9:03 PM
Simulate Hosts	Script	Monitoring:List of Hosts	simulateHosts	10/11/17 9:29 AM
- Module Details:** On the right, a detailed view of the "Group Host By OS Type" module is shown:
 - Module:** Sample
 - Name:** Group Host By OS Type
 - Function Type:** Script
 - Converter:** No
 - Cache Results:** Yes
 - Parameters:** hosts Monitoring:List of Hosts
 - Script:**

```
package system._sample.scripts;
// The following are special reserved parameters which are always available to scripts (see documentation for details)
//
// ResourceBundle - the Java ResourceBundle for the current locale with strings loaded from the module's "strings.properties" file
// specificTimeRange - the current specific time range that must be used to get property values from data objects
// functionHelper - the FunctionHelper instance for getting other information
//
// Uncomment the following line to get a Log instance
// org.apache.commons.logging.Log log = org.apache.commons.logging.LogFactory.getLog("script." + functionHelper.getFunctionId());

def ostypelist = ["windows", "Linux", "AIX", "HPUX", "Solaris"];

def groupedhost = hosts?.groupBy(
it.os.type;
)

def result = [];
ostypelist?.each{ostype ->
    def osContainer = functionHelper.createDataObject('sample:OSObjContainer', 'none', null);
    osContainer.set("osType", ostype);
    osContainer.set("hosts", groupedHost?.get(ostype)?groupedHost.get(ostype):[]);

    result += osContainer;
}

return result;
```
 - Output Data Type:** Sample:List of OSObjContainers
 - Reference Id:** system:sample:groupHostByOSType
 - Last Modified Time:** Oct 10, 2017 10:30:14 AM CST
 - Public:** No
 - Deprecated:** No
 - Comments:** No
 - Context Help:** None

Add a Bar or Pie Chart

The screenshot shows the Foglight interface with the following components:

- Navigation:** On the left, under "Definitions", the "Sample" item is highlighted with a red box.
- Definitions:** A list of various definitions including All Definitions, Administration, Agent Adapter, Alarms, Cartridge Builder, Dependency Mapping, Development Tools, Infrastructure, Reports, and Sample.
- Add View Dialog:** A modal window titled "Add View" is open, showing the "Bar or Pie Chart" component selected (also highlighted with a red box).
 - Common:** Options like Bar Gauge, Bar or Pie Chart, Circular Gauge, Cluster Bar Chart, High/Low Bar Chart, Time Bar Chart, Time Plot Chart.
 - Metric:** Options like Label Value, Metric History Table, Row-Oriented Table, Tree Table.
 - Layouts:** Options like Other Containers, Reporting, Topology, Bean Inputs, Context Inputs, Others.
 - Preview:** Options like Bean Input Container, Map Topology, Alpha (unstable), Legacy.
- Module Details:** Shows a module named "Sample" with "Name" set to "Group Host By OS Type", "Function Type" set to "Script", and "Converter" set to "No".
- Example:** A chart titled "All Alarms Breakdown by Agents" is displayed, showing the percentage of alarms relative to total alarms for three agents: Windows_System_1@tor... (orange), AppMonitor_1@tor... (red), and TerminalServer_1@tor... (purple).
- Help:** A detailed help section for the Bar or Pie Chart component.

Configure the Bar or Pie Chart

- Add context hosts as Input
- Invoke function “*Group Host by OS Type*” to group the hosts by OS.
- Configure “*Parent Items*”

The screenshot shows a configuration interface for a module named "Hosts Summary by OS Type". The interface includes sections for Module, Name, Component, Purpose(s), Comments, Context Inputs, Primary Input, Additional Context, Configuration, and Reference Id.

Module: Sample

Name: Hosts Summary by OS Type

Component: Bar or Pie Chart

Purpose(s): Page, Pagelet

Comments:

Context Inputs:

Key	Name	Usage	Data Type	Fallback Value
timeRange		Required	Common:Time Range	
hosts		Required	Monitoring:List of Hosts	

Primary Input: hosts

Additional Context:

Key	Name	Evaluate Once	Value
groupedHosts		False	Function (Group Host By OS Type) • {hosts} Context <hosts> returning "Localized Value"

Configuration:

- General
 - Chart Type Bar
- Data
 - Parented Items
 - Parented Items Binding
 - Item Parents Context <groupedHosts> returning "Localized Value"
 - For Each Item Parent
 - Value Context <currentItemParent>/hosts returning "Count All"
 - Label Context <currentItemParent>/osType returning "Localized Value"

Reference Id: system:sample.hostsSummaryByOSType

Last Modified Time: Oct 11, 2017 5:14:32 PM CST

Public: No

Deprecated: No

Priority: None


Relevant Role(s): (From module: Administrator)

Allowed Role(s): (all)

Copy Resources Summary View


Quest®

Goal for Resource Summary

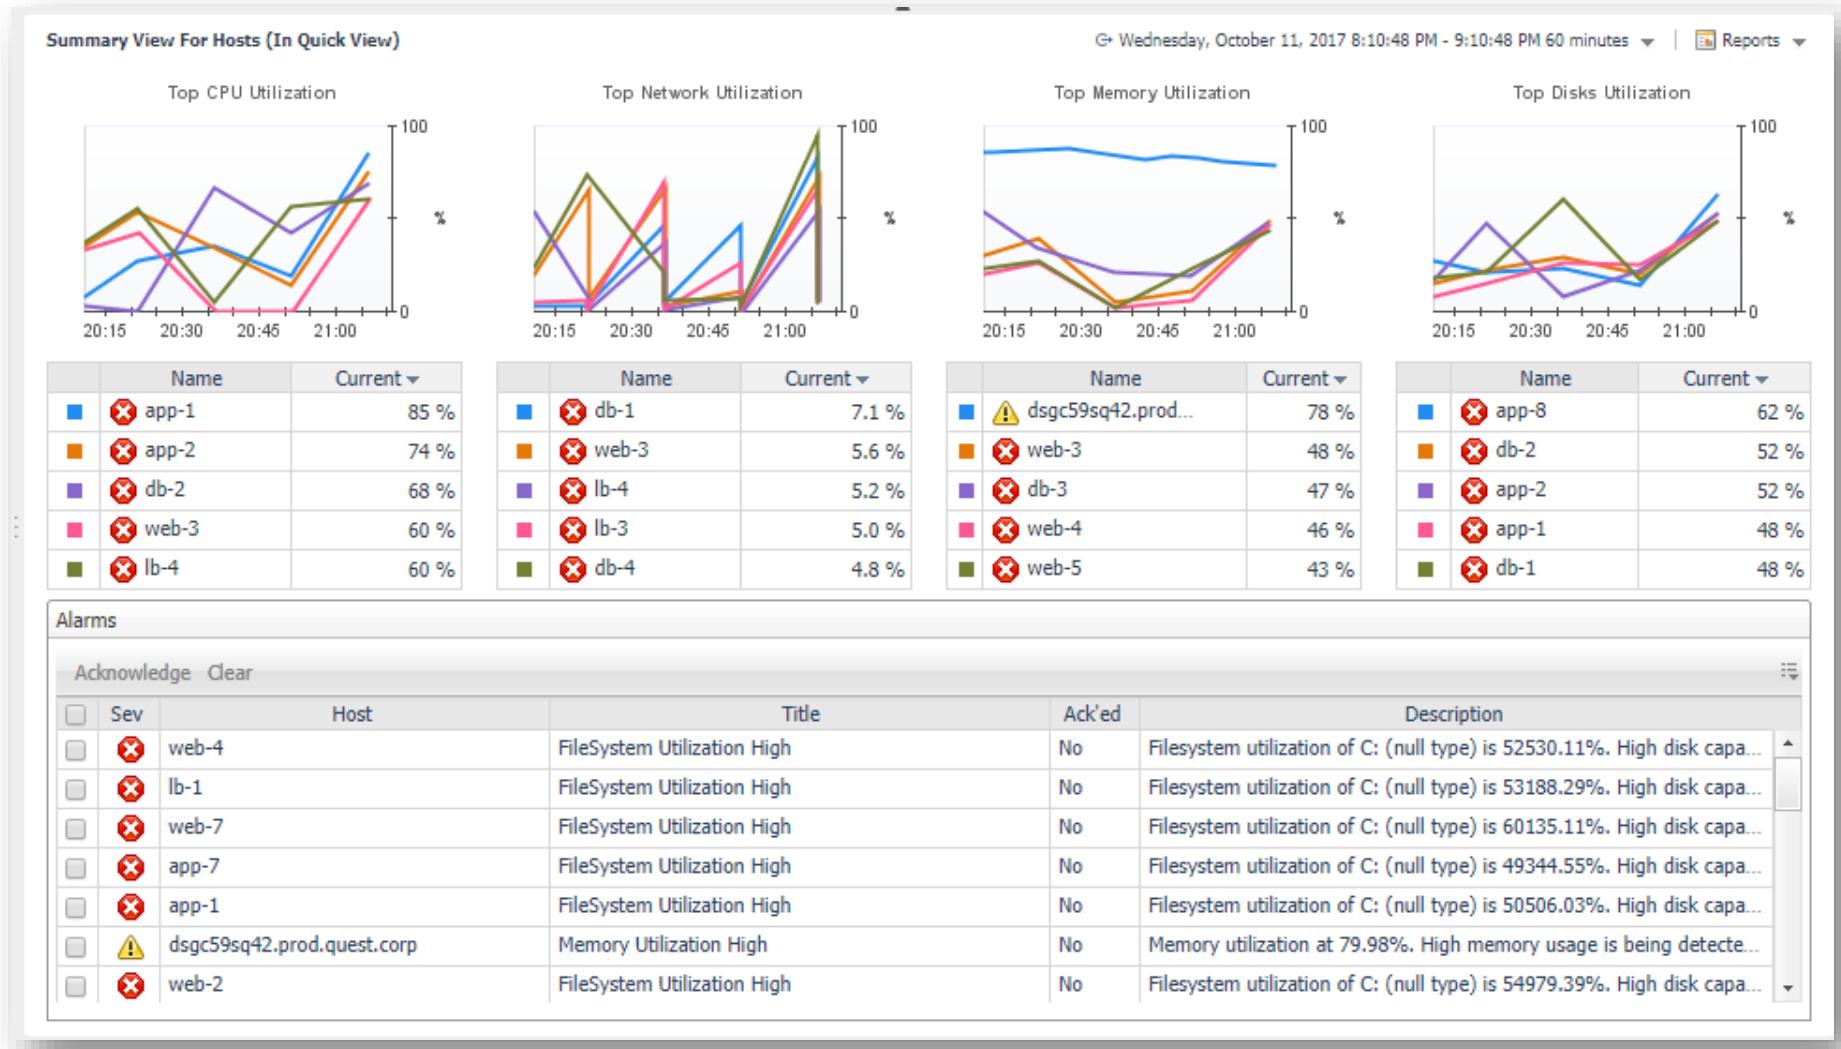


Locate Resource Summary View within IC

- Use WCF Investigation (Design Tab) to locate the View.
- Inspect into the View to edit.

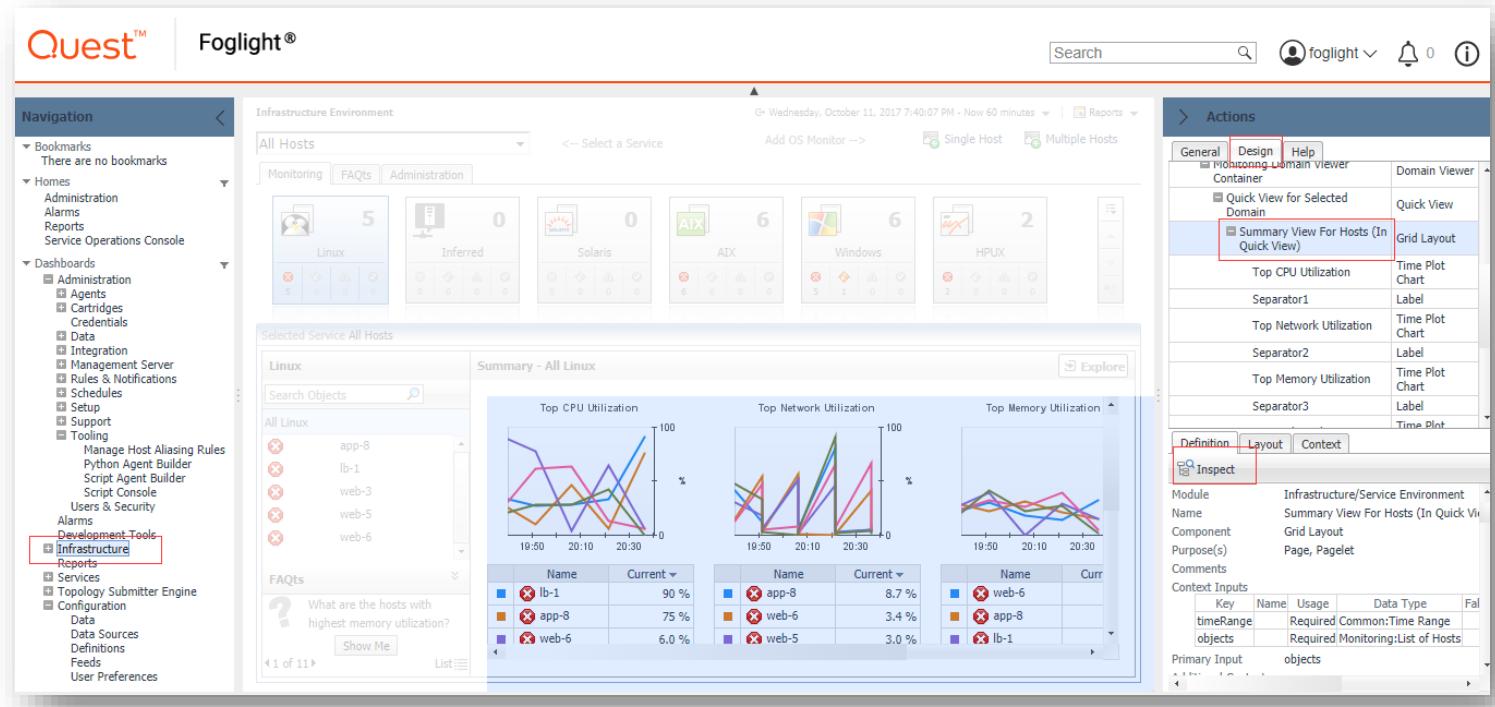

Copy Resource Summary from IC

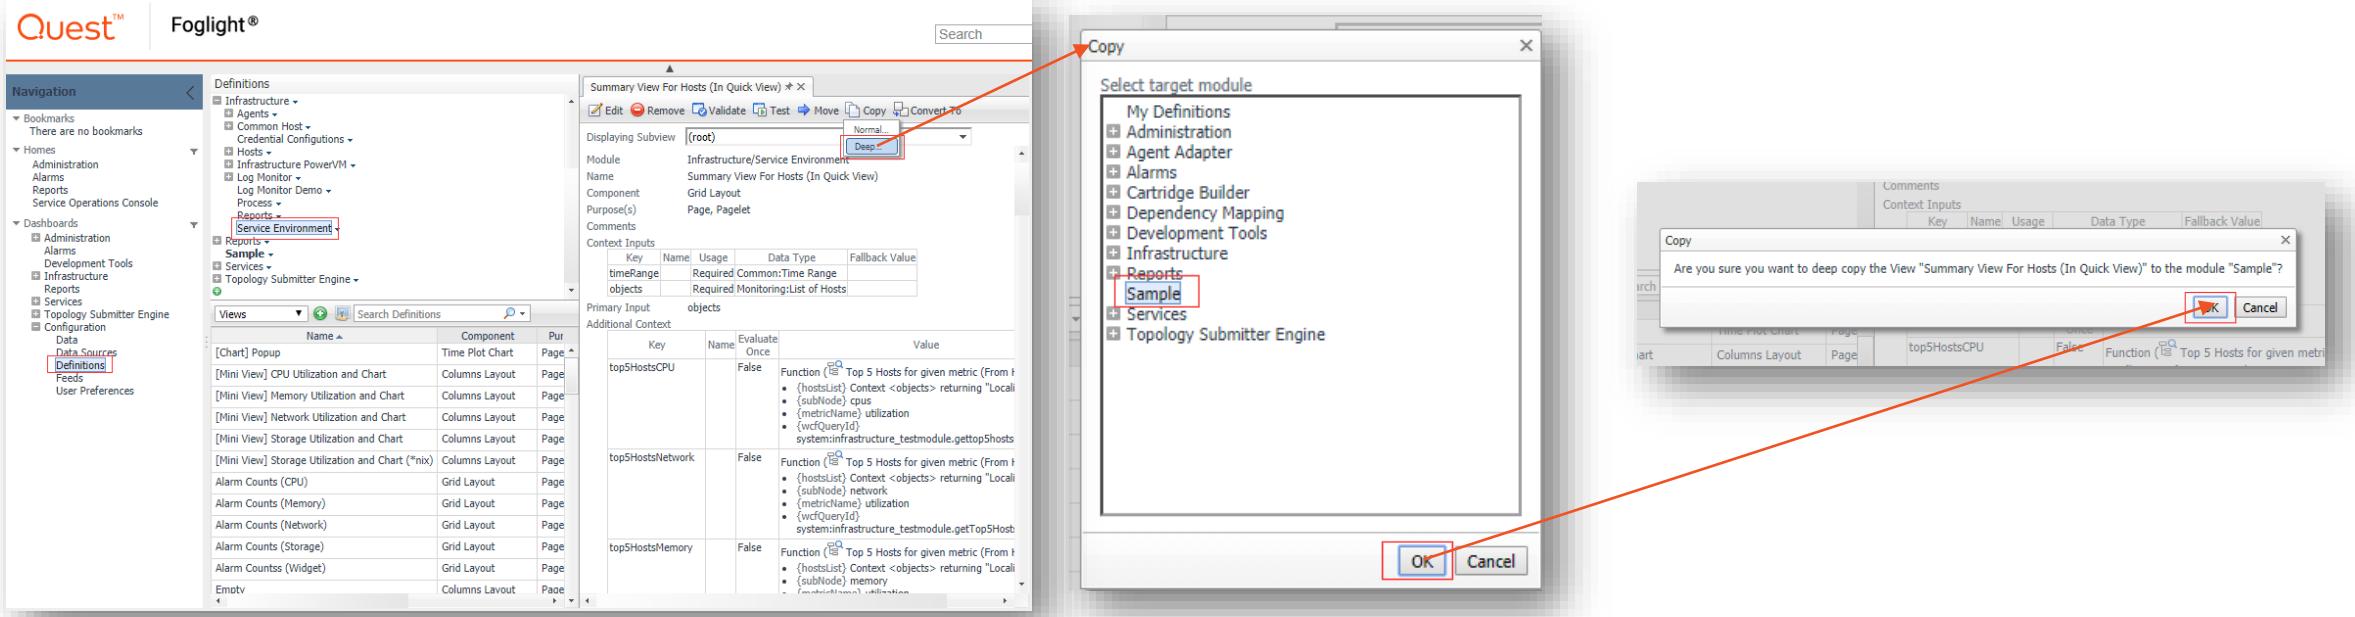

Construct CIO Dashboard

Quest™


Goal for CIO Dashboard

CIO Dashboard shows all hosts used in production environment in different tiers.

Service Table

Service Name	Service Level Compliance	Health	Alarms	Last Updated
AppServers	✗	✗	8	10/12/17 2:00 AM
WebServers	✗	✗	7	10/12/17 2:00 AM
LoadBalancerServers	✗	✗	4	10/12/17 2:00 AM
DatabaseServers	✗	✗	4	10/12/17 2:00 AM

Host Topology

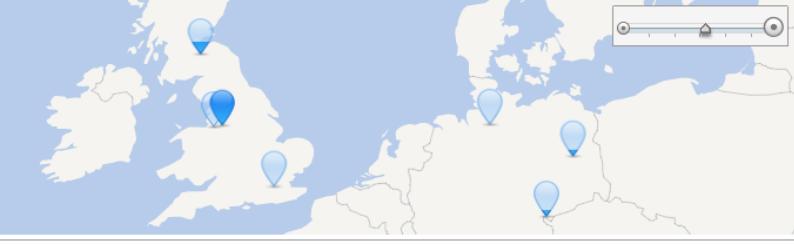


Hosts Summary by OS Type

OS Type	Percentage
Windows	3.0
Linux	1.0
AIX	1.0
HPUX	1.0
Solaris	2.0


Summary View For Hosts (In Quick View)

Top CPU Utilization

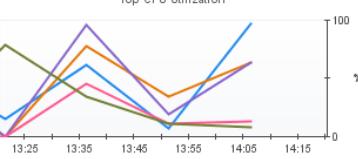


Name	Current
app-7	96 %
app-6	63 %
app-8	63 %
app-5	13 %
app-1	7.1 %

Top Network Utilization

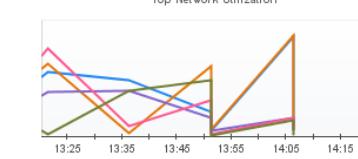


Name	Current
app-4	6.7 %
app-5	6.2 %
app-7	6.0 %
app-8	5.2 %
app-3	2.0 %

Top Memory Utilization

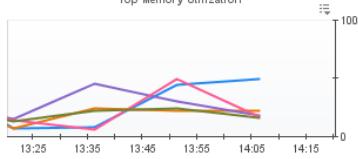

Name	Current
app-8	49 %
app-6	22 %
app-2	18 %
app-1	17 %
app-4	15 %

Top Disks Utilization

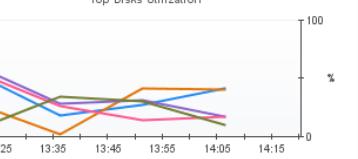

Name	Current
app-5	41 %
app-8	40 %
app-2	16 %
app-1	16 %
app-4	9.9 %

Alarms

Sev	Host	Title	Acked	Description
Info	Host1	Info about application 1	No	Info about application 1
Warning	Host2	Warning about application 2	No	Warning about application 2
Error	Host3	Error about application 3	No	Error about application 3
Critical	Host4	Critical about application 4	No	Critical about application 4

Add a Rows Layout

The screenshot shows a software interface for managing system definitions. On the left, a navigation sidebar lists categories like Infrastructure, Reports, and Data Sources. The 'Data Sources' and 'Definitions' items are highlighted with red boxes. The main area displays a 'Definitions' tree view with nodes such as Agents, Common Host, Hosts, Infrastructure PowerVM, Log Monitor, Process, Reports, Service Environment, Reports, and Services. A 'Sample' node under Reports is also highlighted with a red box. Below this is a table titled 'Views' showing various components and their details.

A modal window titled 'Add View' is open on the right. It contains two tabs: 'Create a Blank View' (selected) and 'Copy an Existing View'. The 'Common' section of the list includes 'Row-Oriented Table' and 'Rows Layout', which are both highlighted with red boxes. The 'Rows Layout' entry is described as follows:

Rows Layout

The Rows Layout view component displays a set of views organized in rows. Within each row, the views are positioned horizontally in the same way as the views in a Grid Layout, except that each row is laid out independently. The natural width of the layout is based on the longest row, and natural height is the sum of the row heights. (Each row's natural height is based on the largest view in that row.)

Example

The example section shows three visualizations: a 'Row Layout Example' chart with three stacked bars (CPU, Memory, Disk), a 'Table Layout' table with five rows labeled 'event_1' through 'event_5', and a 'Image' of a physical server rack with four circular drives.

At the bottom of the modal are 'OK', 'Cancel', and 'Help' buttons.

General Setup for Layout

- Name: CIO Dashboard
- Purpose: Page


Save X Cancel Test

General Context Configuration Layout

Module	Sample
Component	Rows Layout
Name	CIO Dashboard
ID	CIODashboard
Public	<input type="checkbox"/>
Deprecated	<input type="checkbox"/>
Refresh Interval	<input type="text"/> second(s)
Priority	None ▾
Purpose(s)	Page
Custom Purpose(s)	
Relevant Role(s)	(From module: Administrator)
Allowed Role(s)	(all)
Comments	
Context Help	

Context Setup for Layout

- *selectedService*: this context is used to pass the value of selected service in *Service Table*.
- *hosts*: values are from the *selectedService*, and it is required by views '*Host Topology*' and '*Hosts Summary by OS Type*'.

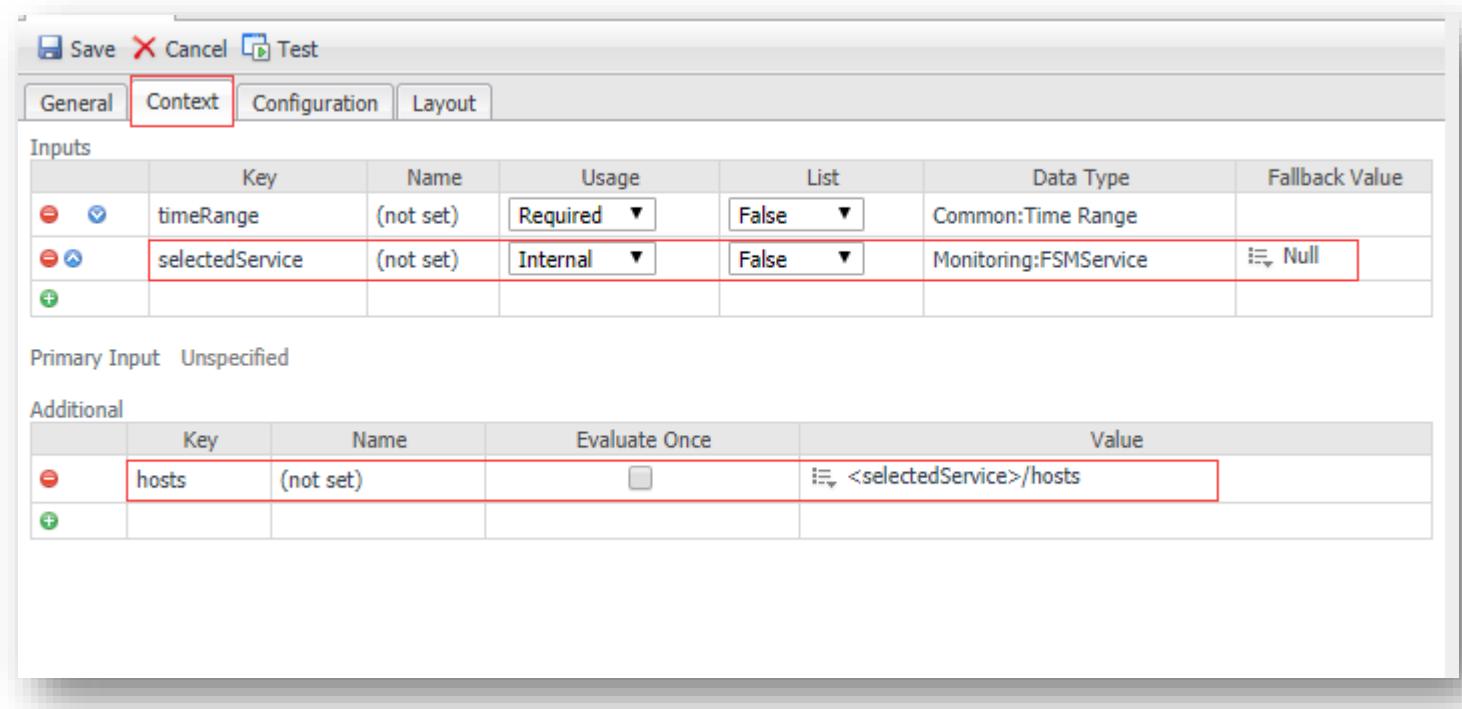


Key	Name	Usage	List	Data Type	Fallback Value
timeRange	(not set)	Required	False	Common:Time Range	
selectedService	(not set)	Internal	False	Monitoring:FSMService	Null


Primary Input Unspecified

Key	Name	Evaluate Once	Value
hosts	(not set)	<input type="checkbox"/>	<selectedService>/hosts


Add Service Table to Layout – Step 1

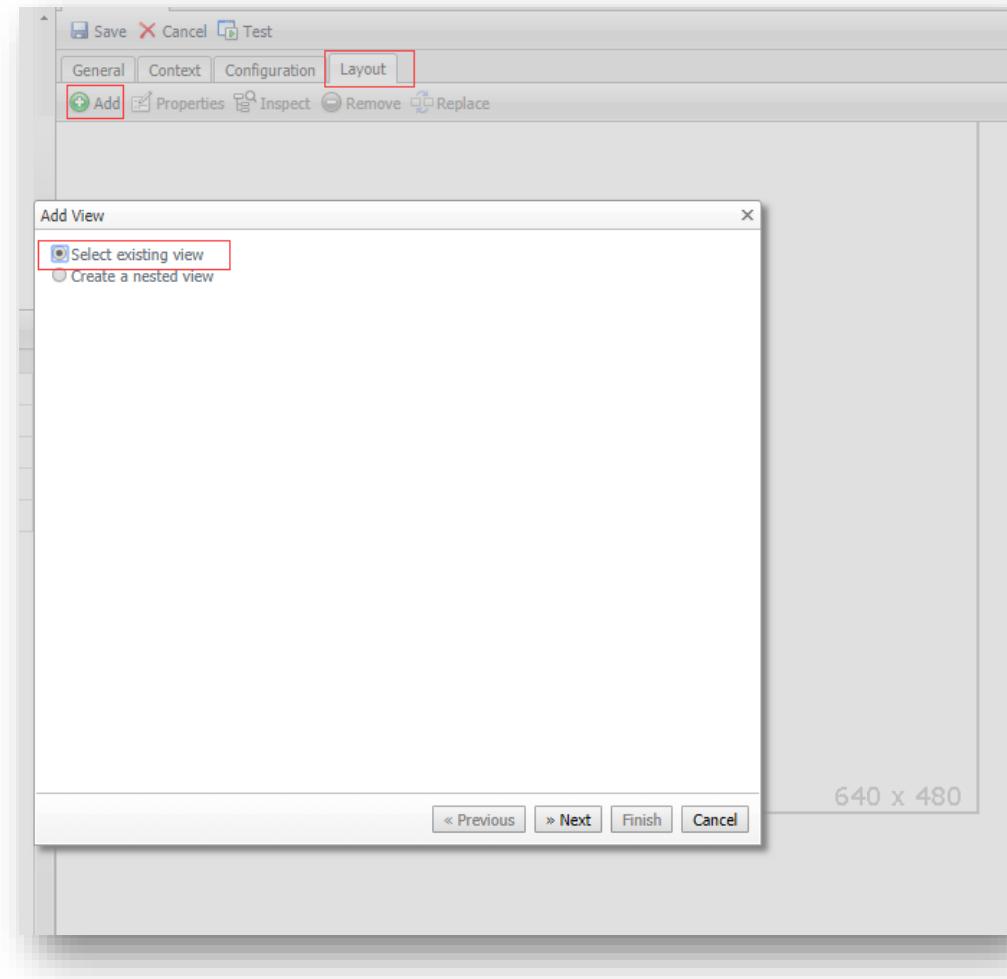

Add Service Table to Layout – Step 2

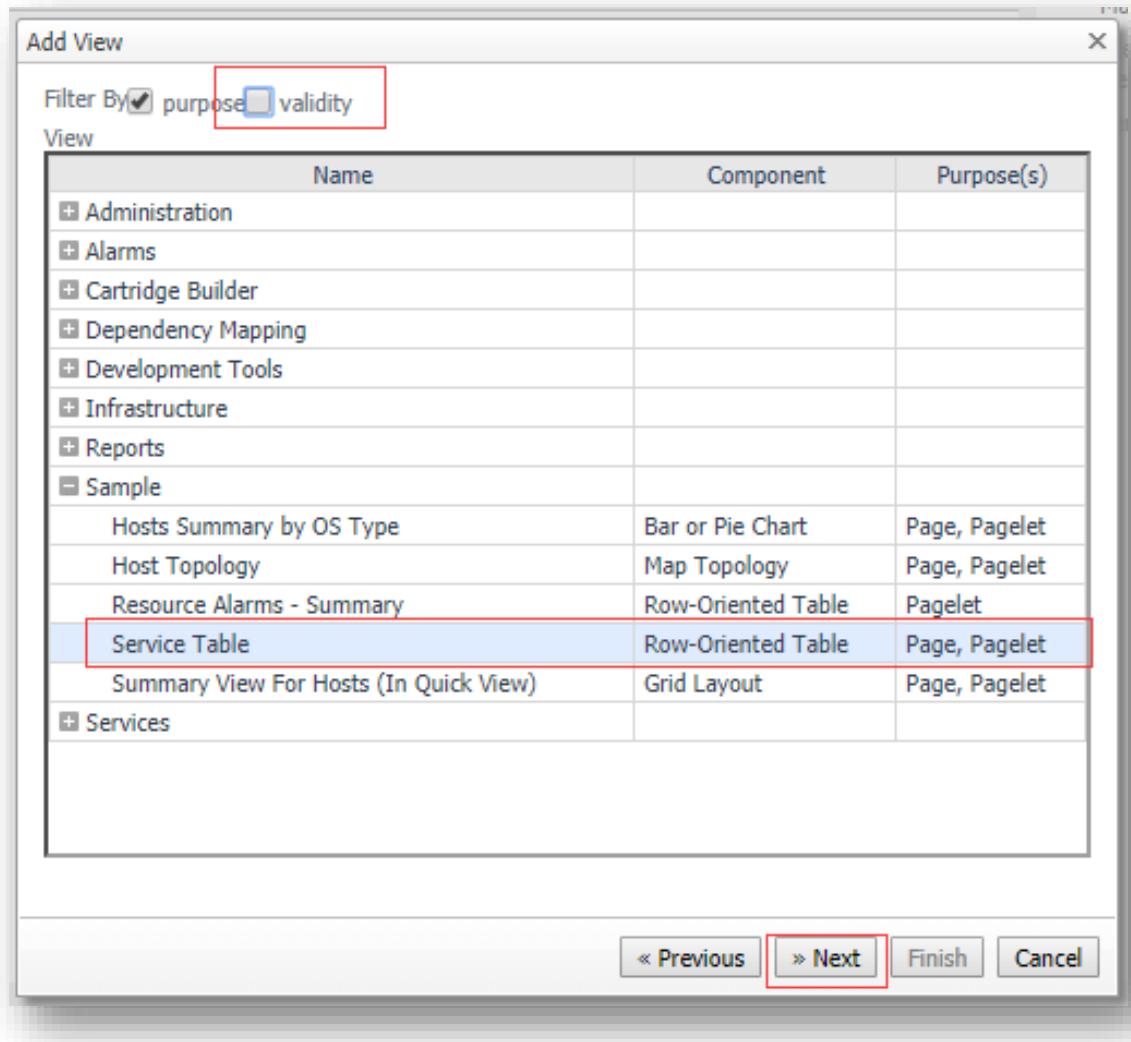


Add Service Table to Layout – Step 3

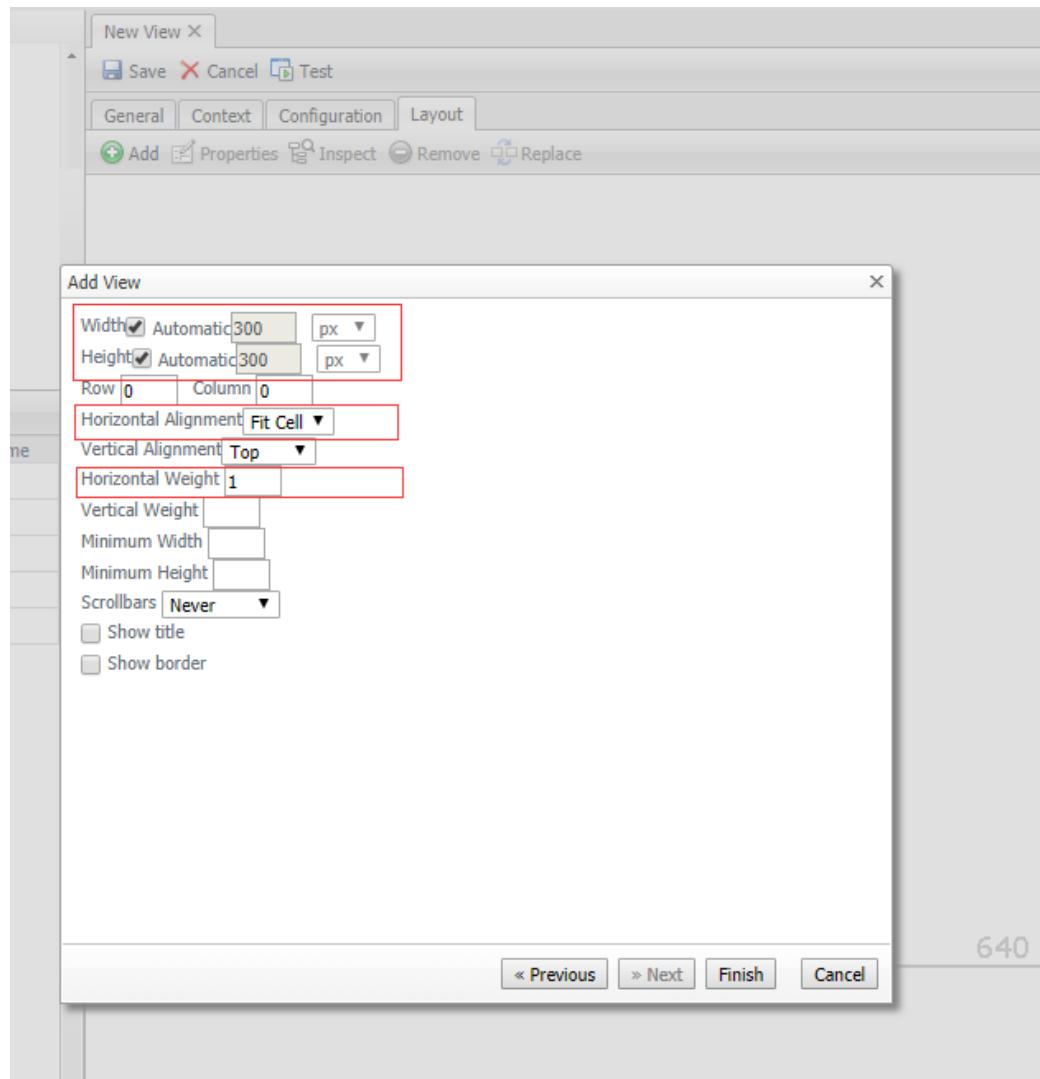


Add Service Table to Layout – Step 4

- Add other views to Layout in the same way
 - *Host Topology*
 - *Host Summary by OS Type*
 - *Summary View For Hosts (In Quick View)*
- Note, the input of *Summary View For Hosts (In Quick View)* is *objects*, which is not match with any context of this Layout, should convert context *hosts* to *objects* when adding this view.

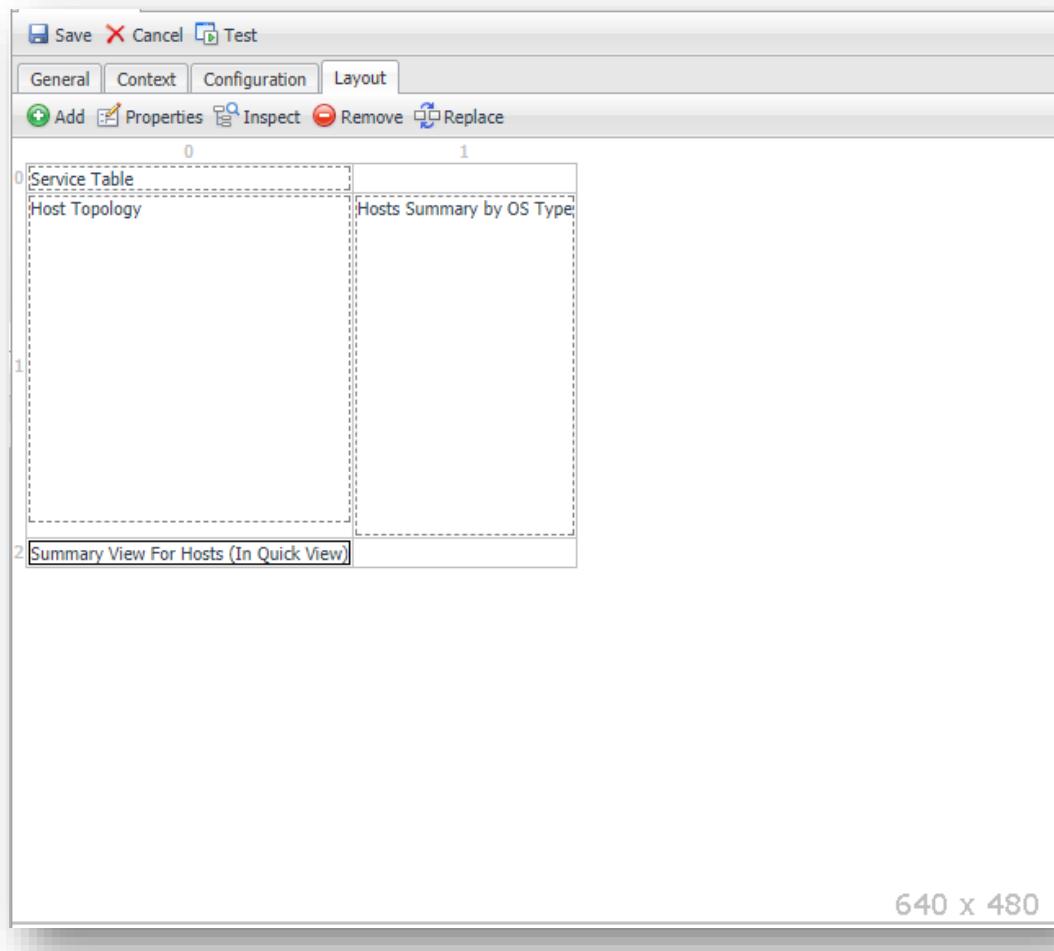


Adjustments for Contained Views

- Specify following properties for each view in Layout
 - Width
 - Height
 - Row
 - Column
 - Alignments
 - Weight: means how much space it should occupy compared with other views.
 - Show Title

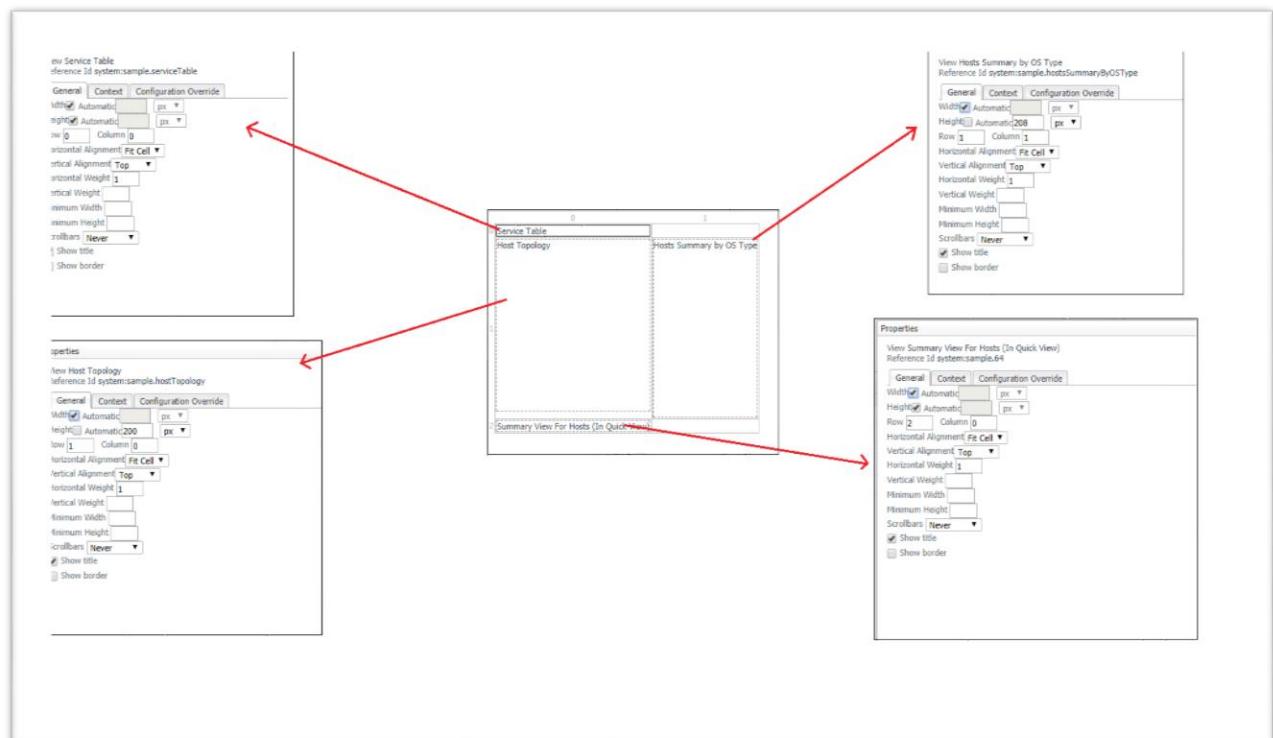

- Add a Page Title
- Give a *Nature* height for Sizing
- Bind ‘CIO Dashboard’ to module as Main View so that a dashboard link appears in Navigation panel.
- Finally, change module name to ‘CIO Dashboard’.

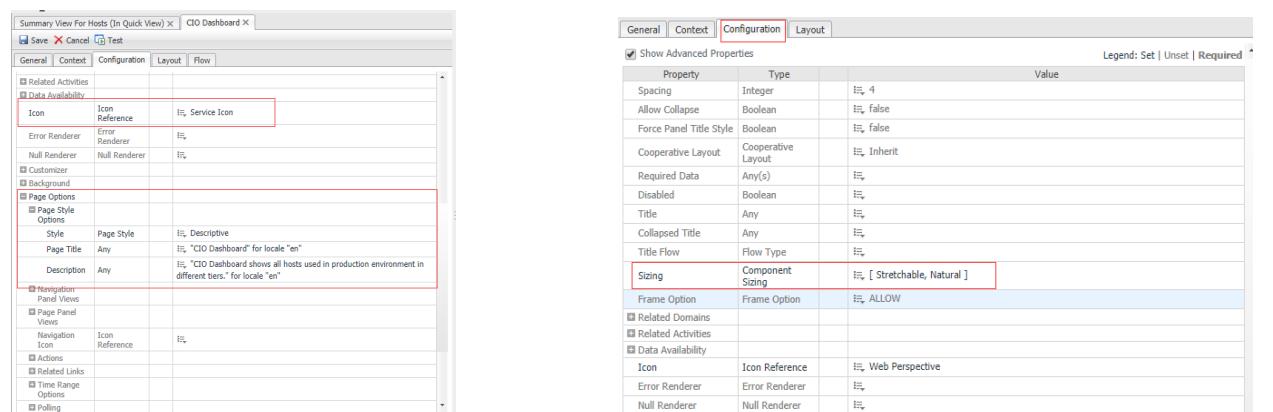

Add a PDF Layout

- PDF Layout is a PDF template that contains the reportlets.

The screenshot shows the Foglight interface with the following components:

- Navigation Bar:** Displays "Quest™ Foglight®".
- Left Sidebar:** Shows a tree view of navigation items under "Definitions" and "Views". The "Definitions" section includes "All Definitions" and "My Definitions". The "Views" section lists various dashboards and reports, with "Definitions" highlighted by a red box.
- Central Area:** A table titled "Views" showing details like Name, Component, Purpose(s), and Layout type. One row, "CIO Dashboard", has its "Purpose(s)" set to "Page, Pagelet".
- Right Panel:** An "Add View" dialog box.
 - Buttons:** "Edit", "Remove", "Validate", "Test", "Move", "Copy".
 - Form Fields:** "Module" (set to "CIO Dashboard"), "Name" (set to "Hosts Summary by OS Type"), "Component" (set to "Bar or Pie Chart"), "Purpose(s)" (set to "Page, Pagelet"), and "Comments".
 - Buttons:** "Create a Blank View" and "Copy an Existing View".
 - Section:** "PDF Layout".
 - Description: "The PDF Layout contains a series of body views that are rendered in sequence (in the order they appear in the layout) to a ServerReport document for printing or saving as a PDF. Note: Page Decoration header and footer views used on the document's first page must be placed before the first body view."
 - Checkboxes:
 - Common
 - Charts and Gauges
 - Metric
 - Tables and Trees
 - Layouts
 - Other Containers
 - Reporting
 - Page Decoration
 - PDF Layout** (highlighted with a red box)
 - Topology
 - Bean Inputs
 - Context Inputs
 - Others
 - Preview:
 - Bean Input Container
 - Map Topology
 - Alpha (unstable)
 - Legacy
 - Example Preview:** Shows a chart titled "Host Summary - Thursday, June 21" with the subtitle "System Load Summary for ...". The chart displays CPU Utilization over time, with multiple metrics plotted. A red box highlights the "OK" button at the bottom right of the preview area.
 - Buttons:** "OK", "Cancel", and "Help".

General Setup for PDF Layout

- Purpose: Report

Save X Cancel Test

General Context Configuration Views

Module	CIO Dashboard
Component	PDF Layout
Name	CIO Report
ID	CIOReport
Public	<input type="checkbox"/>
Deprecated	<input type="checkbox"/>
Refresh Interval	<input type="text"/> second(s)
Priority	None ▾
Purpose(s)	Report
Custom Purpose(s)	<input type="text"/>
Relevant Role(s)	≡ (From module: Administrator)
Allowed Role(s)	≡ (all)
Comments	<input type="text"/>
Context Help	<input type="text"/>

Context Setup for PDF Layout

- Add context *selectService* and additional context *hosts* as Rows Layout does.
- In addition, add context *pageNumber* for PDF footer.

The screenshot shows a software interface for managing context settings. The top bar includes Save, Cancel, and Test buttons. The tabs at the top are General, Context, Configuration, and Views, with Context being the active tab.

Inputs:


	Key	Name	Usage	List	Data Type	Fallback Value
timeRange	(not set)	(not set)	Required	False	Common:Time Range	Null
selectedService	(not set)	(not set)	Internal	False	Monitoring:FSMService	Null

Additional:

	Key	Name	Evaluate Once	Value
hosts	(not set)	(not set)	<input type="checkbox"/>	<selectedService>/hosts

Add Reportlet to PDF Layout

- Add following views to Layout
 - Service Table
 - Host Topology
 - Hosts Summary by OS Type
 - Summary View For Hosts(In Quick View)
 - Page Header
 - Page Footer
 - Page Header and Page Footer should be ahead of other views.
 - It's recommended that all contained views have fixed width and height.
 - Don't forget convert *hosts* to *objects* for Summary View For Hosts(In Quick View).
- Page header and footer could use existing ones under module *Administration/Management Server/Reporting*

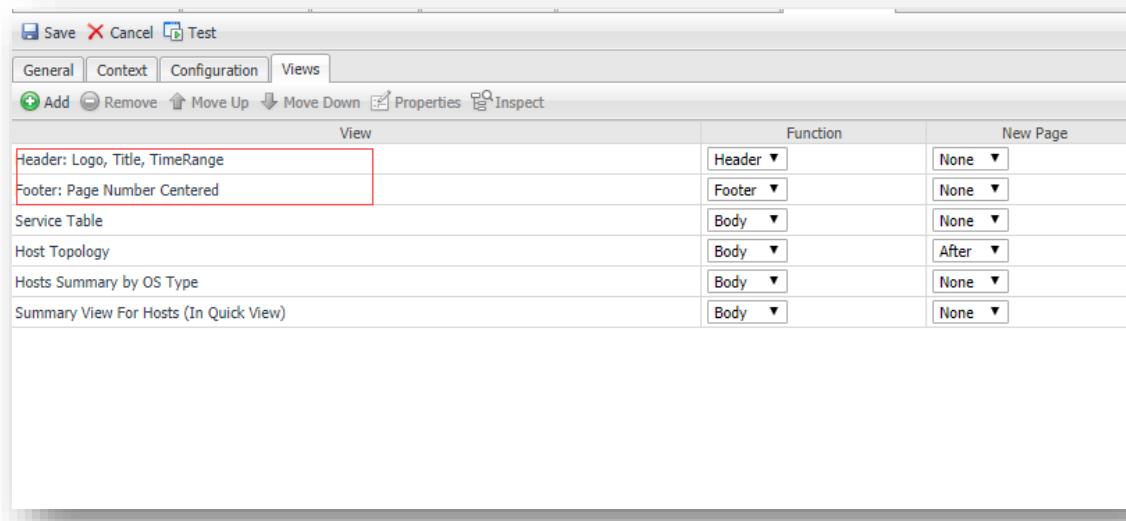

Test CIO Report

Module CIO Dashboard
Name CIO Report
Component PDF Layout
Purpose(s) Report
Comments
Context Inputs

Key	Name	Usage	Data Type	Fallback Value
timeRange		Required	Common:Time Range	
selectedService		Internal	Monitoring:FSMService	Null
pageNumber		Internal	Common:Integer	0

Primary Input selectedService
Additional Context

Key	Name	Evaluate Once	Value
hosts		False	Context <selectedService>/hosts returning "Localized Value"

Reference Id
Last Modified T
Public
Deprecated
Priority
Relevant Role(s)
Allowed Role(s)
Views

Name
Componen
Size
Scrollbars Never
Configuration
• View Function Header

Input Values



Time Range:	Last hour...
Optional	
selectedService:	Null...
pageNumber:	0

Results Cancel

Name Footer: Page Number Centered' from the System module Administration/Management Server/Reporting
Component Page Decoration
Size Automatic x Automatic
Scrollbars Never
Configuration

Associate CIO Report to CIO Dashboard

- Edit the *Configuration* of CIO Report
- Configure the *Report Options*

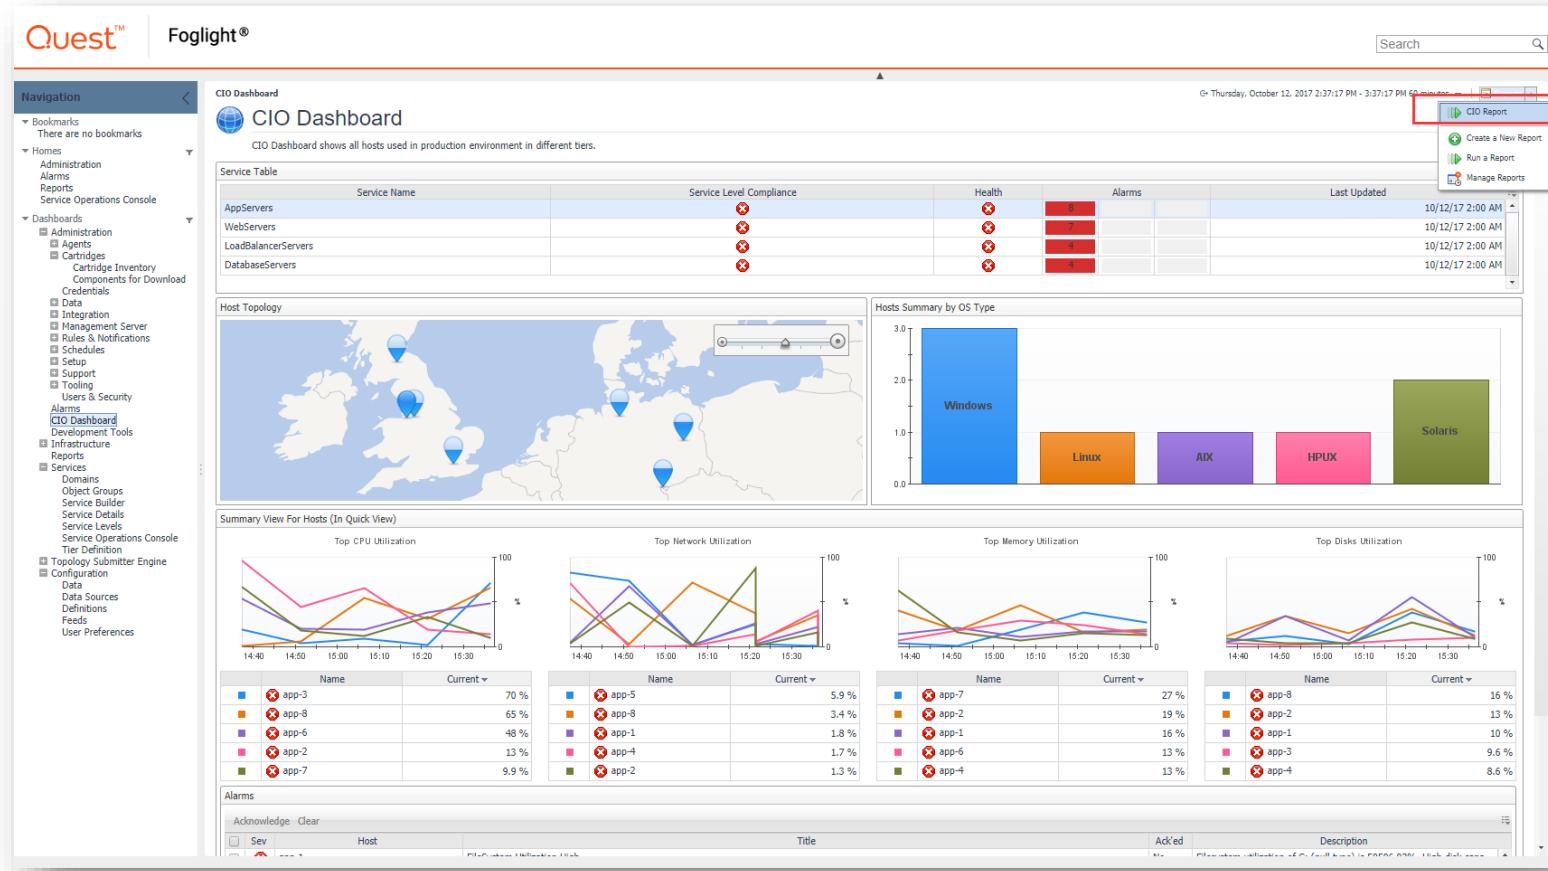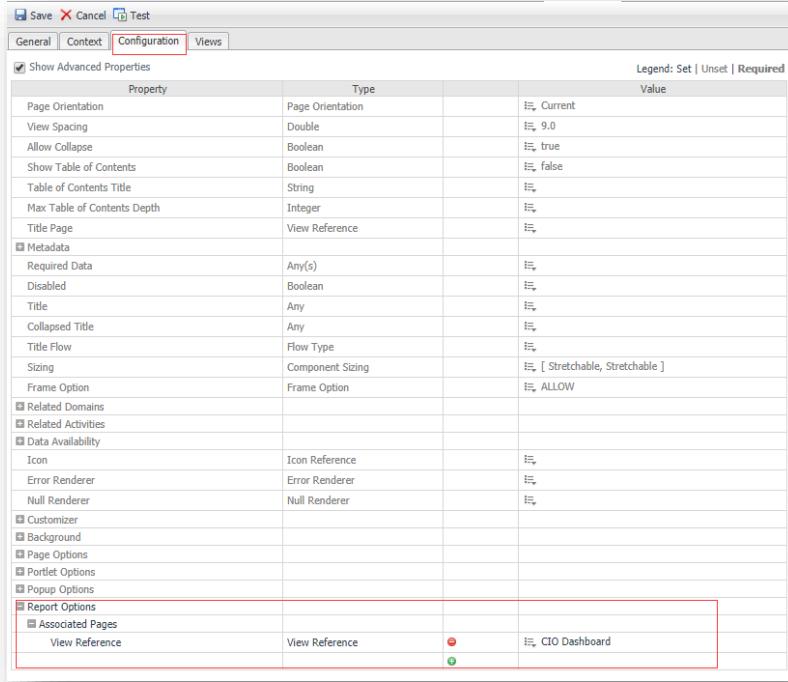


Next Steps

- Add actions to following places
 - SLA Detail
 - Health Detail
 - Alarm Detail
 - Map improvement – Bubble select & Dwell


SLAState Select Action

Edit Service Table -> Flow,
Popup
Services/Explorer/FSMService
e Service Level Compliance
Summary

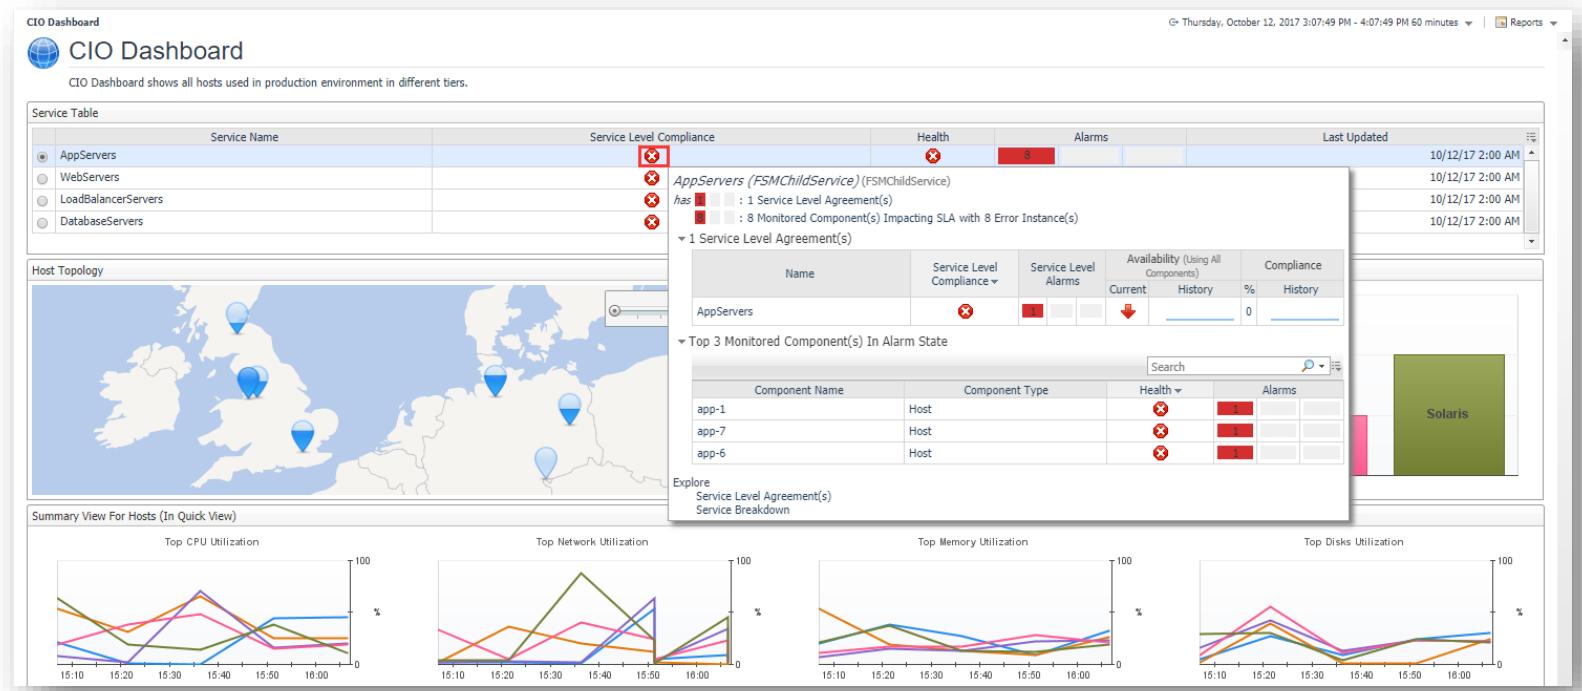

Service Health Select Action

Edit Service Table -> Flow,
Popup
Administration/Management
Server/Commons/Topology
Object aggregateState
Summary

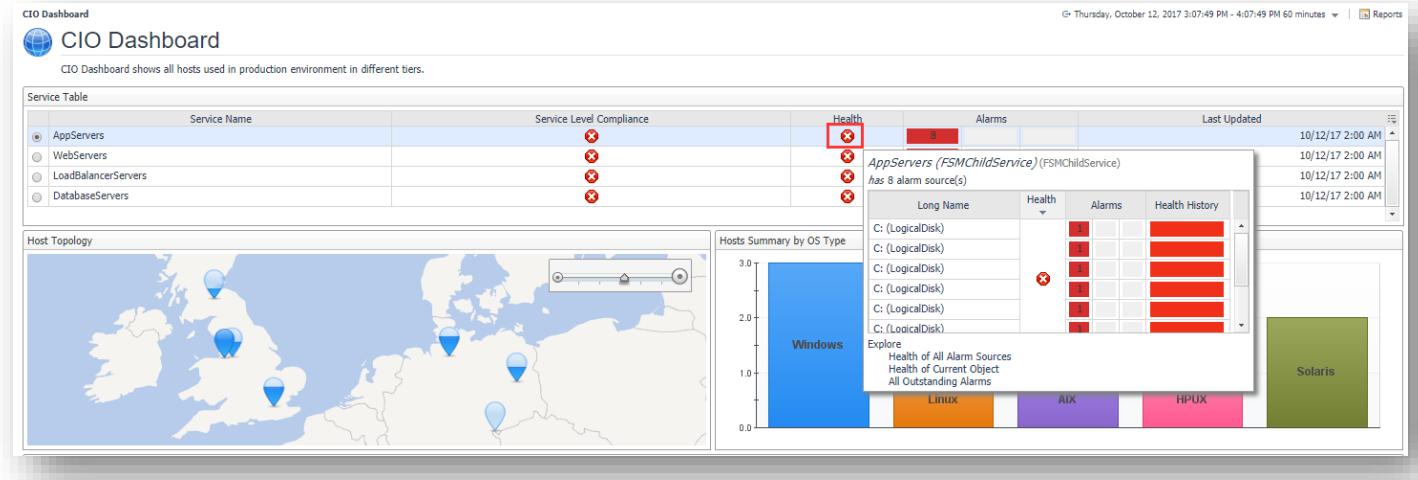

Alarm Count Select Action

Edit Service Table -> Flow,
Popup Alarms/Alarm List As
Popup (TopologyObject)

CIO Dashboard

G: Thursday, October 12, 2017 3:07:49 PM - 4:07:49 PM 60 minutes | Reports

Action

General Design Help

Name

CIO Dashboard Service Table Host Topology Hosts Summary by OS Type

Service Table

Service Name	Service Level Compliance	Health	Alarms	Last Updated
AppServers	✗	✗	8	10/12/17 2:00 AM
WebServers	✗	✗	7	
LoadBalancerServers	✗	✗	4	
DatabaseServers	✗	✗	3	

Hosts Summary by OS Type

OS Type	Count
Windows	3.0
Linux	1.0
AIX	0.0
HPUX	0.0

Summary View For Hosts (In Quick View)

Top CPU Utilization Top Network Utilization Top Memory Utilization Top Disks Utilization

Name	Current
app-4	45 %
app-8	24 %
app-3	20 %
app-6	19 %
app-2	10 %

Name	Current
app-3	5.6 %
app-6	2.9 %
app-1	2.6 %
app-4	2.3 %
app-7	1.8 %

Name	Current
app-7	32 %
app-5	25 %
app-4	23 %
app-2	22 %
app-1	20 %

Name	Current
app-4	30 %
app-6	23 %
app-2	22 %
app-1	20 %
app-5	21 %

Alarms

Sev	Host	Title	Ack'd	Description
✗				

Actions

General Design Help

Name

CIO Dashboard Service Table Host Topology Hosts Summary by OS Type

Select All Unselect All Acknowledge Clear

Sev Time Ack'd Cleared Host Instance Message

Sev	Time	Ack'd	Cleared	Host	Instance	Message
✗	10/10/17 6:15 PM	No	No	app-8	C: (LogicalDisk)	FileSystem Utilization High. Filesystem util
✗	10/10/17 6:15 PM	No	No	app-7	C: (LogicalDisk)	FileSystem Utilization High. Filesystem util
✗	10/10/17 6:15 PM	No	No	app-6	C: (LogicalDisk)	FileSystem Utilization High. Filesystem util
✗	10/10/17 6:15 PM	No	No	app-5	C: (LogicalDisk)	FileSystem Utilization High. Filesystem util
✗	10/10/17 6:15 PM	No	No	app-4	C: (LogicalDisk)	FileSystem Utilization High. Filesystem util
✗	10/10/17 6:15 PM	No	No	app-3	C: (LogicalDisk)	FileSystem Utilization High. Filesystem util
✗	10/10/17 6:15 PM	No	No	app-2	C: (LogicalDisk)	FileSystem Utilization High. Filesystem util

Definition Layout Context

Inspect

Module CIO Dashboard

Name

Component

Comments

Context Inputs

Key	Name	Usage	Data Type	Fallback Value
timeRange	Required	Common:Time Range		
metricModelCPU	Required	Common:Metrics Model		
metricEntry	Optional	Common:Metrics Model Entry		

Primary Input metricModelCPU

Configuration

- Rows Context <metricModelCPU>/entries returning "Localized Value"
- Columns
 - Column
 - Value Context <currentRow>/style, Renderer: Chart Legend returning "Localized Value"
 - ID color
 - Header String Template ()
 - Cell Alignment
 - Vertical Middle
 - Horizontal Center
 - Column
 - Value Localized string ({0},{1})

Quest Confidential

Quest

Host Topology Bubble Actions

Edit Association *Host Node*


- Popup

Infrastructure/Hosts/Host/Host Summary with Status

when Dwell

- Next to Page

Infrastructure/Hosts/Host Monitor when Select

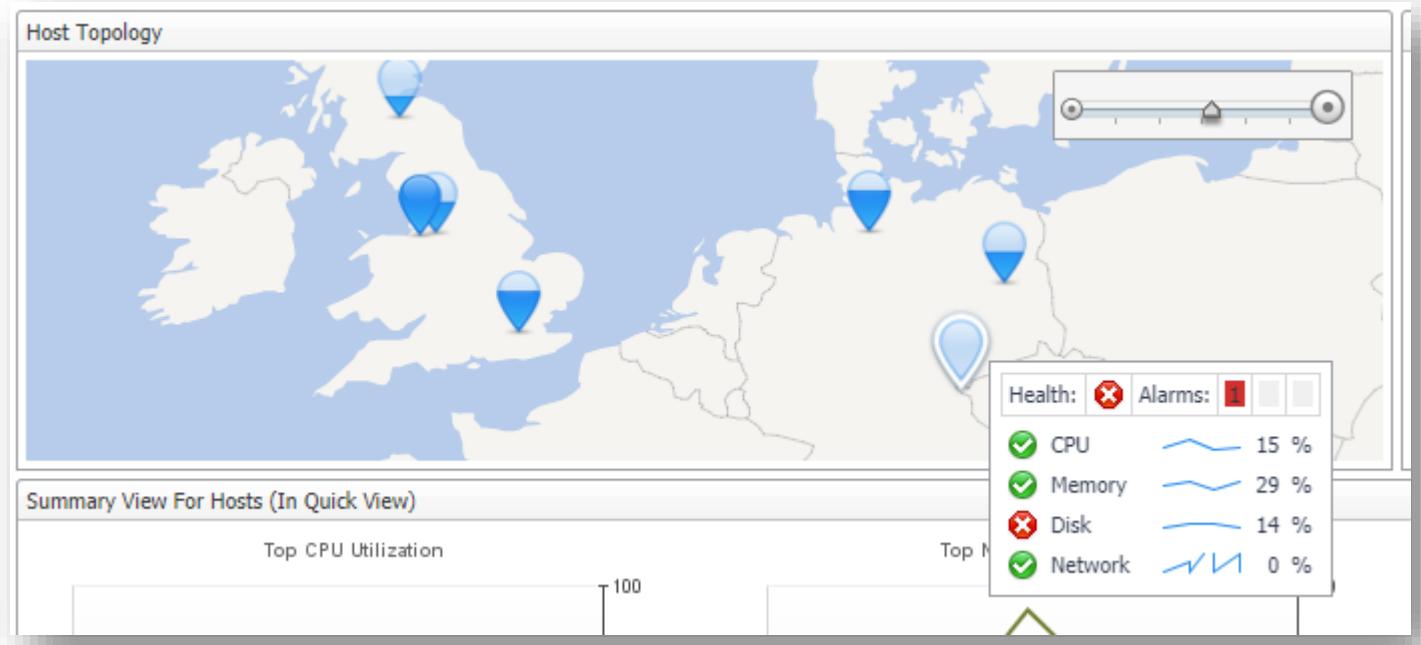

QuestTM