DOKUMENTASI FOODBLESS API

Dibuat Oleh FoodBless Team

Tahun Pengerjaan Proyek FoodBless

(2024)

Daftar Isi

Dokumentasi FoodBless API 4
- Customer Endpoints 4
  - Create Customer 4
  - Update Customer 5
  - Login User 7
  - Get User Details 8
- Admin Endpoints 9
  - Create Admin 9
  - Get All Customer Data 10
  - Get All Seller Data 11
- Seller Endpoints 12
  - Create Seller 12
  - Update Seller 14
- City Endpoints 15
  - Get All Cities 15
  - Get Cities by Province ID 16
  - Get City by ID 17
- Province Endpoints 18
  - Get All Provinces 18
  - Get Province by ID 19
- Food Endpoints 20
  - Get All Foods 20
  - Get Food by ID 20
  - Get Food by Seller ID 21
  - Create Food 22
  - Update Food 24
  - Delete Food 25
- Order Endpoints 26
  - Get All Orders 26
  - Get Orders by Seller ID 26
  - Get Orders by Customer ID 27
  - Get Orders by Food ID 28

Get Orders by Order ID 29
Check New Orders 30
Update Order to Diproses 30
Update Order to Selesai 32
Update Order to Dibatalkan 33
Comment Endpoints 34
Create Comment 34
Get All Comments 35
Get Comments by Seller ID 36

Dokumentasi FoodBless API

Dokumentasi ini memberikan detail tentang berbagai **Endpoint** yang tersedia dalam sistem untuk mengelola pelanggan, admin, penjual, kota, provinsi, makanan, pesanan, dan komentar. Semua **Endpoint** diakses melalui:

BASE URL: https://api.foodbless.site

Customer Endpoints

Create Customer

- Endpoint: /createCustomer
- Method: POST
- Body: form-data
    - username
    - email
    - password
    - confirmPassword
    - role
    - photo
    - name
    - nomorWA
    - address
    - city_id
    - city_province_id

- Contoh:

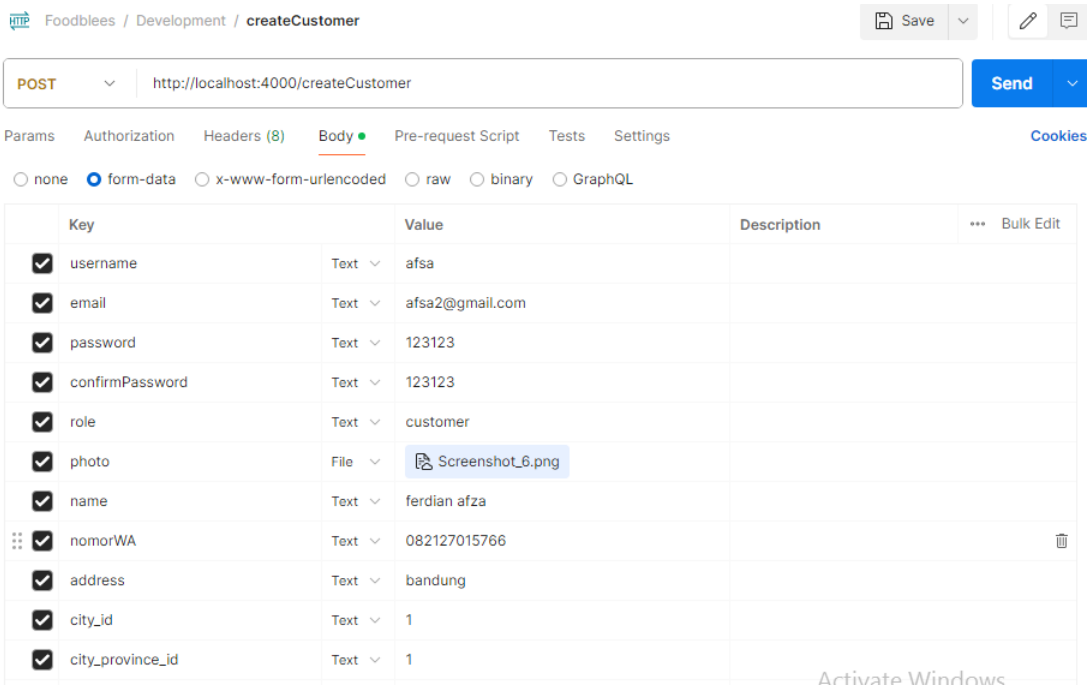

- Response:

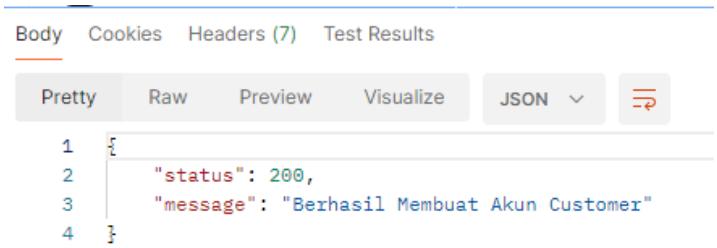

Update Customer

- Endpoint: /updateCustomer
- Method: PUT
- Headers: Authorization (JWT token)
- Body: form-data
    - user_id
    - id_cust
    - username
    - email

- password
- name
- nomorWA
- address
- city_id
- city_province_id
- photo

- Contoh:

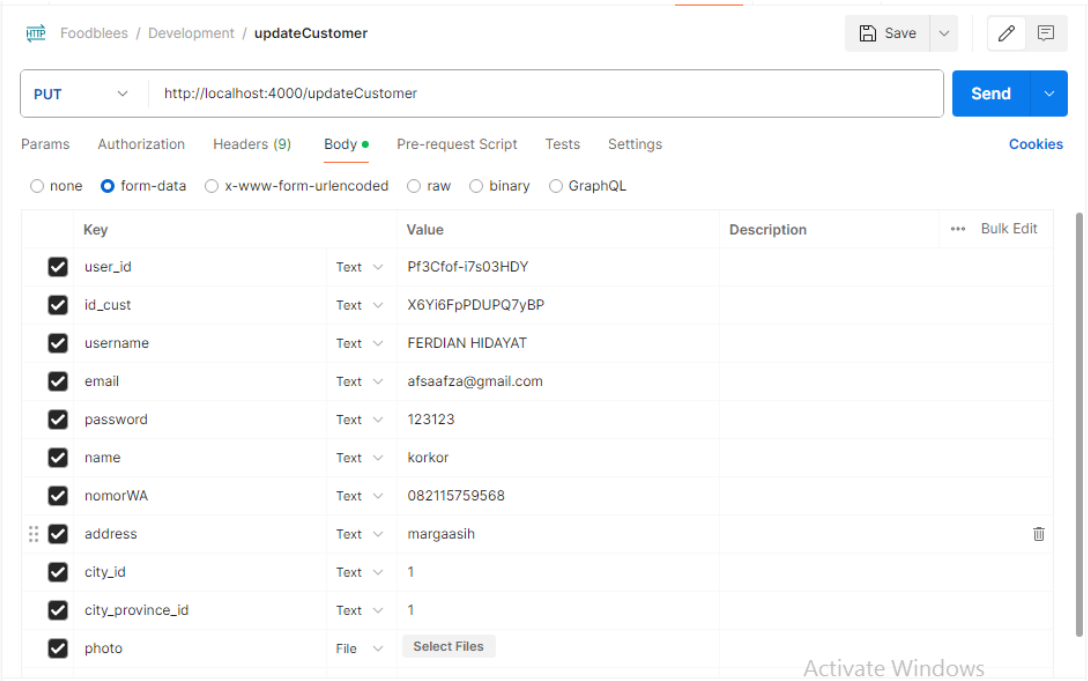

- Response:

Login User

- Endpoint: /login
- Method: POST
- Body: x-www-form-urlencoded
    - email
    - password
- Contoh:

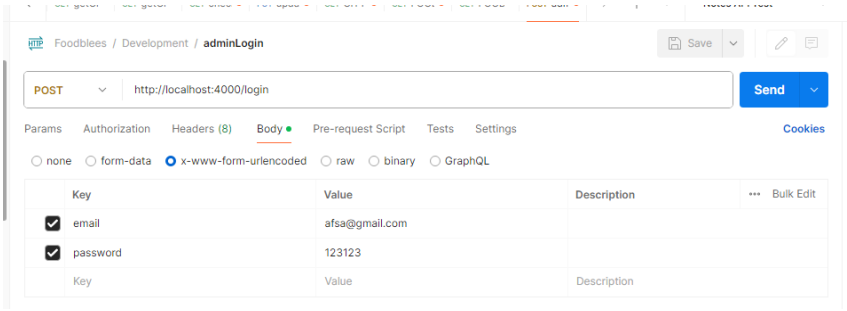

- Response:

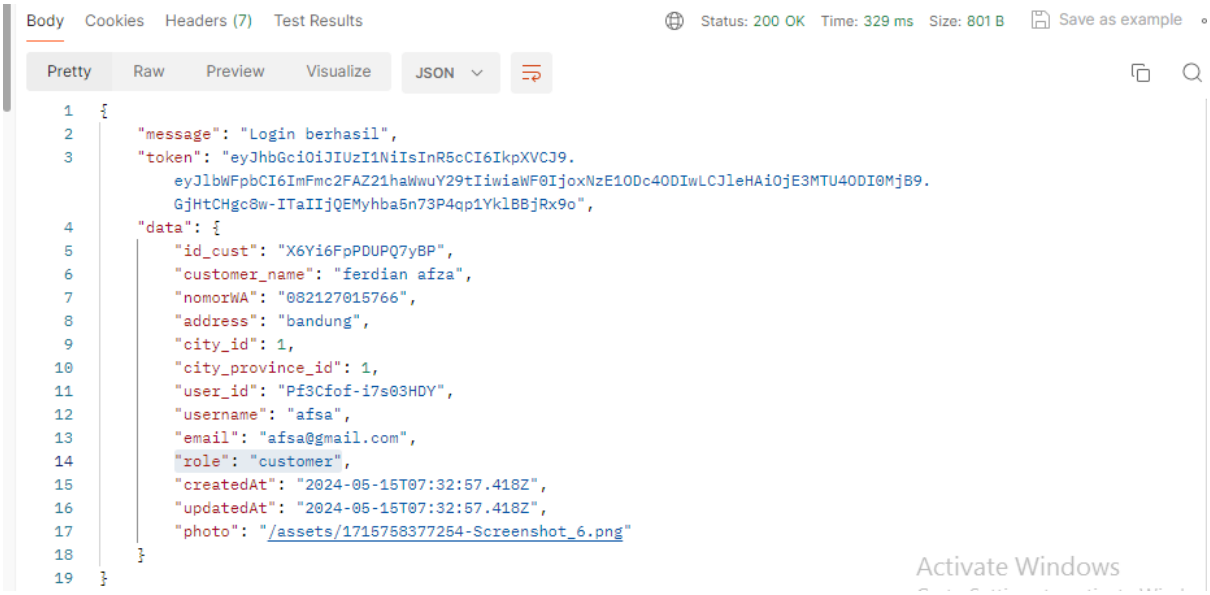

Get User Details

- Endpoint: /user/:id
- Method: GET
- Params:
  - id (user ID)
- Contoh:

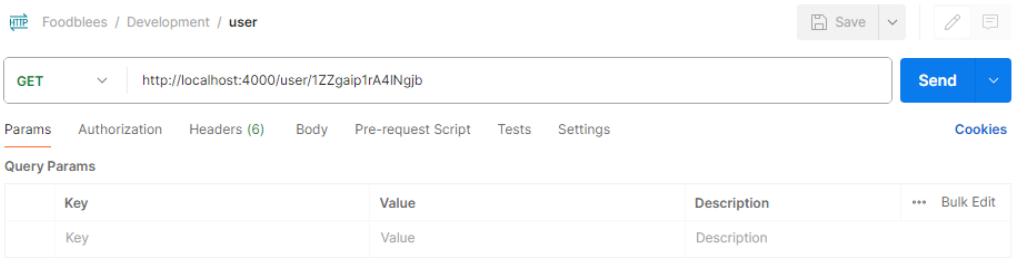

- Response:

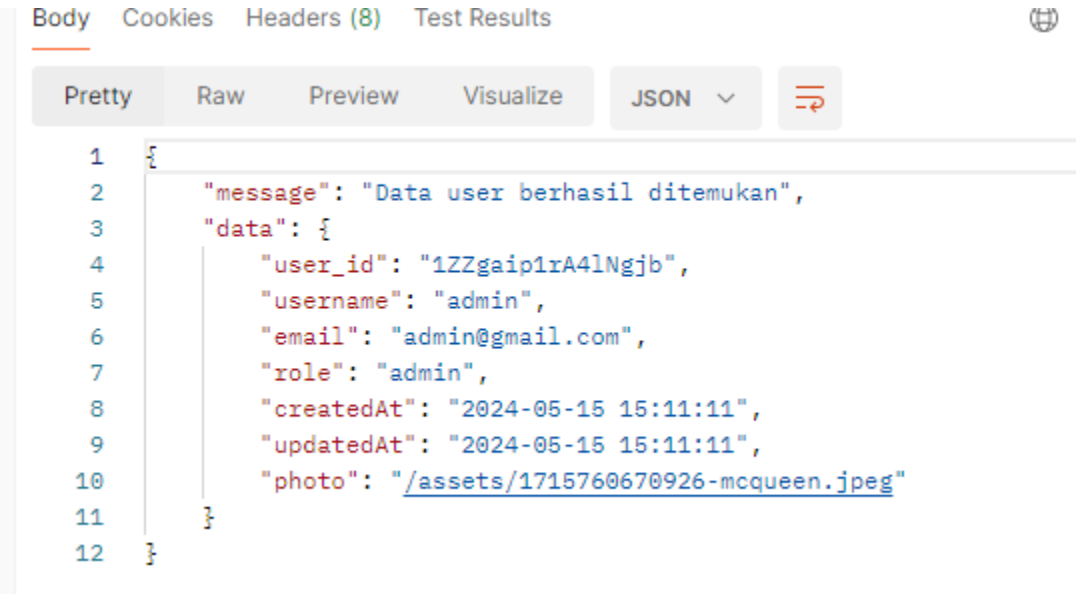

Admin Endpoints

Create Admin

- Endpoint: /createAdmin
- Method: POST
- Body: form-data
    - username
    - email
    - password
    - confirmPassword
    - role
    - photo
- Contoh:

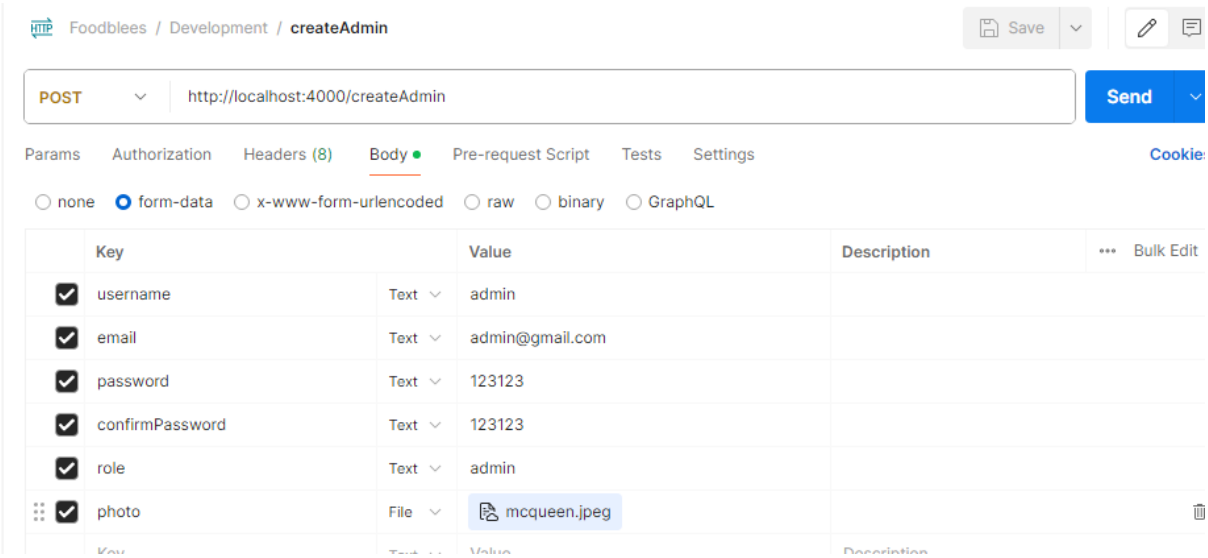

- Response:

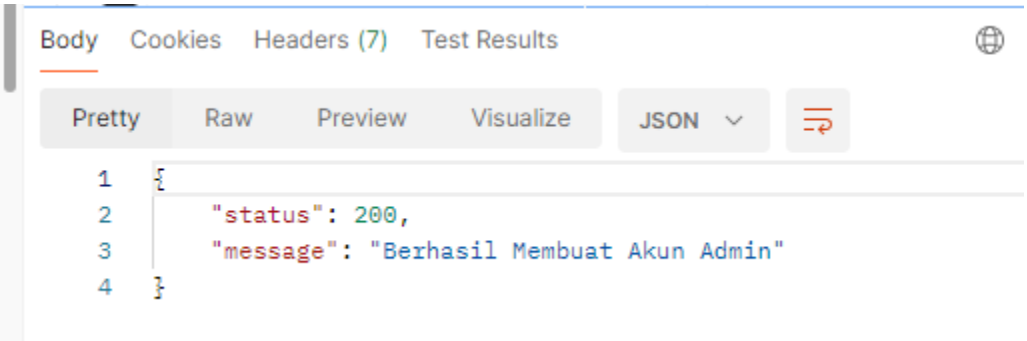

Get All Customer Data

- Endpoint: /getAllUserCustomers
- Method: GET
- Body: form-data
    - user_id
- Contoh:

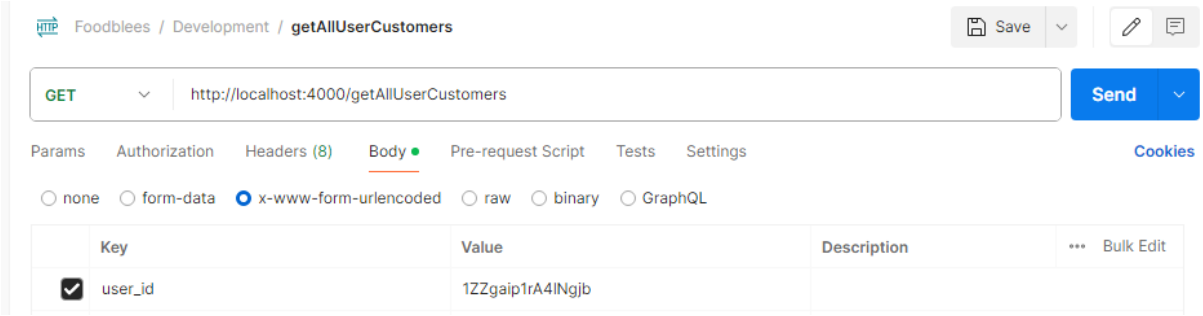

- Response:

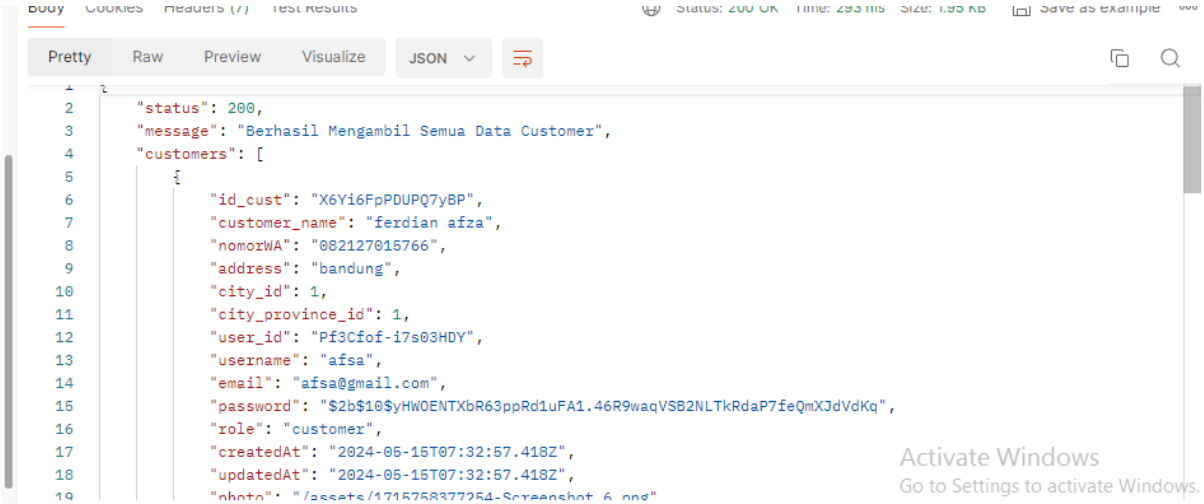

Get All Seller Data

- Endpoint: /getAllUserSellers
- Method: GET
- Body: form-data
    - user_id
- Contoh:

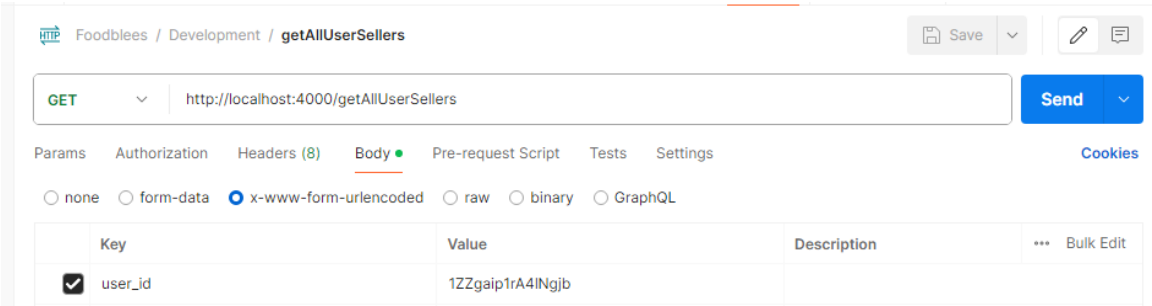

- Response:

Seller Endpoints

Create Seller

- Endpoint: /createSeller
- Method: POST
- Body: form-data
    - username
    - email
    - password
    - confirmPassword
    - role
    - photo
    - name
    - desc
    - nomorWA
    - address
    - city_id
    - city_province_id
- Contoh:

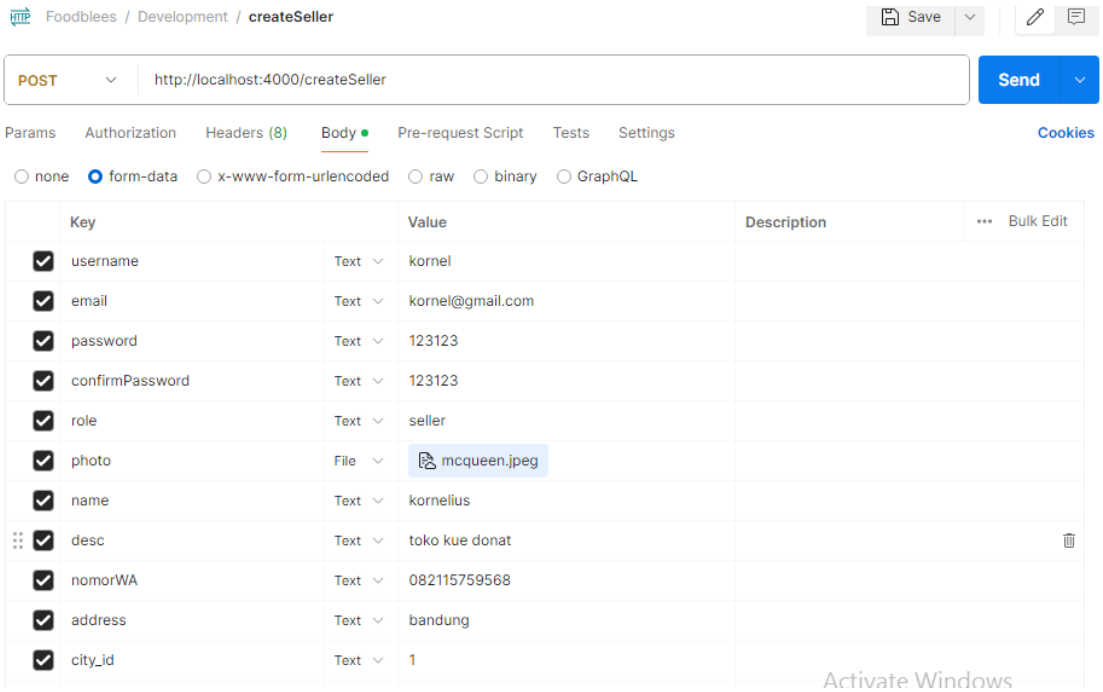
Foodblees / Development / createSeller
Save
POST
http://localhost:4000/createSeller
Send
Params
Authorization
Headers (8)
Body
Pre-request Script
Tests
Settings
Cookies
none
form-data
x-www-form-urlencoded
raw
binary
GraphQL
Key
Value
Description
Bulk Edit
username
Text
kornel
email
Text
kornel@gmail.com
password
Text
123123
confirmPassword
Text
123123
role
Text
seller
photo
File
mcqueen.jpeg
name
Text
kornelius
desc
Text
toko kue donat
nomorWA
Text
082115759568
address
Text
bandung
city_id
Text
1
Activate Windows

- Response:

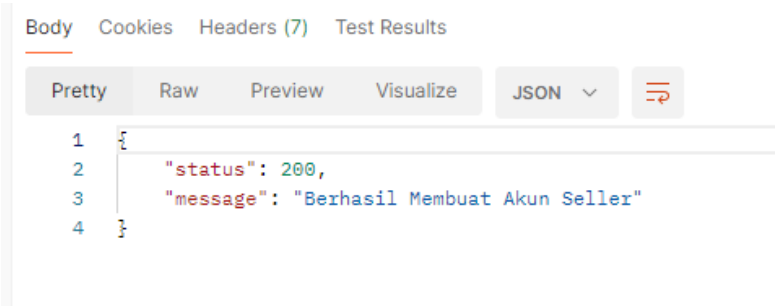
Body
Cookies
Headers (7)
Test Results
Pretty
Raw
Preview
Visualize
JSON
{
"status": 200,
"message": "Berhasil Membuat Akun Seller"
}

Update Seller

- Endpoint: /updateSeller
- Method: PUT
- Headers: Authorization (JWT token)
- Body: form-data
    - user_id
    - id_seller
    - username
    - email
    - password
    - name
    - desc
    - nomorWA
    - address
    - city_id
    - city_province_id
    - photo
- Contoh:

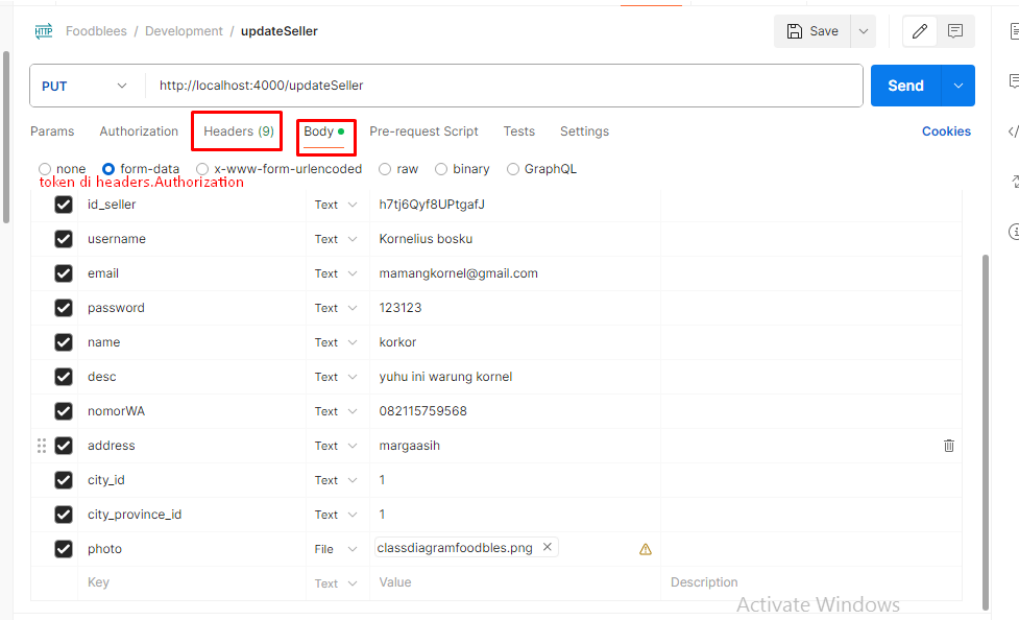

- Response:

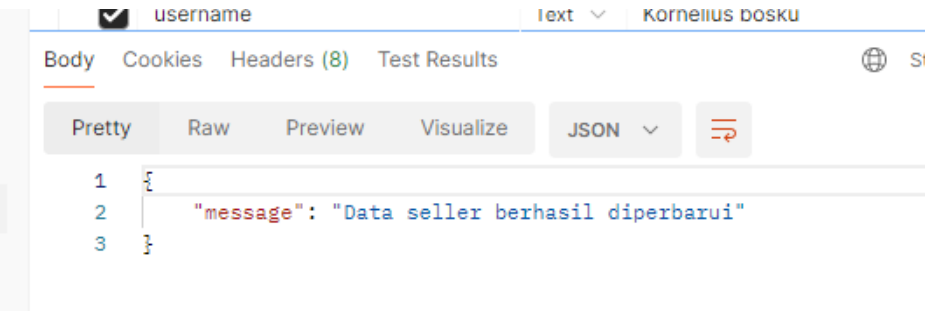

City Endpoints

Get All Cities

- Endpoint: /cityAll
- Method: GET
- Contoh:

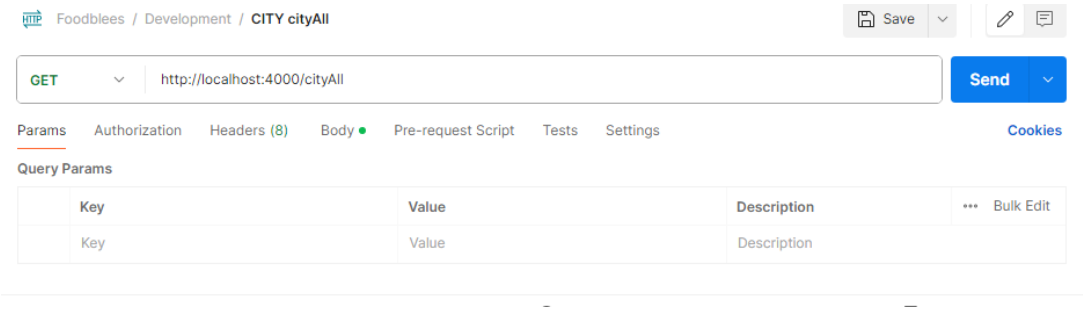

- Response:

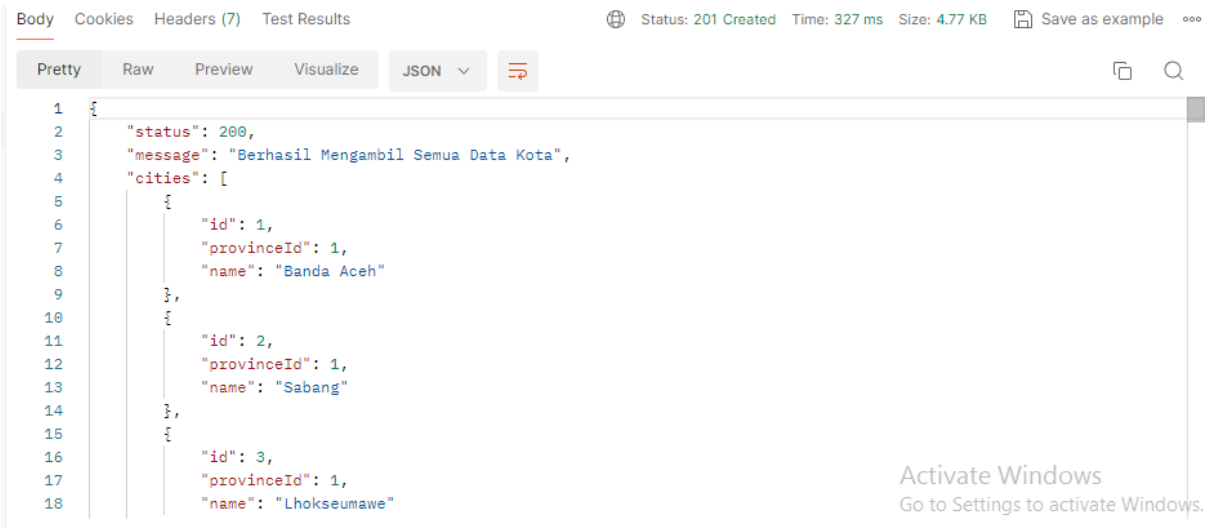

Get Cities by Province ID

- Endpoint: /cityByProvinceId
- Method: GET
- Params: Query params
    - provinceId
- Contoh:

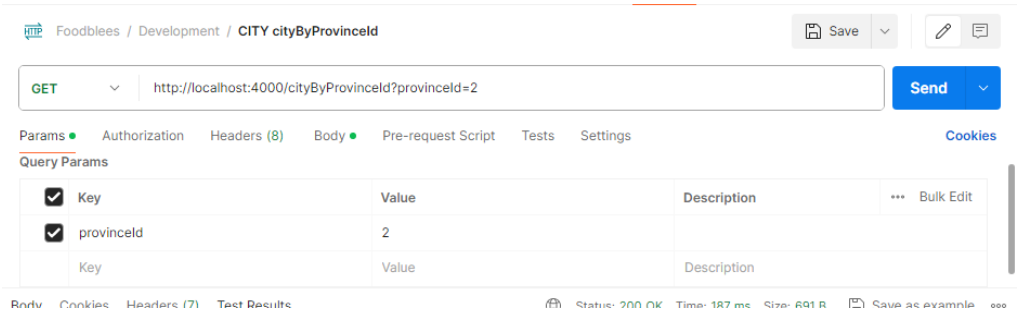

- Response:


```
{
    "status": 200,
    "message": "Berhasil Mengambil Semua Data Kota Berdasarkan Provinsi",
    "cities": [
        {
            "id": 6,
            "provinceId": 2,
            "name": "Binjai"
        },
        {
            "id": 7,
            "provinceId": 2,
            "name": "Gunungsitoli"
        },
        {
            "id": 8,
            "provinceId": 2,
            "name": "Medan"
        },
        {
            "id": 9,
            "provinceId": 2,
```


Activate Windows
Go to Settings to activate Windows

Get City by ID

- Endpoint: /cityById
- Method: GET
- Params: Query params
  - id
- Contoh:

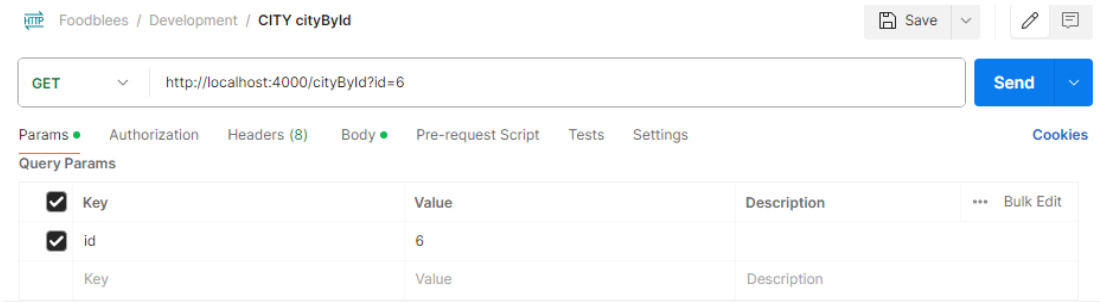

- Response:

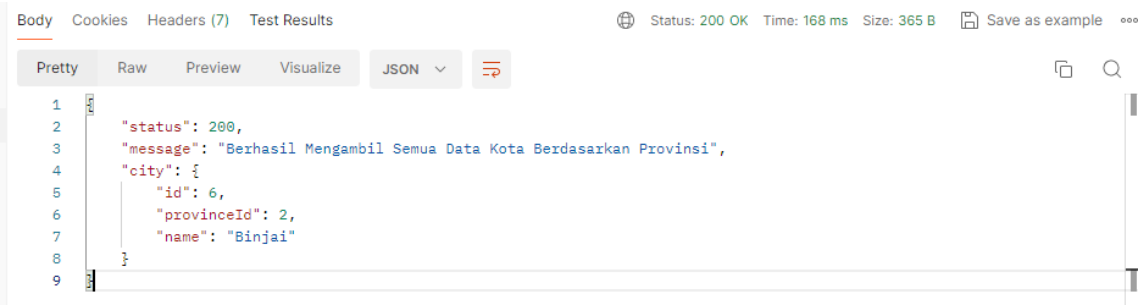

Province Endpoints

Get All Provinces

- Endpoint: /provinceAll
- Method: GET
- Contoh:

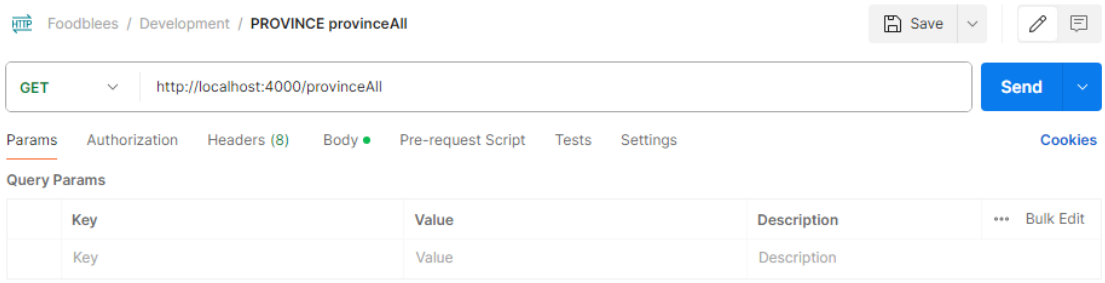

- Response:

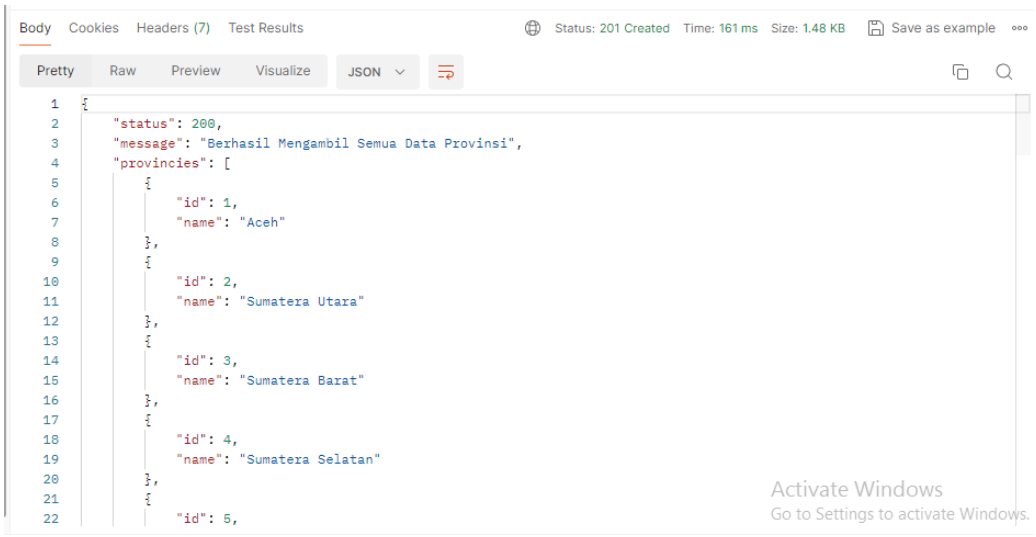

Get Province by ID

- Endpoint: /provinceById
- Method: GET
- Params: Query params
    - id
- Contoh:

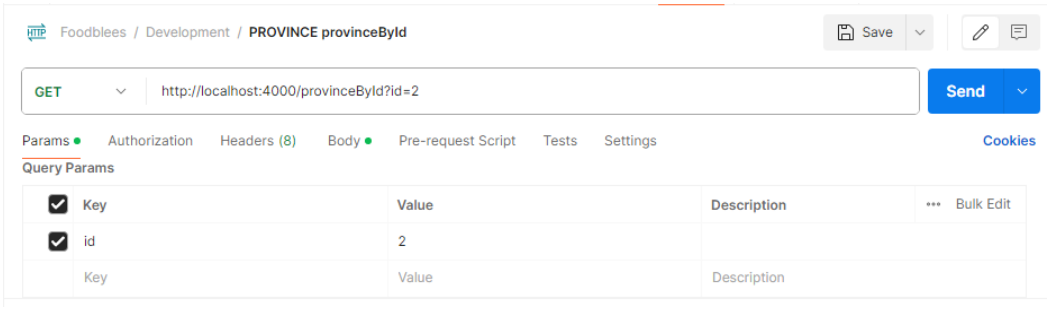

- Response:

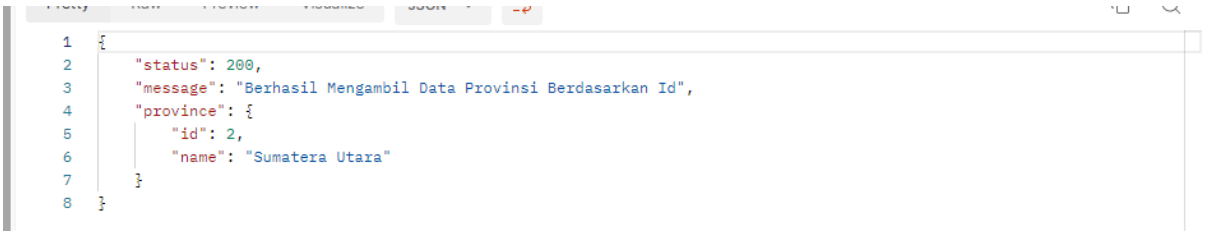

Food Endpoints

Get All Foods

- Endpoint: /getAllFoods
- Method: GET
- Contoh:

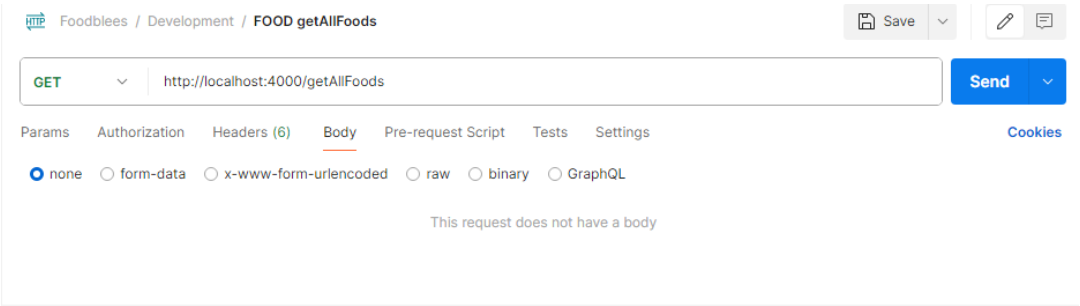

- Response:

Get Food by ID

- Endpoint: /getFoodById
- Method: GET
- Body: x-www-form-urlencoded
    - id
- Contoh:

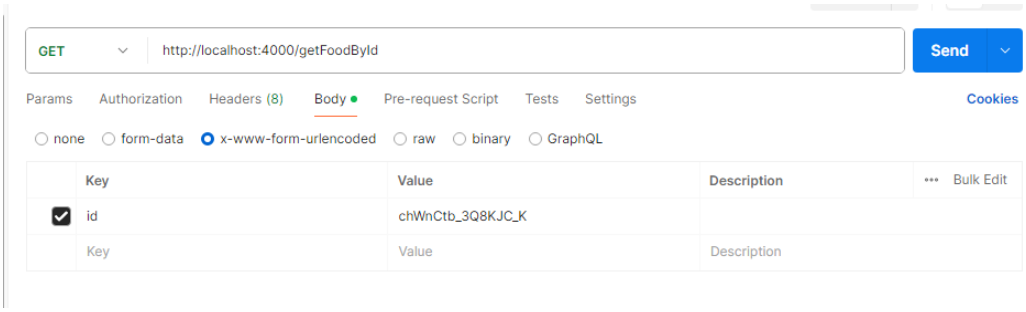

- Response:

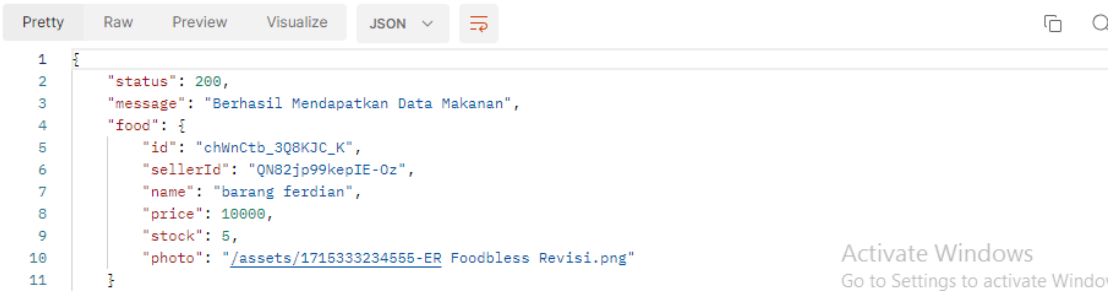

Get Food by Seller ID

- Endpoint: /getFoodBySellerId
- Method: GET
- Body: x-www-form-urlencoded
    - seller_id
- Contoh:

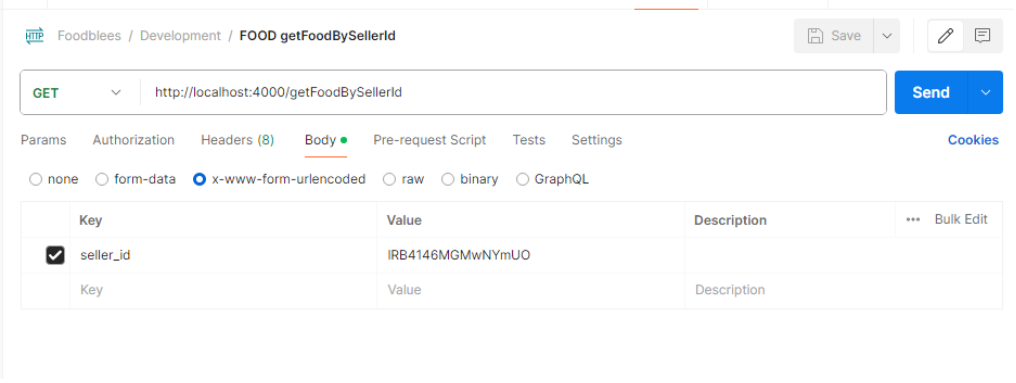

- Response:

Create Food

- Endpoint: /createFood
- Method: POST
- Headers: Authorization (JWT token)
- Body: form-data
    - sellerId
    - seller_city_id
    - name
    - price
    - stock
    - description
    - expireDate
    - photo
    - pickUpTimeStart

- pickUpTimeEnd

- Contoh:

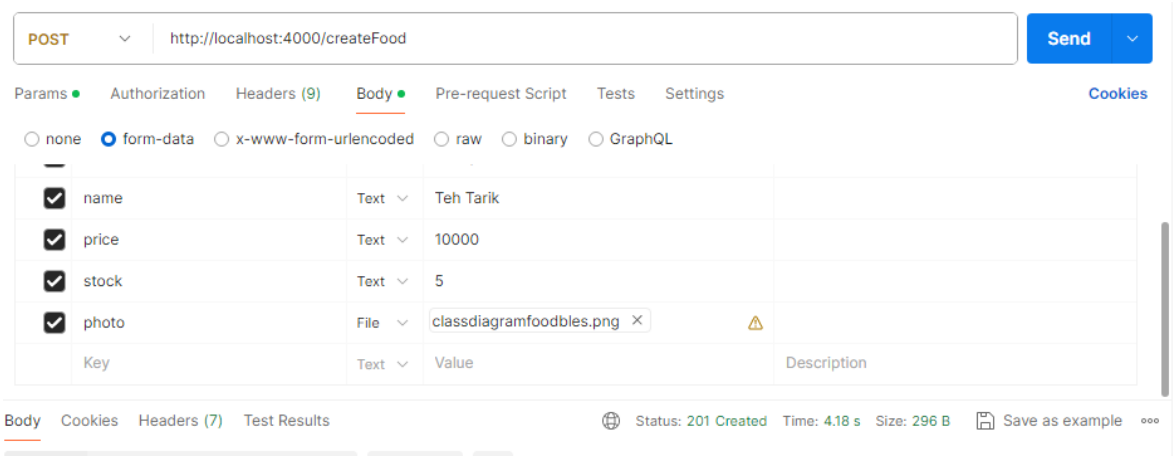

- Response:

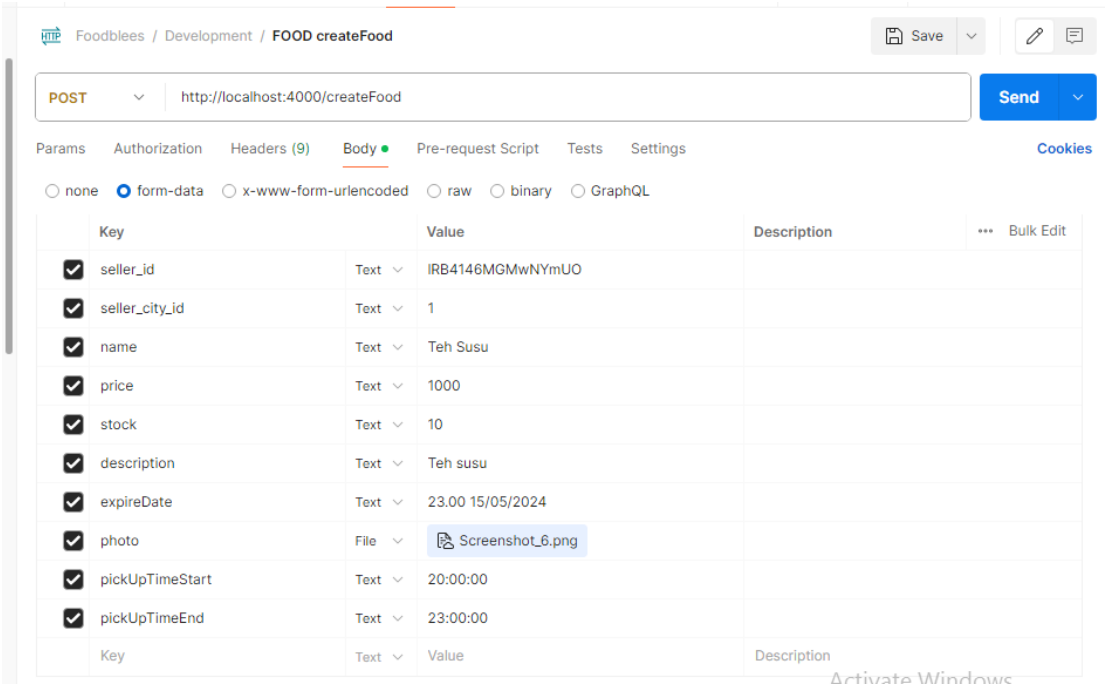

Update Food

- Endpoint: /updateFood
- Method: PUT
- Headers: Authorization (JWT token)
- Body: form-data
    - id (food ID)
    - sellerId
    - name
    - price
    - stock
    - status
    - description
    - expireDate
    - photo
    - pickUpTimeStart
    - pickUpTimeEnd
- Contoh:

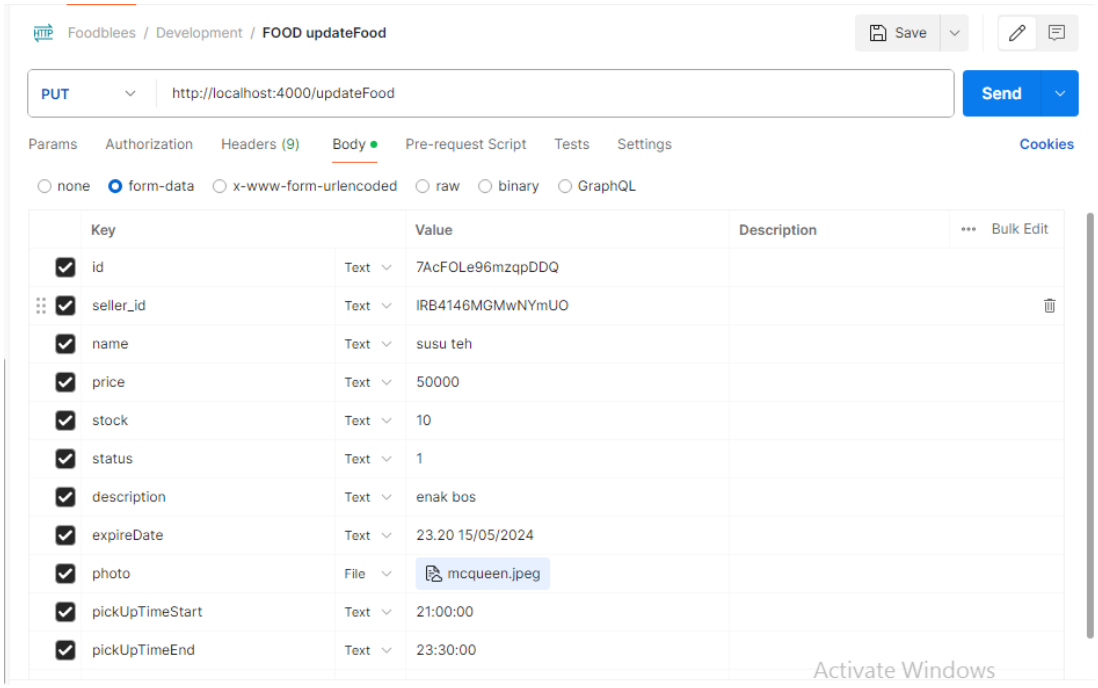

- Response:

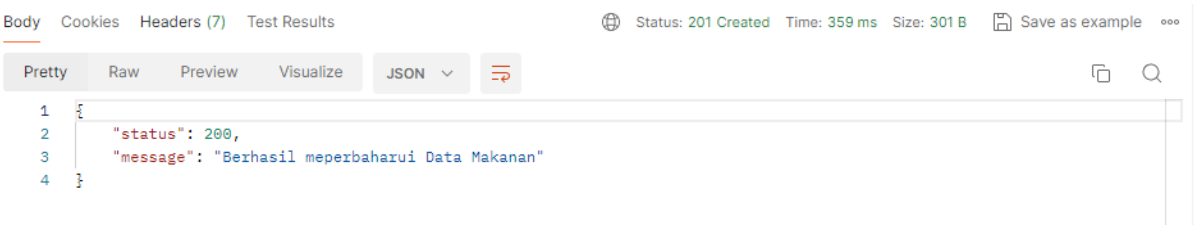

Delete Food

- Endpoint: /deleteFood
- Method: DELETE
- Headers: Authorization (JWT token)
- Body: x-www-form-urlencoded
    - id
    - sellerId
- Contoh:

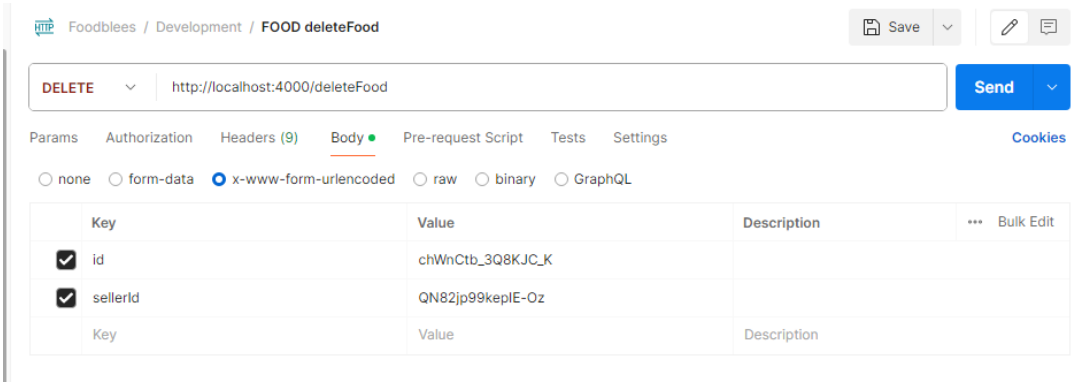

- Response:

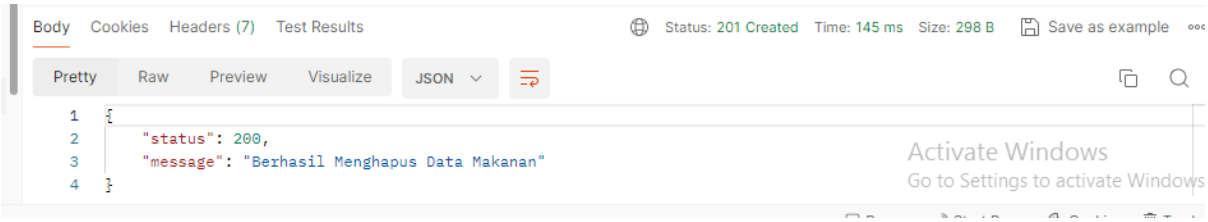

Order Endpoints

Get All Orders

- Endpoint: /getAllOrders
- Method: GET
- Contoh:

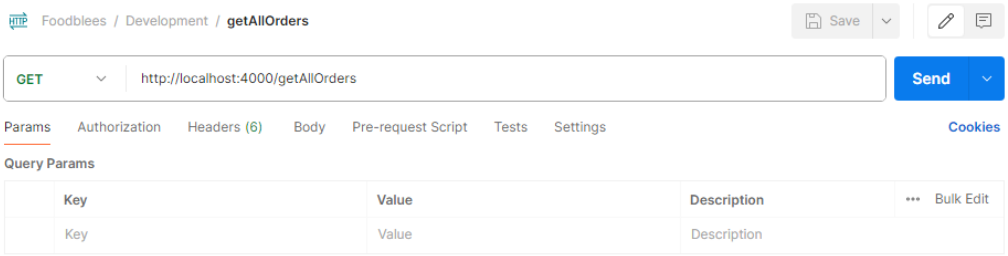

- Response:

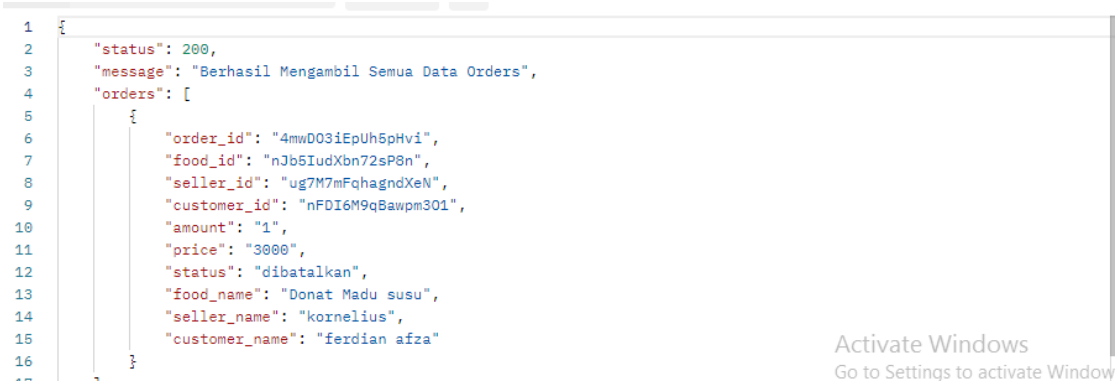

Get Orders by Seller ID

- Endpoint: /getOrdersBySellerId
- Method: GET
- Body: x-www-form-urlencoded
    - seller_id

- Contoh:

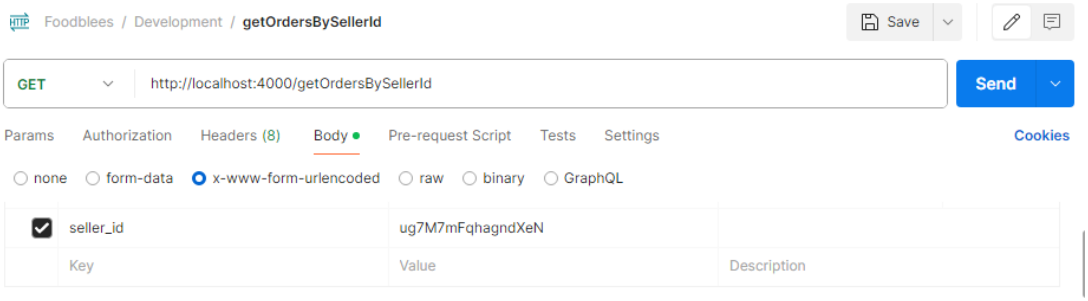

- Response:

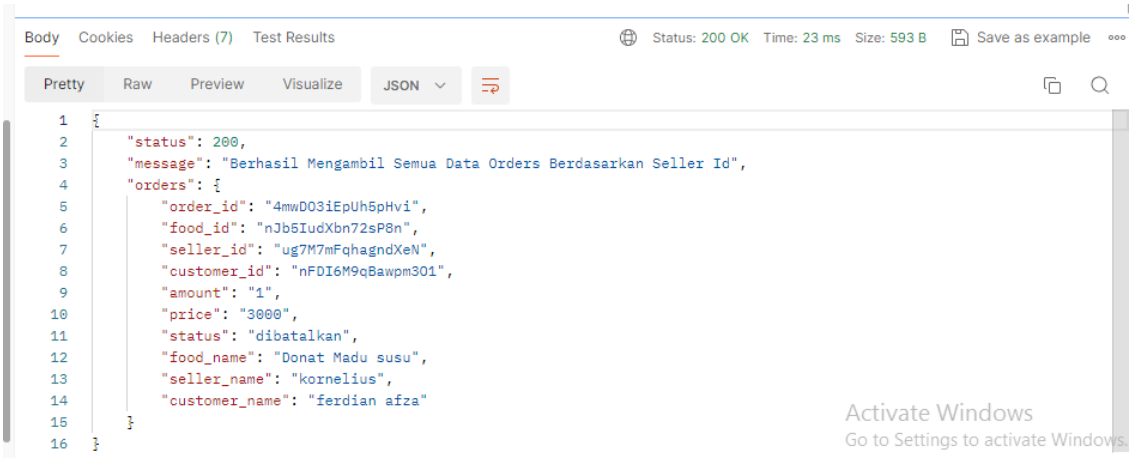

Get Orders by Customer ID

- Endpoint: /getOrdersByCustomerId
- Method: GET
- Body: x-www-form-urlencoded
    - customer_id

- Contoh:

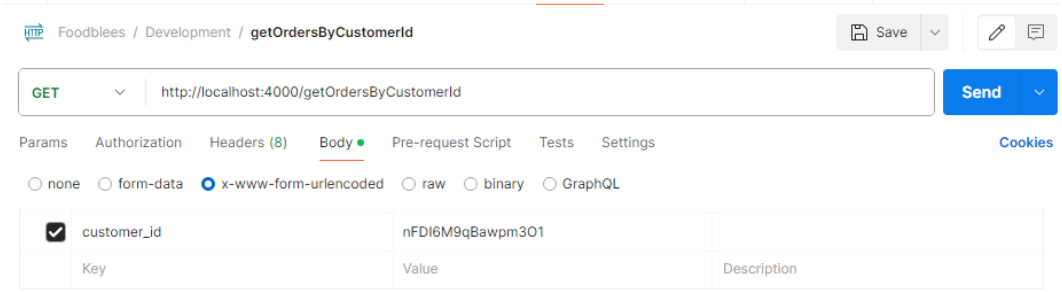

- Response:

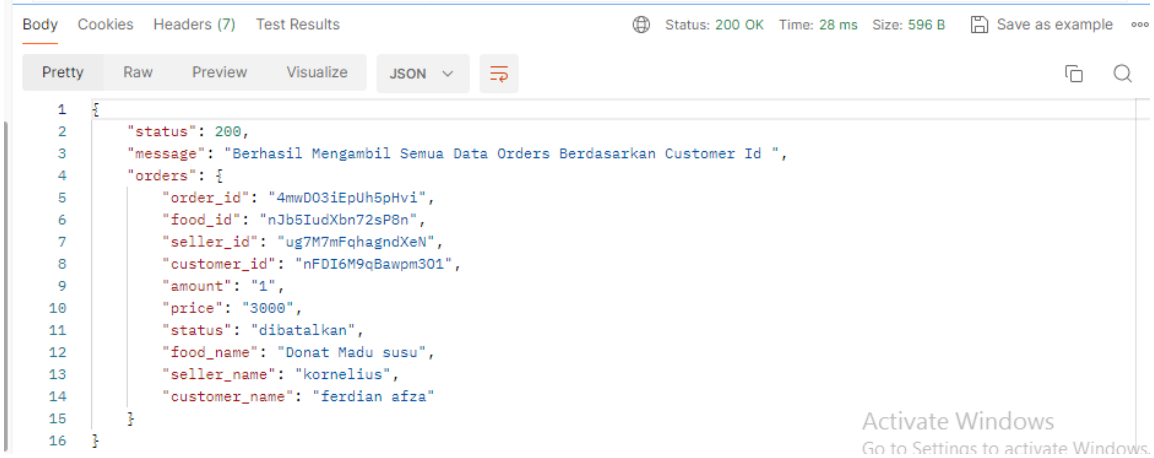

Get Orders by Food ID

- Endpoint: /getOrdersByFoodId
- Method: GET
- Body: x-www-form-urlencoded
    - food_id
- Contoh:

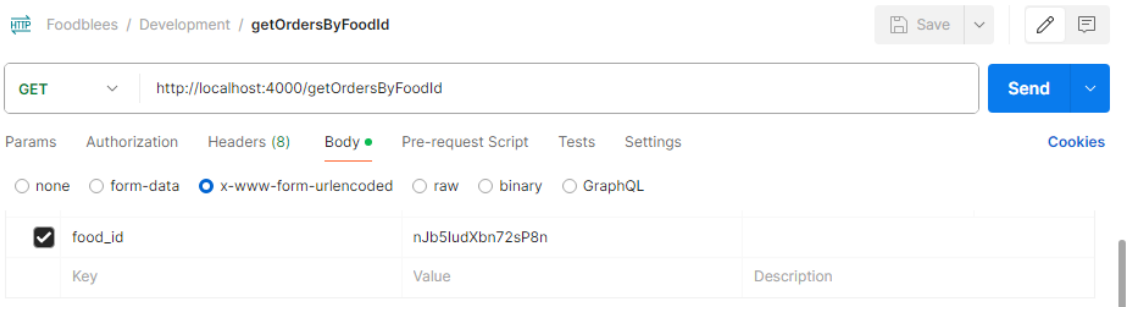

- Response:

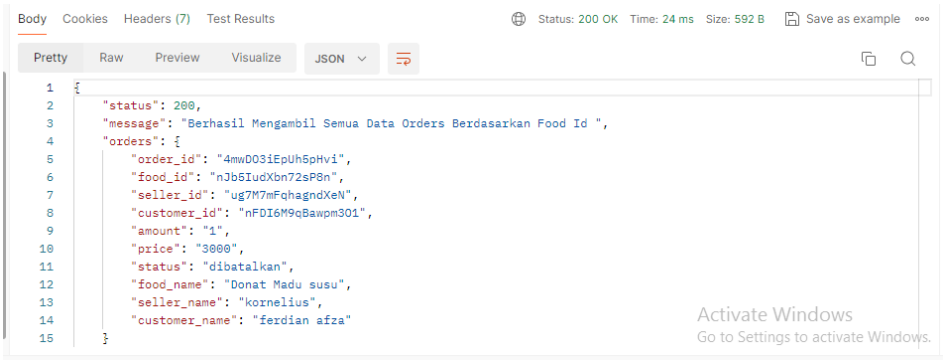

Get Orders by Order ID

- Endpoint: /getOrdersByOrderId
- Method: GET
- Body: x-www-form-urlencoded
    - order_id
- Contoh:

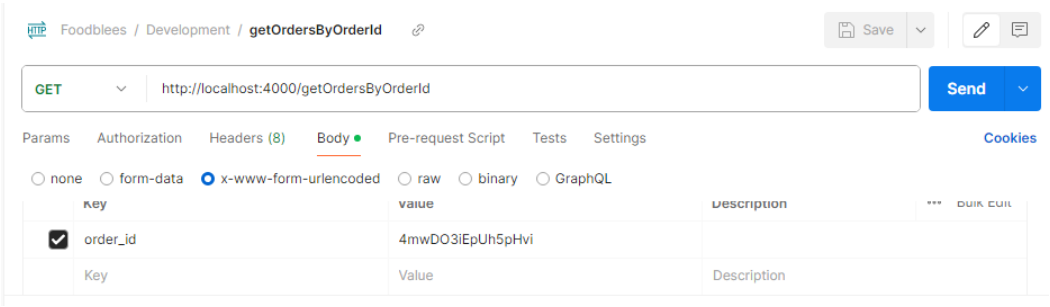

- Response:

Check New Orders

- Endpoint: /checkNewOrder
- Method: GET
- Body: x-www-form-urlencoded
    - seller_id
- Contoh:

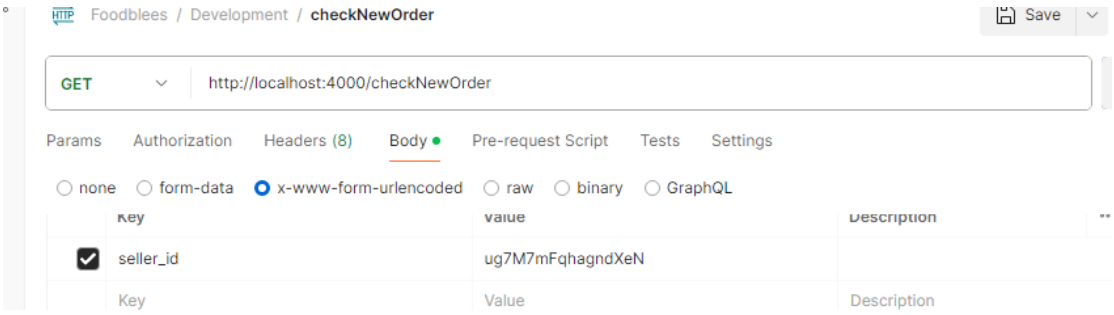

- Response:

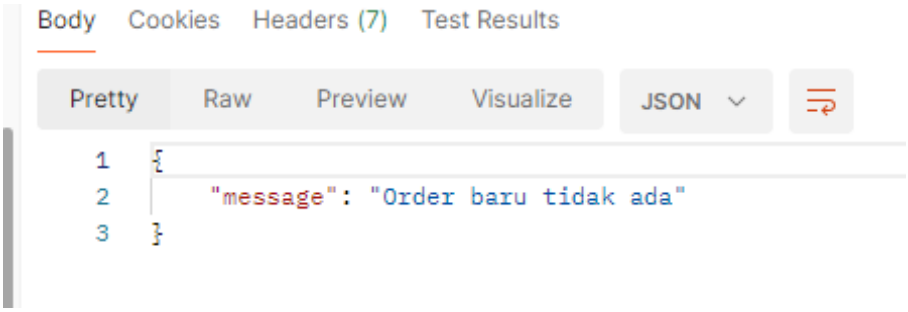

Update Order to Diproses

- Endpoint: /updateOrderToDiproses
- Method: PUT
- Body: x-www-form-urlencoded
    - seller_id
    - order_id

- Contoh:

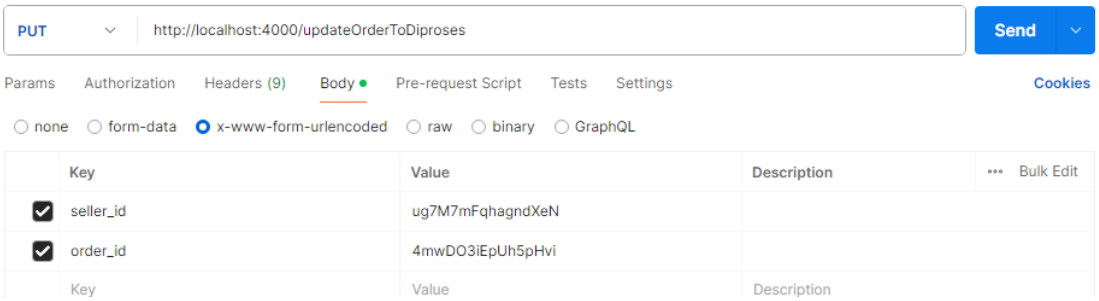

- Response:

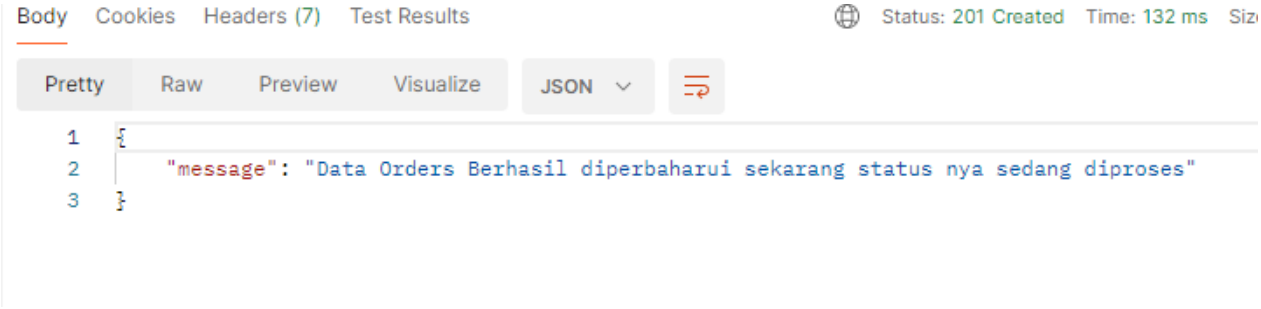

Update Order to Selesai

- Endpoint: /updateOrderToSelesai
- Method: PUT
- Body: x-www-form-urlencoded
    - seller_id
    - order_id
- Contoh:

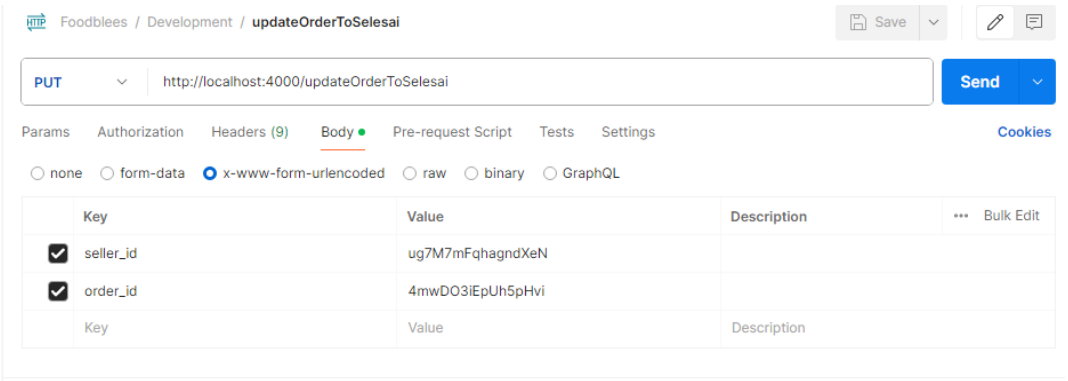

- Response:

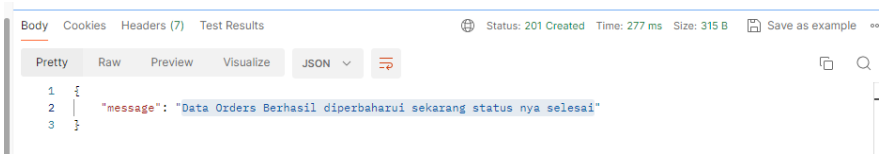

Update Order to Dibatalkan

- Endpoint: /updateOrderToDibatalkan
- Method: PUT
- Body: x-www-form-urlencoded
    - seller_id
    - order_id
- Contoh:

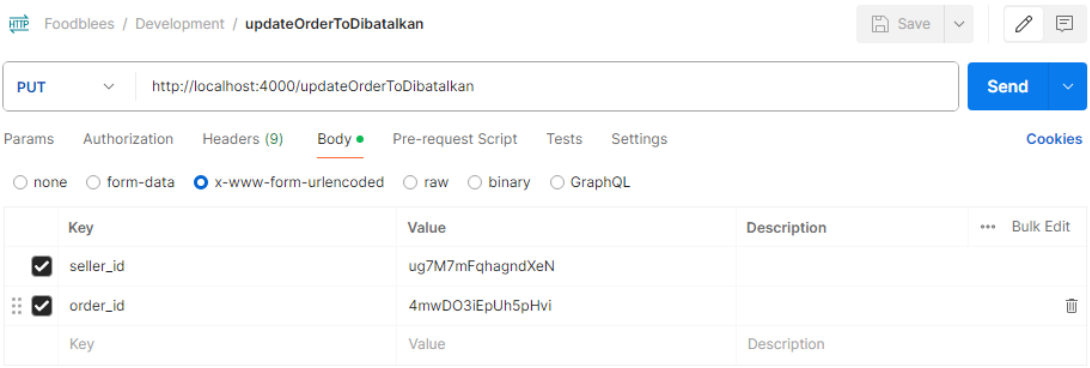

- Response:

Comment Endpoints

Create Comment

- Endpoint: /createComment
- Method: POST
- Body: x-www-form-urlencoded
    - id_seller
    - id_cust
    - description

- Contoh:

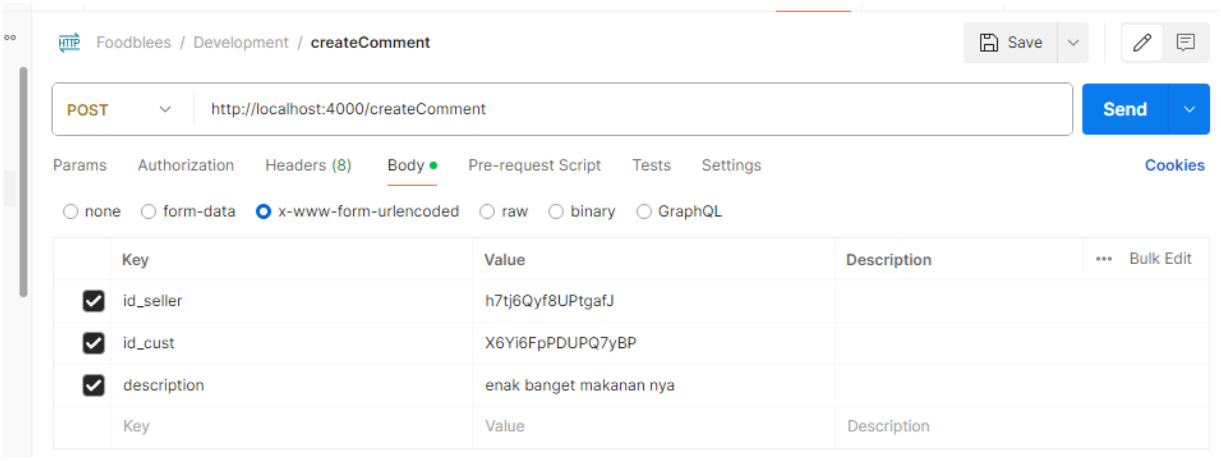

- Response:

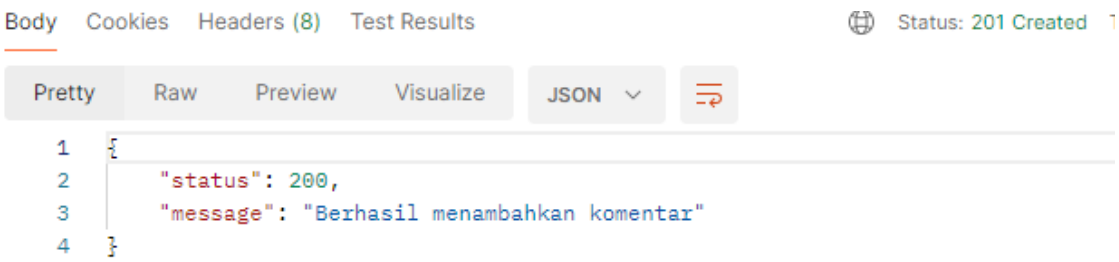

Get All Comments

- Endpoint: /getCommentAll
- Method: GET
- Contoh:

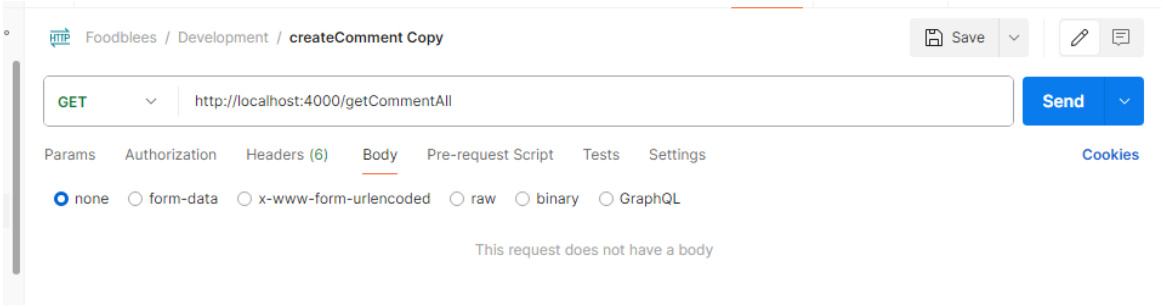

- Response:

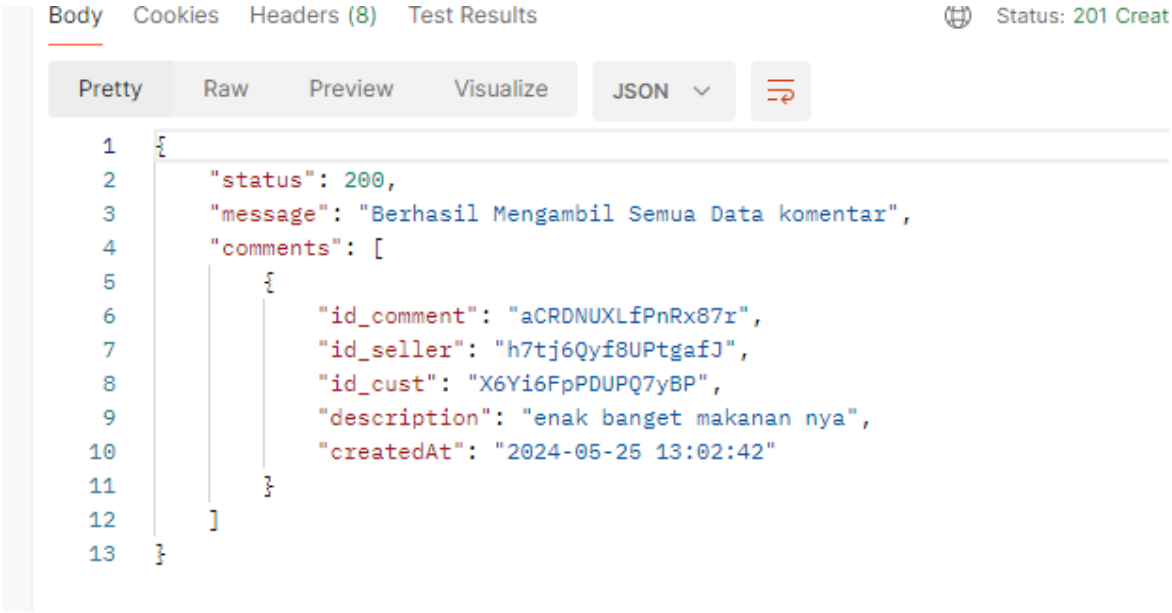

Get Comments by Seller ID

- Endpoint: /getCommentByIdSeller
- Method: GET
- Body: x-www-form-urlencoded
    - id_seller
- Contoh:

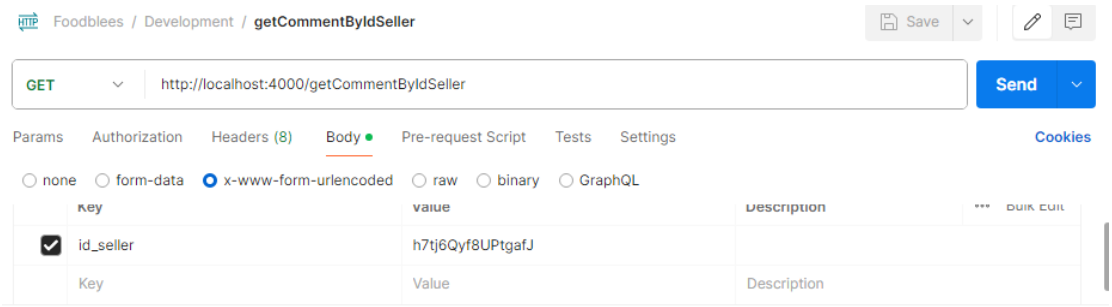
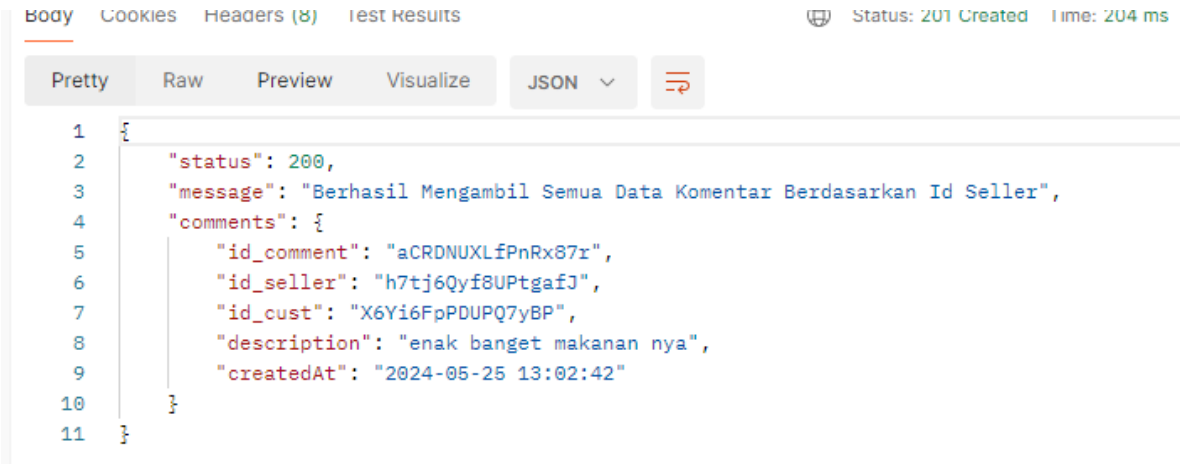
- Response: