DNS

1. Domain

Domain Show/Hide | List Operations | Expand Operations

GET	/api/domain	Get all domains.
POST	/api/domain	Add domain.
DELETE	/api/domain/{domainname}	Delete Domain.
GET	/api/domain/{domainname}	Get Domain detail by name.
PATCH	/api/domain/{domainname}	Update/Delete DNS Record.
POST	/api/adddomainbulk	Add domain in bulk.
PATCH	/api/domain/updatewithprofile/{domainname}/{profileid}	Update DNS record using profile.

1. Get/api/domain - Get all domains

URL : https://dns-api-qa.nominus.com/api/domain?usr=person&tkn=1217775120&mode=1

Add usr, tkn (from **User** - Admin Panel), mode

GET /api/domain — Get all domains.

Implementation Notes

Get list of domain name.

Response Class (Status 200)

OK

Model | Example Value

```
{}
```

Response Content Type application/json

Parameters

Parameter	Value	Description	Parameter Type	Data Type
usr	person		query	string
tkn	1217775120		query	string
mode	1		query	string

Try it out! Hide Response

Curl

```
curl -X GET --header 'Accept: application/json' 'https://dns-api-qa.nominus.com/api/domain?usr=person&tkn=1217775120&mode=1'
```

Request URL

```
https://dns-api-qa.nominus.com/api/domain?usr=person&tkn=1217775120&mode=1
```

2. **POST /api/domain - Add domain**

There are three types of URL for Add domain :

1. **https://dns-api-qa.nominus.com/api/domain?domainname=log12.com&usr=person&tkn=1217775120&mode=1**

   (by default this (1) URL will take IsRequestBodySent=false)
2. **https://dns-api-qa.nominus.com/api/domain?domainname=log11.com&usr=person&tkn=1217775120&mode=1&IsRequestBodySent=true**
3. **https://dns-api-qa.nominus.com/api/domain?domainname=log13.com&usr=person&tkn=1217775120&mode=1&IsRequestBodySent=false**

- Add domainname , usr, tkn, mode, RequestBody, IsRequestBodySent
- We can create domain with three types of **kind**
  - **I. Slave**
  - **II. Master**
  - **III. Native**

1. IsRequestBodySent = **false**
   - When IsRequestBodySent = false all the domains will create with Kind **Native** only (with two NS records (from database) and one SOA record) even if you will provide any type of kind in RequestBody

POST /api/domain — Add domain.

Implementation Notes

Add new domain.

Response Class (Status 201)

CREATED

Model | Example Value

```
{}
```

Response Content Type: application/json

Parameters

Parameter	Value	Description	Parameter Type	Data Type
domainname	log14.cm		query	string
usr	person		query	string
tkn	1217775120		query	string
mode	1		query	string
RequestBody	{ "name": "log14.cm", "kind": "Slave", "masters": ["1.2.3.4"], "nameservers": [ ] } Parameter content type: application/json		body	Model | Example Value { "name": "string", "kind": "string", "masters": ["string"], "nameservers": ["string"], "rrsets": [{
IsRequestBodySent	false		query	boolean

Try it out! Hide Response

Curl

```
curl -X POST --header 'Content-Type: application/json' --header 'Accept: application/json' -d '{ \
   "name": "log14.cm", \
   "kind": "Slave", \
   "masters": [ \
     "1.2.3.4" \
   ], \
   "nameservers": [ ] \
 }' 'https://dns-api-qa.nominus.com/api/domain?domainname=log14.cm&usr=person&tkn=1217775120&mode=1&IsRequestBodySent=false'
```

Request URL

```
https://dns-api-qa.nominus.com/api/domain?domainname=log14.cm&usr=person&tkn=1217775120&mode=1&IsRequestBodySent=false
```

Response Body


```
{
  "name": "log14.cm.",
  "kind": "Native",
  "masters": [],
  "nameservers": null,
  "rrsets": [
    {
      "name": "log14.cm.",
      "type": "SOA",
      "ttl": 3600,
      "changetype": null,
      "records": [
        {
          "content": "ns01.nominus.host. it.nominus.host. 2024011801 10800 3600 1209600 3600",
          "disabled": false,
          "name": null,
          "ttl": 0,
```

2. IsRequestBodySent = **true**
   - While IsRequestBodySent = true, API will perform all validations for RequestBody

1) Kind : Slave

To add domain with Kind **Slave :**

- User must have to add **"master"** value
- Master value must be IPV4
- **"nameservers"** are optional
- **"rrsets"** are not allowed in Slave

Different RequestBody Types for Slave :

Positive :

1. {
   "name": "evision.com",
   "kind": "Slave",
   "masters": [
   "1.2.3.4"
   ],
   "nameservers": [ ]
   }

2. {
   "name": "newzone.com",
   "type": "Zone",
   "kind": "Slave",
   "masters": ["1.1.1.1"]
   }

3. {
   "name": "newzone2.com",
   "type": "Zone",
   "kind": "Slave",
   "masters": ["1.1.1.1"],
   "nameservers": "testname server.com"
   }

Negative :

4. {
   "name": "evision.com",
   "kind": "Slave",

```
"masters": [
  "1.2.3.4"
],
"nameservers": [],
"rrsets": [
  {
    "name": "string",
    "type": "string",
    "ttl": 0,
    "changetype": "string",
    "records": [
      {
        "content": "string",
        "disabled": true,
        "name": "string",
        "ttl": 0,
        "type": "string",
        "priority": 0
      }
    ]
  }
]
}
```

2) Kind : Master

To add domain with Kind **Master :**

- **“masters”** value is optional
- **“nameservers”** value is optional
- **“rrsets”** value is optional

Different RequestBody Types :

Positive :

1. ```
   {
     "name": "log15.com",
     "kind": "Master",
     "masters": [ ],
     "nameservers": [
       "abc.com"
     ],
   ```
   ```

```
 "rrsets": [
  {
    "name": "tata.log15.com",
    "type": "A",
    "ttl": 1800,
    "changetype": "string",
    "records": [
     {
       "content": "1.1.1.1",
       "disabled": true,
       "name": "string",
       "ttl": 0,
       "type": "string",
       "priority": 0
     }
    ]
  }
 ]
}
```

2.
```
{
  "name": "evision.com",
  "type": "Zone",
  "kind": "MASTER",
  "masters": [],
  "nameservers": [
    "ns01.nominus.host.",
    "ns02.nominus.host.",
    "ns03.nominus.host."
   ]
}
```

3.
```
{
"name": "newwzone8.com",
"type": "Zone",
"kind": "Master",
"masters": ["2.2.2.2"],
"nameservers": []
}
```

4.
```
{
"name": "newzone9.com",
"type": "Zone",
"kind": "Master",
```

```
"masters": [],
"nameservers": []
}
```

3) Kind : Native

To add domain with Kind **Native :**

- **“masters”** must be empty if Kind value is Native
- **“nameservers”** value is optional
- **“rrsets”** value is optional

Different RequestBody Types :

Positive :

1.
```
{
 "name": "log15.com",
 "kind": "Native",
 "masters": [ ],
 "nameservers": [
  "abc.com"
 ],
 "rrsets": [
  {
   "name": "tata.log15.com",
   "type": "A",
   "ttl": 1800,
   "changetype": "string",
   "records": [
    {
     "content": "1.1.1.1",
     "disabled": true,
     "name": "string",
     "ttl": 0,
     "type": "string",
     "priority": 0
    }
   ]
  }
 ]
}
```

2.
```
{
```


```
  "name": "evision.com",
  "type": "Zone",
  "kind": "Native",
  "masters": [],
  "nameservers": [
    "test1.com.",
    "test2.com.",
   ]
}
```


3.
```
{
"name": "newzone4.com",
"type": "Zone",
"kind": "Native",
"masters": [],
"nameservers": []
}
```


3. **DELETE/api/domain/{domainname} - Delete Domain**

   URL : https://dns-api-qa.nominus.com/api/domain/log1.cm?usr=person&tkn=1217775120&mode=1


   Add domainname,usr, tkn, mode

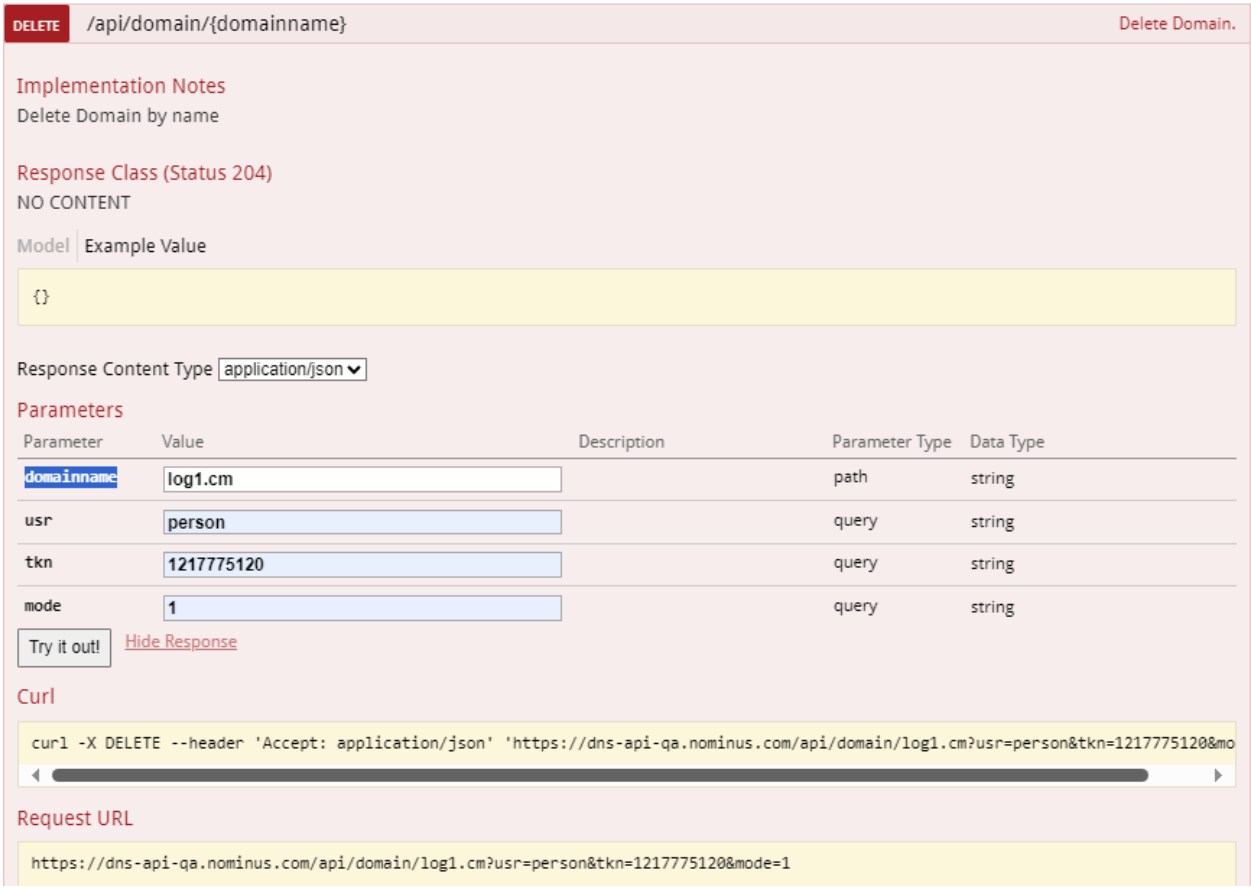

4. **GET/api/domain/{domainname} - Get Domain detail by name**

   URL : https://dns-api-qa.nominus.com/api/domain/devanshi.com?usr=person&tkn=1217775120&mode=1


   Add domainname , usr, tkn, mode

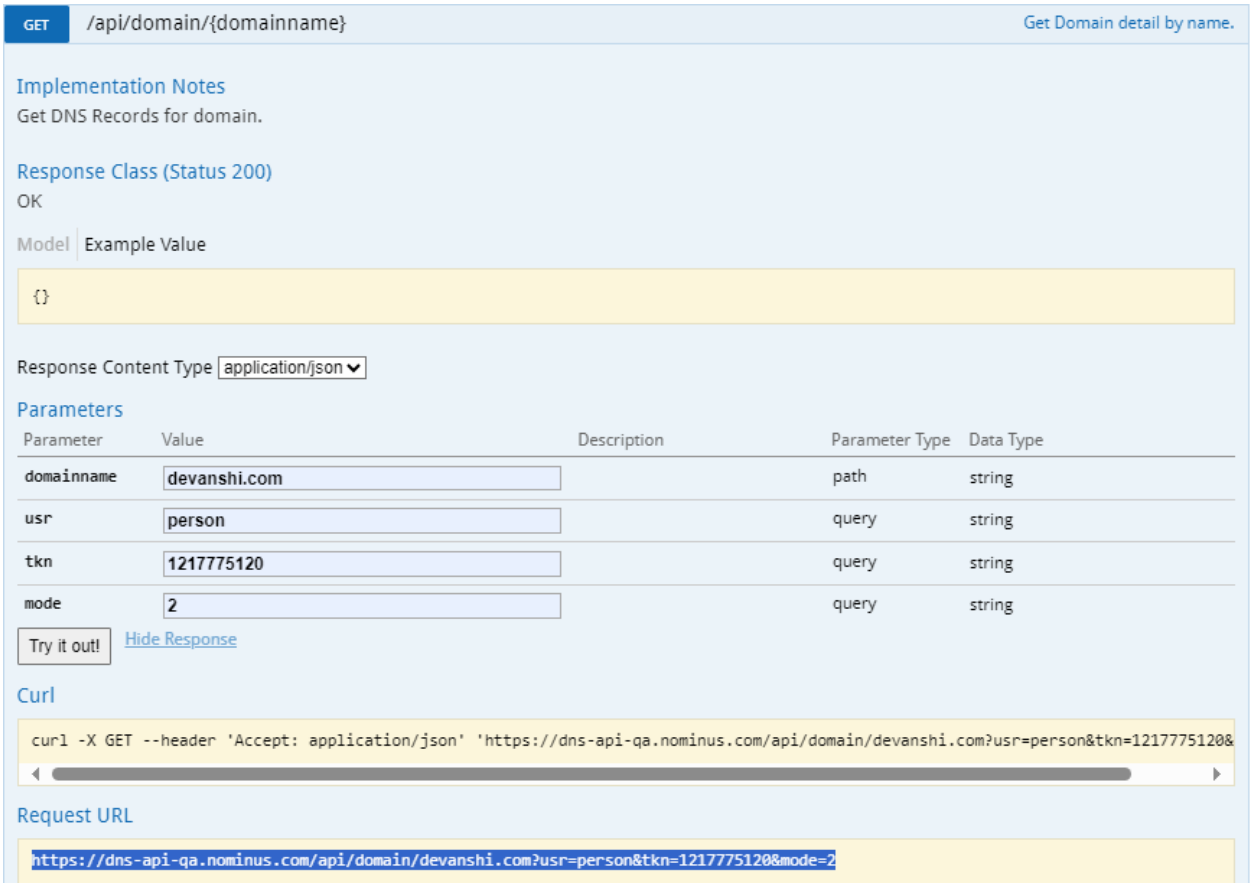

5. **POST /api/adddomainbulk - Add domain in bulk**

   URL : https://dns-api-qa.nominus.com/api/adddomainbulk?usr=person&tkn=1217775120&mode=1

   Add `domainlist,` usr, tkn, mode

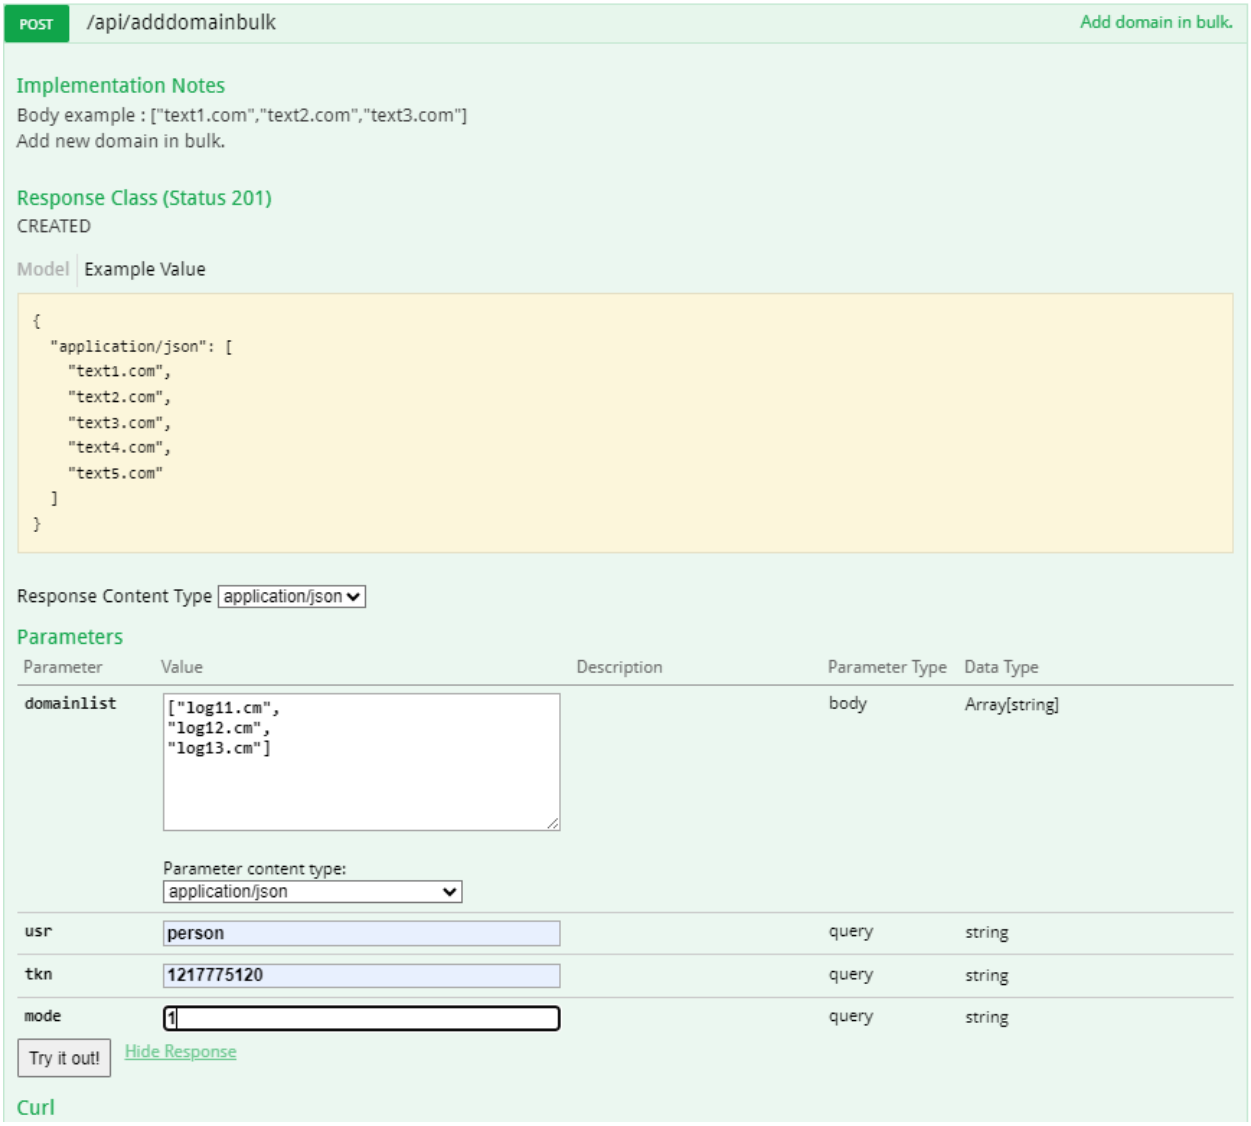

6. **PATCH/api/domain/updatewithprofile/{domainname}/{profileid} - Update DNS record using profile**

URL : https://dns-api-qa.nominus.com/api/domain/updatewithprofile/devanshi.com/2314?usr=person&tkn=1217775120&mode=1

Add `domainname`, `profileid`, usr, tkn, mode

Add profileid from : General > DNS Profiles or General > Customer DNS Profile

PATCH /api/domain/updatewithprofile/{domainname}/{profileid} Update DNS record using profile.

Implementation Notes

Update DNS record by profileid.

Response Class (Status 204)

NO CONTENT

Model | Example Value

```
{}
```

Response Content Type application/json

Parameters

Parameter	Value	Description	Parameter Type	Data Type
domainname	devanshi.com		path	string
profileid	2314		path	integer
usr	person		query	string
tkn	1217775120		query	string
mode	1		query	string

Try it out! Hide Response

Curl

```
curl -X PATCH --header 'Accept: application/json' 'https://dns-api-qa.nominus.com/api/domain/updatewithprofile/devanshi.com/2314?u
```

Request URL

```
https://dns-api-qa.nominus.com/api/domain/updatewithprofile/devanshi.com/2314?usr=person&tkn=1217775120&mode=1
```