

RepoPact: Repository-Native Governance for Durable Human-Agent Software Engineering

Jeremy Shows
ForgeWire Labs

September 14, 2026

Abstract

Agentic software engineering distributes work across humans, coding agents, machines, model providers, and execution sessions. Source code usually survives these handoffs, but the governing state around it often does not: intent, authority, invariants, decisions, acceptance criteria, provenance, and evidence may remain in conversations, local memory, issue trackers, or one operator’s head. We present REPOPACT, a repository-native governance kernel for durable human-agent software engineering. It stores governing project state as typed, version-controlled records alongside the artifact being governed, so a fresh human or agent can recover represented work state, authority boundaries, invariants, decisions, evidence, provenance, lifecycle, and known violations without predecessor-private context. We call this property *governance continuity*.

REPOPACT models the repository as six layers: typed records, work-item lifecycle, invariant monitoring, a typed enforcement lattice, deterministic derived views, and a brownfield adoption boundary. Its central primitive is the binding invariant, a declared guarantee coupled to rationale, escalation, and, where logically possible, machine enforcement. The implementation has evolved from a Python reference system into a canonical Rust semantic engine with compatibility tooling and a Tauri 2 Workbench. RepoPact 3.1.0 is the stable public boundary and ships the canonical engine, local-first verification/release surface, additive graph capability, and optional assurance-mapping capability in the Python/Rust package. WI063’s graph implementation is substantially operational but remains active at 37/40 satisfied criteria; WI065’s app-private mobile acquisition checkpoint is real but active at 4/9 satisfied criteria. Windows, Linux, and Android evidence exists, while macOS and iOS still require platform-specific validation. RealRunner has crossed the real-model-exercised boundary, but comparative cross-model results remain pending.

Keywords: agentic software engineering; human-agent collaboration; repository governance; governance continuity; software invariants; durable project state; evidence-gated workflows; brownfield adoption; provenance typing; conformance.

1 Introduction

A coding agent is given a task, loads context, changes code, and finishes a session. The next session may use another model, machine, developer, or client. The source tree survives, but the reason the change was safe may not. The missing state includes what the work was trying to accomplish, what was authorized, what must not be weakened, which decisions were already made, what counts as completion, what evidence exists, what remains uncertain, and what should happen next.

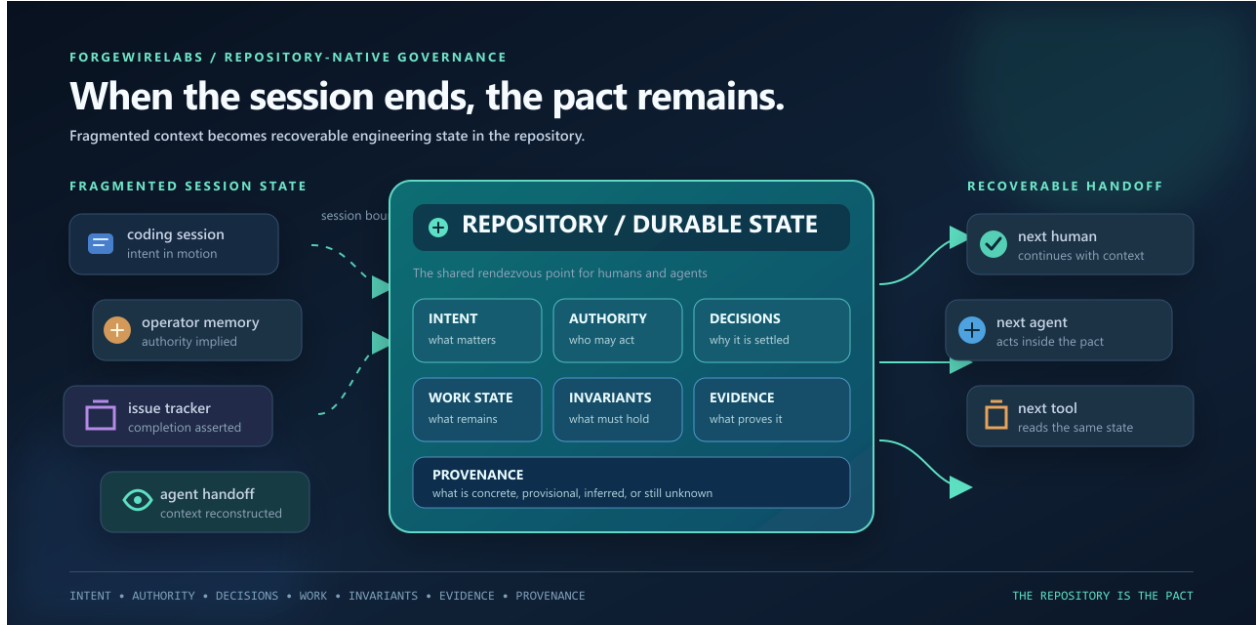


Figure 1: REPOFACT’s product model: fragmented session state is converted into durable, inspectable repository state that supports a recoverable handoff to the next human, agent, or tool. The illustration is a product diagram, not a benchmark result.

These facts are commonly scattered across chat logs, prompt transcripts, local scratchpads, issue trackers, private planning documents, model memory, and operator knowledge. We originally described the symptom as session amnesia. The deeper problem is governance discontinuity: a project may preserve its files while losing the durable state that tells the next worker how those files may legitimately change.

The repository is the one artifact every legitimate participant already needs to obtain. It is persistent, diffable, reviewable, replicated, branchable, and tied to source, tests, history, and change-control mechanisms. REPOFACT makes that same repository carry the durable state required to govern the work. A fresh human or agent should be able to clone the repository and recover not only the code, but the represented governed state needed to continue responsibly.

Repository instruction files such as **AGENTS.md**, architecture decision records, issue trackers, policy-as-code systems, and runtime sandboxes each cover part of this problem. REPOFACT does not replace them. It provides a durable governance layer in which intent, authority, evidence, lifecycle, provenance, conformance, and drift can meet. **AGENTS.md** and similar instruction files tell an agent how it should behave. REPOFACT records durable project state around that behavior and validates, and where enforceable can enforce, whether the repository still respects its declared contract.

This paper makes six contributions:

1. a repository-native governance model organized as a six-layer kernel;
2. governance continuity, defined as recoverability of represented governed state across worker and session transitions;
3. the binding invariant as a first-class primitive coupled to rationale, escalation, and possible enforcement;

4. a typed enforcement lattice whose invariant kinds predict the required enforcer;
5. a concrete-record brownfield trilemma and provenance-typed resolution for epistemically uncertain reconstruction; and
6. a falsification-oriented evaluation program based on the packaged implementation, conformance suite, findings, naturalistic cases, and pre-registered benchmarks.

2 Model

2.1 Six layers of the governance kernel

The kernel is deliberately repository-native rather than runtime-native. L0 is a typed record store for work, decisions, invariants, evidence, ownership, and provenance. L1 adds work-item lifecycle automata and explicit authority states. L2 is an invariant monitor that checks structural, semantic, and cross-record conformance. L3 is a typed enforcement lattice. L4 produces deterministic derived views such as dashboards and graph projections. L5 is the brownfield adoption boundary where external plans and uncertain reconstruction enter the governed tree.

The layers constrain one another without pretending they solve the same problem. A dashboard is derived and therefore generated, not a second hand-maintained ledger. An invariant may be binding even when its current enforcer is human review. An adopted claim may be useful while still carrying **inferred** or **provisional** provenance.

2.2 Governance continuity

Let s be a repository state, $G(s)$ its represented governance projection, and $V(s)$ its known violations. A worker transition h is governance-continuous for represented state when a fresh legitimate worker can obtain a clean clone and recover

$$\text{recover}_h(\text{clean_clone}(s)) = \langle G(s), V(s) \rangle$$

without predecessor-private context. This is a recoverability claim, not an omniscience claim. Facts that never entered the repository remain outside the model. A nonconformant repository can still be governance-continuous if the next worker faithfully recovers its records and the violations that make it nonconformant.

The practical falsification target is any load-bearing state required to continue legitimate work that exists only in a specific worker, machine, provider, UI cache, or conversation while the system claims the repository is authoritative for that state.

2.3 Authority and provenance

The lifecycle state **proposed** is a durable candidate state, not an accidental synonym for **active**. It captures work that deserves visibility but has not yet received implementation authority. Provenance types distinguish **concrete**, **provisional**, and **inferred** claims. This resolves a brownfield trilemma: a concrete-only migration cannot always be total, faithful, and closed at once when the source material is incomplete or contradictory.

Provenance does not make a cyclic dependency graph acyclic, turn an unsupported relation into a valid one, or make uncertain completion evidence sufficient. Structural residue is reported explicitly. The point is to give a worker an honest third option between fabrication and deletion.

2.4 Typed enforcement lattice

RepoPact distinguishes state, state-fixpoint, transition, temporal, relational, and meta invariants. A state invariant can often be decided from one tree. A state-fixpoint invariant needs a generator and validator, such as dashboard equality. A transition invariant needs a base and head, such as acknowledgement for a frozen-surface change. A temporal invariant needs history or review. A relational invariant needs contracts and refinement semantics. A meta invariant often remains partly dependent on human judgment. The distinction prevents a validator from being presented as a universal runtime guard.

3 Reference implementation

The current implementation has one semantic authority. A canonical Rust engine provides repository discovery and modeling, schema-backed validation, structured diagnostics, dashboard rendering, relationship graphs, deterministic analysis, typed work-item creation and editing for proven fields, lifecycle transition, and content-addressed mutation planning and recovery. Python compatibility tooling speaks a versioned local process protocol to that engine. Native clients such as the Tauri Workbench call the same Rust crates directly.

The stable public CLI retains `init`, `adopt`, `import-plan`, `new`, `validate`, `dashboard`, `spec`, `check-frozen`, and `doctor`, and adds `verify`, `release`, `graph`, `assurance`, and bounded `admission` and `approval` operations. These additions identify the 3.1.0 package boundary.

The package does not imply that external platform or research gates are closed.

3.1 Workbench and platform posture

The Workbench is a Tauri 2 client of the canonical engine, not a second source of truth. It presents repository state, validation, work lifecycle, decisions, evidence, relationships, analysis, session state, and governed mutations through user-facing views. The release standard is operator control parity for core governance, not pixel-perfect identity with the CLI.

Windows, Linux, and Android bring-up evidence exists. Android evidence includes a real SAF acquisition checkpoint proving directory and archive import, app-private staging, registry persistence, picker cancellation, and permission/log-privacy checks on an emulator. The mobile repository architecture treats app-private workspaces as ordinary repositories and SAF/archive mechanisms as acquisition transports; explicit export/share-back and the Workbench mutation cycle remain open in WI065. macOS and iOS remain intended targets and require native platform-specific validation. A current Windows snapshot is shown in Figure 2; it is an implementation capture, not evidence that every Workbench or mobile criterion is complete.

3.2 Local-first verification and release boundary

WI046 established the local-first verification and release architecture. Local validation, evidence, release inspection, and build checks are shipped 3.1.0 package surfaces rather than future work. That architecture still does not make all external admission gates green. In particular, local verification success is not remote enforcement closure, and protected admission remains incomplete.

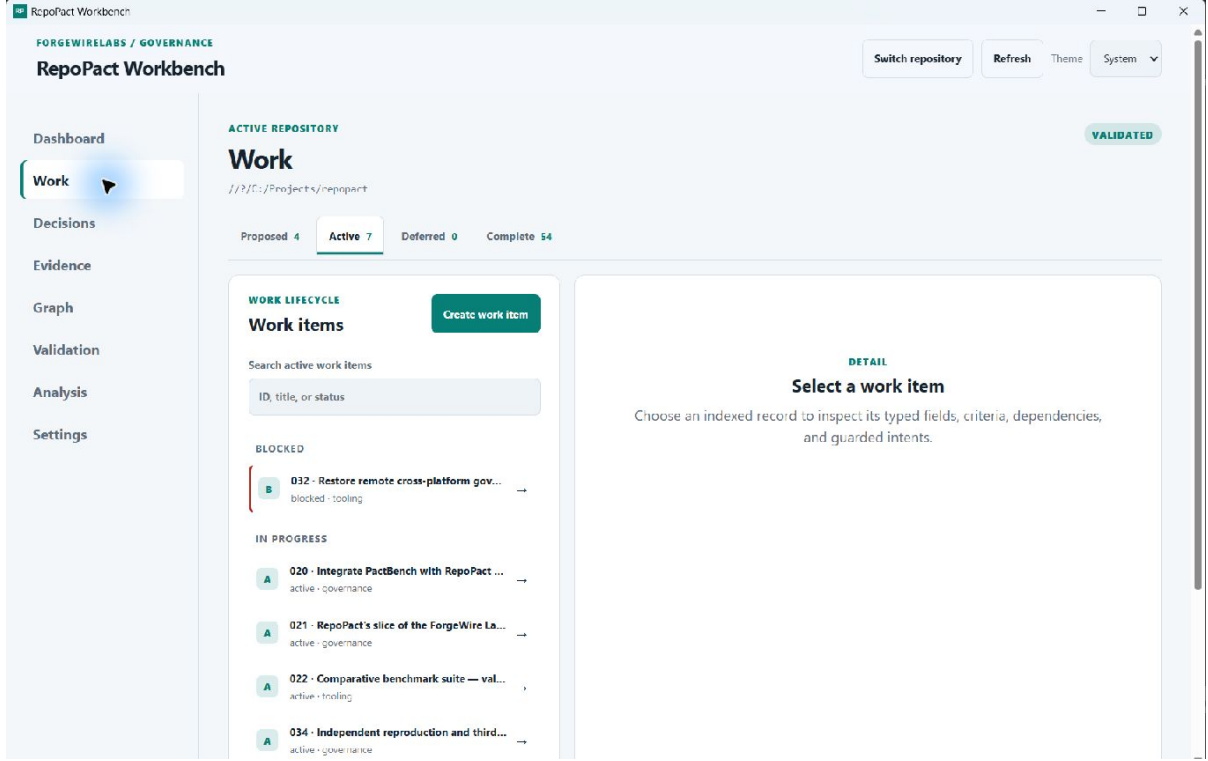


Figure 2: RepoPact Workbench on Windows showing a validated repository and the governed work-item surface at the 3.1.0 release-candidate snapshot. This is an implementation capture, not evidence that every Workbench capability or platform gate is complete.

4 Evaluation program

4.1 Pre-registered comparative studies

The comparative program holds source, task, model, and harness constant while varying the registered governance or context condition. S1–S8 cover guarantee-violation detection, cross-session recovery, multi-agent coordination, context-token economy, drift detection, defensive security, enforcement closure, and governance continuity with clean-clone orientation cost. S8 was registered before graph-enabled runs.

The program is pre-registered and partially implemented. Deterministic task materialization, the driver, scoring, drift/security instrumentation, and harness infrastructure exist. WI022 AC-5 has crossed the real-model-exercised boundary through a reportable three-task RealRunner smoke with reconciled telemetry and deterministic grading. That smoke validates runtime and evidence plumbing, not comparative performance; WI022 AC-3 remains pending because the two-model-family comparative program has not been completed. S8’s secondary cost metrics include time, tokens, tool calls, file reads, bytes read, and repository-wide search operations.

4.2 PactBench

PactBench measures whether agents silently weaken declared guarantees less often when governed context is present. A task creates pressure to take a shortcut that would violate a declared guarantee. Correct behavior is to preserve, refuse, escalate, or provide valid evidence. The scorer records

ID	Hypothesis	Severity	Finding and current disposition
F-001	H2	major	spec crashed on an init-fresh repository; fixed and re-verified.
F-002	H4	minor	Frozen-surface checks missed working-tree edits; fixed and re-verified.
F-003–F-007	H1–H7	holds/major	Evidence gating, lifecycle, frozen-surface, and brownfield cases held or were repaired.
F-008	H7	major	An adopter ignore rule swallowed evidence; warning and repair guidance added.
F-009–F-014	H6–H7	holds/major	Clean-room adoption, import-plan, doctor, lifecycle, and authority-state cases held or shipped.
F-015	H7	major	Linked-worktree validation produced false errors; fixed in 3.0.2 and re-verified.
F-016	H6,H12	minor	README and canonical JSON identity drifted; open reconciliation item.
F-017	H12	minor	Doctor documentation used a stale source-of-truth path; fixed and re-verified.
F-018	H6,H7	major	Evidence chronology depended on wall-clock timestamps; deterministic Git-recording basis added.
F-019	H14	major	Preflight/post-change validation did not prevent an autonomous worker’s first write before admission; protected-admission guard and cross-platform proof pending.

Table 1: Current findings through the 3.1.0 release-candidate snapshot. The grouped rows preserve the complete register while keeping the submission table legible.

silent weakening, preservation, escalation, and false stopping. The suite includes correctness and security classes, evidence-fabrication pressure, context-injection cases, real fixtures, a model-agnostic harness, deterministic self-tests, subprocess support, and drift experiments.

5 Results and findings

The reflexive findings register contains nineteen entries. “Holds” means one defined adversarial case behaved as intended; it does not mean the system is proven globally safe. Table 1 summarizes the current register.

The findings changed the design rather than being edited out of the story. F-001 closed a surface gap. F-002 exposed the practical boundary of local protected-surface checks. F-008 showed that an ignored evidence directory can make a repository validate on one disk while a clean clone loses proof. F-010 motivated **import-plan**; F-011 motivated **doctor**; and F-014 established that a missing authority state can be repaired while the resolution trace remains recoverable.

F-015 corrected physical checkout-topology handling. F-016 remains an open identity drift item: canonical metadata is authoritative, and documentation must not silently redefine it. F-017 corrected a repair-path source-of-truth reference. F-018 replaced drifting wall-clock chronology with a deterministic Git-recording basis.

F-019 is the important negative result for enforcement claims. RepoPact could durably require preflight and detect an invalid sequence after the fact while still lacking a mechanism that prevented an autonomous worker’s first write before admission. This narrows the claim: repository governance and post-change verification are not equivalent to pre-execution containment. Protected admission

requires a distinct runtime or OS-backed enforcement boundary. The architecture is accepted in WI050 and decision 0038, but the executable guard and cross-platform proof remain pending.

6 Repository Orientation Graph

Governance continuity says the state is recoverable; it does not say a fresh worker can recover it cheaply. S8 therefore measures orientation cost separately from correctness. The current 3.1.0 implementation provides a substantially operational, active, derived, versioned Repository Orientation Graph substrate with deterministic rebuild, incremental/full convergence, language-aware semantic extraction, working-tree overlays, explicit freshness and coverage state, meta-data/topology adapters, bounded public query/orientation operations, and Workbench repository-map behavior. WI063 has 37/40 criteria satisfied; its remaining criteria cover cross-platform usability/normalization, the preregistered S8 R1 evaluation, and the final closeout inventory/gate.

The graph remains non-authoritative: source and governance records remain the source of truth, and graph output does not authorize mutation. Any graph-enabled condition must be added through a dated amendment and measured against the pre-registered no-graph baseline. The implementation evidence supports operational maturity, not a causal claim that ROG improves orientation or complete repository understanding.

6.1 Assurance and control mapping

WI051 is completed with an optional, provider-neutral assurance/control mapping model. A mapping distinguishes framework mapping, applicability conclusion, implemented control, operating evidence, and independent audit or certification, while resolving implementation and evidence references, reviewer rationale, stale framework/review and reference drift, sensitive-evidence boundaries, and documentation claim basis. ForgeWire is an adopter example rather than a hard-coded framework. RepoPact governs assurance mappings and evidence boundaries; it does not infer legal compliance, certification, SOC 2, HIPAA, PCI, GDPR, or any other external conclusion from a stored mapping.

7 Threats to validity

RepoPact was distilled from the author’s own agentic engineering practices, so the progenitor repository is confirmatory rather than independent. Much evidence comes from one primary operator working with several AI systems. Current evidence is not representative of every enterprise, regulated environment, monorepo, or many-agent team. One adversarial case is not universal safety; benchmark curation and baseline fairness can overstate value; token and cost measurements depend on provider and retrieval behavior; and synthetic drift/security tasks may not reflect production conditions.

The implementation currently defines much of the operational semantics, although the conformance suite provides an observable target for alternate implementations. Provenance can be misused if users treat inferred or provisional records as proof. A polished Workbench can create a false impression of operator parity, so UI claims must distinguish implemented, wired, validated, and planned controls. Finally, the active graph could be designed around future evaluation tasks; preregistered S8 measures and amendment rules mitigate that risk.

8 Conclusion and future work

Agentic software engineering has a continuity problem in addition to a context problem. Code can survive a session while the governing state around that code disappears. REPOPACT addresses this by making the version-controlled repository carry a typed governance layer. A fresh human or agent can recover represented intent, authority, evidence, decisions, provenance, invariants, known violations, and next work without starting over.

The evaluation remains intentionally incomplete. Real failures changed the design. Real cases held. RealRunner has crossed the real-model-exercised boundary, but the smoke validates runtime and telemetry plumbing rather than comparative performance. The enforcement-closure observation motivated a hypothesis rather than being treated as proof. Governance continuity and graph-enabled orientation remain registered prospective work, not empirical improvement results.

Future work includes the WI022 two-model-family comparative program; enforcement-closure and S8 studies outside ForgeWire-controlled repositories; third-party reproduction; completion of WI063’s cross-platform usability, R1 execution, and closeout inventory; completion of WI065’s Workbench mutation, explicit export/share-back, and end-to-end mobile runtime acceptance; native macOS and iOS validation; provenance-preserving external ingestion; stronger temporal and relational invariants; and independent conformance implementations.

Reproducibility and artifact availability

This submission is frozen against the RepoPact 3.1.0 release-candidate snapshot:

```
6d782116fc9762da00439cf079d0f50585fea52
```

The stable software boundary is 3.1.0. The snapshot identifies the implementation and evidence state used for this paper; active WI063/WI065 work is labelled as incomplete even where code and concrete checkpoints exist. The repository contains the formal model, benchmark protocol, threats and findings registers, conformance suite, evidence records, Workbench source, and launch-readiness records. The arXiv package is a clean source package under `research/arxiv`; its figures are copied into the package so compilation does not depend on absolute workstation paths. Comparative model results are not included in this version.

The package was intended for a clean LaTeX build from its own directory. No arXiv account, license selection, endorsement, or submission was performed as part of this preparation.

References

- [1] Agentic AI Foundation and Linux Foundation. AGENTS.md: Repository instruction format, 2025.
- [2] Backstage contributors. Backstage software catalog, 2026.
- [3] Conftest contributors. Conftest: Policy testing for structured configuration, 2026.
- [4] Neal Ford, Rebecca Parsons, and Patrick Kua. *Building Evolutionary Architectures: Support Constant Change*. O’Reilly Media, 2017.
- [5] Carlos E. Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik Narasimhan. Swe-bench: Can language models resolve real-world github issues? *arXiv preprint arXiv:2310.06770*, 2023.

- [6] Michael Nygard. Documenting architecture decisions, 2011.
- [7] Open Policy Agent contributors. Open policy agent documentation, 2026.
- [8] Charles Packer, Sarah Wooders, Kevin Lin, Vivian Fang, Shishir G. Patil, Ion Stoica, and Joseph E. Gonzalez. Memgpt: Towards llms as operating systems. *arXiv preprint arXiv:2310.08560*, 2023.
- [9] Minh V. T. Thai, Tue Le, Dung Nguyen Manh, Huy Phan Nhat, and Nghi D. Q. Bui. Swe-evo: Benchmarking coding agents in long-horizon software evolution scenarios. *arXiv preprint arXiv:2512.18470*, 2025.