simple deploy with node.js in 15 minutes

R. LISIECKI

visme

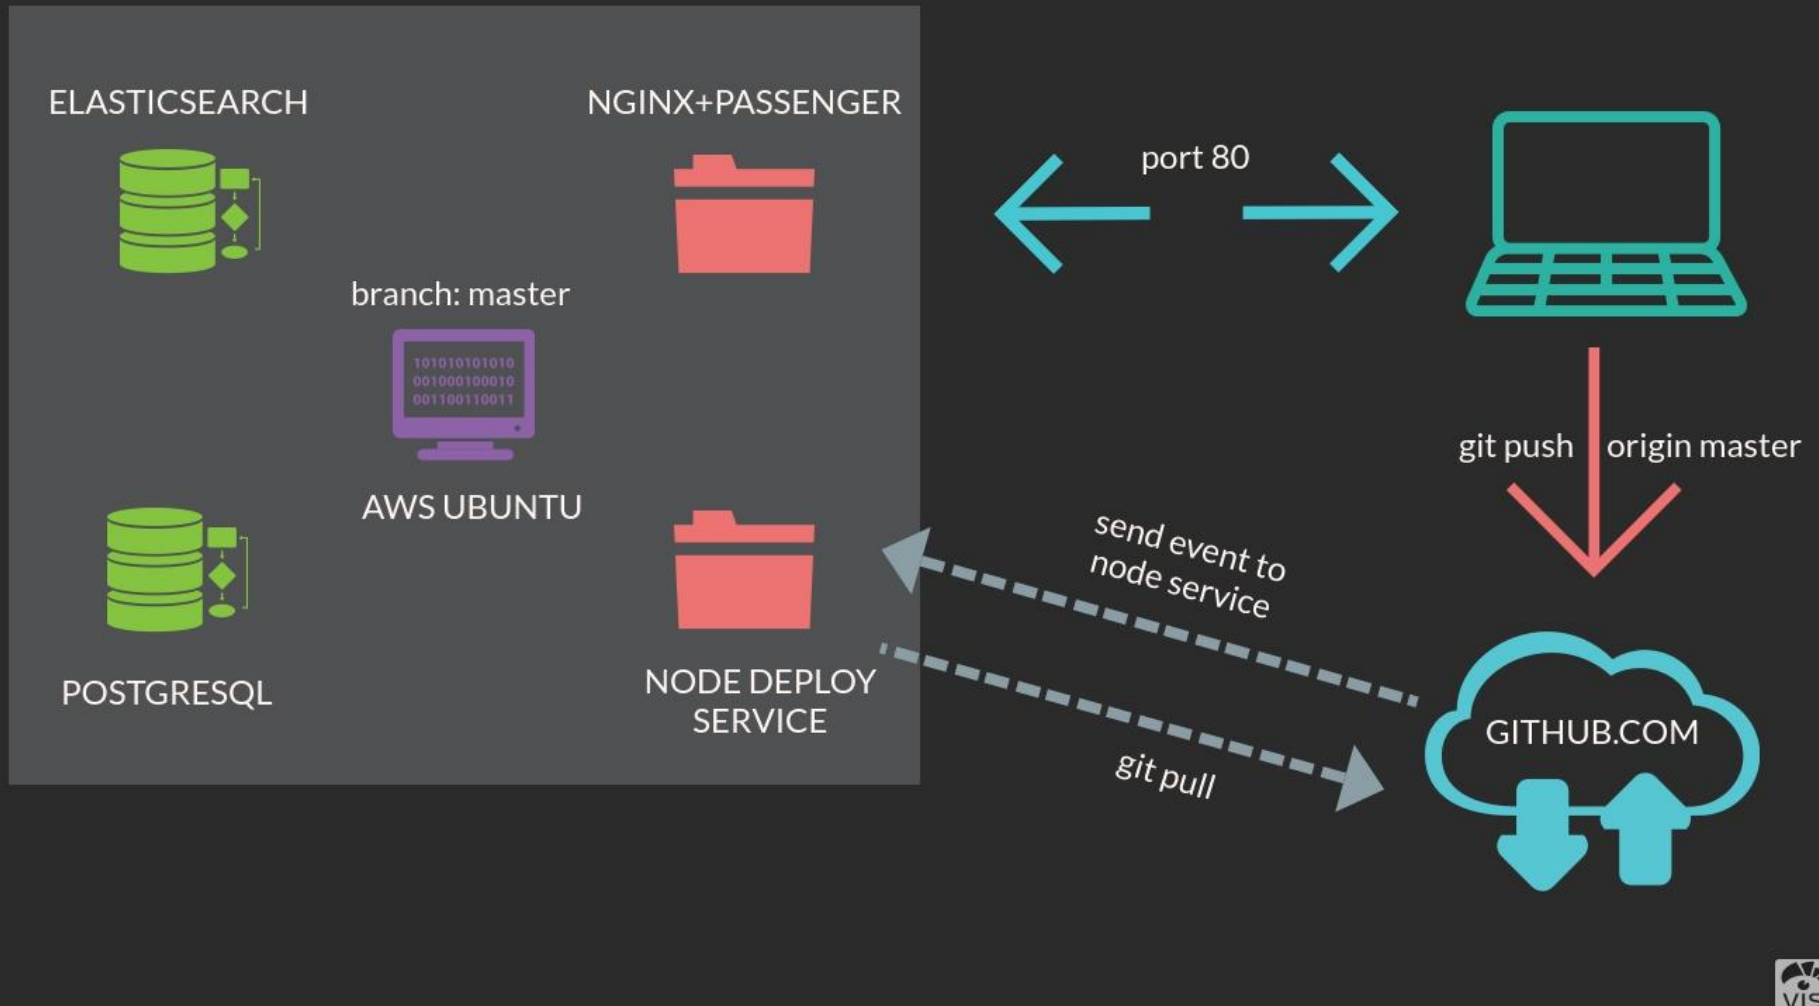
ELASTICSEARCH
NGINX+PASSENGER
port 80
branch: master
101010101010
001000100010
001100110011
AWS UBUNTU
git push
origin master
send event to
node service
POSTGRESQL
NODE DEPLOY
SERVICE
GITHUB.COM
git pull

Node.JS service:

pobranie danych

```
...
  if (req.method == 'POST') {
      console.log("request: POST");
          exec("cd /home/ubuntu/www/ruby1 && git pull && passenger-config restart-app /home/ubuntu/www", function (error, stdout, stderr) {
                  if(error !== null) {
                          console.log('exec error: ' + error);
                  } else {
                          console.log('Success!');
                  }
          });
          res.end('Thank you!'); // response
          console.log('End.');
  }
...
```

wyczyszczenie cache produkcyjnego

littlefoxmiastko / **ruby1**

Unwatch 1 | Star 0 | Fork 1

Code | Issues 0 | Pull requests 0 | Projects 0 | Wiki | Pulse | Graphs | Settings

- Options
- Collaborators
- Branches
- **Webhooks**
- Integrations & services
- Deploy keys

Webhooks / **Manage webhook**

We'll send a `POST` request to the URL below with details of any subscribed events. You can also specify which data format you'd like to receive (JSON, `x-www-form-urlencoded`, *etc*). More information can be found in our developer documentation.

Payload URL *

http://ec2-34-208-194-252.us-west-2.compute.amazonaws.com:899

nodejs service z odpowiednim portem

Content type

application/json

Secret

Which events would you like to trigger this webhook?

- (•) Just the `push` event.
- ( ) Send me **everything**.
- ( ) Let me select individual events.

[x] **Active**

We will deliver event details when this hook is triggered.

Update webhook | Delete webhook

```
littlefox:~/Dokumenty/studia/ruby1/ruby1 master= $ git add .
littlefox:~/Dokumenty/studia/ruby1/ruby1 master += $ git commit -m "test deploy"
[master c2b0f8e] test deploy
 1 file changed, 1 insertion(+), 1 deletion(-)
littlefox:~/Dokumenty/studia/ruby1/ruby1 master> $ git push origin master
Username for 'https://github.com': mlodylis@gmail.com
Password for 'https://mlodylis@gmail.com@github.com':
Counting objects: 6, done.
Delta compression using up to 4 threads.
Compressing objects: 100% (6/6), done.
Writing objects: 100% (6/6), 548 bytes | 0 bytes/s, done.
Total 6 (delta 4), reused 0 (delta 0)
remote: Resolving deltas: 100% (4/4), completed with 4 local objects.
To https://github.com/littlefoxmiastko/ruby1
   483f4c3..c2b0f8e  master -> master
littlefox:~/Dokumenty/studia/ruby1/ruby1 master= $
```



```
Listening at http://172.31.7.187:8999
undefined
request: POST
End.
Success!
```