

The Booking System


scheduling · built in n8n

Confirmation is the easy half. The money is in what happens when someone doesn't turn up.

What it connects to: The calendar owns the slot, the messaging system owns the reminder, and the no-show recovery has to survive both. A reschedule that only updates one side is the classic failure.

1 of 4 SYSTEM

Here's the full sequence — confirm, remind twice, and branch on attendance.

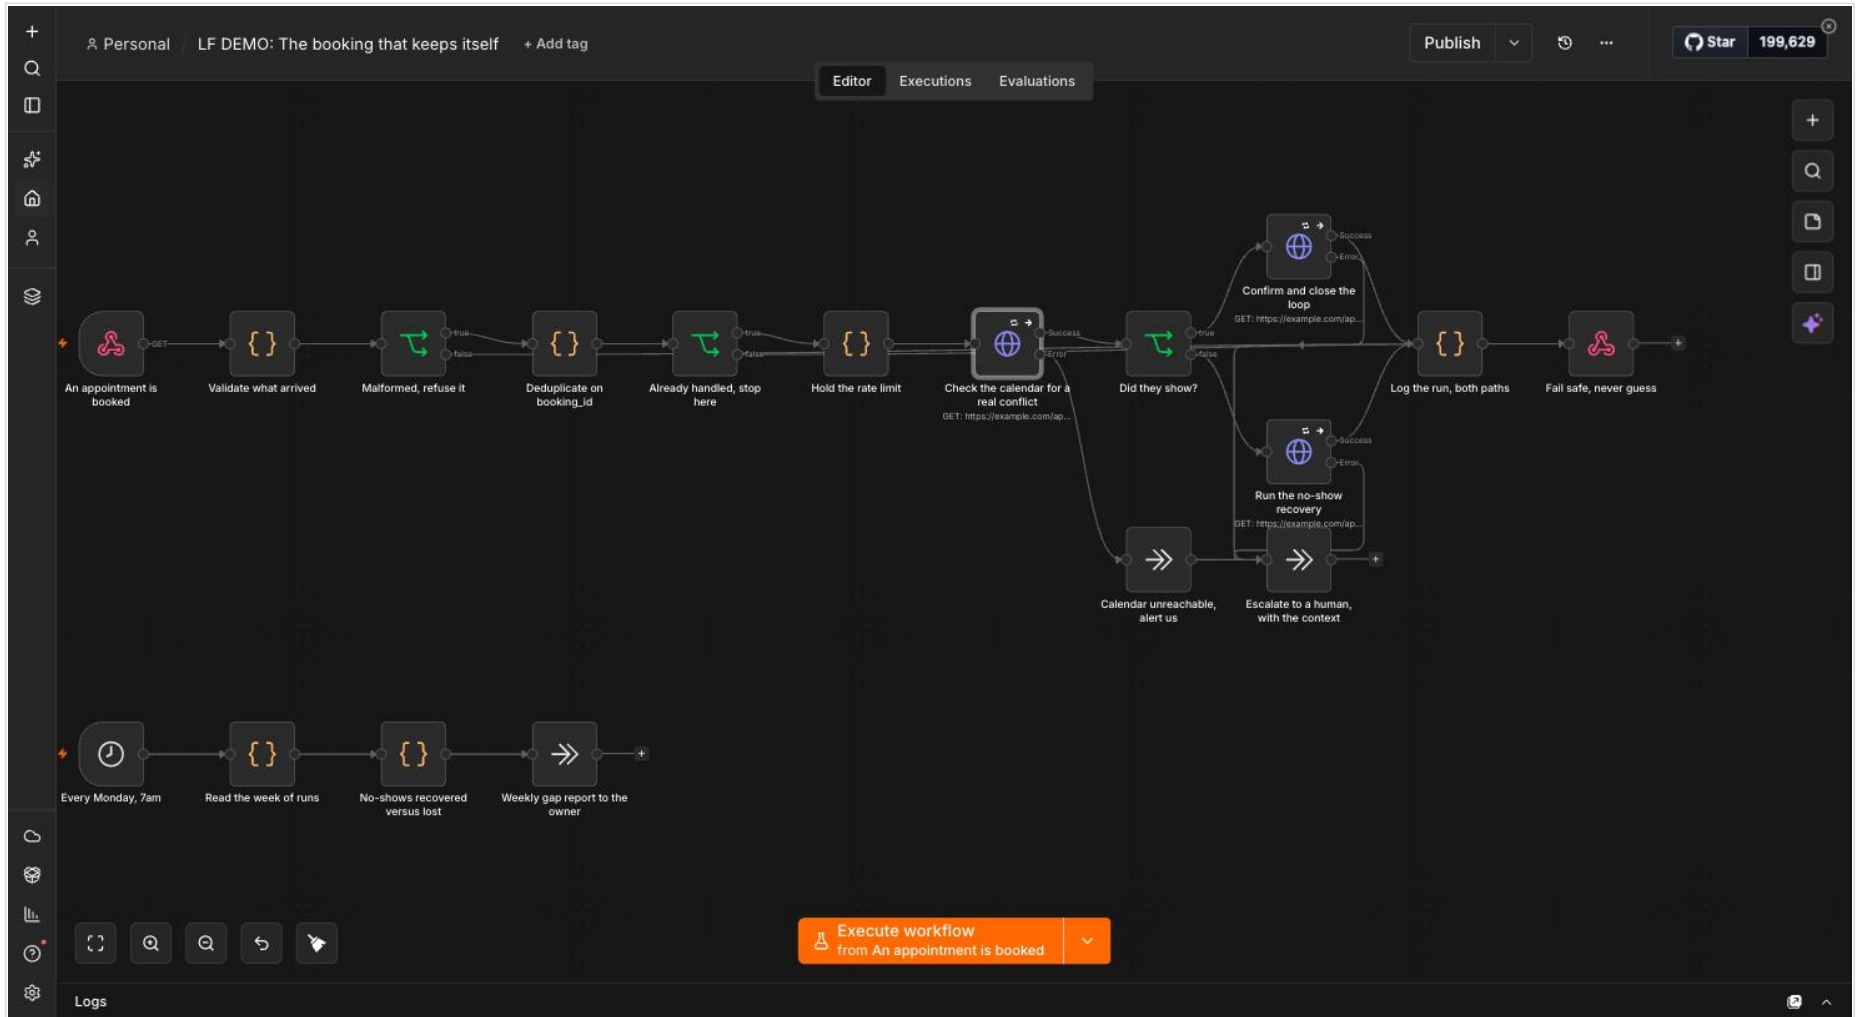

2 of 4 THINKING

This is the no-show recovery path, which is the part that pays for the build.

Did they show?

INPUT

→|

ParametersSettings

Execute step

Conditions

fx

{{ \$json.attended === true || \$json.rescheduled === true }}

is true

+ Add condition


☐ Convert types where required

Options

+ Add option

3 of 4 THEIR-WORLD

The same pattern inside a real booking system, with availability and buffers configured.

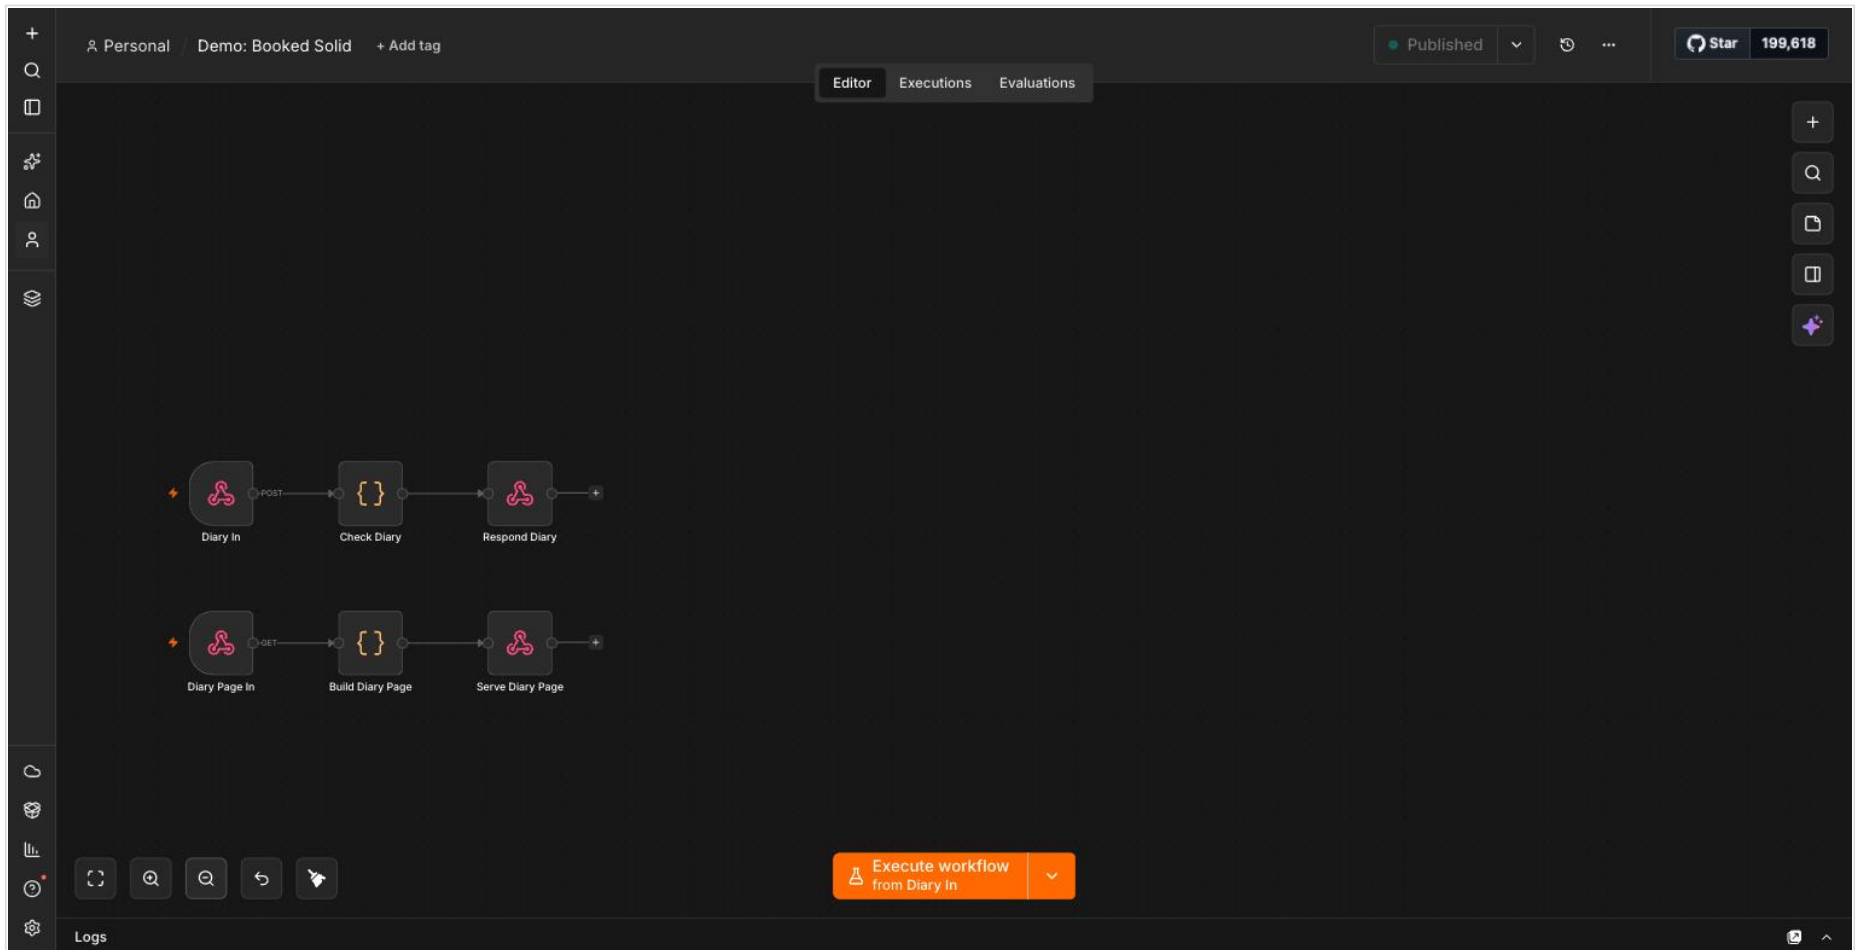

4 of 4 MORE

And the reminder cadence timed against the appointment rather than a fixed delay.

The screenshot displays the Node-RED web interface for a node titled "Check the calendar for a real conflict". The interface is divided into three main sections: INPUT, Settings, and OUTPUT.

- INPUT:** Shows "No input data" with a button "Execute previous nodes" and the text "to view input data".
- Settings:** Contains configuration options for the node.
 - Parameters:** Includes toggle switches for "SSL Certificates", "Always Output Data", "Execute Once", and "Retry On Fail" (which is currently checked).
 - Max. Tries:** A text input field containing the value "3".
 - Wait Between Tries (ms):** A text input field containing the value "2000".
 - On Error:** A dropdown menu set to "Continue (using error output)".
 - Notes:** A large text area for adding notes, currently empty.
 - Display Note in Flow?:** A toggle switch that is currently unchecked.
 - Version:** A footer note stating "HTTP Request node version 4.2 (Latest version: 4.5)".
 - Footer:** A link that says "I wish this node would..."
- OUTPUT:** Shows "No output data" with a button "Execute step" and the text "or set mock data". Above this, there are two informational messages: "This node will automatically retry if it fails" and "Execution will continue even if the node fails".

On the left side of the interface, there is a vertical toolbar with various icons for adding nodes and managing the workspace. The top right corner includes a "Docs" link and a close button. The bottom left corner has a "Logs" tab.