

The Watch


alerting · built in make

Something breaks silently and the business hears it from a customer. That's the most expensive way to find out.

What it connects to: The thing that breaks and the thing that tells you are never the same system, and the watchdog must not depend on the system it is watching.

1 of 4 SYSTEM

Here's the watchdog, with the exact fix carried inside the alert rather than just the symptom.

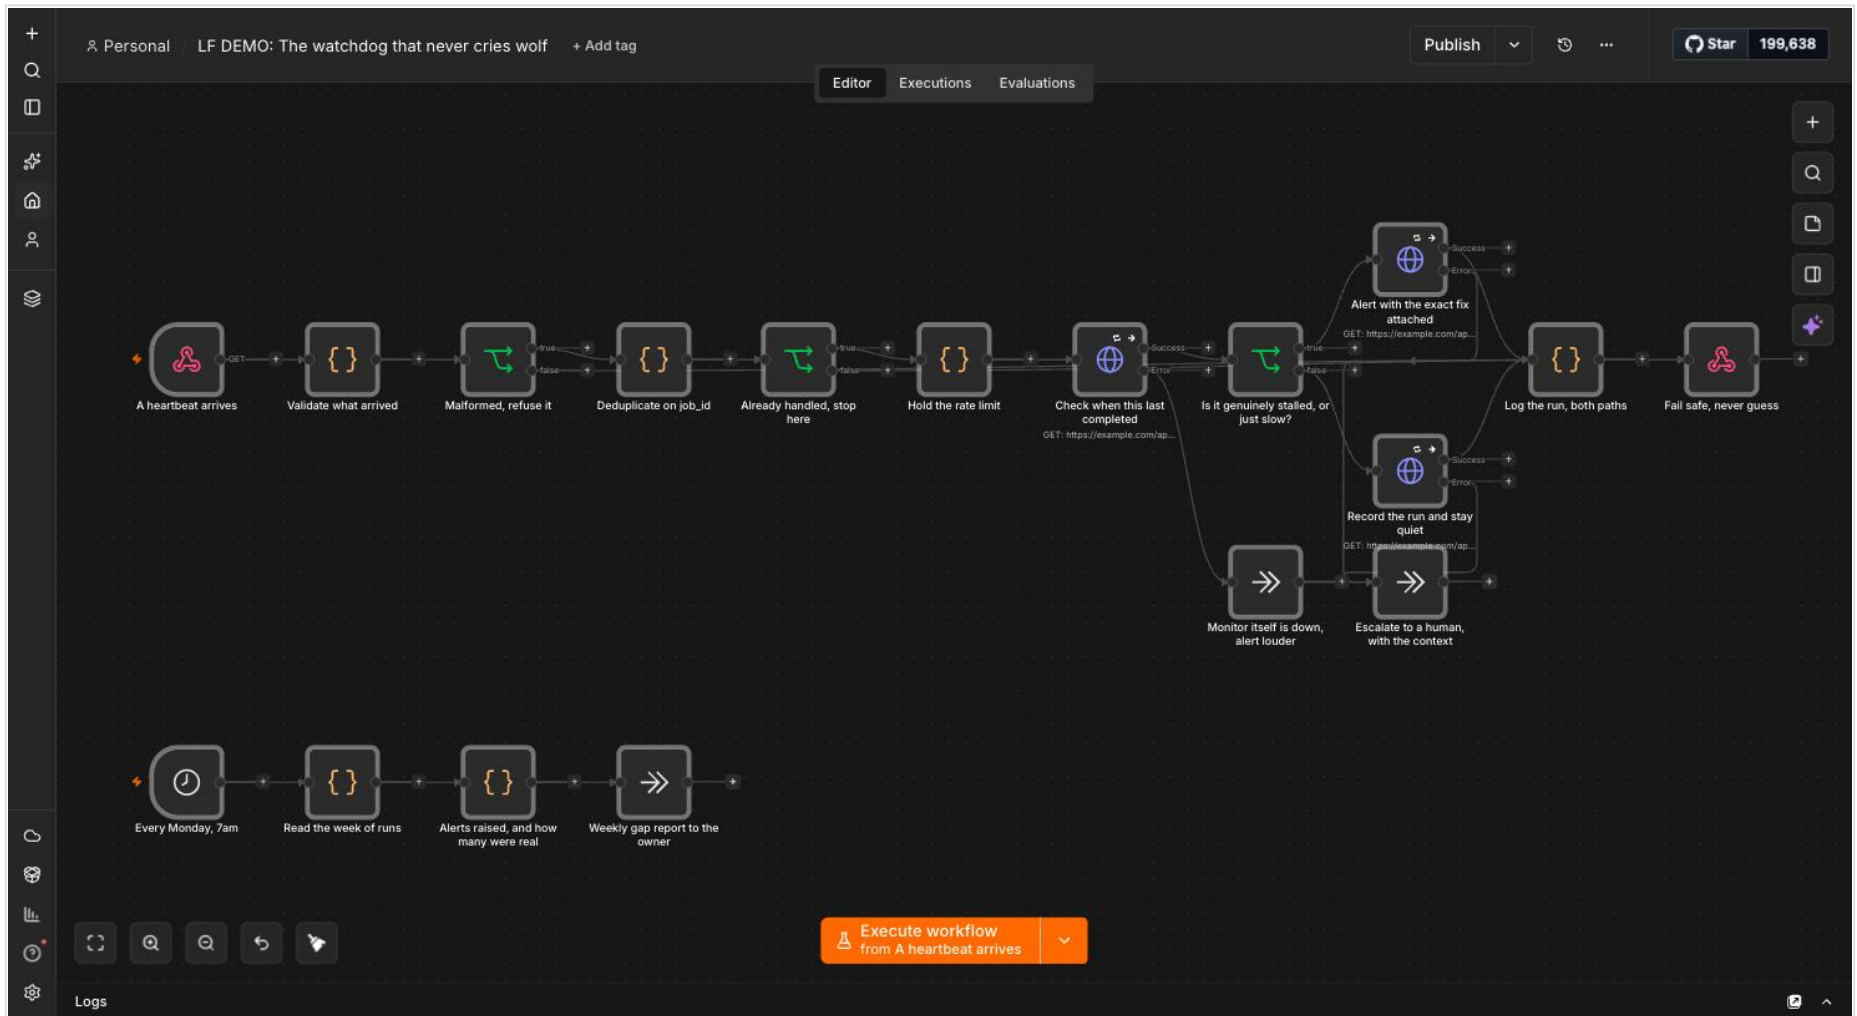

2 of 4 THINKING

It's tested against a planted failure before it ever watches anything real — an alert nobody trusts gets muted.

The screenshot shows a workflow editor interface for a node titled "Is it genuinely stalled, or just slow?". The interface is divided into three main sections: INPUT, Parameters, and OUTPUT.

INPUT Section: Displays "No input data" with a button "Execute previous nodes" and the text "to view input data".

Parameters Section: Contains tabs for "Parameters" and "Settings". Under "Parameters", there is a "Conditions" section with a JSON expression: `{{ $json.stalled === true && $json.minutesSince > $json.threshold }}`. A dropdown menu next to it shows "is true". Below the conditions is a button "+ Add condition". There is also a toggle switch for "Convert types where required" which is currently turned off. An "Options" section is visible with a button "+ Add option". An orange button "Execute step" is located at the top right of the Parameters section.


OUTPUT Section: Displays "No output data" with a button "Execute step" and the text "to view output data".

At the bottom of the Parameters section, there is a text input field with the placeholder "I wish this node would...".

The bottom of the interface shows a "Logs" tab.

3 of 4 THEIR-WORLD

The alerting path in the CRM, escalating with context.

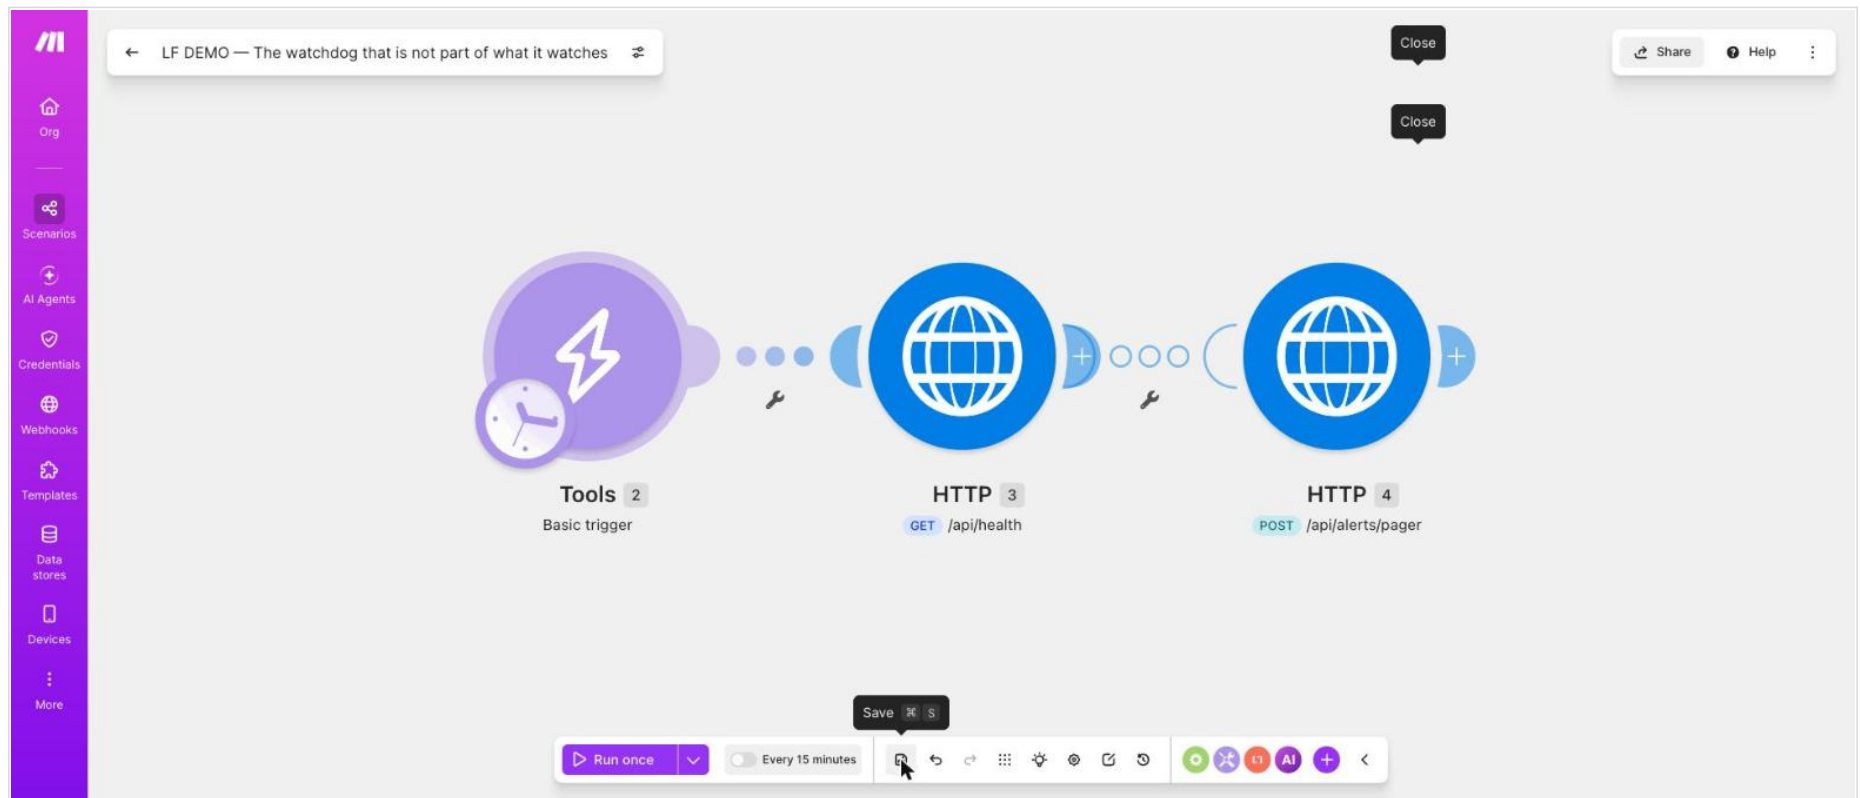

4 of 4 RESULT

And the precision check: how many alerts were actually real.

The screenshot displays a workflow editor interface. On the left is a purple sidebar with navigation icons and labels: Home, Org, Scenarios, AI Agents, Credentials, Webhooks, Templates, Data stores, Devices, and More. The main workspace shows a workflow diagram with a purple clock icon labeled 'Tool Basic' and a blue globe icon labeled 'HTTP 4'. The HTTP node is configured with a POST method and the endpoint '/api/alerts/pager'. A 'Schedule settings' dialog box is open in the center, containing the following fields: 'Run scenario:' with a dropdown set to 'At regular intervals', 'Minutes' with a text input set to '15' and a note 'Must be higher than or equal to 1.', and 'Advanced scheduling' with a link to '+ Add more schedules'. At the bottom of the dialog are 'Advanced settings', 'Cancel', and 'Save' buttons. The top of the interface includes a breadcrumb 'LF DEMO — The watchdog that is not part of what it watches', 'Close' buttons, and 'Share' and 'Help' links. At the bottom, there is a control bar with 'Run once' and 'Every 15 minutes' buttons, a toolbar with various icons, and a row of colored circular icons.