

The Data Layer


data-model-architecture · built in pipedrive

Most CRM problems are data-model problems wearing a workflow costume.

What it connects to: The schema has to hold for every system that writes into it. A property that only makes sense in one tool is the one that breaks the reporting later.

1 of 4 SYSTEM

Here's the system that enforces it — a record only gets written once every field maps to a property that exists.

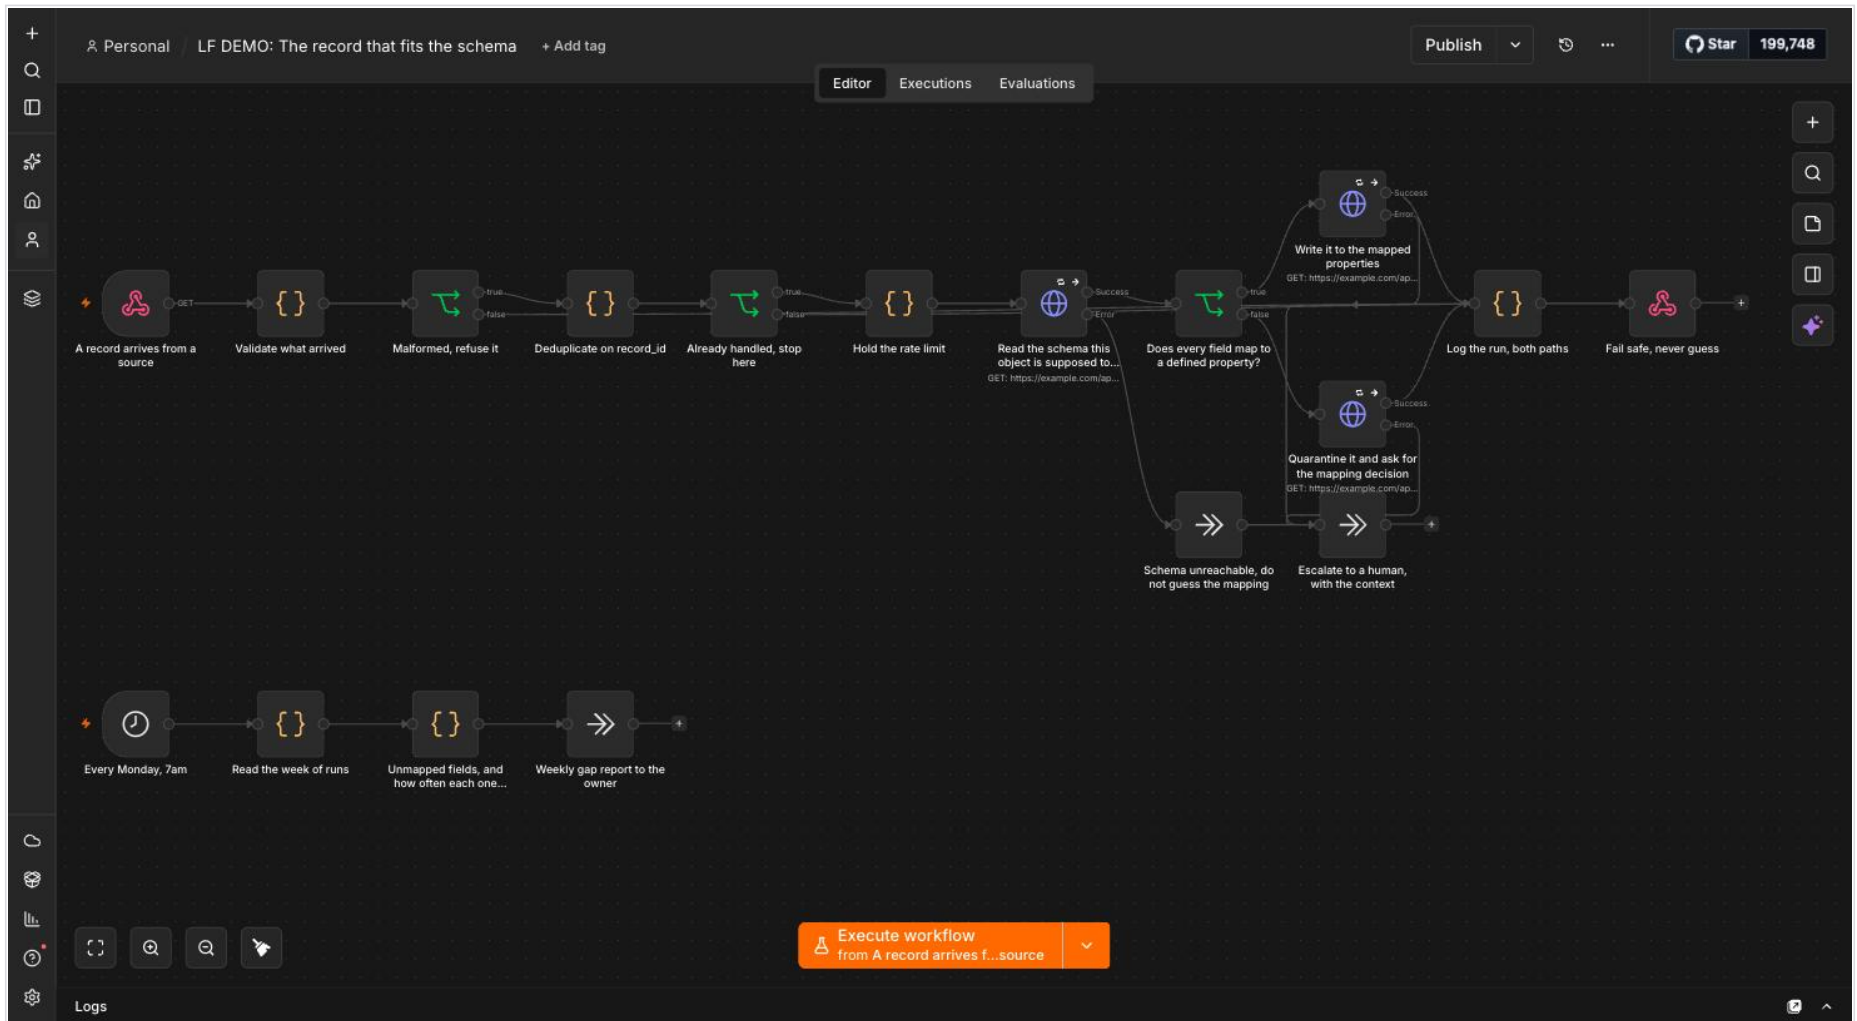

2 of 4 THINKING

This is the gate that keeps the model clean: every field has to map to a property that exists, or the record is quarantined rather than guessed at. Guessing is how you end up with three fields meaning the same thing.

The screenshot shows a dark-themed user interface for a data processing tool. At the top, a green icon with a checkmark and a question mark is next to the text "Does every field map to a defined property?". Below this, the interface is split into two main sections. The left section, labeled "INPUT", contains a large area with the text "No input data" and a button labeled "Execute previous nodes" with the subtitle "to view input data". The right section has tabs for "Parameters" and "Settings". Under the "Settings" tab, there is a "Conditions" section with a text input field containing the JSON schema: `{{ $json.fullyMapped === true && $json.objectExists === true }}`. To the right of this field is a dropdown menu showing "is true". Below the conditions section is a toggle switch labeled "Convert types where required" which is currently turned off. At the bottom of the right section is an "Options" section with a button labeled "+ Add option". An orange button labeled "Execute step" is located at the top right of the right section.

Does every field map to a defined property?

INPUT

No input data

Execute previous nodes
to view input data

Parameters Settings

Execute step

Conditions

`{{ $json.fullyMapped === true && $json.objectExists === true }}` is true

+ Add condition

☐ Convert types where required

Options +

+ Add option

Here's the object model on a real portal — objects, properties, and how they associate.

pipedrive
Settings / Data fields
Search Pipedrive
+ ? ⓘ SF

Nova

Setup guide

Contacts

Activities

Deals

Leads

Insights

Sales Inbox

More

MY ACCOUNT

- Personal preferences
- Password and login
- Email sync
- Contact sync
- Calendar sync
- Google Drive
- Pipedrive MCP BETA
- Your devices
- Notifications
- Referral program
- Interface preferences

COMPANY OVERVIEW

- Company settings
- Manage users
- User overview
- Data fields**
- Usage
- Beta program

123	Probability Number	✓		...
	Organization Organization	✓	✓	...
	Contact person Person	✓	✓	...
	Label Multiple options	✓	✓	...
	Expected close date Date	✓		...
	Sequence enrollment			...
	Project Project			...

^ Ungrouped custom fields 2

Field name	Description	+	📄	Pipelines	☆ Quality rules	⚙ Edit
SAMPLE - On Hold Reason Single option CUSTOM				All		...
SAMPLE - Stall Reason Single option CUSTOM				All		...

^ P Default fields

Field name	+	📄	☆ Quality rules	⚙ Edit
Title Text	✓	✓		🔑

4 of 4 MORE

And the property architecture underneath it, with fill rates so you can see what's actually used.

Unmapped fields, and how often each one arrived

INPUT

→|

No input data

Execute previous nodes

to view input data

ParametersSettingsExecute step

ModeRun Once for All Items

LanguageJavaScript

JavaScriptCodeAsk AI

```
1 // Unmapped fields, and how often each one arrived – the schema gap,
2 ranked.
3 const recs = Object.values($getWorkflowStaticData('global').records || {});
4 {});
5 const week = recs.filter(r => r.at > Date.now() - 7*864e5);
6 const counts = {};
7 for (const r of week) for (const f of (r.unmapped || [])) counts[f] =
8 (counts[f] || 0) + 1;
9 const ranked = Object.entries(counts).sort((a, b) => b[1] -
10 a[1]).slice(0, 5);
11 const quarantined = week.filter(r => r.quarantined);
12 return [{ json: {
13   received: week.length,
14   quarantined: quarantined.length,
15   worstFields: ranked,
16   note: ranked.length
17   ? `"${ranked[0][0]}" arrived ${ranked[0][1]} times with nowhere to
18   go. Decide the property once and ${quarantined.length} quarantined
```

Type \$ for a list of **special vars/methods**. Debug by using `console.log()` statements and viewing their output in the browser console.