

The Follow Up


quote-follow-up · built in n8n

Following up on a quote is nobody's actual job, so it quietly becomes nobody's.

What it connects to: The quote lives in the CRM and the reply lands in a mailbox. Stopping the cadence means the mailbox has to be able to reach back into the CRM.

1 of 4 SYSTEM

Here's the cadence — day 2, day 5, day 9, then nurture.

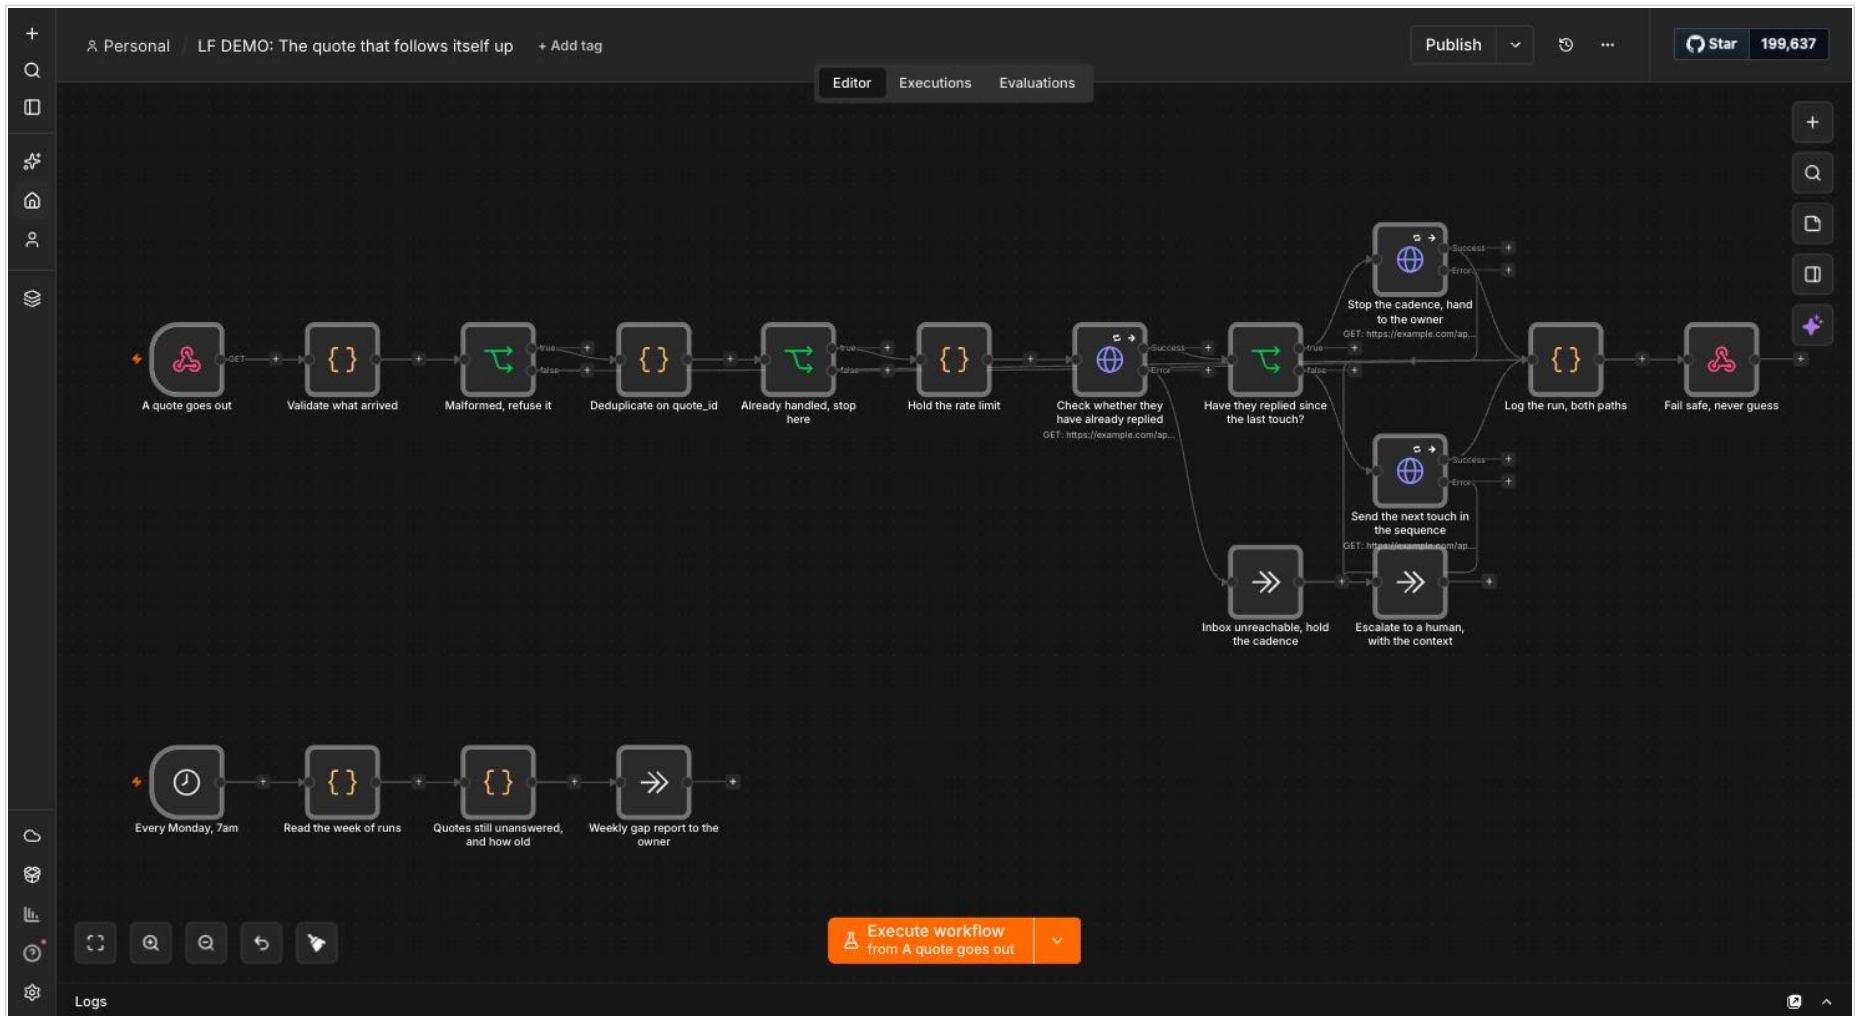

2 of 4 THINKING

Every touch checks for a reply first and stops dead the moment they answer. That gate is what separates follow-up from nagging.

Have they replied since the last touch?

INPUT

→|

ParametersSettings

Execute step

Conditions

fx

{{ \$json.replied !== true && \$json.touchNumber < 4 }}

is true

+ Add condition

☐ Convert types where required

Options

+ Add option

3 of 4 RESULT

And what it reports: which quotes are unanswered and how old.

The screenshot displays the Node-RED web interface with a dark theme. The top bar shows the title 'Check whether they have already replied' and a 'Docs' link. The interface is divided into three main sections: INPUT, Parameters/Settings, and OUTPUT.

INPUT Section: Displays 'No input data' with a button 'Execute previous nodes' and the text 'to view input data'.

Parameters/Settings Section: Contains a tabbed interface with 'Parameters' and 'Settings' tabs. The 'Settings' tab is active, showing various configuration options for the 'HTTP Request' node:

- SSL Certificates:** Toggle switch (off).
- Always Output Data:** Toggle switch (off).
- Execute Once:** Toggle switch (off).
- Retry On Fail:** Toggle switch (on, highlighted in green).
- Max. Tries:** Input field with the value '3'.
- Wait Between Tries (ms):** Input field with the value '2000'.
- On Error:** Dropdown menu set to 'Continue (using error output)'.
- Notes:** A large text area for adding notes.
- Display Note in Flow?:** Toggle switch (off).

Below the settings, it indicates 'HTTP Request node version 4.2 (Latest version: 4.5)' and a link 'I wish this node would...'. An orange 'Execute step' button is located at the top right of the settings panel.

OUTPUT Section: Displays 'No output data' with a button 'Execute step' and the text 'or set mock data'. Above this, there are two informational messages: 'This node will automatically retry if it fails' and 'Execution will continue even if the node fails'.

The bottom of the interface features a 'Logs' tab.

4 of 4 MORE

And what it reports: which quotes are unanswered and how old.

The screenshot shows the configuration interface for the 'Deduplicate on quote_id' node in n8n. The interface is divided into three main sections: INPUT, Parameters/Settings, and OUTPUT.

INPUT Section: Displays 'No input data' with a right-pointing arrow icon. Below this is a button labeled 'Execute previous nodes' and the text 'to view input data'.

Parameters/Settings Section: Contains tabs for 'Parameters' and 'Settings'. The 'Parameters' tab is active, showing:

- Mode:** A dropdown menu set to 'Run Once for All Items'.
- Language:** A dropdown menu set to 'JavaScript'.
- JavaScript:** A code editor with a 'Code' tab and an 'Ask AI' button. The code is:

```
1 // The same event arrives twice more often than anyone expects.
2 const key = $json["quote_id"];
3 const seen = $getWorkflowStaticData('global');
4 seen.keys = seen.keys || {};
5 const isNew = !seen.keys[key];
6 seen.keys[key] = Date.now();
7 return [{ json: { ...$json, isNew, dedupeKey: key } }];
```

OUTPUT Section: Displays 'No output data' with a left-pointing arrow icon. Below this is a button labeled 'Execute step' and the text 'or set mock data'.

Footer: A 'Logs' tab is visible at the bottom left. A hint at the bottom center reads: 'Type \$ for a list of special vars/methods. Debug by using console.log() statements and viewing their output in the browser console.' Below this is a text input field with the placeholder 'I wish this node would...'.