

The Data Layer


data-model-architecture · built in pipedrive

Most CRM problems are data-model problems wearing a workflow costume.

What it connects to: The schema has to hold for every system that writes into it. A property that only makes sense in one tool is the one that breaks the reporting later.

1 of 4 SYSTEM

Here's the system that enforces it — a record only gets written once every field maps to a property that exists.

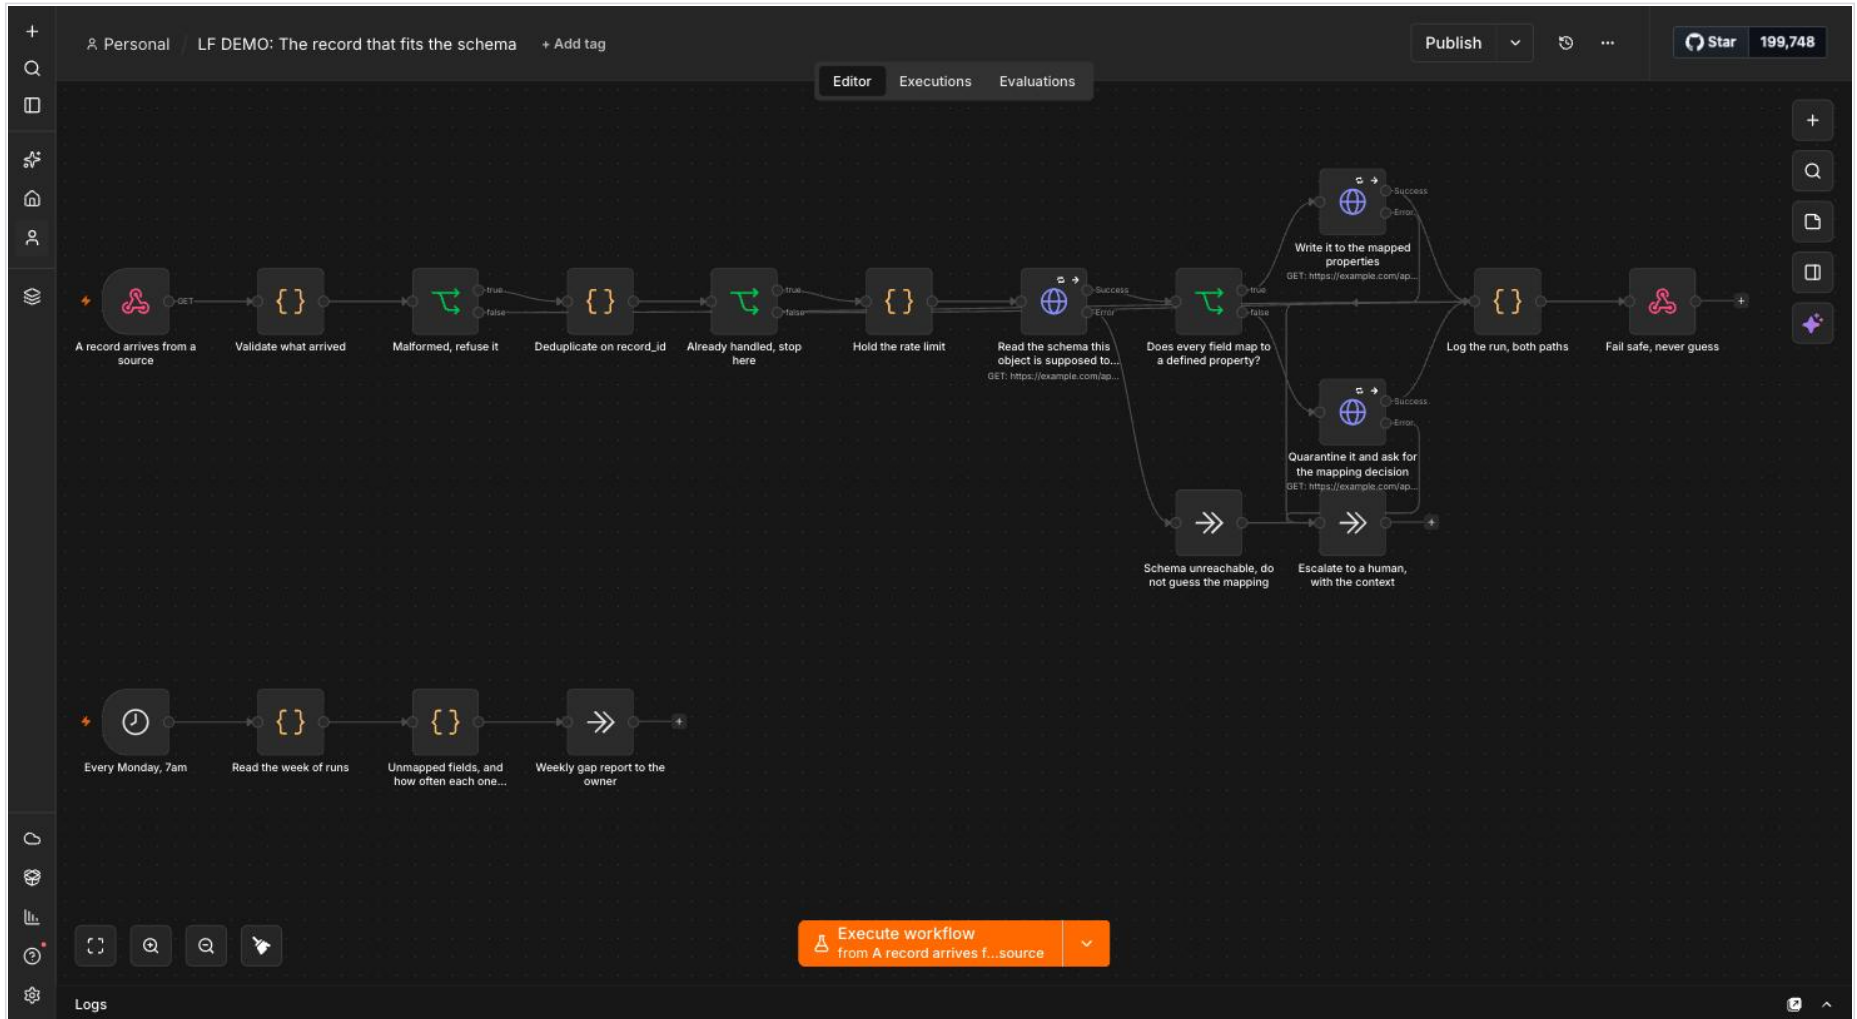

2 of 4 THINKING

This is the gate that keeps the model clean: every field has to map to a property that exists, or the record is quarantined rather than guessed at. Guessing is how you end up with three fields meaning the same thing.

The screenshot shows a dark-themed user interface for a data processing tool. The main window is titled "Does every field map to a defined property?". It is divided into two main sections: "INPUT" on the left and "Parameters" / "Settings" on the right.

INPUT Section:

- At the top, it says "INPUT".
- Below that, there is a large area with the text "No input data" and a button "Execute previous nodes" with the subtitle "to view input data".
- On the far left, there is a vertical sidebar with various icons, including a globe icon.

Parameters / Settings Section:

- At the top right of this section is an orange button labeled "Execute step".
- Below the button is a section titled "Conditions".
- Inside the "Conditions" section, there is a text area containing the following code:

```
{{ $json.fullyMapped === true && $json.objectExists === true }}
```
- To the right of the code area is a dropdown menu with the text "is true".
- Below the code area is a button labeled "+ Add condition".
- Below the "+ Add condition" button is a toggle switch labeled "Convert types where required", which is currently turned off.
- Below the toggle switch is a section titled "Options" with a plus sign icon to its right.
- Below the "Options" section is a button labeled "+ Add option".

Here's the object model on a real portal — objects, properties, and how they associate.

pipedrive

Nova

Setup guide

Contacts

Activities

Deals

Leads

Insights

Sales Inbox

More

MY ACCOUNT

Personal preferences

Password and login

Email sync

Contact sync

Calendar sync

Google Drive

Pipedrive MCP

Your devices

Notifications

Referral program

Interface preferences

COMPANY OVERVIEW

Company settings

Manage users

User overview

Data fields

Usage

Beta program

Settings / Data fields

Search Pipedrive

123

Probability

Number

✓

...

Organization

Organization

✓

✓

...

Contact person

Person

✓

✓

...

Label

Multiple options

✓

✓

...

Expected close date

Date

✓

...

Sequence enrollment

...

Project

Project

...

^

Ungrouped custom fields

2

...

Field name

Description

+

Pipelines

Quality rules

Edit

SAMPLE - On Hold Reason

Single option

CUSTOM

All

...

SAMPLE - Stall Reason

Single option

CUSTOM

All

...

^

P

Default fields

Field name

+

Quality rules

Edit

abc

Title

Text

✓

✓

4 of 4 MORE

And the property architecture underneath it, with fill rates so you can see what's actually used.

Unmapped fields, and how often each one arrived

INPUT

→|

No input data

Execute previous nodes

to view input data

ParametersSettingsExecute step

ModeRun Once for All Items

LanguageJavaScript

JavaScriptCodeAsk AI

```
1 // Unmapped fields, and how often each one arrived – the schema gap,
2 ranked.
3 const recs = Object.values($getWorkflowStaticData('global').records || {});
4 {});
5 const week = recs.filter(r => r.at > Date.now() - 7*864e5);
6 const counts = {};
7 for (const r of week) for (const f of (r.unmapped || [])) counts[f] =
8 (counts[f] || 0) + 1;
9 const ranked = Object.entries(counts).sort((a, b) => b[1] -
10 a[1]).slice(0, 5);
11 const quarantined = week.filter(r => r.quarantined);
12 return [{ json: {
13   received: week.length,
14   quarantined: quarantined.length,
15   worstFields: ranked,
16   note: ranked.length
17   ? `"${ranked[0][0]}" arrived ${ranked[0][1]} times with nowhere to
18   go. Decide the property once and ${quarantined.length} quarantined
```

Type \$ for a list of **special vars/methods**. Debug by using `console.log()` statements and viewing their output in the browser console.