

The Migration Build


platform-migration · built in n8n

Migrations lose records quietly. Nobody finds out until the customer who was lost calls.

What it connects to: Migration is two data models arguing. The mapping decision — which field becomes which property — is the entire job; the import is the easy part.

1 of 4 SYSTEM

Here's the migration: reversible batches, counts reconciled before anything commits.

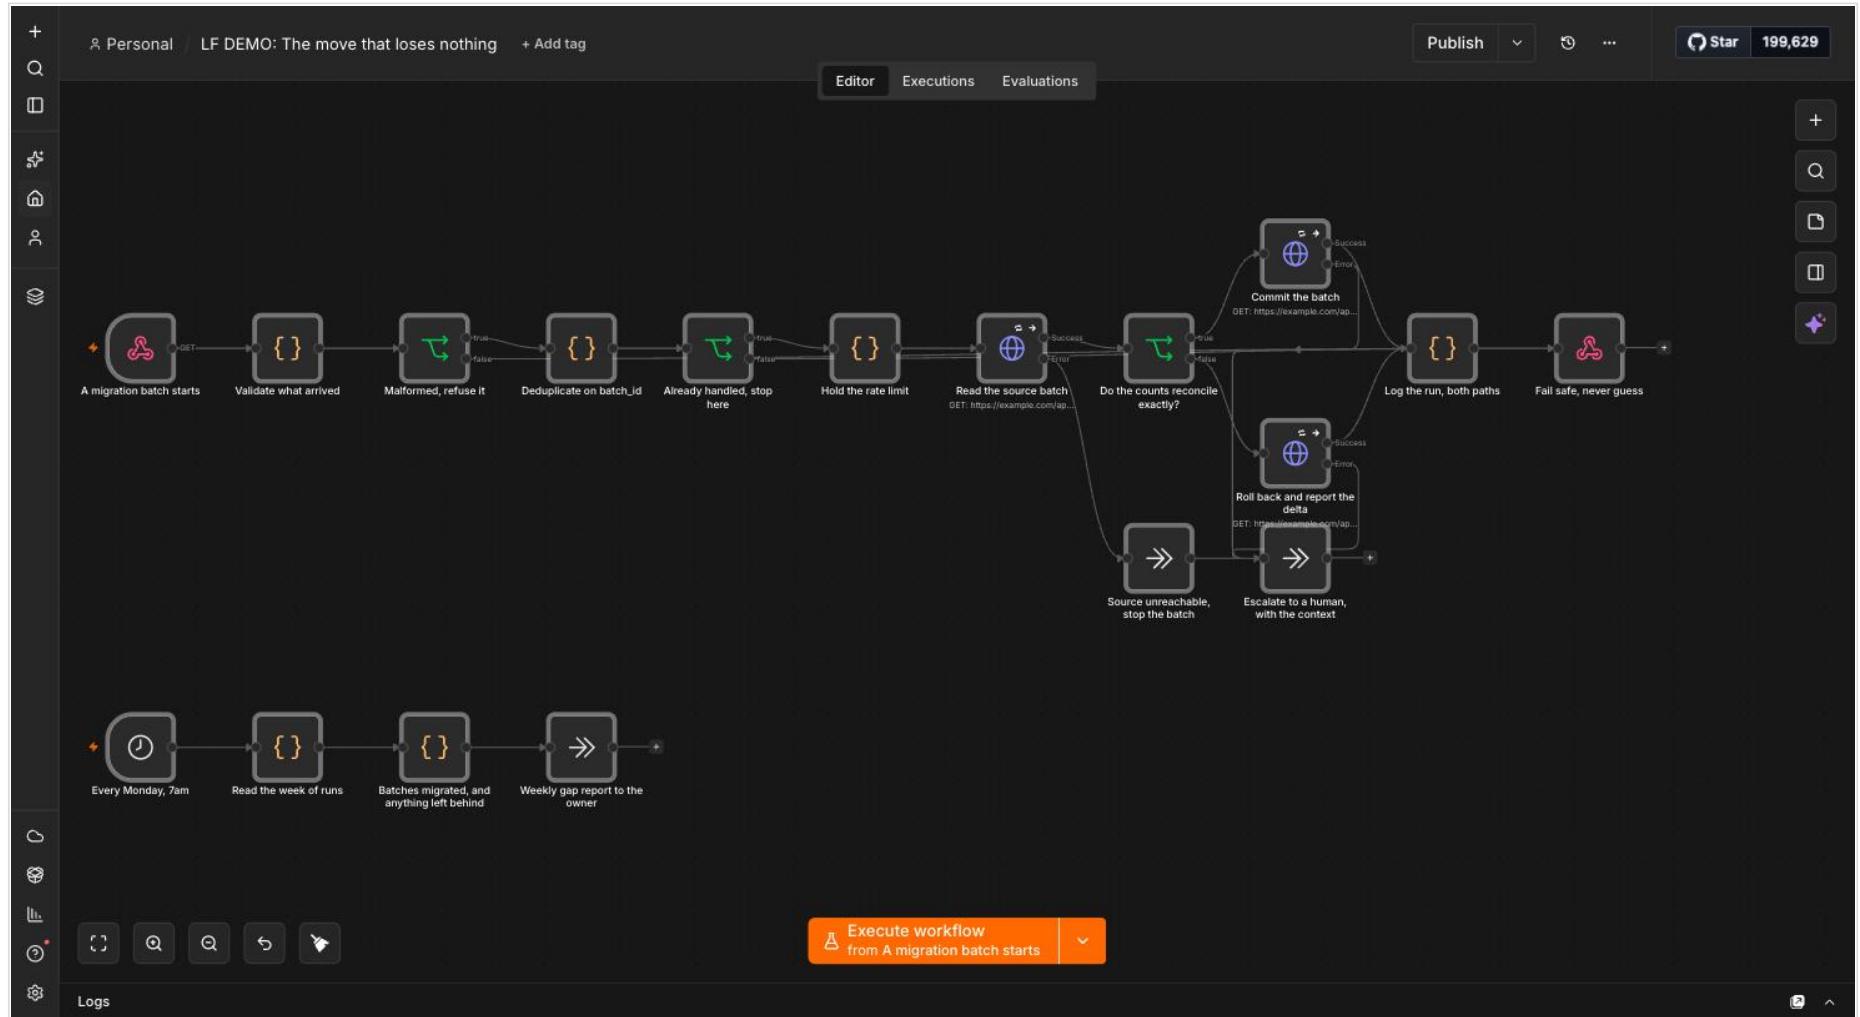

2 of 4 THINKING

If the counts don't match, the batch rolls back and reports the delta instead of half-writing.

The screenshot shows a workflow editor with a central node titled "Do the counts reconcile exactly?". The node has two tabs: "Parameters" (selected) and "Settings". In the "Parameters" tab, there is a "Conditions" section with a single condition: `{{ $json.countsMatch === true && $json.sourceCount > 0 }}`. Below the conditions, there is a toggle switch for "Convert types where required" which is currently turned off. There is also an "Options" section with a "+ Add option" button. To the right of the conditions, there is a checkbox labeled "is true" which is checked. An "Execute step" button is located in the top right corner of the node's configuration area. The node is flanked by two panels: "INPUT" on the left and "OUTPUT" on the right. Both panels display "No input data" and "No output data" respectively, with buttons to "Execute previous nodes" and "Execute step" to view data. A "Logs" panel is visible at the bottom left. The interface is dark-themed.

Do the counts reconcile exactly?

INPUT

OUTPUT

Parameters Settings

Execute step

Conditions

`{{ $json.countsMatch === true && $json.sourceCount > 0 }}` is true

+ Add condition

☐ Convert types where required

Options

+ Add option

No input data

Execute previous nodes

to view input data

No output data

Execute step

to view output data

? I wish this node would...

Logs

3 of 4 RESULT

And the result — records in, associations intact, zero errors.

The screenshot displays the Apache NiFi web console interface for the 'Read the source batch' node. The interface is divided into three main sections: INPUT, Parameters/Settings, and OUTPUT.

- INPUT Section:** Shows 'No input data' with a button 'Execute previous nodes' and the text 'to view input data'.
- Parameters/Settings Section:** Contains a list of settings: 'SSL Certificates' (off), 'Always Output Data' (off), 'Execute Once' (off), and 'Retry On Fail' (on). Below these are 'Max. Tries' (3) and 'Wait Between Tries (ms)' (2000). The 'On Error' dropdown is set to 'Continue (using error output)'. There is a 'Notes' text area and a 'Display Note in Flow?' toggle (off). At the bottom, it says 'HTTP Request node version 4.2 (Latest version: 4.5)' and a link 'I wish this node would...'. An orange 'Execute step' button is located at the top right of this section.
- OUTPUT Section:** Shows 'No output data' with a button 'Execute step' and the text 'or set mock data'. It also includes informational text: 'This node will automatically retry if it fails' and 'Execution will continue even if the node fails'.

The bottom of the interface features a 'Logs' tab and a status bar.

4 of 4 MORE

And the result — records in, associations intact, zero errors.

The screenshot shows a workflow editor interface for a node titled "Deduplicate on batch_id". The interface is divided into three main sections: INPUT, Parameters/Settings, and OUTPUT.

- INPUT Section:** Displays "No input data" with a right-pointing arrow icon. Below this is a button labeled "Execute previous nodes" and the text "to view input data".
- Parameters/Settings Section:** Contains tabs for "Parameters" and "Settings". The "Parameters" tab is active, showing:
 - Mode:** A dropdown menu set to "Run Once for All Items".
 - Language:** A dropdown menu set to "JavaScript".
 - JavaScript Code:** A code editor with a "Code" tab and an "Ask AI" button. The code is:

```
1 // The same event arrives twice more often than anyone expects.
2 const key = $json["batch_id"];
3 const seen = $getWorkflowStaticData('global');
4 seen.keys = seen.keys || {};
5 const isNew = !seen.keys[key];
6 seen.keys[key] = Date.now();
7 return [{ json: { ...$json, isNew, dedupeKey: key } }];
```
- OUTPUT Section:** Displays "No output data" with a left-pointing arrow icon. Below this is a button labeled "Execute step" and the text "or set mock data".

At the bottom of the interface, there is a "Logs" tab and a status bar that says "I wish this node would...".