

The Takeover Build

production-takeover · built in n8n


I don't change anything in week one. I map what it actually does versus what it's documented to do.

What it connects to: An inherited system spans tools nobody documented together. Week one is drawing the map across all of them before touching any of them.

Launch Forte · sample data in accounts we own · no client information appears in any frame

1 of 4 SYSTEM

Here's the probe: watch the inherited system, record every surprise, change nothing yet.

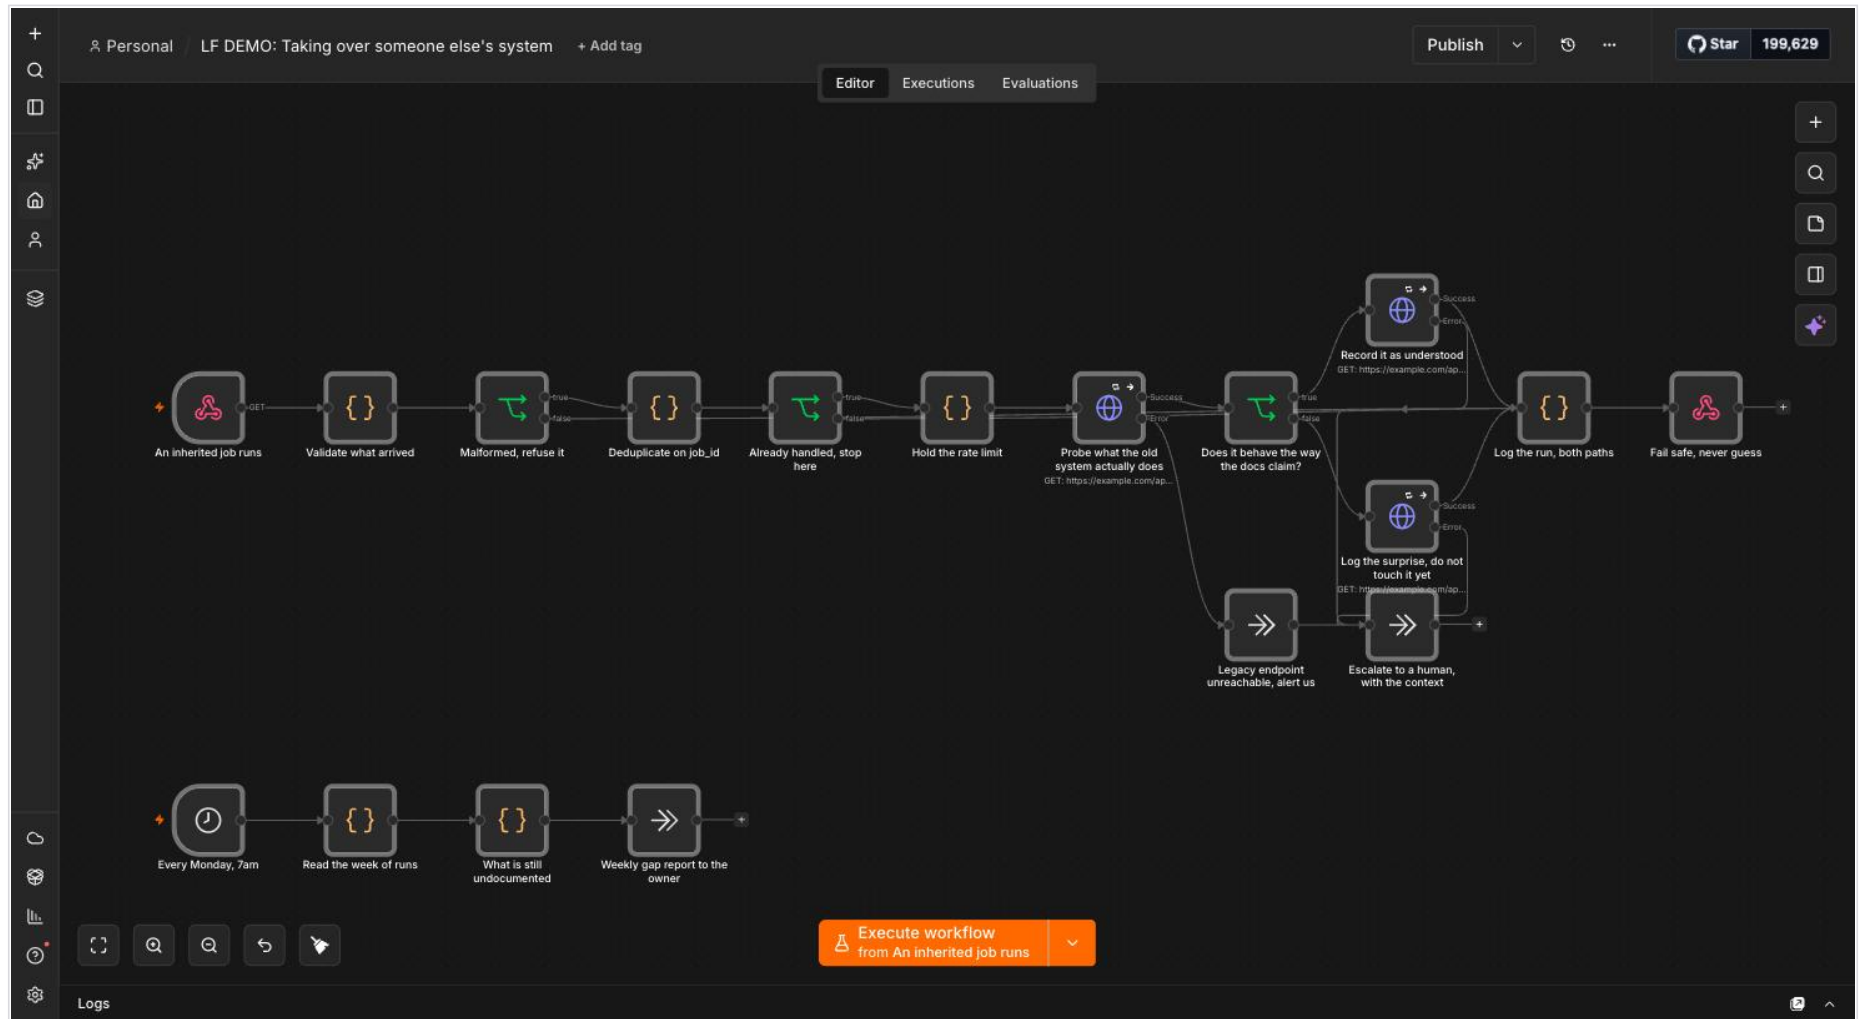

2 of 4 THINKING

The gap between documented and observed behaviour is the real scope.

The screenshot displays the Node-RED web interface. At the top, a tab is labeled "Does it behave the way the docs claim?". The interface is divided into three main sections: INPUT, CONFIGURATION, and OUTPUT.

INPUT Section: Displays "No input data" with a button "Execute previous nodes" and the text "to view input data".


CONFIGURATION Section: Contains tabs for "Parameters" and "Settings". The "Parameters" tab is active, showing a "Conditions" section with a text input field containing the JSON condition: `{{ $json.matchesDocs === true && $json.probeComplete === true }}`. Below this is a toggle switch for "Convert types where required" and an "Options" section with a "+ Add option" button. An "Execute step" button is located at the top right of this section.

OUTPUT Section: Displays "No output data" with a button "Execute step" and the text "to view output data".

At the bottom of the interface, there is a "Logs" panel and a footer area with the text "I wish this node would..." and a small icon.

3 of 4 THEIR-WORLD

Every external call retries on its own terms rather than inheriting one blanket rule — an inherited system tells you which calls it can survive being hit twice.

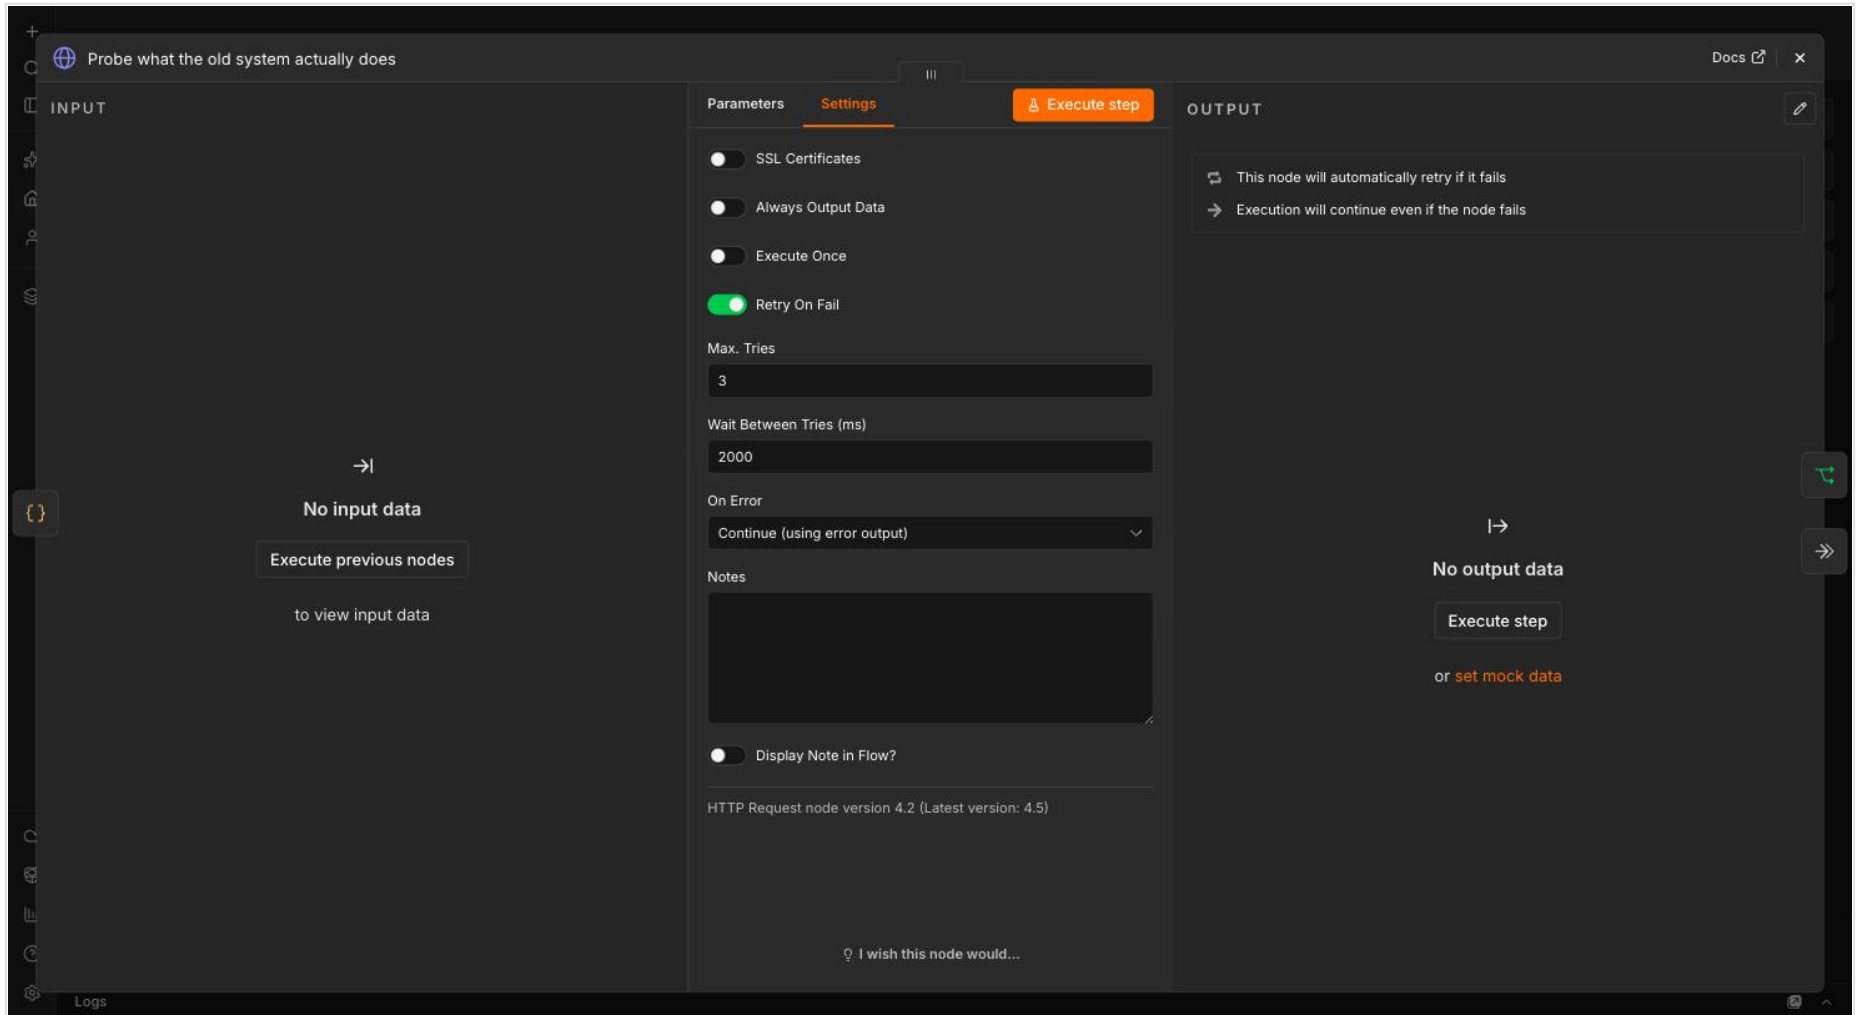

4 of 4 RESULT

And both paths get logged, the good one and the failed one, because week one is worth nothing if the evidence isn't written down.

The screenshot displays a workflow editor interface with a dark theme. The central panel is titled "Log the run, both paths" and contains a JavaScript node configuration. The node is set to "Run Once for All Items" mode and "JavaScript" language. The code block contains the following JavaScript code:

```
1 // A path that is not logged cannot be improved. These are the fields
2 worth keeping for this build.
3 const s = $getWorkflowStaticData('global');
4 s.runs = s.runs || {};
5 const row = { at: Date.now(), jobId: $json.job_id, matchesDocs:
6 $json.matchesDocs, surprise: $json.surprise || null };
7 s.runs[$json.dedupeKey] = row;
8 return [{ json: { ...row, ok: true } }];
```

Below the code block, a tooltip提示 suggests: "Type \$ for a list of special vars/methods. Debug by using console.log() statements and viewing their output in the browser console."

The interface is divided into three main sections:

- INPUT:** On the left, it shows "No input data" and a button "Execute previous nodes" with the text "to view input data" below it.
- Parameters / Settings:** The central configuration panel for the node, including tabs for "Parameters" and "Settings", and an "Execute step" button.
- OUTPUT:** On the right, it shows "No output data" and a button "Execute step" with the text "or set mock data" below it.

At the bottom left, there is a "Logs" tab. At the bottom center, a status bar says "I wish this node would...".