

Linear Algebra for Machine Learning in Python

Dr. Moritz Wolter

September 13, 2022

High Performance Computing and Analytics Lab

Overview

Introduction

Essential operations

Linear curve fitting

Regularization

Introduction

Même le feu est régi par les nombres.

Fourier¹ studied the transmission of heat using tools that would later be called an eigenvector-basis. Why would he say something like this?

¹Jean Baptiste Joseph Fourier (1768-1830)

$\mathbf{A} \in \mathbb{R}^{m,n}$ is a real-valued Matrix with m rows and n columns.

$$\mathbf{A} = \begin{pmatrix} a_{11} & a_{12} & \dots & a_{1n} \\ a_{21} & a_{22} & \dots & a_{2n} \\ \vdots & \vdots & & \vdots \\ a_{m1} & a_{m2} & \dots & a_{mn} \end{pmatrix}, a_{ij} \in \mathbb{R}. \quad (1)$$

Essential operations

Addition

To matrices $\mathbf{A} \in \mathbf{R}^{m,n}$ and $\mathbf{B} \in \mathbf{R}^{m,n}$ can be added by adding their elements.

$$\mathbf{A} + \mathbf{B} = \begin{pmatrix} a_{11} + b_{11} & a_{12} + b_{12} & \dots & a_{1n} + b_{1n} \\ a_{21} + b_{21} & a_{22} + b_{22} & \dots & a_{2n} + b_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ a_{m1} + b_{m1} & a_{m2} + b_{m2} & \dots & a_{mn} + b_{mn} \end{pmatrix} \quad (2)$$

Multiplication

Multiply $\mathbf{A} \in \mathbb{R}^{m,n}$ by $\mathbf{B} \in \mathbb{R}^{n,p}$ produces $\mathbf{C} \in \mathbb{R}^{m,p}$,

$$\mathbf{AB} = \mathbf{C}. \quad (3)$$

To compute \mathbf{C} the elements in the rows of \mathbf{A} are multiplied with the column elements of \mathbf{B} and the products added,

$$c_{ik} = \sum_{j=1}^m a_{ij} \cdot b_{jk}. \quad (4)$$

Linear Algebra for Machine Learning in Python

└ Essential operations

└ Multiplication

Multiply $\mathbf{A} \in \mathbb{R}^{m,n}$ by $\mathbf{B} \in \mathbb{R}^{n,p}$ produces $\mathbf{C} \in \mathbb{R}^{m,p}$,

$$\mathbf{AB} = \mathbf{C}. \quad (3)$$

To compute \mathbf{C} the elements in the rows of \mathbf{A} are multiplied with the column elements of \mathbf{B} and the products added,

$$c_{ik} = \sum_{j=1}^n a_{ij} \cdot b_{jk}. \quad (4)$$

Define on the board:

- Dot product $\mathbf{a} \cdot \mathbf{b} = a_1 b_1 + a_2 b_2 + \cdots + a_n b_n$ for two vectors $\mathbf{a}, \mathbf{b} \in \mathbb{R}^n$.
- Row times column view [Str+09]:

The identity matrix

$$\mathbf{I} = \begin{pmatrix} 1 & & & \\ & 1 & & \\ & & \ddots & \\ & & & 1 \end{pmatrix} \quad (5)$$

2022-09-13

Linear Algebra for Machine Learning in Python

└ Essential operations

└ The identity matrix

The identity matrix

$$\mathbf{I} = \begin{pmatrix} 1 & & \\ & 1 & \\ & & \ddots \\ & & & 1 \end{pmatrix}$$

(5)

Demonstrate multiplication with the inverse by hand. TODO

Matrix inverse

The inverse Matrix \mathbf{A}^{-1} undoes the effects of \mathbf{A} , or in mathematical notation,

$$\mathbf{A}\mathbf{A}^{-1} = \mathbf{I}. \quad (6)$$

The process of computing the inverse is called gaussian elimination.

Linear Algebra for Machine Learning in Python

└ Essential operations

└ Matrix inverse

The inverse Matrix \mathbf{A}^{-1} undoes the effects of \mathbf{A} , or in mathematical notation,

$$\mathbf{A}\mathbf{A}^{-1} = \mathbf{I}$$

(6)

The process of computing the inverse is called gaussian elimination.

Example on the board:

$$\mathbf{A} = \begin{pmatrix} 2 & 0 \\ 1 & 3 \end{pmatrix} \rightsquigarrow \left(\begin{array}{cc|cc} 2 & 0 & 1 & 0 \\ 1 & 3 & 0 & 1 \end{array} \right) \rightsquigarrow \left(\begin{array}{cc|cc} 1 & 0 & \frac{1}{2} & 0 \\ 1 & 3 & 0 & 1 \end{array} \right) \quad (7)$$

$$\rightsquigarrow \left(\begin{array}{cc|cc} 1 & 0 & \frac{1}{2} & 0 \\ 0 & 3 & -\frac{1}{2} & 1 \end{array} \right) \rightsquigarrow \left(\begin{array}{cc|cc} 1 & 0 & \frac{1}{2} & 0 \\ 0 & 1 & -\frac{1}{6} & \frac{1}{3} \end{array} \right) \quad (8)$$

Test the result:

$$\begin{pmatrix} 2 & 0 \\ 1 & 3 \end{pmatrix} \begin{pmatrix} \frac{1}{2} & 0 \\ -\frac{1}{6} & \frac{1}{3} \end{pmatrix} = \begin{pmatrix} 2 \cdot \frac{1}{2} + 0 \cdot -\frac{1}{6} & 2 \cdot 0 + 0 \cdot \frac{1}{3} \\ 1 \cdot \frac{1}{2} + 3 \cdot -\frac{1}{6} & 0 \cdot 0 + 3 \cdot \frac{1}{3} \end{pmatrix} = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} \quad (9)$$

The Transpose

The transpose operation flips matrices along the diagonal, for example in \mathbb{R}^2 ,

$$\begin{pmatrix} a & b \\ c & d \end{pmatrix}^T = \begin{pmatrix} a & c \\ b & d \end{pmatrix} \quad (10)$$

Motivation of the determinant

TODO

Computing determinants in two or three dimensions

The two dimensional case:

$$\begin{vmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{vmatrix} = a_{11} \cdot a_{22} - a_{12} \cdot a_{21} \quad (11)$$

(12)

Computing the determinant of a three dimensional matrix.

$$\begin{vmatrix} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \\ a_{31} & a_{32} & a_{33} \end{vmatrix} = a_{11} \cdot \begin{vmatrix} a_{21} & a_{23} \\ a_{32} & a_{33} \end{vmatrix} - a_{12} \cdot \begin{vmatrix} a_{21} & a_{13} \\ a_{32} & a_{33} \end{vmatrix} + a_{13} \cdot \begin{vmatrix} a_{21} & a_{23} \\ a_{22} & a_{23} \end{vmatrix} \quad (13)$$

Linear Algebra for Machine Learning in Python

└ Essential operations

└ Computing determinants in two or three dimensions

The two dimensional case:

$$\begin{vmatrix} a_{11} & a_{12} \\ a_{21} & a_{22} \end{vmatrix} = a_{11} \cdot a_{22} - a_{12} \cdot a_{21} \quad (11)$$

(12)

Computing the determinant of a three dimensional matrix:

$$\begin{vmatrix} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \\ a_{31} & a_{32} & a_{33} \end{vmatrix} = a_{11} \cdot \begin{vmatrix} a_{22} & a_{23} \\ a_{32} & a_{33} \end{vmatrix} - a_{12} \cdot \begin{vmatrix} a_{21} & a_{23} \\ a_{31} & a_{33} \end{vmatrix} + a_{13} \cdot \begin{vmatrix} a_{21} & a_{22} \\ a_{31} & a_{32} \end{vmatrix} \quad (13)$$

Draw the sign pattern on the board:

$$\begin{vmatrix} + & - & + & \dots \\ - & + & - & \dots \\ + & - & + & \dots \\ \vdots & \vdots & \vdots & \ddots \end{vmatrix} \quad (14)$$


The determinant can be expanded along any column as long as the sign pattern is respected.

Determinants in n-dimensions

$$\begin{vmatrix} a_{11} & a_{21} & \dots & a_{1n} \\ a_{21} & a_{22} & \dots & a_{2n} \\ \vdots & \vdots & & \vdots \\ a_{m1} & a_{m2} & \dots & a_{mn} \end{vmatrix} = a_{11} \begin{vmatrix} a_{22} & \dots & a_{2n} \\ \vdots & & \vdots \\ a_{m2} & \dots & a_{mn} \end{vmatrix} + a_{21} \begin{vmatrix} a_{21} & \dots & a_{2n} \\ \vdots & & \vdots \\ a_{m2} & \dots & a_{mn} \end{vmatrix} \\
 - a_{m1} \begin{vmatrix} a_{11} & \dots & a_{1n} \\ a_{21} & \dots & a_{2n} \\ \vdots & & \vdots \end{vmatrix}$$

Linear curve fitting

What is the best line connecting measurements?

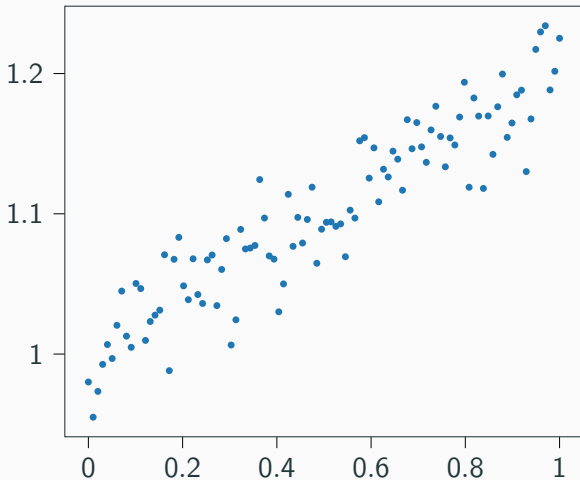

Problem Formulation

A line has the form $cx + d$, with $c, x, d \in \mathbb{R}$. In matrix language we could ask for every point to be on the line,

$$\begin{pmatrix} 1 & x_1 \\ 1 & x_2 \\ 1 & x_3 \\ \vdots & \vdots \\ 1 & x_n \end{pmatrix} \begin{pmatrix} c \\ d \end{pmatrix} = \begin{pmatrix} p_1 \\ p_2 \\ \vdots \\ p_n \end{pmatrix}. \quad (15)$$

We can treat polynomials as vectors, too! The coordinates populate the matrix rows in $\mathbf{A} \in \mathbb{R}^{n_p \times 2}$, and the coefficients appear in $\mathbf{x} \in \mathbb{R}^2$, with the points we would like to model in $\mathbf{b} \in \mathbb{R}^{n_p}$. The problem now appears in matrix form and can be solved using linear algebra!

The Pseudoinverse [Str+09; DFO20]

The inverse we saw earlier only exists for square that is n by n matrices. Nonsquare \mathbf{A} such as the one we just saw, require the pseudoinverse,

$$\mathbf{A}^\dagger = (\mathbf{A}^T \mathbf{A})^{-1} \mathbf{A}^T. \quad (16)$$

Sometimes solving $\mathbf{Ax} + \mathbf{b} = 0$ is impossible, the pseudoinverse considers,

$$\min_x \frac{1}{2} |\mathbf{Ax} - \mathbf{b}|^2 \quad (17)$$

$$(18)$$

instead. $\mathbf{A}^\dagger \mathbf{b} = \mathbf{x}$ yields the solution.

Linear Algebra for Machine Learning in Python

└ Linear curve fitting

└ The Pseudoinverse [Str+09; DFO20]

The inverse we saw earlier only exists for square that is n by n matrices. Nonsquare \mathbf{A} such as the one we just saw, require the pseudoinverse,

$$\mathbf{A}^\dagger = (\mathbf{A}^T \mathbf{A})^{-1} \mathbf{A}^T. \quad (16)$$

Sometimes solving $\mathbf{Ax} + \mathbf{b} = 0$ is impossible, the pseudoinverse considers,

$$\min_x \frac{1}{2} |\mathbf{Ax} - \mathbf{b}|^2 \quad (17)$$

(18)

instead $\mathbf{A}^\dagger \mathbf{b} = \mathbf{x}$ yields the solution.

Sometimes solving $\mathbf{Ax} + \mathbf{b} = 0$ is impossible. One the board, derive:

$$\min_x \frac{1}{2} |\mathbf{Ax} - \mathbf{b}|^2 \quad (19)$$

$$(20)$$

At the optimum we expect,

$$0 = \nabla_x \frac{1}{2} |\mathbf{Ax} - \mathbf{b}|^2 \quad (21)$$

$$= \nabla_x \frac{1}{2} (\mathbf{Ax} - \mathbf{b})^T (\mathbf{Ax} - \mathbf{b}) \quad (22)$$


$$= (\mathbf{Ax} - \mathbf{b}) \mathbf{A}^T \quad (23)$$

$$= \mathbf{A}^T \mathbf{Ax} - \mathbf{A}^T \mathbf{b} \quad (24)$$


$$\mathbf{A}^T \mathbf{b} = \mathbf{A}^T \mathbf{Ax} \quad (25)$$

$$(\mathbf{A}^T \mathbf{A})^{-1} \mathbf{A}^T \mathbf{b} = \mathbf{x} \quad (26)$$

Linear regression

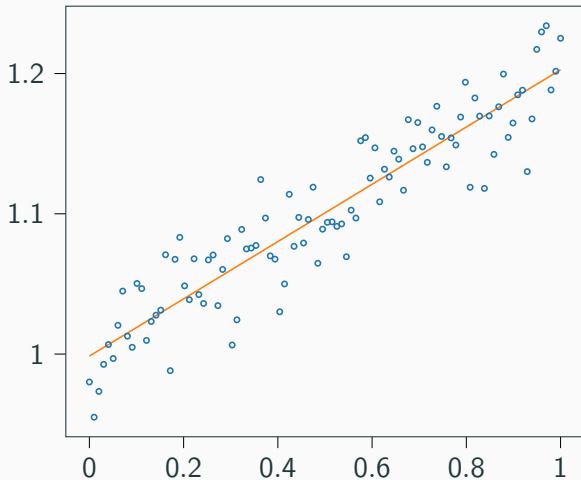

What about harder problems?

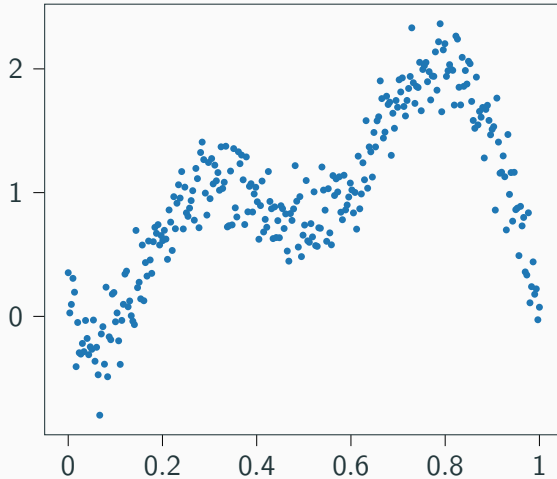


Fitting higher order polynomials

$$\underbrace{\begin{pmatrix} 1 & x_1^1 & x_1^2 & \dots & x_1^m \\ 1 & x_2^1 & x_2^2 & \dots & x_2^m \\ 1 & x_3^1 & x_3^2 & \dots & x_3^m \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 1 & x_n^1 & x_n^2 & \dots & x_n^m \end{pmatrix}}_{\mathbf{A}} \underbrace{\begin{pmatrix} c_1 \\ c_2 \\ \vdots \\ c_m \end{pmatrix}}_{\mathbf{x}} = \underbrace{\begin{pmatrix} p_1 \\ p_2 \\ \vdots \\ p_n \end{pmatrix}}_{\mathbf{b}}. \quad (27)$$

As we saw for the linear regression $\mathbf{A}^\dagger \mathbf{b} = \mathbf{x}$ gives us the coefficients.

Overfitting

Below the solution for a polynomial of 7th degree, that is $m = 7$.

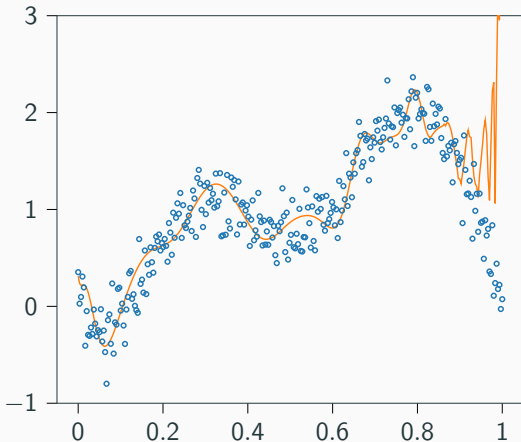

The noise took over! What now?

Regularization

- Is there a way to fix the previous example?
- To do so we start from a rather peculiar observation.

Eigenvalues and Eigen-Vectors

Multiply matrix **A** with vectors **x₁** and **x₂**,

$$\mathbf{A} = \begin{pmatrix} 1 & 4 \\ 0 & 2 \end{pmatrix}, \mathbf{x}_1 = \begin{pmatrix} 1 \\ 0 \end{pmatrix}, \mathbf{x}_2 = \begin{pmatrix} 4 \\ 1 \end{pmatrix}, \quad (28)$$

we observe

$$\mathbf{Ax}_1 = \begin{pmatrix} 1 \\ 0 \end{pmatrix}, \mathbf{Ax}_2 = \begin{pmatrix} 8 \\ 2 \end{pmatrix} \quad (29)$$

Vector **x₁** has not changed! Vector **x₂** was multiplied by two. In other words,

$$\mathbf{Ax}_1 = 1\mathbf{x}_1, \mathbf{Ax}_2 = 2\mathbf{x}_2 \quad (30)$$

Eigenvalues and Eigen-vectors

Eigenvectors turn multiplication with a matrix into multiplication with a number,

$$\mathbf{Ax} = \lambda \mathbf{x}. \quad (31)$$

Eigenvalue-Decomposition [Str+09]

Eigenvalues let us look into the heart of a square system-matrix

$\mathbf{A} \in \mathbb{R}^{n,n}$.


$$\mathbf{A} = \mathbf{S} \begin{pmatrix} \lambda_1 & & & \\ & \lambda_2 & & \\ & & \ddots & \\ & & & \lambda_n \end{pmatrix} \mathbf{S}^{-1} = \mathbf{S} \mathbf{\Lambda} \mathbf{S}^{-1} \quad (32)$$

Computing the Decomposition

Dealing with matrices which aren't square:

$$\mathbf{A} = \mathbf{U}\mathbf{\Sigma}\mathbf{V}^T \quad (33)$$

Regularized solution

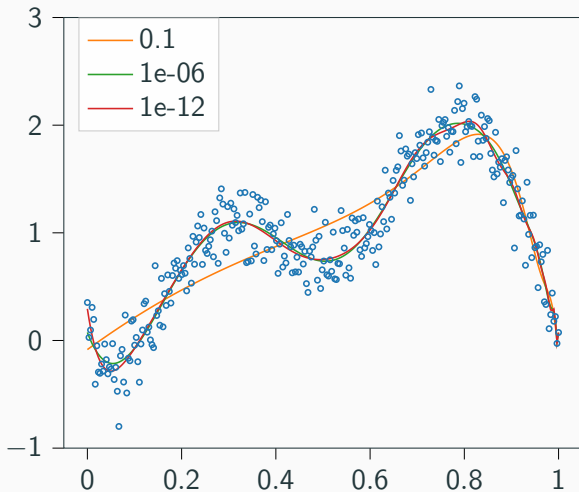

Conclusion

- True scientists know what linear can do for them!

References

- [DFO20] Marc Peter Deisenroth, A Aldo Faisal, and Cheng Soon Ong. *Mathematics for machine learning*. Cambridge University Press, 2020.
- [Str+09] Gilbert Strang, Gilbert Strang, Gilbert Strang, and Gilbert Strang. *Introduction to linear algebra*. Vol. 4. Wellesley-Cambridge Press Wellesley, MA, 2009.