

Constant-delay Enumeration for Lorem Ipsum

Fernando Riveros ✉

Pontificia Universidad Católica de Chile

Cristian Riveros ✉

Pontificia Universidad Católica de Chile

Abstract

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

2012 ACM Subject Classification Theory of computation → Database theory

Keywords and phrases Streams, query evaluation, enumeration algorithms.

1 Introduction

Write an introduction here.

Cristian: Here a comment from Cristian.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

2 Preliminaries

Sets and intervals. Given a set A , we denote by 2^A the *powerset* of A . We denote by \mathbb{N} the natural numbers. Given $n, m \in \mathbb{N}$ with $n \leq m$, we denote by $[n]$ the set $\{1, \dots, n\}$ and by $[n..m]$ the interval $\{n, n+1, \dots, m\}$ over \mathbb{N} .

Events and streams. We fix a set \mathbf{T} of *event types*, a set \mathbf{A} of *attributes names*, and a set \mathbf{D} of *data values* (e.g., integers, floats, strings). An *event* e is a partial mapping $e : \mathbf{A} \rightarrow \mathbf{D}$ that maps attributes names in \mathbf{A} to data values in \mathbf{D} . We denote $\text{att}(e)$ the domain of e , called the attributes of e , and we assume that $\text{att}(e)$ is finite. We denote by $e(A)$ the data value of the attribute $A \in \mathbf{A}$ whenever $A \in \text{att}(e)$. Further, each event e has a type in \mathbf{T} denoted by $\text{type}(e)$. We write \mathbf{E} to denote the set of all events over event types \mathbf{T} , attributes names \mathbf{A} , and data values \mathbf{D} . A *stream* is an (arbitrary long) sequence $\bar{S} = e_1 e_2 \dots e_n$ of events where $|\bar{S}| = n$ is the length of the stream.

Complex events. Fix a finite set \mathbf{X} of variables and assume that $\mathbf{T} \subseteq \mathbf{X}$, where \mathbf{T} is the set of event types as defined earlier, this is to say that all event types are a variable. Let \bar{S} be a stream of length n . A complex event of \bar{S} is a triple (i, j, μ) where $i, j \in [n]$, $i \leq j$, and $\mu : \mathbf{X} \rightarrow 2^{[i..j]}$ is a function with finite domain. Intuitively, i and j marks the beginning and end of the interval where the complex event happens, and μ stores the events in the interval $[i..j]$ that fired the complex event. In the following, we will usually use C to denote a complex event (i, j, μ) of \bar{S} and omit \bar{S} if the stream is clear from the context. We will use $\text{interval}(C)$, $\text{start}(C)$, and $\text{end}(C)$ to denote the interval $[i..j]$, the start i , and the end j .

$$\begin{aligned}
\llbracket R \rrbracket(\bar{S}) &= \{ (i, i, \mu) \mid \text{type}(e_i) = R \wedge \mu(R) = \{i\} \wedge \forall X \neq R. \mu(X) = \emptyset \} \\
\llbracket \varphi \text{ AS } X \rrbracket(\bar{S}) &= \{ C \mid \exists C' \in \llbracket \varphi \rrbracket(\bar{S}). \text{interval}(C) = \text{interval}(C') \wedge C(X) = \bigcup_Y C'(Y) \\
&\quad \wedge \forall Z \neq X. C(Z) = C'(Z) \} \\
\llbracket \varphi \text{ FILTER } X[P] \rrbracket(\bar{S}) &= \{ C \mid C \in \llbracket \varphi \rrbracket(\bar{S}) \wedge C(X) \models P \} \\
\llbracket \varphi_1 \text{ OR } \varphi_2 \rrbracket(\bar{S}) &= \llbracket \varphi_1 \rrbracket(\bar{S}) \cup \llbracket \varphi_2 \rrbracket(\bar{S}) \\
\llbracket \varphi_1 \text{ AND } \varphi_2 \rrbracket(\bar{S}) &= \llbracket \varphi_1 \rrbracket(\bar{S}) \cap \llbracket \varphi_2 \rrbracket(\bar{S}) \\
\llbracket \varphi_1; \varphi_2 \rrbracket(\bar{S}) &= \{ C_1 \cup C_2 \mid C_1 \in \llbracket \varphi_1 \rrbracket(\bar{S}) \wedge C_2 \in \llbracket \varphi_2 \rrbracket(\bar{S}) \wedge \text{end}(C_1) < \text{start}(C_2) \} \\
\llbracket \varphi_1 : \varphi_2 \rrbracket(\bar{S}) &= \{ C_1 \cup C_2 \mid C_1 \in \llbracket \varphi_1 \rrbracket(\bar{S}) \wedge C_2 \in \llbracket \varphi_2 \rrbracket(\bar{S}) \wedge \text{end}(C_1) + 1 = \text{start}(C_2) \} \\
\llbracket \varphi^+ \rrbracket(\bar{S}) &= \llbracket \varphi \rrbracket(\bar{S}) \cup \llbracket \varphi; \varphi^+ \rrbracket(\bar{S}) \\
\llbracket \varphi^\oplus \rrbracket(\bar{S}) &= \llbracket \varphi \rrbracket(\bar{S}) \cup \llbracket \varphi : \varphi^\oplus \rrbracket(\bar{S}) \\
\llbracket \pi_L(\varphi) \rrbracket(\bar{S}) &= \{ \pi_L(C) \mid C \in \llbracket \varphi \rrbracket(\bar{S}) \}
\end{aligned}$$

■ **Figure 1** Figure 1: The semantics of CEL formulas defined over a stream $\bar{S} = e_1 e_2 \dots e_n$ where each e_i is an event.

of C , respectively. Further, by some abuse of notation we will also use $C(X)$ for $X \in \mathbf{X}$ to denote the set $\mu(X)$ of C .

The following operations on complex events will be useful throughout the paper. We define the union of complex events C_1 and C_2 , denoted by $C_1 \cup C_2$, as the complex event C' such that $\text{start}(C') = \min\{\text{start}(C_1), \text{start}(C_2)\}$, $\text{end}(C') = \max\{\text{end}(C_1), \text{end}(C_2)\}$, and $C'(X) = C_1(X) \cup C_2(X)$ for every $X \in \mathbf{X}$. Further, we define the *projection over L* of a complex event C , denoted by $\pi_L(C)$, as the complex event C' such that $\text{interval}(C') = \text{interval}(C)$ and $C'(X) = C(X)$ whenever $X \in L$, and $C'(X) = \emptyset$, otherwise. Finally, we denote by (i, j, μ_\emptyset) the complex event with trivial mapping μ_\emptyset such that $\mu_\emptyset(X) = \emptyset$ for every $X \in \mathbf{X}$.

Predicate of events. A *predicate* is a possibly infinite set \mathbf{P} of events. We say that an event e satisfies predicate P , denoted $e \models P$, if, and only if, $e \in P$. We generalize this notation from events to a set of events E such that $E \models P$ if, and only if, $e \models P$ for every $e \in E$. We assume a fixed set of predicates \mathbf{P} . Further, we assume that there is a basic set of predicates $P_{basic} \subseteq \mathbf{P}$ and \mathbf{P} is the closure of P_{basic} under intersection and negation (i.e., $P_1 \cap P_2 \in \mathbf{P}$ and $\mathbf{E} P \in \mathbf{P}$ for every $P, P_1, P_2 \in \mathbf{P}$) where $\mathbf{E} P \in \mathbf{P}$ for every $P, P_1, P_2 \in \mathbf{P}$ where \mathbf{E} is a predicate in \mathbf{P} , that we usually denote by true.

Complex event logic. In this work, we use the Complex Event Logic (CEL) introduced in [21] and implemented in CORE [11] as our basic query language for CER. The syntax of a CEL formula φ is given by the grammar:

$$\varphi := R \mid \varphi \text{ AS } X \mid \varphi \text{ FILTER } X[P] \mid \varphi \text{ OR } \varphi \mid \varphi \text{ AND } \varphi \mid \varphi; \varphi \mid \varphi : \varphi \mid \varphi^+ \mid \varphi^\oplus \mid \pi_L(\varphi)$$

where $R \in \mathbf{T}$ is an event type, $X \in \mathbf{X}$ is a variable, $P \in \mathbf{P}$ is a predicate, and $L \subseteq \mathbf{X}$ is a set of variables. We define the semantics of a CEL formula φ over a stream \bar{S} , recursively, as a set of complex events over \bar{S} . In Figure 1, we define the semantics of each CEL operator like in [11, 21].

3 Main results

In this section we introduce an extension to the semantics of CEL, namely we introduce a new operator using [allen interval algebra] *overlap*. We then extend the formal computational model for evaluating CEL formulas and prove its correctness. We start by recalling the notion of a CEA to later extend the proof. **Complex Event Automata.** A *Complex Event Automata* (CEA) is a tuple $\mathcal{A} = (Q, \mathbf{P}, \mathbf{X}, \Delta, q_0, F)$ where Q is a finite set of states, \mathbf{P} is the set of predicates, \mathbf{X} is a finite set of variables, $\Delta \subseteq Q \times \mathbf{P} \times 2^{\mathbf{X}} \times Q$ is a finite relation (called the transition relation), $q_0 \in Q$ is the initial state, and F is the set of final states. A run ρ of \mathcal{A} over the stream $\bar{S} = e_1 e_2 \dots e_n$ from position i to j is a sequence:

$$\rho := p_i \xrightarrow{P_i/L_i} p_{i+1} \xrightarrow{P_{i+1}/L_{i+1}} p_{i+2} \xrightarrow{P_{i+2}/L_{i+2}} \dots \xrightarrow{P_j/L_j} p_{j+1}$$

where $p_i = q_0$, $(p_k, P_k, L_k, p_{k+1}) \in \Delta$, and $e_k \models P_k$ for all $k \in [i..j]$. We say that the run is accepting if $p_{j+1} \in F$. A run ρ from positions i to j like above defines the complex event $C_\rho = (i, j, \mu_\rho)$ such that $\mu_\rho(X) = \{k \in [i..j] \mid X \in L_k\}$ for every $X \in \mathbf{X}$. Note that the starting and ending positions i, j of the run define the interval of the complex event, and the labels $L_k \in \mathbf{X}$ define the mapping μ_ρ of C_ρ . We define the set of all complex events of \mathcal{A} over \bar{S} as:

$$\llbracket \mathcal{A} \rrbracket(\bar{S}) = \{C_\rho \mid \rho \text{ is an accepting run of } \mathcal{A} \text{ over } \bar{S}\}$$

We present then the overlap operator for CEL as with the following definition:

$$\begin{aligned} \llbracket \varphi_1 :o \varphi_2 \rrbracket(\bar{S}) = \{C_1 \cup C_2 \mid C_1 \in \llbracket \varphi_1 \rrbracket(\bar{S}) \wedge C_2 \in \llbracket \varphi_2 \rrbracket(\bar{S}) \\ \wedge \text{start}(C_1) \leq \text{start}(C_2) \leq \text{end}(C_1) \leq \text{end}(C_2)\} \end{aligned}$$

We also know from [11,22] the following theorem:

► **Theorem 1** (CEA and CEL equivalence). *For every CEL formula φ there exists a CEA \mathcal{A}_φ such that $\llbracket \varphi \rrbracket(\bar{S}) = \llbracket \mathcal{A}_\varphi \rrbracket(\bar{S})$ for every stream \bar{S}*

To maintain the correctness of it true, we extend the induction proof [11,22] by proving the following property: There exists a \mathcal{A}_{φ_1} be a CEA as defined previously. Let φ_1 and φ_2 formulas in CEL. Then

$$\llbracket \varphi_1 :o \varphi_2 \rrbracket(\bar{S}) = \llbracket \mathcal{A} \rrbracket(\bar{S})$$

Lets assume then that there exists an automaton that satisfies the previous property for φ_1 and φ_2 , therefore we know there exists $\mathcal{A}_{\varphi_1} = (Q_1, \mathbf{P}_1, \mathbf{X}_1, \Delta_1, q_0, F_1)$ and $\mathcal{A}_{\varphi_2} = (Q_2, \mathbf{P}_2, \mathbf{X}_2, \Delta_2, p_0, F_2)$ Then the construction for the overlap operator is as folllows:

Let $\mathcal{A}_{\varphi_1 \circ \varphi_2}$ be a CEA where $\mathcal{A}_{\varphi_1 \circ \varphi_2} = (Q_{\circ}, P_{\circ}, X_{\circ}, \Delta_{\circ}, q_0, F_2)$.

Where $Q_{\circ} = Q_1 \uplus Q_2 \uplus Q_1 \times Q_2$, $P_{\circ} = \mathbf{P}_1 \cup \mathbf{P}_2$, $X_{\circ} = \mathbf{X}_1 \cup \mathbf{X}_2$ and:

$$\begin{aligned} \Delta_{\circ} = \{ & (q, P_1, L_1, (q', p_0)) \mid (q, P_1, L_1, q') \in \Delta_1, (q, p_0) \in Q_1 \times Q_2 \} \cup \\ & \{ ((q, p), P_1 \wedge P_2, L_1 \cup L_2, (q', p')) \mid (q, P_1, L_1, q') \in \Delta_1, (p, P_2, L_2, p') \in \Delta_2, (q, p), (q', p') \in \\ & Q_1 \times Q_2 \} \cup \\ & \{ ((q, p), P_2, L_2, p') \mid q \in F_1, (p, P_2, L_2, p') \in \Delta_2 \} \uplus \Delta_1 \uplus \Delta_2 \end{aligned}$$

Intuitively, given an stream S we capture the eventes given φ_1 , and at some point (the overlap) we start capturing the events for φ_2 too.

The proof is by double containment.

T.P. $\llbracket \varphi_1 : \circ \varphi_2 \rrbracket(\bar{S}) \subseteq \llbracket \mathcal{A}_{\circ} \rrbracket(\bar{S})$

Let $C_1 \cup C_2 \in \llbracket \varphi_1 : \circ \varphi_2 \rrbracket(\bar{S})$ where $C_i \in \llbracket \varphi_i \rrbracket(\bar{S}) = \llbracket \mathcal{A}_{\varphi_i} \rrbracket(\bar{S})$ with $i \in \{1, 2\}$. From this we extend that there exists a run on both \mathcal{A}_{φ_1} and \mathcal{A}_{φ_2} that accept C_1 and C_2 respectively. This is:

$$\begin{aligned} \rho_1 : q_0 &\xrightarrow{P_0/L_0} q_1 \xrightarrow{P_1/L_1} \dots \xrightarrow{P_{n-1}/L_{n-1}} q_n \\ \rho_2 : p_0 &\xrightarrow{P'_0/L'_0} p_1 \xrightarrow{P'_1/L'_1} \dots \xrightarrow{P'_{m-1}/L'_{m-1}} p_m \end{aligned}$$

With $q_n \in F_1$ and $p_m \in F_2$. By the previous construction of \mathcal{A}_{\circ} we can start building a run ρ_{\circ} as follows:

$$\rho_{\circ} : q_0 \xrightarrow{P_0/L_0} q_1 \xrightarrow{P_1/L_1} \dots \xrightarrow{P_{i-1}/L_{i-1}} q_i$$

with $i \leq n$. By definition we know that $start(C_1) \leq start(C_2)$ therefore we can extend the run as such:

$$\rho_{\circ} : \dots q_i \xrightarrow{P_i/L_i} (q_{i+1}, p_0)$$

And then by construction:

$$\rho_{\circ} : \dots (q_{i+1}, p_0) \xrightarrow{P_{i+1} \wedge P'_0 / L_{i+1} \cup L'_0} (q_{i+2}, p_1) \xrightarrow{P_{i+2} \wedge P'_1 / L_{i+2} \cup L'_1} \dots \xrightarrow{P_{n-1} \wedge P'_{j-1} / L_{n-1} \cup L'_{j-1}} (q_n, p_j)$$

With $j \leq m$ and $q_n \in F_1$. By definition we know that $end(C_1) \leq end(C_2)$ therefore we can extend the run once more:

$$\rho_{\circ} : \dots (q_n, p_j) \xrightarrow{P'_j/L'_j} p_{j+1}$$

Finally then, by construction:

$$\rho_{\circ} : \dots p_{j+1} \xrightarrow{P'_{j+1}/L'_{j+1}} p_{j+2} \xrightarrow{P'_{j+2}/L'_{j+2}} \dots \xrightarrow{P'_{n-1}/L'_{n-1}} p_n$$

Because $p_n \in F_2$, then ρ_{\circ} is a run of \mathcal{A}_{\circ} that accepts $C_1 \cup C_2$ over a stream \bar{S} . Then $\llbracket \varphi_1 : \circ \varphi_2 \rrbracket(\bar{S}) \subseteq \llbracket \mathcal{A}_{\circ} \rrbracket(\bar{S})$.

T.P. $\llbracket \mathcal{A}_{\circ} \rrbracket(\bar{S}) \subseteq \llbracket \varphi_1 : \circ \varphi_2 \rrbracket(\bar{S})$

Let ρ_{\circ} be a run of \mathcal{A}_{\circ} that accepts C over \bar{S} :

$$\rho_{\circ} : q_0 \xrightarrow{P_0/L_0} \dots \xrightarrow{P_{i-1}/L_{i-1}} (q_i, p_0) \xrightarrow{P_i \wedge P'_0 / L_i \cup L'_0} \dots \rightarrow (q_n, p_{j+1}) \xrightarrow{P'_{j+1}/L'_{j+1}} \dots \xrightarrow{P'_{n-1}/L'_{n-1}} p_m$$

By construction we can define the runs ρ_1 and ρ_2 of \mathcal{A}_1 and \mathcal{A}_2 as follows:

$$\begin{aligned} \rho_1 : q_0 &\xrightarrow{P_0/L_0} q_1 \xrightarrow{P_1/L_1} \dots \xrightarrow{P_{n-1}/L_{n-1}} q_n \\ \rho_2 : p_0 &\xrightarrow{P'_0/L'_0} p_1 \xrightarrow{P'_1/L'_1} \dots \xrightarrow{P'_{m-1}/L'_{m-1}} p_m \end{aligned}$$

Where the complex event accepted by this runs we denote by C_1 and C_2 . By construction its easy to see that $start(C_1) \leq start(C_2) \leq end(C_1) \leq end(C_2)$ and $C_1 \in \llbracket \varphi_1 \rrbracket(\bar{S}) \wedge C_2 \in \llbracket \varphi_2 \rrbracket(\bar{S})$. We now prove that $C = C_1 \cup C_2$ or equivalently, because $start(C) = \min\{start(C_1), start(C_2)\}$, $end(C) = \max\{end(C_1), end(C_2)\}$, we are left to prove that $C(X) = C_1(X) \cup C_2(X)$ for every $X \in \mathbf{X}$.

T.P. $C(X) \subseteq C_1(X) \cup C_2(X)$

Lets recall that $C = (0, m, \mu)$ with $[0..m]$ the interval of C . And $\mu(X) = C(X) = \{k \in [0..m] \mid X \in L_k\}$ for every $X \in X_o$, with $e_k \models P_{:o,k}$. There are 2 cases:

- $0 \leq k < i$: this is the first part of the run, therefore $P_{:o,k} = P_k$, with $P_k \in \mathbf{P}_1$, and $L_{:o,k} = L_k$, with $L_k \subseteq \mathbf{X}_1$, therefore $e_k \models P_k$. Then $C(X) \subseteq C_1(X)$ in the interval $[0..i-1]$. Analogous for $j < k \leq m$, we have that $C(X) \subseteq C_2(X)$ in the interval $[n+1..m]$.
- $i \leq k \leq n$: middle part of the run, therefore $P_{:o,k} = P_k \wedge P'_k$ with $P'_k \in \mathbf{P}_2$, and $L_{:o,k} = L_k \cup L'_k$ with $L'_k \subseteq \mathbf{X}_2$, therefore $e_k \models P_k$ and $e_k \models P'_k$. Then $C(X) \subseteq C_1(X) \cup C_2(X)$ in the interval $[i..n]$.

Finally, $C(X) \subseteq C_1(X) \cup C_2(X)$ in the interval $[0..m]$.

T.P. $C_1(X) \cup C_2(X) \subseteq C(X)$

Fernando: Aqui sigo perdido. Si sigo una demostracion similar a la de arriba caigo en el caso de tener que demostrar que $e_k \models P_k$, cuando $i \leq k \leq n$ donde pueden haber dos casos: que $e_k \models P'_k$ o que $e_k \not\models P'_k$, ¿no? lo cual no haria posible que $P_k \wedge P'_k$ se cumpla en todos los casos y por lo tanto k no estaria en $C(X)$, por ende la union de C_1 y C_2 seria superset. Se que lo discutimos en la reu pasada, pero no me acuerdo como ir por este camino sin caer en necesitar que exista $TRUE/\emptyset$

4 Conclusions

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

-
- 164 — **References** —
- 165 1 Guillaume Bagan, Arnaud Durand, and Etienne Grandjean. On acyclic conjunctive queries
166 and constant delay enumeration. In *CSL*, pages 208–222, 2007.
- 167 2 Marco Bucci, Alejandro Grez, Andrés Quintana, Cristian Riveros, and Stijn Vansummeren.
168 CORE: a complex event recognition engine. *VLDB*, 15(9):1951–1964, 2022.
- 169 3 Arnaud Durand and Etienne Grandjean. First-order queries on structures of bounded degree
170 are computable with constant delay. *ACM Trans. Comput. Log.*, 8(4):21, 2007.

171 **A** Proofs from Section 2

172 Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut
 173 labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco
 174 laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in
 175 voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat
 176 non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

177 **B** Proofs of Section 3

178 **B.1** Proof of Lemma ??

179 Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut
 180 labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco
 181 laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in
 182 voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat
 183 non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

184 Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt
 185 ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco
 186 laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in
 187 voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat
 188 non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

189 Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt
 190 ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco
 191 laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in
 192 voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat
 193 non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.


194 Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt
 195 ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco
 196 laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in
 197 voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat
 198 non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

199 Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt
 200 ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco
 201 laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in
 202 voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat
 203 non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

204 Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt
 205 ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco
 206 laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in
 207 voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat
 208 non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

209 **B.2** Proof of Theorem 1

210 Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut
 211 labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco
 212 laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in

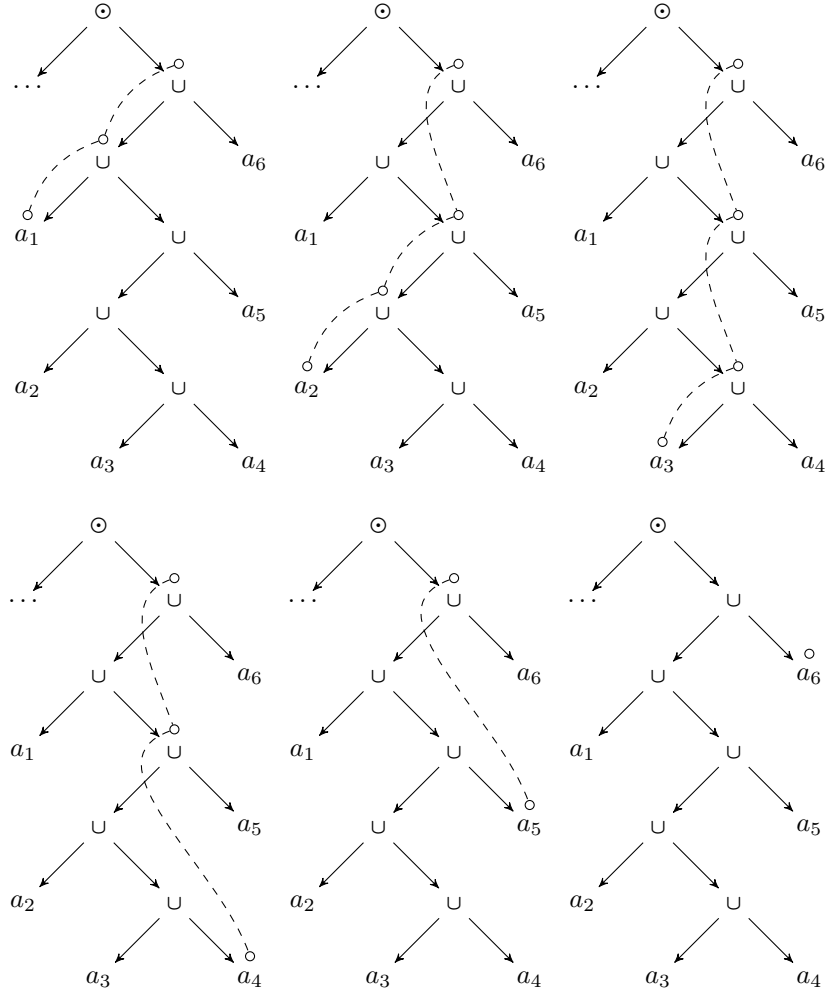


■ **Figure 2** An example iteration of `trav` and `move`. The sequences of nodes joined by dashed lines represent a stack St , where the first one was obtained after calling `trav` over the topmost union node, and the following five are obtained by repeated applications of `move(St)`.

213 voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat
 214 non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

215 Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt
 216 ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco
 217 laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in
 218 voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat
 219 non proident, sunt in culpa qui officia deserunt mollit anim id est laborum. Lorem ipsum
 220 dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et
 221 dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris
 222 nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate
 223 velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non
 224 proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

225 Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt
 226 ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco

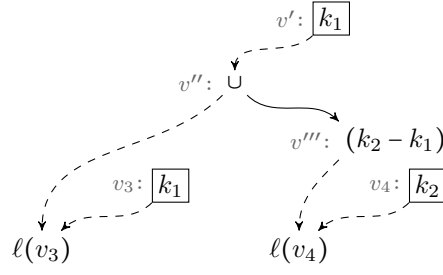

■ **Figure 3** Gadget used in Theorem 1.

laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

B.3 Proof of Proposition ??


Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

▷ **Claim 2.** Fix $k \in \mathbb{N}$. Let \mathcal{C}_k be the class of all duplicate-free and k -bounded D that satisfy the ϵ condition. Then one can solve the problem $\text{Enum}[\mathcal{C}_k]$ with output-linear delay and without preprocessing (i.e. constant preprocessing time).

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in

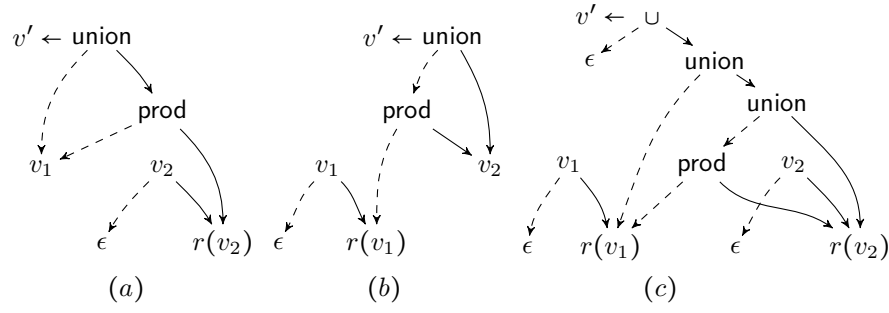

■ **Figure 4** Gadgets for product as defined for an \mathcal{D} with the ϵ -node.

262 voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat
 263 non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

264 Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt
 265 ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco
 266 laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in
 267 voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat
 268 non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.