

Attention Propagates, the FFN Overwrites, and the Axis Is a Mixture

Relational Mechanics and Category Geometry of a Truth Direction
Across Two Model Families

Francesco Karim Vicidomini

Independent researcher

Reference code: `flip_consolidate.py`, `axis_provenance.py`, `ffn_erosion.py`, `swiglu.py`,
`circuits.py`, `behav_check.py`, `categories.py`, `arrangement_law.py`, `dictionary_export.py`

July 2026*

Abstract

The companion paper [1] measured how much of a language model’s truth representation fits on a single training-free direction, and where that reading fails. This paper asks the two questions underneath: which component of the transformer makes the direction, and what is the direction made of? On four base models from two families (Qwen2.5, Llama-3.2), under held-out protocols with pre-registered predictions, we report three findings. First, a relational law: the feed-forward network’s write at a block is anti-aligned with every truth frame that does not contain it, while attention is pro-aligned with frames it did not write; at the readability peak the two contributions are near mirror images. The law generalizes, and corrects, a peak-anchored claim of our own, whose circularity was exposed by a provenance control built against our own instrument; the correction is reported as a result. Second, the erosion of the truth signal after the peak survives every control and is causally attributed, on all four models, to the SwiGLU value stream rather than the gate. Third, the single axis is a semantically signed mixture: per-category truth axes form a structured arrangement that the model does not inherit from the lexical surface but constructs, and the two families converge on the same arrangement (Mantel $p = 0.0009$). A measured dictionary and a registered contract for any future sparse autoencoder close the series.

1 Introduction

A training-free direction in the residual stream of a small language model carries a real, held-out, permutation-tested truth signal on facts the model knows; that signal is bounded by a full linear probe, and the gap between the two grows as the model’s knowledge decreases and as the material becomes heterogeneous [1]. Those are measurements about the axis as an object. This paper is about the axis as a process and as a composite: which architectural component builds it, which degrades it, by what mechanism, and what internal structure the single direction is summarizing.

*This document consolidates three working notes (“The FFN Flip is Peak-Relative”, July 3; “Attention Propagates, the FFN Overwrites”, July 4; “The Truth Axis is a Semantically Signed Mixture”, July 5) into a single manuscript. Every number in this document was regenerated under a single uniform protocol on July 9–10, 2026; where a regenerated value supersedes a published one, the change and its cause are stated in the text. The v1 to v2 correction of the flip interpretation is reported inside the document, as a result, in Section 6.2. Companion paper: “How Much of Truth Fits on a Single Axis?” (Zenodo DOI 10.5281/zenodo.20938285), cited as [1].

The paper proceeds in two movements. The first movement is mechanical. Starting from the causal finding of the companion paper (attention builds the signal in the middle layers, the FFN degrades it after the peak), the instrument is sharpened from per-band ablation to a per-layer, per-component, fixed-frame projection and followed across four models. The initial result, confirmed by pre-registered prediction, was simple: the FFN writes pro-truth into the peak block and flips to anti-truth at exactly the next block, wherever the peak sits. That result was then subjected to a control of our own construction, fitting the measuring frame at several blocks rather than only at the peak, and the control exposed a circularity in the simple reading. What replaced it is stronger: a fully relational law (Sec. 6.3) in which the FFN opposes every truth frame it did not help write and attention propagates every frame it did not write, with the peak-anchored flip as the special case where the frame is fitted at the peak. Section 6.2 narrates the failure and the generalization in full, because the sequence (claim, self-raised objection, exposure, stronger law) is scientific content rather than an embarrassment to be footnoted.

The second movement is geometric. If the FFN writes truth in category-dependent directions, the single axis of the companion paper cannot be an atom; it must be a mixture. Grouping the data by Wikidata relation and fitting per-category truth axes, the mixture is measured directly: its signed geometry, its reorganization with depth, and, in a registered cross-family falsification, the convergence of its arrangement between the two families. The heterogeneity effect measured in the companion paper (the probe gap jumping from 0.062 on homogeneous material to 0.203 on a mix) is, in hindsight, this mixture seen from one direction.

Contributions.

1. The *relational law* (pre-registered, four models, two families): FFN contributions anti-align with truth frames that do not contain them; attention contributions pro-align with frames they did not write; at the peak, under a clean pre-FFN frame, the two are near mirror images (Sec. 6.3).
2. The *axis-provenance control* that forced the law: a ruler-placement method with synthetic ground-truth validation, applied against our own published claim (Secs. 5.5, 6.2).
3. Causal attribution of the post-peak *erosion* to the SwiGLU value stream on all four models, by an exact algebraic split and by causal freezes, with pre-registered predictions for the Llama family and the gate exonerated everywhere (Sec. 7).
4. Two pre-registered discriminations with opposite outcomes: post-peak attention-FFN *tug-of-war* is a trait of scale (present in both 3B models, absent in both smaller ones), while single-layer *ignition* of the truth signal is a trait of the Qwen family (Sec. 8).
5. A pre-registered *negative*, extended cross-family: the gauge-invariant OV/QK circuit crossover sits at a stable late relative depth on all four models and does not track the truth peak (Sec. 9).
6. The *category geometry*: per-category truth axes form a semantically signed arrangement that reorganizes with depth and converges across families, with the FFN's write directions decoding the category far above a lexical baseline (Sec. 10).
7. A *measured dictionary* and a four-criterion registered contract that any trained sparse autoencoder must beat to justify its cost (Sec. 11).

2 Related work

Truth directions and their limits. The companion paper [1] defines the axis, the held-out protocol over pairs, the permutation null and its p -value estimator, and the know-rate; those definitions are reused here, not restated. Bürger et al. [2] establish the two-dimensional truth subspace and the polarity direction whose unsupervised recovery the companion paper reports.

MLPs as key-value writers. The memory-editing literature [3] attributes to transformer MLPs the physiology of key-value stores whose writes deposit factual content into the residual stream. The relational law of Sec. 6.3 is a dynamical face of that picture: the component that deposits the next frame’s material is, per these measurements, the one that opposes the current frame.

Rotational dynamics of factual selection. A recent preprint [5] reports that factual constraint processing separates alternatives by rotation, with active suppression of the correct continuation at intermediate depth. The propagate/overwrite asymmetry supplies a candidate microscopic writer for that macroscopic observation.

Attention-head specialization. The head-taxonomy line of work [6] motivated the pre-registered test of whether static, gauge-invariant circuit norms predict where truth lives (they do not, Sec. 9) and defines the per-head follow-up of Sec. 12.

Cross-model representation convergence. The convergence of the category arrangement across families (Sec. 10) is a signed, truth-specific instance of the broader phenomenon that different models trained on the same world converge to similar representations [7].

3 Scope and evidence levels

Results are organized in three evidential levels and never mixed. **Level A:** replicated across models with predictions written before the runs. **Level B:** causal but on fewer models, or with multiple independent methods on one. **Level C:** leads, declared as such (Sec. 12). Retractions and failed predictions are reported in the text at the point where they occur; the largest, the correction of our own flip interpretation, has its own section (6.2).

4 Setup

Four base (non-instruct) models across two families:

Table 1: Models. The truth peak p is the block whose intact residual maximizes held-out truth AUC (protocol of [1]); “block b ” denotes the output of transformer block b . Know-rate: fraction of 200 CounterFact prompts whose true target the model reproduces under greedy decoding (seed 0), measured before any geometry. Axis and probe AUC: CounterFact, 250 pairs, held-out; gap = probe – axis.

model	blocks	d_{model}	peak p	know-rate	axis	probe	gap
Qwen2.5-1.5B	28	1536	15	30.0% (61/200)	0.792	0.854	0.062
Qwen2.5-3B	36	2048	16	37.0% (74/200)	0.832	0.881	0.049
Llama-3.2-1B	16	2048	7	35.5% (71/200)	0.690	0.831	0.141
Llama-3.2-3B	28	3072	9	41.0% (82/200)	0.785	0.897	0.112

Two regularities and one boundary, extending the dimensionality claim of [1]: within each family the gap decreases as the know-rate increases; across families a family-level offset remains, with Qwen concentrating more of the truth signal on the single axis at comparable knowledge. An earlier version of this table imported the Qwen2.5-1.5B row from the companion paper’s mixed-dataset column while the other rows were measured on CounterFact alone, a protocol inhomogeneity caught by re-measurement; all rows above come from one command under one protocol, and the earlier slogan that the gap “tracks knowledge every time” is retired in favor of the two-part statement.

Dataset: NeelNanda/counterfact-tracing (pinned revision c945b08..., loaded as Parquet only), 250 minimal pairs unless stated. Decomposition runs use `float32` and are gated by the additive identity check of [1] (median relative errors $0.65\text{--}1.23 \times 10^{-7}$ across the runs of this paper); extraction-only runs use `bfloat16`. The spread of the four peaks in relative depth (0.32–0.54) already anticipates the negative of Sec. 9: no fixed depth, absolute or relative, locates truth.

5 Methods

5.1 Frames and the fixed-frame contribution statistic

Within a block the residual stream updates additively, $h_{b+1} = h_b + a_b + f_b$, with a_b the attention contribution and f_b the FFN contribution, captured by forward hooks [1].

Definition 1 (Truth frame). *The post frame F_b^{post} is the oriented truth axis v_1 fit (on training folds only, true side positive) on the block output $h_{b+1} = h_b + a_b + f_b$; it contains f_b and a_b . The pre frame F_b^{pre} is the same construction on the pre-FFN state $h_b + a_b$; it contains a_b but excludes f_b . A frame exists at b when the axis fit there clears its permutation null held-out.*

The statistic for a contribution c at layer L measured against a frame F with axis v_1 is the held-out class gap and its effect size,

$$\text{gap}(c; F) = \overline{(v_1 \cdot c)}|_{\text{true}} - \overline{(v_1 \cdot c)}|_{\text{false}}, \quad d'(c; F) = \frac{\text{gap}(c; F)}{\text{pooled std}}, \quad (1)$$

with the pooled standard deviation over the held-out projections of both classes. A negative FFN gap means the FFN literally writes toward the false side of the frame. Stability criterion, fixed in code before the consolidation runs: a value is *stable* if its magnitude exceeds both 2σ across 5 cross-validation seeds and a floor of 0.03.

5.2 The exact SwiGLU split

The FFN computes $f = W_{\text{down}}(g \odot u)$ with $g = \text{silu}(W_{\text{gate}}x)$, $u = W_{\text{up}}x$. The projection of f on v_1 is $w \cdot (g \odot u)$ with $w = W_{\text{down}}^\top v_1$, the residual axis pulled back through the down-projection; no axis is ever fit in the expanded space, avoiding the $p \gg n$ regime (more dimensions than samples) entirely. With the symmetric intra-pair split ($\Delta g = g_t - g_f$, $\bar{g} = (g_t + g_f)/2$, likewise for u) the mixed term cancels and the identity is exact:

$$w \cdot (g_t \odot u_t - g_f \odot u_f) = \underbrace{w \cdot (\Delta g \odot \bar{u})}_{\text{gate term}} + \underbrace{w \cdot (\bar{g} \odot \Delta u)}_{\text{value term}}. \quad (2)$$

Verified numerically at 7.4×10^{-8} relative error on real data.

5.3 Interventions

Beyond zero-ablation of a component over a band of layers (peak+1 to peak+3, readout at band end, on every model), two refinements. (i) A *frozen control* obtained for free: with both components zeroed over the band, the readout state is identically the band-entry state, so the frozen reference is read off the intact pass. (ii) *Gate-freeze and value-freeze*: at the reading position, g (respectively u) is replaced by its intra-pair mean cached from the intact run, killing the class-driven variation of one stream while the FFN stays on.

5.4 Static circuit norms

Per attention head (GQA-aware), the gauge-invariant circuit norms $\|W_q^\top W_k\|_F$ (routing) and $\|W_o W_v\|_F$ (writing) [4]. Individual weight norms are gauge-dependent ($W_q \rightarrow \alpha W_q$, $W_k \rightarrow W_k/\alpha$ leaves the function unchanged); the products are not. A gauge self-test gates the computation. The *crossover* is the first layer from which the median-normalized OV/QK ratio stays above 1 for at least three consecutive layers, a criterion fixed in code before any run.

5.5 The axis-provenance control

The objection this method answers, raised by the author against the author’s own instrument, is that a result anchored to “the block where the ruler was fit, plus one” could be a property of the ruler rather than of the FFN. The control: fit frames at several blocks $b \in \{p-4, p-2, p, p+2\}$, both post and pre, and recompute the full d' profile of each component under each frame. The discrimination criterion was fixed before the runs and validated on synthetic ground truth: a planted global axis with a planted writer flip stays pinned under every frame; a planted circular writer collapses under the pre frame (collapse ratio 0.04) while planted genuine alignment survives (0.99). The released tools print full matrices with no automatic verdict; the reason is a repeated methodological lesson recorded in Sec. 9.

5.6 Per-category axes, transfer, decoding, and the Mantel statistic

CounterFact is grouped by Wikidata relation; the top- K relations by unique pairs are used ($K=8$ for the registered falsification, 60 pairs each): P103 mother tongue, P1412 languages spoken, P176 manufacturer, P27 citizenship, P30 continent, P37 official language, P413 sport position, P495 country of origin. Per-category truth axes are fit at the peak block, each oriented within its own category, so the sign of a cross-category cosine is information: negative means the shared direction reads the other category’s truth backwards. Four measurements: (i) signed cosine matrices at the

peak and at an early block (block 2, the lexical surface control); (ii) the held-out *transfer matrix*, cell (i, j) being the held-out AUC of category i 's axis on category j 's pairs; (iii) nearest-centroid *decoding* of the category from the FFN's class-signed write direction Δf at peak+1, against the same decoder on early residual differences (the lexical baseline); (iv) the *Mantel test*, a permutation test for the correlation between two distance matrices, here applied under category-label permutation to compare the two families' signed-cosine arrangements.

6 First movement: the flip, its correction, and the relational law

6.1 The peak-relative flip (the measurement that survives)

For each model the prediction was written before the run: under the peak-fit post frame, the FFN's gap is pro-truth at the peak block p and flips to stable anti-truth at $p+1$.

Table 2: The flip at peak+1 under the peak-fit post frame. CounterFact 250 pairs, 5 seeds, permutation null with 100 within-pair swaps ($\hat{p} = 0.0099$ on every row). All four rows from the uniform July 10 consolidation; the Qwen2.5-1.5B row supersedes the earlier single-seed scan (+0.728/−0.692), with which it agrees to the second decimal.

model	$\text{gap}_{\text{ffn}}(p)$	$\text{gap}_{\text{ffn}}(p+1)$	$d'(p)$	$d'(p+1)$
Qwen2.5-1.5B	+0.730 ± 0.002	−0.691 ± 0.002	+0.58	−0.82
Qwen2.5-3B	+0.575 ± 0.005	−0.926 ± 0.002	+0.68	−1.25
Llama-3.2-1B	+0.092 ± 0.001	−0.111 ± 0.001	+0.54	−0.94
Llama-3.2-3B	+0.087 ± 0.001	−0.167 ± 0.001	+0.49	−1.26

The four peaks sit at different absolute and relative depths (Table 1); the flip sits at peak+1 in all four. Aligned in peak-relative coordinates and normalized by the flip amplitude, the per-layer profiles collapse onto a common shape: rise into the peak, spike at +1, decay toward zero (Fig. 1). The measurement is correct and reproduces; its interpretation, that the flip is anchored to the peak, is what the next subsection tests.

6.2 The correction: the control bites its owner

Under frames fit at $p-4$, $p-2$, p , $p+2$ (Sec. 5.5), the transition does not stay at $p+1$: it tracks the frame. On every model the post-frame diagonal reads pro at b and anti at $b+1$ for every b where a frame exists (Table 3). The peak-anchored flip was the $b=p$ slice of a relational pattern present at every such block. An accidental replication is worth recording: a consolidation run launched with a wrong default re-measured Qwen2.5-3B with the frame at block 15, off its peak, and returned the same pro/anti pair at 15/16 (+0.541/−0.545, 5 seeds, $\hat{p} = 0.0099$); the accident confirms the law at a frame no one chose.

Table 3: Post-frame diagonals: per fit block b , the FFN’s held-out d' at b and at $b+1$. Pro at b , anti at $b+1$, wherever a frame exists.

model (peak)	frame b	$d'_{\text{ffn}}(b)$	$d'_{\text{ffn}}(b+1)$
Qwen2.5-1.5B (15)	13 / 15 / 17	+0.61 / +0.57 / +0.52	−0.79 / −0.82 / −0.73
Qwen2.5-3B (16)	14 / 16 / 18	+0.06 / +0.69 / +0.73	−0.09 / −1.23 / −0.79
Llama-3.2-1B (7)	5 / 7 / 9	+0.13 / +0.54 / +0.19	−0.07 / −0.95 / −0.54
Llama-3.2-3B (9)	7 / 9 / 11	+0.37 / +0.49 / +0.57	−0.42 / −1.25 / −1.39

Under the pre frame the FFN’s “pro at own block” term does not merely shrink; it inverts sign (Table 4). Measured against the frame that exists at the moment it writes, the FFN is strongly anti-aligned. The pro term of the post frame was, in substantial part, the frame measuring its own ingredient: f_b is inside h_{b+1} and drags the axis fit there toward itself. Where the axis is weak or absent, the pattern correctly vanishes: frames fit before the Qwen-3B ignition (fit-block cosines to the peak axis 0.049 and 0.079) and before the Llama-1B peak return noise. What the failure bought: a general law instead of a special case, and a live demonstration that the safeguards bind their owner.

6.3 The relational law

Table 4: Pre-frame diagonals: the same cells with f_b excluded from the frame’s data. The FFN inverts sign; attention, measured identically, is the mirror image.

model	frame b	$d'_{\text{ffn}}(b)$	$d'_{\text{attn}}(b)$
Qwen2.5-1.5B	13 / 15 / 17	−0.63 / −0.41 / −0.78	+1.56 / +1.31 / +1.04
Qwen2.5-3B	14 / 16 / 18	−0.14 / −1.16 / −0.46	+0.26 / +1.38 / +1.40
Llama-3.2-1B	7 / 9	−1.17 / −0.82	+1.26 / +0.82
Llama-3.2-3B	7 / 9 / 11	−0.81 / −1.43 / −1.41	+0.99 / +1.63 / +1.75

The decisive zone is the sub-diagonal of the pre matrices: contributions at layer L measured against frames of blocks strictly before L , which contain neither f_L nor a_L and are clean of every containment effect. There (Fig. 2) the FFN is negative and attention positive nearly everywhere a frame exists, on all four models. At the peak, under the same clean frame, the two components are near mirror images: +1.31/ − 0.41 (Qwen-1.5B), +1.38/ − 1.16 (Qwen-3B), +1.26/ − 1.17 (Llama-1B), +1.63/ − 1.43 (Llama-3B). Pre-registered predictions for the two Llamas, written before those runs, were all confirmed. The regularity can be stated compactly.

Empirical Law 1 (Propagate vs. overwrite). *Let F be a truth frame that exists at block b , and let $L \geq b$ be a layer whose contributions are not contained in F (any L for pre frames at $b = L$; any $L > b$ for both frame types). Then, as an empirical regularity across the four models studied: $d'(f_L; F) < 0$ and $d'(a_L; F) > 0$ wherever both are stable. Attention propagates frames it did not write; the FFN opposes them and deposits the material of later frames.*

The law dissolves the earlier implicit picture of an axis being eroded like an object: the axis is not an object in the model but a moving statistical summary of where the class difference lives, and the FFN’s class-signed writes are what successive frames are made of. This is the dynamical face of the key-value write-head physiology attributed to MLPs [3], and a candidate microscopic writer for the macroscopic finding of [5].

The flip is peak-relative on four models (5-seed consolidation, July 10 runs)

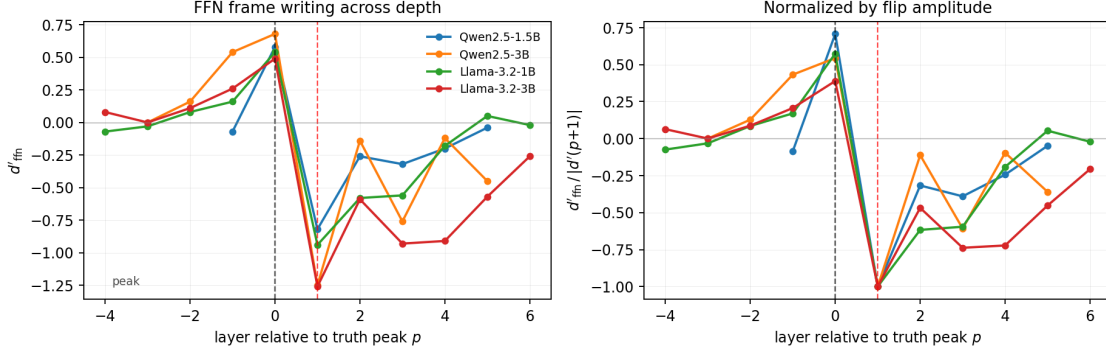


Figure 1: The FFN’s frame writing (d') across depth, aligned at the truth peak, four models. Right: normalized by the flip amplitude.

7 The erosion: real, frame-free, and carried by the value stream on four models

The correction separates two phenomena the peak-anchored reading conflated: frame-relative rotation (what the flip was) and frame-free decay of class signal after the peak (the genuine erosion). The erosion stands on measurements that use no frozen frame, now on all four models (Table 5); the predictions for the Llama rows were registered before those runs and confirmed. This section is Level A.

Table 5: Causal ablation over the band peak+1 to peak+3, readout at band end; held-out refit truth AUC. FFN-off restores signal on every model; attn-off is neutral on the smaller models and destructive on both 3B models (the tug-of-war of Sec. 8).

model	intact	FFN-off	attn-off	frozen
Qwen2.5-1.5B	0.712	0.815	0.708	0.793
Qwen2.5-3B	0.793	0.846	0.738	0.831
Llama-3.2-1B	0.551	0.744	0.531	0.691
Llama-3.2-3B	0.740	0.847	0.593	0.785

Table 6: Inside the SwiGLU, four models. Left: the exact split of Eq. 2 at the flip layer (peak-fit frame). Right: causal freezes over the band (AUC recovery vs. intact). The anti-truth write and its causal carrier are the value stream everywhere; the gate is neutral or mildly pro-truth.

model	split at flip			freeze recovery	
	gate	value	total	gate	value
Qwen2.5-1.5B	+0.041	−0.734	−0.692	+0.040	+0.089
Qwen2.5-3B	−0.120	−0.806	−0.926	+0.008	+0.064
Llama-3.2-1B	+0.016	−0.127	−0.110	+0.028	+0.123
Llama-3.2-3B	+0.021	−0.186	−0.166	+0.056	+0.122

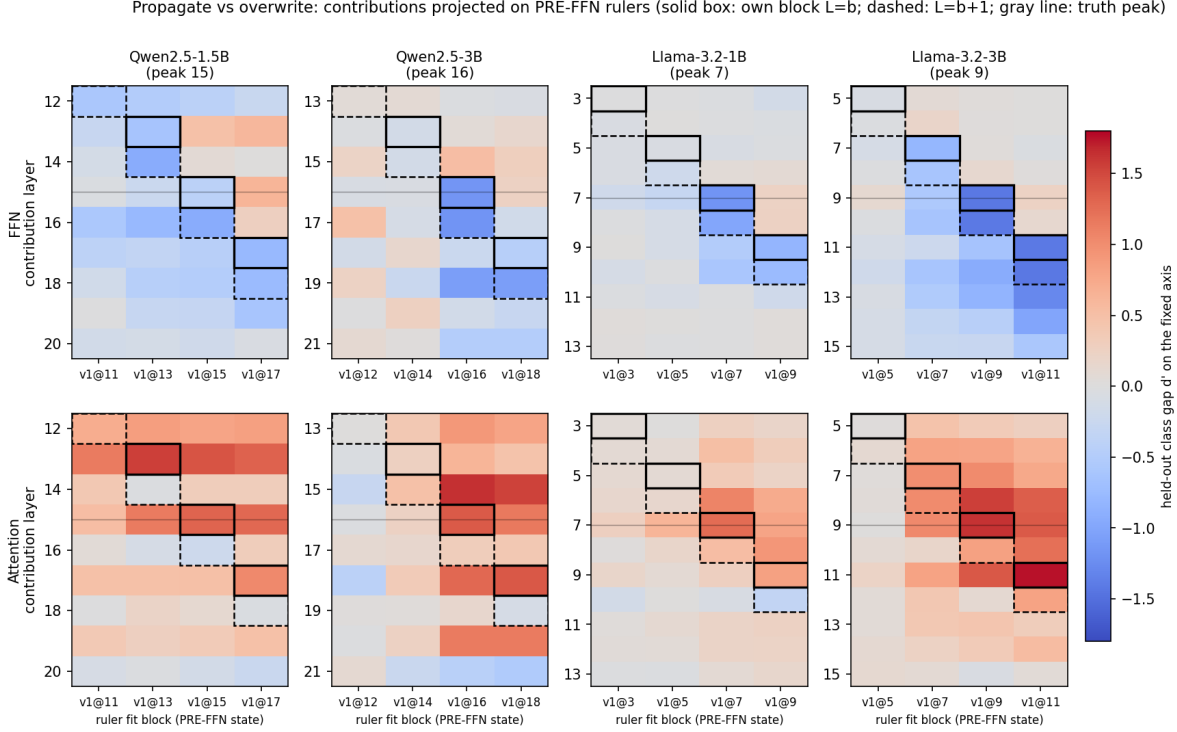


Figure 2: Propagate vs. overwrite on four models: held-out d' of each component’s contribution (FFN above, attention below) against pre frames fit at four blocks. The FFN row is cold wherever a frame exists; the attention row is warm.

Three annotations keep the table honest. First, the earlier hypothesis that the gate carries the erosion (which neurons open switching the stream toward next-token context) is falsified in the same direction on every model; at the peak, by contrast, the split shows the gate carrying about two thirds of the pro-truth construction (Qwen-1.5B: gate $+0.486$, value $+0.242$). Second, on Llama-3.2-3B the value-freeze lands at 0.862 , above the frozen reference 0.785 : with the value stream’s class variation silenced, the band’s attention adds signal, which is the tug-of-war of the next section seen causally. Third, the earlier lead “FFN-off beats frozen”, demoted to noise on the Qwen models ($+0.022/+0.015$, both under the stability floor), resurfaces above the floor on both Llamas ($+0.052/+0.062$); the demotion was correct for Qwen, and the effect is recorded as family-dependent, without a dedicated null, hence an observation and not a claim. A frame-free rotation check closes the projection-artifact objection on three models: the cosine of the mean FFN pair-difference with v_1 jumps sign in a single step at peak+1 with the write magnitude intact (deltas -0.741 , -0.654 , -0.632 on Qwen-1.5B, Qwen-3B, Llama-1B), where genuine rotation predicts a smooth multi-layer sweep.

8 Two traits, discriminated: tug-of-war is scale, ignition is family

Two pre-registered discriminations with opposite outcomes, which together show that scale and training recipe leave distinct, measurable signatures.

Tug-of-war is a trait of scale. In the erosion band, removing attention is neutral on the two smaller models (refit change -0.004 on Qwen-1.5B, -0.020 on Llama-1B, both under the floor)

and destructive on both 3B models (-0.055 on Qwen-3B, -0.147 on Llama-3B). The registered discrimination read: present on Llama-3B and absent on Llama-1B implies scale; absent on both implies a Qwen-family trait. Outcome: scale. In the larger models the post-peak band is a tug-of-war in which attention still writes pro-truth while the FFN’s value stream overwrites, not a passive decline.

Ignition is a trait of the Qwen family. The Qwen-3B per-layer AUC curve switches on in a single layer ($0.526 \rightarrow 0.790$), driven by a coordinated two-layer construction burst; the Qwen-1.5B curve is a smooth ramp. The registered discrimination: scale predicts a step in Llama-3.2-3B; family predicts a ramp. Measured: a ramp ($0.526 \rightarrow 0.657 \rightarrow 0.664 \rightarrow 0.749 \rightarrow 0.785$ across levels 6–10). Ignition is, on present evidence, a trait of the Qwen recipe at the 3B scale, not of scale itself.

9 A pre-registered negative, cross-family: the static crossover does not track the peak

Motivated by an external observation that value-to-query weight norms scale with depth [6], the gauge-invariant version was tested: does the layer where the writing circuit overtakes the routing circuit predict the truth peak? The prediction for the Llama models, registered before their runs, was that it does not. Outcome (Table 7): the crossover sits at a stable late relative depth on all four models (0.61–0.75) while the peak wanders (0.32–0.54); the two coincide only on Qwen2.5-1.5B, the accident that spawned the hypothesis the first working note falsified across scale. The depth-scaling of the circuits may be real and general; it is not where truth lives. The late-layer OV explosion (Qwen-1.5B sums 338.9/322.0 at layers 26–27) instead matches the decoupling of Sec. 12.

Table 7: The OV/QK crossover (first layer sustaining ratio > 1 for three consecutive layers) against the truth landmarks, four models. Distance is to the nearer of peak and flip.

model	crossover	peak / flip	distance	rel. depth (cross vs. peak)
Qwen2.5-1.5B	17	15 / 16	1	0.61 vs. 0.54
Qwen2.5-3B	24	16 / 17	7	0.67 vs. 0.44
Llama-3.2-1B	12	7 / 8	4	0.75 vs. 0.44
Llama-3.2-3B	17	9 / 10	7	0.61 vs. 0.32

A methodological note on automatic verdicts. During the regeneration of this table, the circuit tool’s hardcoded landmark annotations (written for one model) mislabeled the truth peak on the other three and printed a spurious coincidence verdict for Llama-3.2-3B. It was the third automatic verdict to misread its own numbers in this project’s history, after two in the provenance tooling. All released tools now print matrices and distances with no verdict prose; the reading belongs to the researcher. The raw norm tables, which depend only on the weights, were unaffected.

10 Second movement: the axis is a semantically signed mixture

If the FFN writes truth along directions that depend on what kind of fact is being written, the single axis is a mixture, and its ingredients can be measured. Design and statistics as in Sec. 5.6; the registered falsification runs on the two 3B models. Llama-3.2-1B is excluded from this section by

a scoping rule stated in advance: it is the weakest-axis model of the four (axis AUC 0.690), and per-category axes fit on 60 pairs there risk reporting noise as geometry.

The signed geometry. At the peak, the language-relation block coheres (Qwen-3B cosines +0.27 to +0.76; Llama-3B +0.55 to +0.69), continent anti-aligns with that block (Qwen -0.07 to -0.20 ; Llama -0.09 to -0.15), sport-position is near-orthogonal to everything, and country-of-origin sides with the block (strongly on Llama, +0.51 to +0.75). The anti-alignment is confirmed by an independent statistic: transfer from the continent axis into the language block falls below chance (Llama: AUC 0.198–0.33); on Qwen the below-chance transfer is bidirectional, on Llama one-directional, a partial replication reported as such. Within-category transfer exceeds cross-category transfer on both models (Qwen 0.662 vs. 0.596; Llama 0.898 vs. 0.808), which also bears on the topic-generalization question raised for the companion paper’s protocol.

The reorganization with depth. The early-block matrices are not flat: they carry shared corpus statistics (the two families’ early matrices correlate at $r = +0.934$). Depth does not create arrangement from nothing; it re-files it. Citizenship sides with geography at the embedding level and with the language block at the peak, on both families. The extreme case: the axes of languages-spoken and official-language start near anti-parallel ($\cos = -0.90$ Qwen, -0.86 Llama, presumably a lexical opposition in how the two templates use language tokens) and merge at the peak (+0.76, +0.62). Within each model, the early and peak arrangements are uncorrelated or anti-correlated ($r = -0.547$ Qwen, -0.175 Llama): the peak structure contradicts, rather than inherits, the lexical surface.

The FFN writes truth along category-dependent directions. Decoding the relation from the unit write direction Δf at peak+1: 74.17% (Qwen-3B) and 81.67% (Llama-3B) against chance 12.5% and permutation null 95th percentiles near 15.5% ($\hat{p} = 0.0099$ both); lexical baseline 39.17% and 42.08%. Read together with Law 1: the component that overwrites truth frames does so along category-dependent directions. The mixture is not only in the representation but in the writing.

The registered falsification and its verdict. Five predictions were written before any Llama measurement of this geometry; outcomes in full, partials included. **R1** (language block on Llama, cosines in $[+0.15, +0.45]$): structure confirmed, magnitude outside the registered window on the high side. **R2** (continent anti-aligned, below-chance transfer both directions): signs confirmed; bidirectionality held only on Qwen. **R3** (Δf decoding at least 10 points over lexical): confirmed with a margin near 40 points. **R4** (the citizenship early-to-peak switch replicates): confirmed, plus the stronger merge. **R5** (the arrangement law): confirmed; off-diagonal peak matrices, Qwen-3B vs. Llama-3B, Pearson $r = +0.770$ (Spearman +0.893), Mantel null 95th percentile +0.498, $p = 0.0009$; robust to excluding the anomalous relation P176 ($r = +0.808$, $p = 0.0037$).

The arrangement law. Combined with the within-model reorganization, the reading is: the two families share a lexical starting arrangement, abandon it, and converge on the same functional arrangement. Same start, same move, same destination, different machines. The arrangement of the truth mixture is a property of the knowledge domain, not of the training recipe: a signed, truth-specific instance of cross-model representation convergence [7]. In hindsight this section also explains a companion-paper measurement from the other side: forcing one axis onto heterogeneous material costs 0.203 of held-out AUC against a full probe, versus 0.062 on homogeneous material [1], because the single axis is being asked to summarize a signed mixture with one number.

The truth axis is a semantically signed mixture: per-relation truth axes (signed cosines) and category decoding of FFN writes

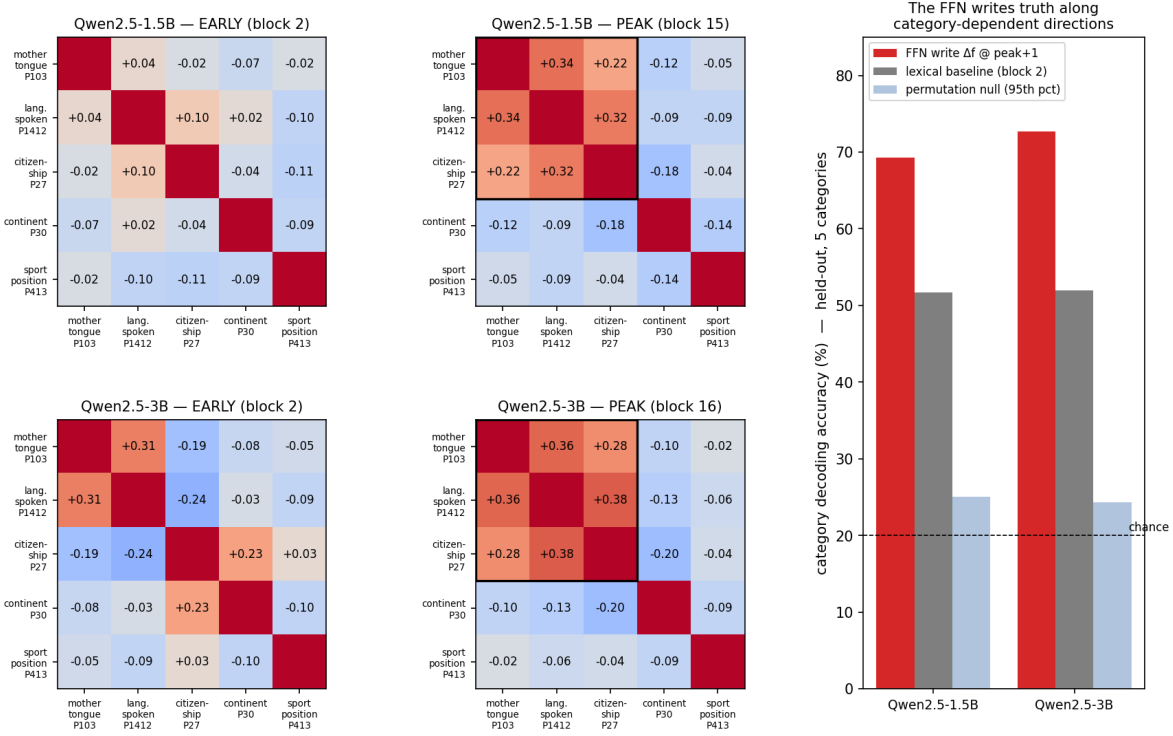


Figure 3: The category geometry: early vs. peak signed-cosine matrices, and decoding vs. the lexical baseline.

Anomaly, declared. On Llama-3B, relation P176 (manufacturer) shows within-CV and incoming transfer of 1.000 from every axis: universal perfect separability, which suggests surface structure in that relation’s pairs rather than truth geometry. It is excluded in the R5 robustness check (which holds) and flagged for inspection before any claim rests on it.

11 The measured dictionary and the sparse contract

`dictionary_export.py` saves, per model, the measured dictionary: the per-category oriented axes, the global axis, and the FFN write centroids, with signed matrices and full metadata in one loadable file (a $[K \times d]$ bundle of tens of kilobytes): a K -direction truth and category monitor whose baseline performance is quantified above. The sparse autoencoder that this series hands to engineering is justified only if, against matched nulls, it (1) aligns with the per-category axes, (2) respects the semantic geography, (3) reproduces the signs, including the inverted loading on continent and the depth reorganization, and (4) beats the measured dictionary on class-signal reconstruction and category decoding. Either outcome is content.

12 Leads, declared as leads

A second readable dimension in the mid-knowledge regime. On Llama-3.2-1B at the peak, a held-out logistic on (Re, Im) reaches 0.783 vs. 0.690 for the single axis; on Llama-3.2-3B phase

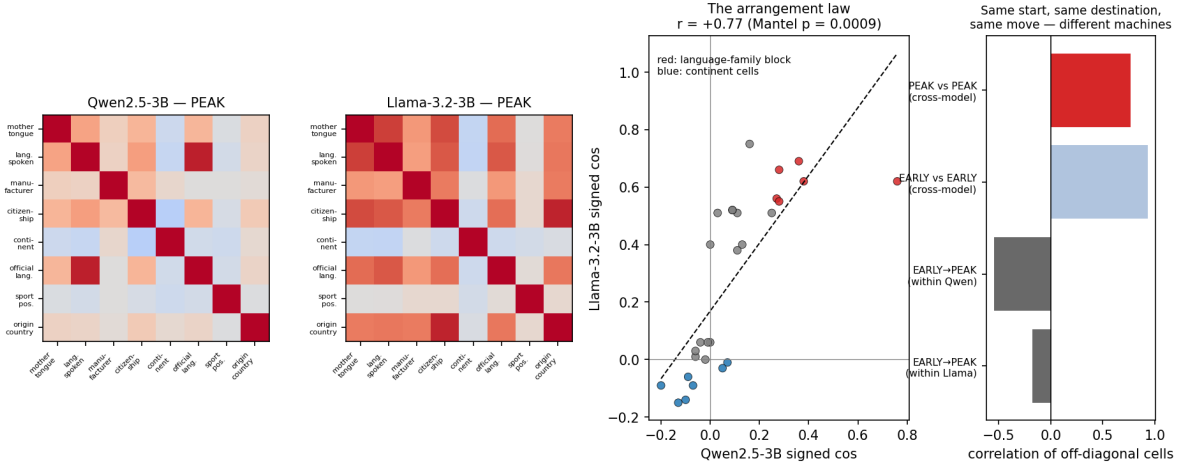


Figure 4: The arrangement law (R5). Left: the two $K=8$ peak signed-cosine matrices. Center: their off-diagonal cells against each other. Right: cross-model agreement at the peak and at the embedding level, and the within-model reorganization between them.

scores match or beat the axis in the decay zone. In the Qwen models the second dimension never added more than $+0.02$. Read through the dimensionality relation, this is the expected geometric signature of the mid-knowledge regime: as knowledge decreases, off-axis components become readable. It refines, and does not contradict, the one-dimensionality claim of [1], which was always scoped to known facts. No dedicated null on the margin yet.

Per-head anatomy. The attention contribution is a sum of heads through the output projection, and the fixed-frame instrument applies unchanged to each head’s slice. Whether the pro-truth propagation at the peak, and the 3B tug-of-war, are carried by a few identifiable heads or distributed across the pack connects this anatomy to [6].

Framing bias with an open lexical confound. A 2×2 moral/prudential design on Qwen2.5-1.5B: framing does not rotate the axis (transfer 0.979–0.99), but there is a large level bias among equally-true statements (-2.75σ at layer 11), and the SVD of mixed-framing pairs recovers a framing direction at $|\cos| = 0.912$ in PC2, the companion paper’s recovery structure on a new factor. The confound: the bias is already -2.86σ at layer 1, which points to the lexical surface; crossed templates are required before this is more than a lead.

Late-layer decoupling. In all inspected models the total volume written by the FFN grows toward the output while its projection on the truth frame goes to zero and the intact truth AUC decays toward chance. The terminal regime is a decoupling: the model writes enormously, and none of it speaks of truth. Terminal sign changes in the gap are zero-crossings of a dying signal, below both the stability floor and the null, and must not be read as structure.

Frame-aware re-reading of the split. The observational split of Table 6 is measured under a peak-fit frame and should be re-read against pre frames; the causal freezes are frame-free and the attribution stands regardless.

13 Limitations

Four models, two families; a third family would promote the arrangement law from law-candidate to law and widen the relational law’s base. The pre frame removes the direct containment circularity but not indirect paths (accumulated earlier writes shape the pre frame). All measurements use last-token states over one dataset (CounterFact, pinned revision) with one statement form per relation; template syntax may contribute to the continent anti-alignment, and crossed templates are the known cure. No permutation nulls were run on the provenance matrices themselves; the diagonal magnitudes sit far above the null scales measured on identical statistics, but the formal check is future work. Ablation measures necessity for linear readability of truth, not for behavior; the freezes act at the reading position only. The category section uses 60 pairs per relation, no bootstrap error bars, and one degenerate relation on Llama (declared). The know-rate is a string-match lower bound. The propagate/overwrite reading is a description of measured alignments, not yet a circuit-level mechanism; why attention inherits frames and the FFN opposes them is the open question this paper sharpens rather than answers.

14 Reproducibility

All tools import `truth_probe.py` and `anatomy.py` from the companion repository and embed the identity, null, and stability safeguards described above; models load with safetensors only and `trust_remote_code=False`; the dataset revision is pinned in Sec. 4. Two rules learned inside this project and now part of its method: the model is passed explicitly to every command (tool defaults differ, and one default produced the accidental replication of Sec. 6.2), and no tool prints an automatic verdict. The Llama models require accepting the license on Hugging Face. Representative commands; repeat with `-model` and the landmarks of Table 1 for each model:

```
# behavioral label BEFORE geometry, and the axis/probe gap (Table 1)
python behav_check.py --model meta-llama/Llama-3.2-3B --n 200 --seed 0
python truth_probe.py signal --model meta-llama/Llama-3.2-3B \
    --dataset counterfact --max-pairs 250 --baseline --perm 200 \
    --rev-counterfact c945b082ca08d0a8f3ba227fb78404a09614c36e

# the flip, consolidated: 5 seeds + permutation null + rotation check (Table 2)
python flip_consolidate.py --model meta-llama/Llama-3.2-3B \
    --axis-block 9 --flip-layer 10 --scan-start 5 --scan-end 15

# axis provenance: post and pre frames, both components (Tables 3-4)
python axis_provenance.py --model meta-llama/Llama-3.2-3B --peak 9 \
    --scan-start 5 --scan-end 15
python axis_provenance.py --model meta-llama/Llama-3.2-3B --peak 9 \
    --scan-start 5 --scan-end 15 --component attn

# causal ablation with fixed-frame and frozen controls (Table 5)
python ffn_erosion.py ablate --model meta-llama/Llama-3.2-3B \
    --band-start 10 --band-end 12 --readout 12

# exact gate/value split and causal freezes (Table 6)
python swiglu.py attrib --model meta-llama/Llama-3.2-3B \
```

```

--axis-block 9 --scan-start 6 --scan-end 13
python swiglu.py gatefreeze --model meta-llama/Llama-3.2-3B \
--band-start 10 --band-end 12 --readout 12

# gauge-invariant circuit norms (weights only, CPU; Table 7)
python circuits.py --model meta-llama/Llama-3.2-3B --dtype bfloat16 \
--peak 9 --flip 10

# category geometry, arrangement law, dictionary export (Sec. 9-10)
python categories.py --model Qwen/Qwen2.5-3B --peak 16 --write-layer 17 --k-relations 8
python categories.py --model meta-llama/Llama-3.2-3B --peak 9 --write-layer 10 --k-relations 8
python arrangement_law.py
python dictionary_export.py --model Qwen/Qwen2.5-3B --peak 16 --write-layer 17 --k-relations 8
python dictionary_export.py --model meta-llama/Llama-3.2-3B --peak 9 --write-layer 10 --k-relati

```

`arrangement_law.py` carries the canonical matrices transcribed in its source with the regeneration commands in its header; the transcription was verified cell-by-cell against fresh `categories.py` runs before the statistics reported here. Scripts are in `src/` of the repository (github.com/Francesco-Marhel/TruthProbe). Figures `flip_collapse.png`, `provenance_asymmetry.png`, `categories_geometry.png`, `arrangement_law.png` accompany the source. License: CC BY 4.0.

15 Conclusion

Two movements, one instrument, one discipline. The mechanics: attention propagates truth frames it did not write; the FFN opposes the frame of its moment and deposits the material of the next; the genuine post-peak erosion survives every control and is carried, on all four models, by the SwiGLU value stream. The geometry: the single axis is a semantically signed mixture whose arrangement the model does not inherit from the lexical surface but constructs, and constructs the same way across two families, because the arrangement belongs to the knowledge, not to the machine. Between the two movements sits the correction that makes them trustworthy: a pre-registered claim of ours, confirmed on three models, was exposed as the special case of a better law by a control built against our own instrument, and the paper reports the failure with the same care as the findings, because a result that has survived its owner’s best attack is worth more than one that has never been attacked. The handoff to the next stage is concrete: a measured dictionary, a four-criterion contract for any sparse autoencoder that claims to do better, and a per-head question with its instrument already built.

Acknowledgments

The author thanks Boaz Nadler for detailed comments on the companion manuscript, whose standards of definition and precision this document attempts to apply from the start.

References

- [1] F. K. Vicidomini. *How Much of Truth Fits on a Single Axis? Knowledge-Dependent Dimensionality, Polarity Recovery, and the Anatomy of a Truth Direction in Qwen2.5-1.5B*. Working paper, v2, July 2026. Zenodo DOI 10.5281/zenodo.20938285.

- [2] L. Bürger, F. A. Hamprecht, B. Nadler. *Truth is Universal: Robust Detection of Lies in LLMs*. NeurIPS 2024. arXiv:2407.12831.
- [3] K. Meng, D. Bau, A. Andonian, Y. Belinkov. *Locating and Editing Factual Associations in GPT*. NeurIPS 2022. arXiv:2202.05262.
- [4] N. Elhage et al. *A Mathematical Framework for Transformer Circuits*. Transformer Circuits Thread, Anthropic, 2021.
- [5] *How Transformers Reject Wrong Answers: Rotational Dynamics of Factual Constraint Processing*. Preprint, February 2026.
- [6] *The HeadGenome Taxonomy: A Structural and Causal Map of Attention Head Specialization in Transformers*. Preprint, OpenReview iG4i2pc4wg.
- [7] M. Huh, B. Cheung, T. Wang, P. Isola. *The Platonic Representation Hypothesis*. ICML 2024. arXiv:2405.07987.