

Attention Propagates, the FFN Overwrites, and the Axis Is a Mixture

Relational Mechanics and Category Geometry of a Truth Direction
Across Two Model Families

Francesco Karim Vicidomini

Independent researcher

Reference code: `ffn_erosion.py`, `swiglu.py`, `circuits.py`, `flip_consolidate.py`,
`axis_provenance.py`, `behav_check.py`, `categories.py`, `arrangement_law.py`, `dictionary_export.py`

July 2026*

Abstract

The companion paper [1] measured how much of a language model’s truth representation fits on a single training-free direction, and where that reading fails. This paper asks the two questions underneath: *which component of the transformer makes the axis, and what is the axis made of?* On four base models across two families (Qwen2.5-1.5B/3B, Llama-3.2-1B/3B), under held-out protocols with pre-registered predictions, we report three findings. First, a *relational law*: the feed-forward network’s contribution at a block is anti-aligned with every truth frame that does not contain it, while attention is pro-aligned with frames it did not write; at the peak the two components are near mirror images (+1.63 vs. −1.43 on Llama-3.2-3B). We name the asymmetry *propagate vs. overwrite*. The law generalizes, and corrects, an earlier peak-anchored reading of our own, whose circularity was exposed by an axis-provenance control we built against our own instrument; the correction is reported as a result. Second, the genuine *erosion* of the truth signal after the peak survives the correction and is causally attributed to the SwiGLU value stream, not the gate. Third, the axis is a *semantically signed mixture*: per-category truth axes form a structured geometry (language relations cohere, continent anti-aligns, near-antiparallel language axes merge at the peak), the FFN writes truth along category-dependent directions (74–82% category decoding vs. 39–42% lexical baseline), and the peak arrangement converges across the two families (Mantel $r = +0.77$, $p = 0.0009$) while contradicting the shared lexical arrangement both start from. The mixture’s geometry is a property of the knowledge domain, not of the training recipe. A measured dictionary and a four-criterion contract for any future sparse autoencoder are delivered as the engineering handoff.

1 Introduction

A training-free direction in the residual stream of a small language model carries a real, held-out, permutation-tested truth signal on facts the model knows; that signal is bounded by a full linear probe, and the gap between the two grows as the model’s knowledge decreases and as the material becomes heterogeneous [1]. Those are measurements about the axis as an object. This paper is

*This document consolidates three working notes (“The FFN Flip is Peak-Relative”, July 3; “Attention Propagates, the FFN Overwrites”, July 4; “The Truth Axis is a Semantically Signed Mixture”, July 5) into a single manuscript. The v1 to v2 correction of the flip interpretation is reported inside the document, as a result, in Section 7. Companion paper: “How Much of Truth Fits on a Single Axis?” (Zenodo DOI 10.5281/zenodo.20938285), cited as [1] throughout.

about the axis as a *process* and as a *composite*: which architectural component builds it, which degrades it, by what mechanism, and what internal structure the single direction is summarizing.

The paper proceeds in two movements. The first movement is mechanical. Starting from the causal finding of the companion paper (attention builds the signal in the middle layers, the FFN degrades it after the peak), we sharpen the instrument from per-band ablation to a per-layer, per-component, fixed-frame projection, and follow it across four models and two families. The initial result, confirmed by pre-registered prediction on three models, was striking and simple: the FFN writes pro-truth into the peak block and flips to anti-truth at exactly the next block, wherever the peak sits. That result was then subjected to a control of our own construction, fitting the measuring frame at several blocks rather than only at the peak, and the control exposed a circularity in the simple reading. What replaced it is better: a fully relational law in which the FFN opposes every truth frame it did not help write and attention propagates every frame it did not write, with the peak-anchored flip as the special case where the frame is fitted at the peak. Section 7 narrates the failure and the generalization in full, because the sequence (claim, self-raised objection, pre-registered discrimination, exposure, stronger law) is scientific content, not an embarrassment to be footnoted.

The second movement is geometric. If the FFN writes truth in category-dependent directions, the single axis of the companion paper cannot be an atom; it must be a mixture. Grouping the data by Wikidata relation and fitting per-category truth axes, we measure the mixture directly: its signed geometry, its reorganization with depth, and, in a registered cross-family falsification, the convergence of its arrangement between the Qwen and Llama families. The heterogeneity effect measured in the companion paper (the probe gap jumping from 0.062 on homogeneous material to 0.203 on a mix) is, in hindsight, this mixture seen from one direction.

Contributions.

1. The *relational law* (pre-registered, four models, two families): FFN contributions anti-align with truth frames that do not contain them; attention contributions pro-align with frames they did not write; at the peak, under a clean pre-FFN frame, the two are near mirror images (Sec. 8).
2. The *axis-provenance control* that forced the law: a ruler-placement method with synthetic ground-truth validation that separates genuine alignment from measurement circularity, applied against our own published claim (Secs. 5.5, 7).
3. Causal attribution of the frame-free *erosion* to the SwiGLU value stream, by an exact algebraic split of the FFN’s along-axis write and by causal freezes, with the gate exonerated (Sec. 9).
4. A pre-registered *negative*: the gauge-invariant OV/QK circuit crossover does not track the truth peak across scale (Sec. 11).
5. The *category geometry*: per-category truth axes form a semantically signed arrangement that reorganizes with depth and converges across families (Mantel $r = +0.77$, $p = 0.0009$), with the FFN’s write directions decoding the category far above a lexical baseline (Sec. 12).
6. A *measured dictionary* and a four-criterion registered contract that any trained sparse autoencoder must beat to justify its cost (Sec. 13).

2 Related work

Truth directions and their limits. The companion paper [1] defines the axis, the held-out protocol, the permutation null, and the know-rate used throughout, and situates the approach against linear probes and sparse dictionaries; those definitions are reused here, not restated. Bürger et al. [2] establish the two-dimensional truth subspace and the polarity direction whose unsupervised recovery the companion paper reports.

MLPs as key-value writers. The memory-editing literature [3] attributes to transformer MLPs the physiology of key-value stores whose writes deposit factual content into the residual stream. The relational law of Sec. 8 is a dynamical face of that picture: the component that deposits the next frame’s material is, per these measurements, the one that opposes the current frame.

Rotational dynamics of factual selection. A recent preprint [5] reports that factual constraint processing separates alternatives by rotation rather than rescaling, with active suppression of the correct continuation at intermediate depth. The propagate/overwrite asymmetry supplies a candidate microscopic writer for that macroscopic observation.

Attention-head specialization. The head-taxonomy line of work [6] motivated our pre-registered test of whether static, gauge-invariant circuit norms predict where truth lives (they do not, Sec. 11) and defines the natural per-head follow-up of Sec. 14.

Cross-model representation convergence. The convergence of the category arrangement across families (Sec. 12) is a signed, truth-specific instance of the broader phenomenon that different models trained on the same world converge to similar representations [7].

3 Scope, evidence levels, and the status of a correction

Nothing here has the status of a settled result; everything is labeled. Results are organized in three evidential levels and never mixed. **Level A:** replicated across models with predictions written before the runs (the relational law, the dimensionality points, the crossover negative, the arrangement law). **Level B:** single-model but causal, with multiple independent methods agreeing (the value-stream attribution). **Level C:** leads, declared as such (Sec. 14).

This document also contains a correction of our own published interpretation, reported as a result. The original peak-anchored reading of the FFN flip was confirmed by pre-registered prediction on three models and then exposed as the special case of a relational law by a control we built against our own instrument. Every v1 number reproduces; what changed is what one of them meant. Three further items from earlier stages are retracted or falsified below and reported in full: the “attention builds, FFN consolidates” story (overturned causally in [1]); the hypothesis that the SwiGLU gate carries the erosion (falsified in favor of the value stream, Sec. 9); and the hypothesis that the static OV/QK crossover predicts the truth peak (falsified by pre-registered criterion, Sec. 11). A fourth item, the “FFN-off beats frozen” margin, failed to replicate across scale and is demoted from lead to noise.

4 Setup

Four base (non-instruct) models across two families:

Table 1: Models. The truth peak p is the block whose intact residual maximizes held-out truth AUC (protocol of [1]); “block b ” denotes the output of transformer block b . Know-rate: fraction of 200 CounterFact prompts whose true target the model reproduces under greedy decoding (seed 0), measured before any geometry.

model	blocks	d_{model}	truth peak p	rel. depth	know-rate
Qwen2.5-1.5B	28	1536	15	0.54	30.0% (61/200)
Qwen2.5-3B	36	2048	16	0.44	37.0% (74/200)
Llama-3.2-1B	16	2048	7	0.44	35.5% (71/200)
Llama-3.2-3B	28	3072	9	0.32	41.0% (82/200)

Dataset: NeelNanda/counterfact-tracing (pinned revision c945b08..., loaded as Parquet only), 250 minimal pairs unless stated. The axis construction, the k -fold held-out protocol over pairs, the permutation null and its p -value estimator, and the know-rate are exactly those of [1]. All decomposition runs use `float32` and are gated by the additive identity check of [1] (median relative errors $0.65\text{--}1.23 \times 10^{-7}$ across the runs of this paper); a run is certified by its in-code checks, not by its launch conditions. Extraction-only runs (peak finding, behavioral checks) use `bfloat16`. The spread of the four peaks in relative depth (0.32–0.54) already anticipates the negative of Sec. 11: no fixed depth, absolute or relative, locates truth.

5 Methods

5.1 The fixed-axis contribution gap

Within a block the residual stream updates additively, $h_{b+1} = h_b + a_b + f_b$, with a_b the attention contribution and f_b the FFN contribution, captured by forward hooks [1]. The axis v_1 is fit once, on training folds only, on a chosen *fit block* (oriented true = positive there), and every contribution at every layer is projected onto that same fixed direction. The statistic for a contribution c is the held-out class gap

$$\text{gap}(c) = \overline{(v_1 \cdot c)}|_{\text{true}} - \overline{(v_1 \cdot c)}|_{\text{false}}, \quad d' = \frac{\text{gap}}{\text{pooled std}}, \quad (1)$$

where the pooled standard deviation is computed over the held-out projections of both classes. A negative FFN gap means the FFN literally writes toward the false side of the axis on which the model represents truth. Stability criterion (fixed in code before the consolidation runs): a per-layer value is “stable” if its magnitude exceeds both 2σ across 5 CV seeds and a floor of 0.03.

5.2 The exact SwiGLU split

The FFN computes $f = W_{\text{down}}(g \odot u)$ with $g = \text{silu}(W_{\text{gate}}x)$ and $u = W_{\text{up}}x$, elementwise in the shared expanded basis. The projection of f on v_1 is $w \cdot (g \odot u)$ with $w = W_{\text{down}}^T v_1$: the residual axis pulled back through the down-projection. No axis is ever fit in the 8960/11008-dimensional expanded space, avoiding the $p \gg n$ regime entirely. With the symmetric intra-pair split ($\Delta g = g_t - g_f$, $\bar{g} = (g_t + g_f)/2$, and likewise for u) the mixed term cancels and the identity is exact:

$$w \cdot (g_t \odot u_t - g_f \odot u_f) = \underbrace{w \cdot (\Delta g \odot \bar{u})}_{\text{gate term}} + \underbrace{w \cdot (\bar{g} \odot \Delta u)}_{\text{value term}}. \quad (2)$$

Verified numerically at 7.4×10^{-8} relative error on real data.

5.3 Interventions

Beyond zero-ablation of a component over a band of layers, two refinements. (i) A *frozen control* obtained for free: with both attention and FFN zeroed over the band, the readout state is identically the band-entry state, so the frozen reference is read off the intact pass. (ii) *Gate-freeze / value-freeze*: at the reading position, g (resp. u) is replaced by its intra-pair mean cached from the intact run, killing the class-driven variation of one stream while the FFN stays on. Zeroing the gate outright would zero the whole FFN and test nothing new.

5.4 Static circuit norms

Per attention head (GQA-aware: each group of query heads shares one K/V), the gauge-invariant circuit norms $\|W_q^\top W_k\|_F$ (routing) and $\|W_o W_v\|_F$ (writing) [4]. Individual weight norms are gauge-dependent ($W_q \rightarrow \alpha W_q$, $W_k \rightarrow W_k/\alpha$ leaves the function unchanged); the products are not. A gauge self-test (rescale and verify invariance at machine precision) gates the computation.

5.5 The axis-provenance control

The objection this method answers, raised by the author against the author’s own instrument, is that a result anchored to “the block where the ruler was fit, plus one” could be a property of the ruler rather than of the FFN. The control: fit v_1 at several blocks $b \in \{p-4, p-2, p, p+2\}$ and recompute the full gap profile under each ruler. Two rulers per fit block, from the same cached tensors:

post : v_1 fit on the block output $h_{b+1} = h_b + a_b + f_b$ (contains f_b),
pre : v_1 fit on the pre-FFN state $h_b + a_b$ (f_b excluded).

The pre ruler removes the direct circularity of measuring f_b against an axis fit on a state that contains f_b . The discrimination criterion was fixed before the runs and validated on synthetic ground truth: a planted global axis with a planted writer flip stays pinned under every ruler; a planted circular writer collapses under the pre ruler (collapse ratio 0.04) while planted genuine alignment survives (0.99). Genuine alignment therefore predicts a clearly positive pre-ruler diagonal; circularity predicts collapse. A methodological note learned the hard way: two successive automatic “transition-rule” verdicts in the tooling misread these matrices during the analysis; the released tool prints the full matrices and diagonal summaries with *no* automatic verdict, and every reading below is of the full matrices.

5.6 Per-category axes, transfer, decoding, and the Mantel statistic

CounterFact is grouped by Wikidata relation; the top- K relations by unique pairs are used ($K=5$ exploratory, $K=8$ for the registered falsification; 60 pairs each): P103 mother tongue, P1412 languages spoken, P176 manufacturer, P27 citizenship, P30 continent, P37 official language, P413 sport position, P495 country of origin. Per-category truth axes are fit at the peak block, each oriented true = positive *within its own category*, so the sign of a cross-category cosine is information: negative means the shared direction reads the other category’s truth backwards. Four measurements: (i) signed cosine matrices at the peak and at an early block (block 2, the lexical surface control); (ii) the held-out *transfer matrix*, whose cell (i, j) is the held-out AUC of category i ’s axis applied to category j ’s pairs; (iii) nearest-centroid *decoding* of the category from the FFN’s class-signed write direction Δf at peak+1, against the same decoder on early residual differences (the lexical baseline); (iv) the *Mantel test*, a permutation test for the correlation between two distance (here: signed-cosine) matrices, used to compare the two families’ arrangements under category-label permutation.

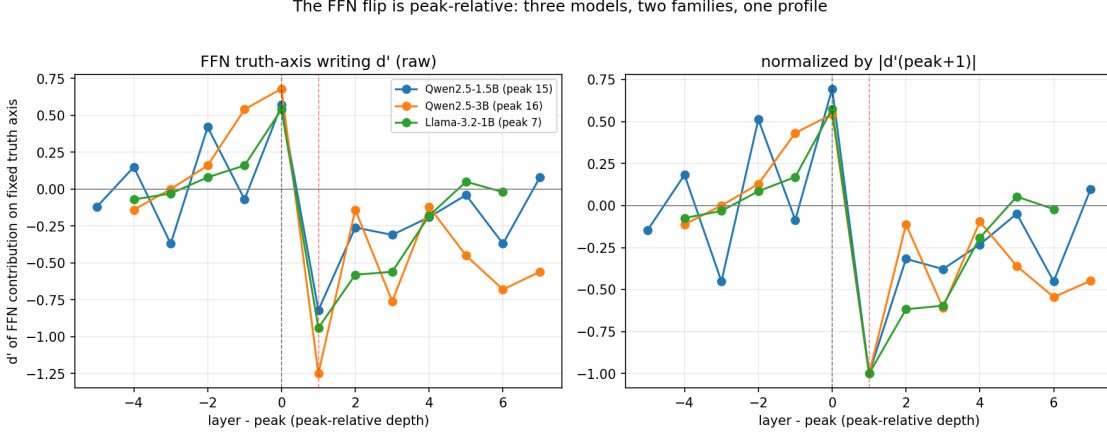


Figure 1: The FFN’s truth-axis writing (d' of the fixed-axis contribution gap) across depth, aligned at the truth peak (dashed black), three models and two families. Right: normalized by the flip amplitude $|d'(p+1)|$. The red dashed line marks peak+1.

Deterministic sampling per relation was verified by exact reproduction of the $K=5$ submatrix inside the $K=8$ run; a determinism defect in the decoding fold assignment (salted string hash) was found by cross-run comparison and fixed (process-stable CRC32) before the canonical runs.

6 Level A, first movement: the peak-relative flip

For each of three models the prediction was written before the run: under the peak-fit ruler, the FFN’s fixed-axis gap is pro-truth at the peak block p and flips to stable anti-truth at $p+1$.

Table 2: The flip at peak+1 under the peak-fit (post) ruler, CounterFact 250 pairs. Gap is mean $\pm$ std over 5 seeds where consolidated; Qwen2.5-1.5B values are from the single-seed scan of the anatomy session, consistent with its 5-seed consolidation. Permutation null: 100 within-pair swaps.

model	layer	gap _{ffn}	d'_{ffn}	verdict
Qwen2.5-1.5B	15 ($= p$)	+0.728	+0.57	pro-truth
	16 ($= p+1$)	−0.692	−0.82	anti-truth (flip)
Qwen2.5-3B	16 ($= p$)	+0.575 $\pm$ 0.005	+0.68	pro-truth stable
	17 ($= p+1$)	−0.926 $\pm$ 0.002	−1.25	anti-truth stable ($\hat{p} = 0.0099$)
Llama-3.2-1B	7 ($= p$)	+0.092 $\pm$ 0.001	+0.54	pro-truth stable
	8 ($= p+1$)	−0.111 $\pm$ 0.001	−0.94	anti-truth stable ($\hat{p} = 0.0099$)

The three peaks sit at different absolute depths (15, 16, 7) and different relative depths (0.54, 0.44, 0.44); the flip sits at peak+1 in all three. Aligned in peak-relative coordinates and normalized by the flip amplitude, the three per-layer profiles collapse onto a common shape: rise into the peak, spike at +1, decay toward zero (Fig. 1). The collapse is not perfect and the imperfections are data: the 1.5B pre-peak side oscillates where the other two rise monotonically, and the post-flip decay profiles differ (the 3B erosion band is non-monotone: −1.25, −0.14, −0.76 at layers 17–19).

This measurement is correct and reproduces. Its *interpretation*, that the flip is anchored to the peak, had not yet been tested. The next section tests it.

7 The correction: from peak-anchored to relational

The sequence is narrated in three acts because the sequence is the content.

Act 1 (the claim). The FFN gap, measured under the peak-fit ruler, is pro-truth at p and anti-truth at $p+1$, replicated with pre-registered predictions on three models across two families (Sec. 6).

Act 2 (the control bites its owner). Under rulers fit at $p-4$, $p-2$, p , $p+2$ (Sec. 5.5), the transition does not stay at $p+1$: *it tracks the ruler*. On Qwen2.5-1.5B the diagonal reads pro at b / anti at $b+1$ for $b = 13, 15, 17$ alike ($+0.61 / -0.79$, $+0.57 / -0.82$, $+0.52 / -0.73$); on Qwen2.5-3B for $b = 16, 18$; and subsequently on both Llamas (Table 3). The peak-anchored flip was the $b=p$ slice of a relational pattern present at every block where an axis exists.

Table 3: POST-ruler diagonals on four models: per fit block b , the FFN’s held-out d' at b and at $b+1$. Pro at b , anti at $b+1$, for every b where an axis exists, not only at the peak.

model (peak)	ruler b	$d'_{\text{ffn}}(b)$	$d'_{\text{ffn}}(b+1)$
Qwen2.5-1.5B (15)	13 / 15 / 17	$+0.61 / +0.57 / +0.52$	$-0.79 / -0.82 / -0.73$
Qwen2.5-3B (16)	14 / 16 / 18	$+0.06 / +0.69 / +0.73$	$-0.09 / -1.23 / -0.79$
Llama-3.2-1B (7)	5 / 7 / 9	$+0.13 / +0.54 / +0.19$	$-0.07 / -0.95 / -0.54$
Llama-3.2-3B (9)	7 / 9 / 11	$+0.37 / +0.49 / +0.57$	$-0.42 / -1.25 / -1.39$

Act 3 (the pre ruler exposes the circularity). Under the pre-FFN ruler the “pro at own block” term does not merely collapse; it *inverts sign* (Table 4). Measured against the frame that exists at the moment it writes, the FFN’s contribution is strongly anti-aligned. The pro term of the post ruler was, in substantial part, the ruler measuring its own ingredient: f_b is inside h_{b+1} and drags the axis fit there toward itself. The residual above-diagonal positives under the pre ruler (e.g. f_{13} at $+0.48/+0.60$ on pre-frames of blocks 15/17 in Qwen-1.5B) are the same circularity one step forward, since those later frames contain f_{13} .

What the failure bought: a general law instead of a special case, a measured mechanism instead of a coordinate, and a live demonstration that the shields bind their owner. Where the axis is weak or absent, the pattern correctly vanishes: rulers fit before the Qwen-3B ignition (fit-block cosines to the peak axis 0.049 and 0.079) and before the Llama-1B mid-knowledge peak return noise, the internal consistency expected if the law is about frames that exist.

8 Level A: the relational law and the propagate–overwrite asymmetry

Table 4: PRE-ruler diagonals: the same cells with f_b excluded from the ruler’s data. The FFN inverts sign (circularity exposed; it writes against the frame of its moment). Attention, measured identically, is the mirror image.

model	ruler b	$d'_{\text{ffn}}(b)$	$d'_{\text{attn}}(b)$
Qwen2.5-1.5B	13 / 15 / 17	−0.63 / −0.41 / −0.78	+1.56 / +1.31 / +1.04
Qwen2.5-3B	14 / 16 / 18	−0.14 / −1.16 / −0.46	+0.26 / +1.38 / +1.40
Llama-3.2-1B	7 / 9	−1.17 / −0.82	+1.26 / +0.82
Llama-3.2-3B	7 / 9 / 11	−0.81 / −1.43 / −1.41	+0.99 / +1.63 / +1.75

The decisive zone is the sub-diagonal of the pre matrices: contributions at layer L measured against frames of blocks strictly before L , which contain neither f_L nor a_L and are therefore clean of every containment effect. There (Fig. 2) the FFN is negative nearly everywhere an axis exists, and attention is positive nearly everywhere an axis exists, on all four models. At the peak, under the same clean frame, the two components are near mirror images: +1.31/ − 0.41 (Qwen-1.5B), +1.38/ − 1.16 (Qwen-3B), +1.26/ − 1.17 (Llama-1B), +1.63/ − 1.43 (Llama-3B). Pre-registered predictions for the two Llamas, written before those runs (POST pro/anti diagonal; PRE sign inversion for the FFN; sub-diagonal positive for attention and negative for the FFN), were all confirmed.

We name the asymmetry **propagate vs. overwrite**. Attention, which reads the residual stream, transports the truth frames already present: it is pro-aligned with directions it did not write. The FFN, which generates content from its weights, opposes the frame of its moment and deposits the material of the next: its writes are what later frames are made of. The correct ontology dissolves the earlier implicit picture of an axis being eroded like an object: the axis is not an object in the model; it is a moving statistical summary of where the class difference lives, and the FFN’s class-signed writes constitute it. This is the dynamical face of the key-value write-head physiology attributed to MLPs by the memory-editing literature [3], and it supplies a candidate microscopic writer for the macroscopic finding of [5] that factual selection separates by rotation with active suppression of the correct continuation.

9 Level B: the erosion is real, frame-free, and carried by the value stream

The correction separates two phenomena that the peak-anchored reading conflated: *frame-relative rotation* (what the flip actually was) and *frame-free decay* of class signal after the peak (the genuine erosion). The erosion stands on measurements that use no frozen ruler.

First, the refit truth AUC (axis re-fit at every layer) decays after the peak (e.g. 0.79 → 0.54 on Qwen-1.5B): if the FFN only rotated the frame while preserving class signal, refit readability would not fall. Second, the causal results: zero-ablating the FFN over the post-peak band raises refit AUC (+0.103 on Qwen-1.5B, band 16–18; +0.053 on Qwen-3B, band 17–19), attention-off does not, and the axis-geometry cosines show it is the FFN that rotates the readable direction (intact entry→readout |cos| 0.627/0.667 vs. 0.876/0.890 with the FFN off). Two honest annotations. The earlier lead “FFN-off beats the frozen reference” did not replicate (+0.022 on 1.5B vs. +0.015 on 3B, both straddling the noise threshold); the supported statement is FFN-off ≈ frozen on both

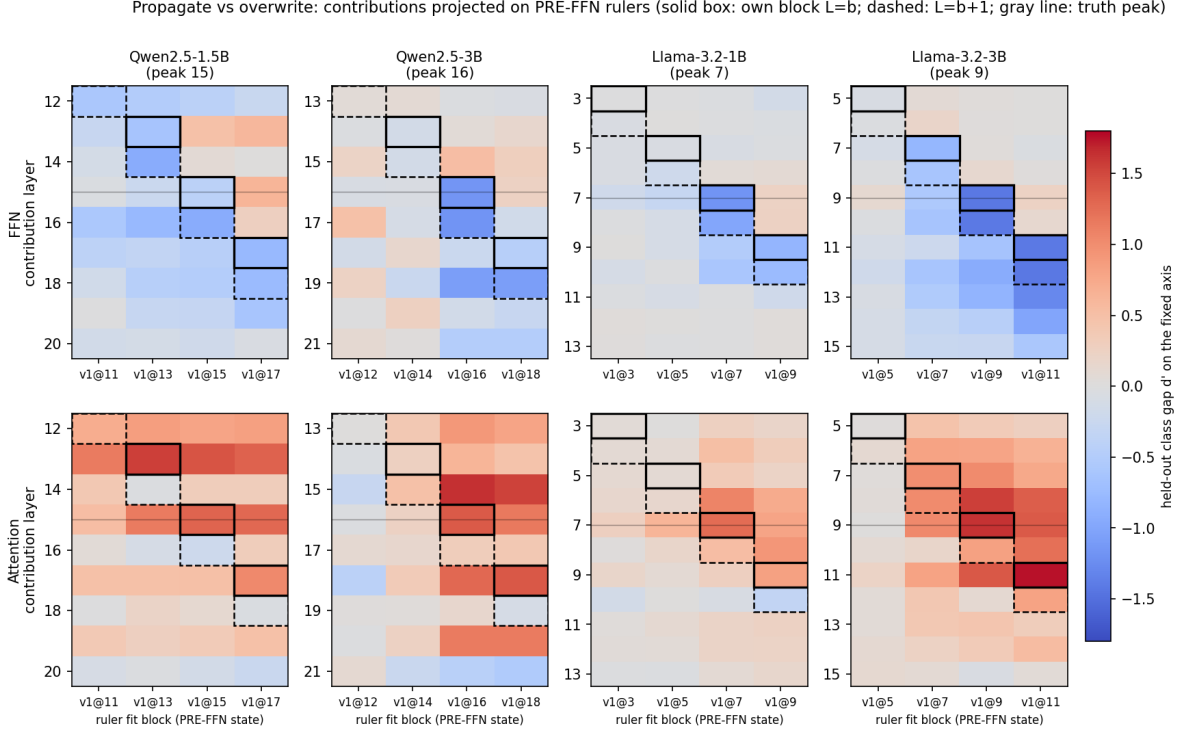


Figure 2: Propagate vs. overwrite on four models. Held-out class gap d' of each component’s contribution (rows: FFN above, attention below) projected on pre-FFN rulers fit at four blocks (columns within each panel). Solid box: own block $L=b$; dashed: $L=b+1$; gray line: truth peak. The FFN row is cold wherever an axis exists; the attention row is warm.

models. And a scale difference: in the 3B, attention-off in the band hurts (-0.055), consistent with its post-peak attention still writing pro-truth (fixed-axis gap $+0.663$ at block 18): the 3B erosion band is a tug-of-war, not a passive decline.

Inside the SwiGLU: the value stream, not the gate. The working hypothesis entering this chapter was contextual: the gate (which neurons open) switches the stream toward next-token format context and thereby erodes truth. Three independent methods return the same verdict, and it is the opposite attribution. (i) The exact split of Eq. 2 on Qwen2.5-1.5B:

Table 5: Exact gate/value split of the FFN’s along-axis write (peak-fit ruler), Qwen2.5-1.5B.

layer	gate term	value term	total	gate share
13	+0.249	+0.099	+0.348	0.72
15 (p)	+0.486	+0.242	+0.728	0.67
16 ($p+1$)	+0.041	-0.734	-0.692	-0.06
17	+0.123	-0.385	-0.262	-0.47
18	-0.004	-0.279	-0.284	0.02

At the flip the anti-truth total is carried almost entirely by the value term; the gate term stays neutral or mildly pro-truth (at layer 17 the two streams fight, and the gate loses). The same split

explains the pro-truth construction at the peak: two thirds gate. (ii) Causal freezes over the band (readout block 18): value-freeze recovers +0.089 AUC (0.801, essentially the frozen reference 0.793); gate-freeze recovers only +0.040. (iii) A qualitative logit-lens of the band FFN contributions shows format and template content (punctuation, scaffolding fragments, code tokens) dominating both classes, with both classes pushed toward the false side and true statements pushed harder (layer 16: mean projection -2.36 true vs. -1.65 false). The corrected statement: after the peak, the FFN’s value stream injects prediction-oriented content whose along-axis component is systematically anti-truth. This attribution is causal on one model; the observational split table should be re-read against pre-FFN rulers (Sec. 14), but the causal freezes are frame-free and stand.

The rotation objection, raised and closed. Could the negative gap be a rotating write-direction seen through a fixed axis, a projection artifact, rather than genuine anti-truth writing? Rotation makes a precise prediction: the cosine of the mean FFN pair-difference with v_1 should sweep smoothly through zero across several layers with roughly constant magnitude. The data show the opposite on both consolidated models: a one-step sign jump at peak+1 with the magnitude intact (Qwen-3B: $\cos = +0.245 \rightarrow -0.409$, $\Delta = -0.654$, $\|d\|$ $2.52 \rightarrow 2.34$; Llama-1B: $+0.292 \rightarrow -0.341$, $\Delta = -0.632$, $\|d\|$ $0.33 \rightarrow 0.34$). It is class-signed writing, not rotation. A secondary reading of the same table: most of what the FFN writes is orthogonal to the axis (class-blind volume), with a small, real, systematically anti-truth along-axis component on top.

10 Level A: the dimensionality relation, four points and a provenance fix

The companion paper’s knowledge-dependent dimensionality claim, measured there on one model, gains cross-family support here, together with a correction of our own earlier table. The first version of this table imported the Qwen2.5-1.5B row from the companion paper’s mixed-dataset column, while the other rows were measured on CounterFact alone: a protocol inhomogeneity, caught by re-measurement, of exactly the kind the provenance control of Sec. 5.5 targets in geometry. All four rows below come from one command under one protocol (CounterFact, 250 pairs, held-out, seed 0), and the know-rates from one command at $n=200$ (the original registrations used $n=40$ estimates, e.g. 42% for both Llamas, consistent within their granularity with the 41.0% and 35.5% measured here).

Table 6: Know-rate and axis-vs-probe gap per model, uniform protocol (CounterFact 250 pairs; know-rate on 200 prompts, greedy, seed 0).

model	know-rate	axis AUC	probe AUC	gap
Llama-3.2-3B	41.0% (82/200)	0.785	0.897	0.112
Qwen2.5-3B	37.0% (74/200)	0.832	0.881	0.049
Llama-3.2-1B	35.5% (71/200)	0.690	0.831	0.141
Qwen2.5-1.5B	30.0% (61/200)	0.792	0.854	0.062

Two regularities and one honest boundary. Within each family the gap decreases as the know-rate increases (Qwen: 0.062 at 30.0% vs. 0.049 at 37.0%; Llama: 0.141 at 35.5% vs. 0.112 at 41.0%). Across families a family-level offset remains: at comparable knowledge, the Qwen models concentrate more of the truth signal on the single axis than the Llama models. The earlier slogan that the gap “tracks knowledge every time” is therefore retired in favor of the two-part statement: within-family

monotone, cross-family offset. For Llama-3.2-3B the expectation (mid knowledge, intermediate gap) was registered from the behavioral check before the probe was run; the measured 0.112 fell inside the registered window. The family offset is consistent with the family trait of the next section.

11 Pre-registered negatives, and ignition as a family trait

The static OV/QK crossover does not track the peak. Motivated by an external observation that value-to-query weight-norm ratios scale with depth across architectures [6], we tested the gauge-invariant version: does the layer where the writing circuit $\|W_o W_v\|$ overtakes the routing circuit $\|W_q^\top W_k\|$ (median-normalized, sustained for 3 consecutive layers, criterion fixed in code before the runs) predict the truth peak? On Qwen2.5-1.5B the crossover (layer 17) sits one block from the flip: consistent. The cross-scale prediction registered before the second run discriminated two hypotheses: peak tracks crossover (3B peak at $\sim 22 \pm 2$) vs. fixed relative depth (peak at ~ 19). The measured 3B peak is block 16, eight blocks from its crossover (24); across the two scales the crossover moves deeper in relative depth ($0.61 \rightarrow 0.67$) while the peak moves shallower ($0.54 \rightarrow 0.44$). Two points moving in opposite directions falsify the link. The depth-scaling of the circuits themselves may well be real and general; it is simply not where truth lives. The late-layer OV explosion (e.g. $\|W_o W_v\|$ sums of 338.9/322.0 at Qwen-1.5B layers 26–27) instead matches the decoupling of Sec. 14.

Ignition is a family trait, not a scale effect. The Qwen-3B per-layer AUC curve switches on in a single layer ($0.526 \rightarrow 0.790$), driven by a coordinated two-layer construction burst in which both components write pro-truth strongly (attention $d' +1.58/+1.27$ at blocks 15–16); the 1.5B curve is a smooth ramp. The pre-registered discrimination: scale predicts a step in Llama-3.2-3B; family predicts a ramp. Measured: a ramp ($0.526 \rightarrow 0.657 \rightarrow 0.664 \rightarrow 0.749 \rightarrow 0.785$ across levels 6–10). Ignition is, on present evidence, a trait of the Qwen recipe at the 3B scale, not of scale itself.

12 Level A, second movement: the axis is a semantically signed mixture

If the FFN writes truth along directions that depend on *what kind of fact* is being written, the single axis is a mixture, and its ingredients can be measured. The design and statistics are those of Sec. 5.6; three models carry this section (Qwen2.5-1.5B/3B exploratory, Qwen2.5-3B and Llama-3.2-3B for the registered falsification).

The signed geometry. At the peak, the language-family block coheres (Qwen-3B: $+0.27$ to $+0.76$; Llama-3B: $+0.55$ to $+0.69$), continent is anti-aligned with that block (Qwen -0.07 to -0.20 ; Llama -0.09 to -0.15), sport-position is near-orthogonal to everything, and country-of-origin sides with the block (strongly on Llama, $+0.51$ to $+0.75$). The anti-alignment is confirmed by an independent statistic: transfer from the continent axis into the language block falls below chance on both families (Llama: AUC 0.20–0.33); on Qwen the below-chance transfer is bidirectional, on Llama one-directional, a partial replication reported as such. Within-category transfer exceeds cross-category transfer on both models, which also bears directly on the topic-generalization question raised for the companion paper’s protocol.

The reorganization with depth. The early-block matrices are not flat: they carry shared corpus statistics (the two families’ early matrices correlate at $r = 0.93$). Depth does not create arrangement

from nothing; it *re-files* it. Citizenship sides with geography at the embedding level and with the language family at the peak, on both families. The extreme case: the axes of *languages spoken* and *official language* start near anti-parallel ($\cos = -0.90$ Qwen, -0.86 Llama, presumably a lexical opposition in how the two templates use language tokens) and merge at the peak ($+0.76$, $+0.62$). Within each model, the early and peak off-diagonal arrangements are uncorrelated or anti-correlated ($r = -0.55$ Qwen, -0.18 Llama): the peak structure contradicts, rather than inherits, the lexical surface.

The FFN writes truth along category-dependent directions. Decoding the relation from the unit write direction Δf at peak+1 ($K=8$): 74.2% (Qwen-3B) and 81.7% (Llama-3B) against chance 12.5% and permutation null 95th percentile $\approx 15.5\%$ ($\hat{p} = 0.0099$ both); lexical baseline 39.2%/42.1%. Thirty-five to forty points of category structure in the write directions beyond token identity. Read together with the relational law: the component that overwrites truth frames does so along category-dependent directions. The mixture is not only in the representation but in the writing.

The registered falsification and its verdict. Five predictions were written before any Llama measurement of this geometry; outcomes, including the partials, in full. **R1** (language block on Llama, signed cosines in $[+0.15, +0.45]$): structure confirmed, magnitude *outside* the registered window on the high side ($+0.55$ to $+0.69$). **R2** (continent anti-aligned; below-chance transfer both directions): signs confirmed; the bidirectional below-chance transfer held only partially (one direction on Llama). **R3** (Δf decoding ≥ 10 points over lexical, $p < 0.05$): confirmed, margin about 40 points. **R4** (the citizenship early $\rightarrow$ peak switch replicates): confirmed, plus the stronger languages/official-language merge. **R5** (the arrangement law): confirmed. Off-diagonal peak matrices, Qwen-3B vs. Llama-3B: Pearson $r = +0.770$ (Spearman 0.893), Mantel category-label permutation null 95th percentile $+0.498$, $p = 0.0009$; robust to excluding the anomalous relation P176 ($r = +0.808$, $p = 0.0037$).

The arrangement law. Combined with the within-model reorganization, the reading is: the two families share a lexical starting arrangement, abandon it, and converge on the same functional arrangement. Same start, same move, same destination, different machines. The arrangement of the truth mixture is a property of the knowledge domain, not of the training recipe: a signed, truth-specific instance of cross-model representation convergence [7]. In hindsight this section also explains a companion-paper measurement from the other side: forcing one axis onto heterogeneous material costs 0.203 of held-out AUC against a full probe, versus 0.062 on homogeneous material [1], because the single axis is being asked to summarize a signed mixture with one number.

Anomaly, declared. On Llama-3B, relation P176 (manufacturer) shows within-CV and incoming transfer of 1.000 from every axis: universal perfect separability, which suggests surface structure in that relation’s pairs rather than truth geometry. It is excluded in the R5 robustness check (which holds) and flagged for inspection before any claim rests on it.

13 The measured dictionary and the sparse contract

`dictionary_export.py` saves, per model, the *measured dictionary*: the per-category oriented axes, the global axis, and the FFN write centroids (a $[K \times d]$ bundle of tens of kilobytes), with signed matrices and full metadata in one loadable file: a K -direction truth/category monitor whose baseline performance is quantified above. The sparse autoencoder that this series hands to engineering is

The truth axis is a semantically signed mixture: per-relation truth axes (signed cosines) and category decoding of FFN writes

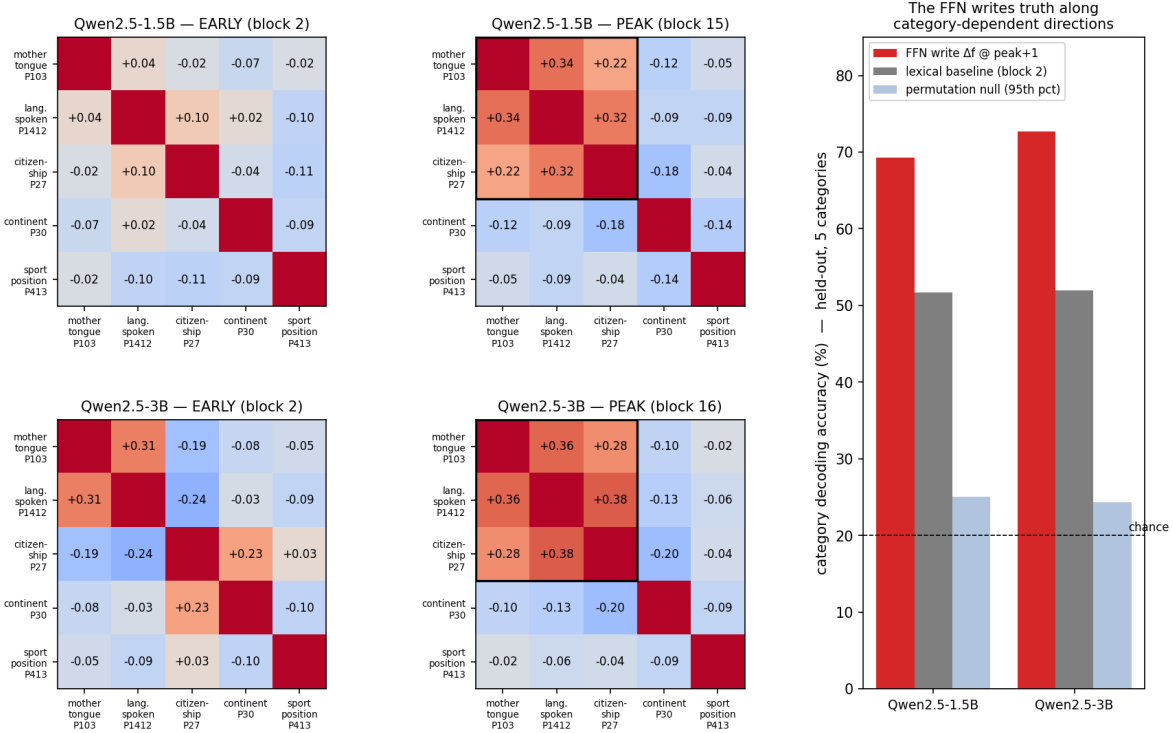


Figure 3: The category geometry: early vs. peak signed-cosine matrices and decoding vs. lexical baseline on the exploratory models.

justified only if, against matched nulls, it (1) aligns with the per-category axes, (2) respects the semantic geography, (3) reproduces the signs, including the inverted loading on continent and the depth reorganization, and (4) beats the measured dictionary on class-signal reconstruction and category decoding. Either outcome is content.

14 Leads, declared as leads

A second readable dimension in the mid-knowledge regime. On Llama-3.2-1B at the peak, a held-out logistic on (Re, Im) reaches 0.783 vs. 0.690 for the single axis (+0.092); the phase score alone reaches 0.755; on Llama-3.2-3B phase scores match or beat the axis by +0.08–0.10 in the decay zone. In the Qwen models the second dimension never added more than +0.02. Read through the dimensionality relation, this is the expected geometric signature of the mid-knowledge regime: as knowledge decreases, truth de-concentrates and off-axis components become readable. It refines, and does not contradict, the one-dimensionality claim of [1], which was always scoped to known facts. Status: no dedicated null on the 2D–1D margin yet.

Per-head anatomy. The attention contribution is a sum of 12–32 heads through the output projection, and the fixed-axis instrument applies unchanged to each head’s slice. The open question is whether the pro-truth propagation at the peak (and the 3B post-peak tug-of-war) is carried by a few identifiable heads, connecting this anatomy to the head-specialization taxonomy of [6], or distributed across the pack.

R5 — the arrangement of the truth mixture converges across families

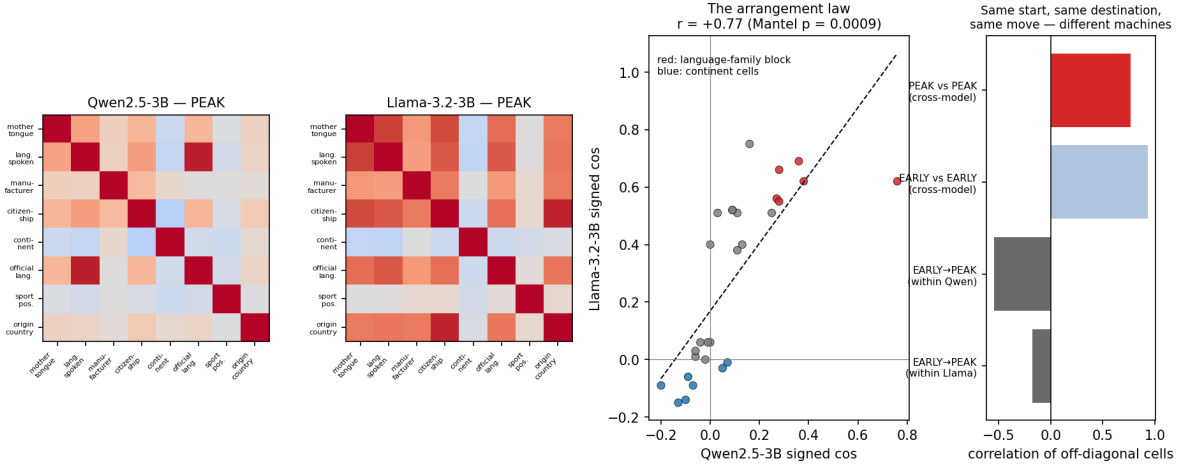


Figure 4: The arrangement law (R5). Left: the two $K=8$ peak signed-cosine matrices. Center: their off-diagonal cells against each other ($r = +0.77$; red: language-family block, blue: continent cells). Right: the four correlations that state the law, cross-model agreement at the peak and at the embedding level, and the within-model reorganization between them.

Framing bias with an open lexical confound. A 2×2 moral/prudential design (24 quads) on Qwen2.5-1.5B: unlike polarity, framing does not rotate the axis (moral-to-prudential transfer 0.979–0.99; no flip), but there is a large level bias among equally-true statements (-2.75σ at layer 11, stable through the middle band), and the SVD of mixed-framing pairs recovers a framing direction at $|\cos| = 0.912$ in PC2 (with t_G in PC1 at 0.993), the same recovery structure as the companion paper’s polarity result, on a new factor. The confound: the bias is already -2.86σ at layer 1, which shouts lexical surface (“wrong” vs. “risky”), not deep context. Crossed-template controls are required before this is more than a lead.

Late-layer decoupling. In all inspected models the total volume written by the FFN grows toward the output (contribution norms $16 \rightarrow 38$ on the 1.5B; OV circuit norms exploding in the last blocks) while its projection on the truth axis goes to zero and the intact truth AUC decays to near chance. The terminal regime is not an oscillation of the axis but a decoupling: the model writes enormously, and none of it speaks of truth. Small terminal sign changes in the gap are zero-crossings of a dying signal (below both the stability criterion and the permutation null) and must not be read as structure.

Frame-aware re-reading of the split table. The observational gate/value split of Table 5 was measured under a peak-fit ruler and should be re-read against pre-FFN rulers; the causal freezes are frame-free and the attribution of Sec. 9 stands regardless.

15 Limitations

Four models, still two families; a third family would promote the arrangement law from law-candidate to law and widen the base of the relational law. The pre ruler removes the direct containment circularity but not indirect paths (accumulated earlier writes shape the pre-frame). The relational law is measured on last-token states over one dataset (CounterFact, pinned revision) with one statement

form per relation (template syntax may contribute to the continent anti-alignment; crossed templates are the known cure). No permutation nulls were run on the provenance matrices themselves; the diagonal magnitudes ($|d'|$ up to 1.6) sit far above the null scales measured on identical statistics, but the formal check is future work. The value-stream attribution is causal on one model; the corresponding runs on the 3B and the Llamas are mechanical to add. Ablation measures necessity for linear readability of truth, not for behavior; the gate/value freezes act at the reading position only. The category section uses 60 pairs per relation, no bootstrap error bars, two weak within-axes on Qwen, and one degenerate relation on Llama (declared). The know-rate is a string-match lower bound. The propagate/overwrite reading is a description of measured alignments, not yet a circuit-level mechanism; *why* attention inherits frames and the FFN opposes them is the open question this paper sharpens rather than answers.

16 Reproducibility

All tools import `truth_probe.py` and `anatomy.py` from the companion repository and embed the identity, null, and stability shields described above; models load with safetensors only (`trust_remote_code=False`); the dataset revision is pinned in Sec. 4. The Llama models require accepting the license on Hugging Face and a read token. Representative commands (repeat with `-model` for each model):

```
# behavioral label BEFORE geometry
python behav_check.py --model meta-llama/Llama-3.2-3B --n 200 --seed 0

# peak finding and the axis/probe gap (Table 5)
python truth_probe.py signal --dataset counterfact --max-pairs 250 \
    --model meta-llama/Llama-3.2-3B --baseline --perm 200 \
    --rev-counterfact c945b082ca08d0a8f3ba227fb78404a09614c36e

# consolidate the flip: 5 seeds + permutation null + rotation check (fp32)
python flip_consolidate.py --model meta-llama/Llama-3.2-1B \
    --axis-block 7 --flip-layer 8 --scan-start 3 --scan-end 13

# axis provenance: post+pre rulers, FFN and attention (Tables 2-3)
python axis_provenance.py --model meta-llama/Llama-3.2-3B --peak 9 \
    --scan-start 5 --scan-end 15
python axis_provenance.py --model meta-llama/Llama-3.2-3B --peak 9 \
    --scan-start 5 --scan-end 15 --component attn

# corrected causal ablation with fixed-axis and frozen controls
python ffn_erosion.py ablate --model Qwen/Qwen2.5-3B \
    --band-start 17 --band-end 19 --readout 19

# exact gate/value attribution and causal freezes (Qwen2.5-1.5B)
python swiglu.py attrib
python swiglu.py gatefreeze

# gauge-invariant static circuit norms (weights only, CPU is fine)
python circuits.py --model Qwen/Qwen2.5-3B --dtype bfloat16
```

```
# category geometry, arrangement law, dictionary export
python categories.py --model Qwen/Qwen2.5-3B --peak 16 --write-layer 17 --k-relations 8
python categories.py --model meta-llama/Llama-3.2-3B --peak 9 --write-layer 10 --k-relations 8
python arrangement_law.py
python dictionary_export.py --model Qwen/Qwen2.5-3B --peak 16 --write-layer 17
```

Scripts are in `src/` of the repository (github.com/Francesco-Marhel/TruthProbe); figures `flip_collapse.png`, `provenance_asymmetry.png`, `categories_geometry.png`, `arrangement_law.png` accompany the source. License: CC BY 4.0.

17 Conclusion

Two movements, one instrument, one discipline. The mechanics: attention propagates truth frames it did not write; the FFN opposes the frame of its moment and deposits the material of the next; the genuine post-peak erosion survives every control and is carried by the SwiGLU value stream. The geometry: the single axis is a semantically signed mixture whose arrangement the model does not inherit from the lexical surface but constructs, and constructs the same way across two families, because the arrangement belongs to the knowledge, not to the machine. Between the two movements sits the correction that makes them trustworthy: a pre-registered claim of ours, confirmed on three models, was exposed as the special case of a better law by a control we built against our own instrument, and the paper reports the failure with the same care as the findings, because a result that has survived its owner’s best attack is worth more than one that has never been attacked. The handoff to the next stage is concrete: a measured dictionary, a four-criterion contract for any sparse autoencoder that claims to do better, and a per-head question with its instrument already built.

Acknowledgments

The author thanks Boaz Nadler for detailed comments on the companion manuscript, whose standards of definition and precision this document attempts to apply from the start.

References

- [1] F. K. Vicidomini. *How Much of Truth Fits on a Single Axis? Knowledge-Dependent Dimensionality, Polarity Recovery, and the Anatomy of a Truth Direction in Qwen2.5-1.5B*. Working paper, v2, July 2026. Zenodo DOI 10.5281/zenodo.20938285.
- [2] L. Bürger, F. A. Hamprecht, B. Nadler. *Truth is Universal: Robust Detection of Lies in LLMs*. NeurIPS 2024. arXiv:2407.12831.
- [3] K. Meng, D. Bau, A. Andonian, Y. Belinkov. *Locating and Editing Factual Associations in GPT*. NeurIPS 2022. arXiv:2202.05262.
- [4] N. Elhage et al. *A Mathematical Framework for Transformer Circuits*. Transformer Circuits Thread, Anthropic, 2021.
- [5] *How Transformers Reject Wrong Answers: Rotational Dynamics of Factual Constraint Processing*. Preprint, February 2026.

- [6] *The HeadGenome Taxonomy: A Structural and Causal Map of Attention Head Specialization in Transformers*. Preprint, OpenReview iG4i2pc4wg.
- [7] M. Huh, B. Cheung, T. Wang, P. Isola. *The Platonic Representation Hypothesis*. ICML 2024. arXiv:2405.07987.