Jenkins Task-2

Task Description:

Create a simple script file and push it to repo. Create a project in Jenkins connected to your GitHub repository. When a commit is made to your repo, automatically build must get triggered from Jenkins and the output must be shared to me via email.

Creating an EC2 Instance:

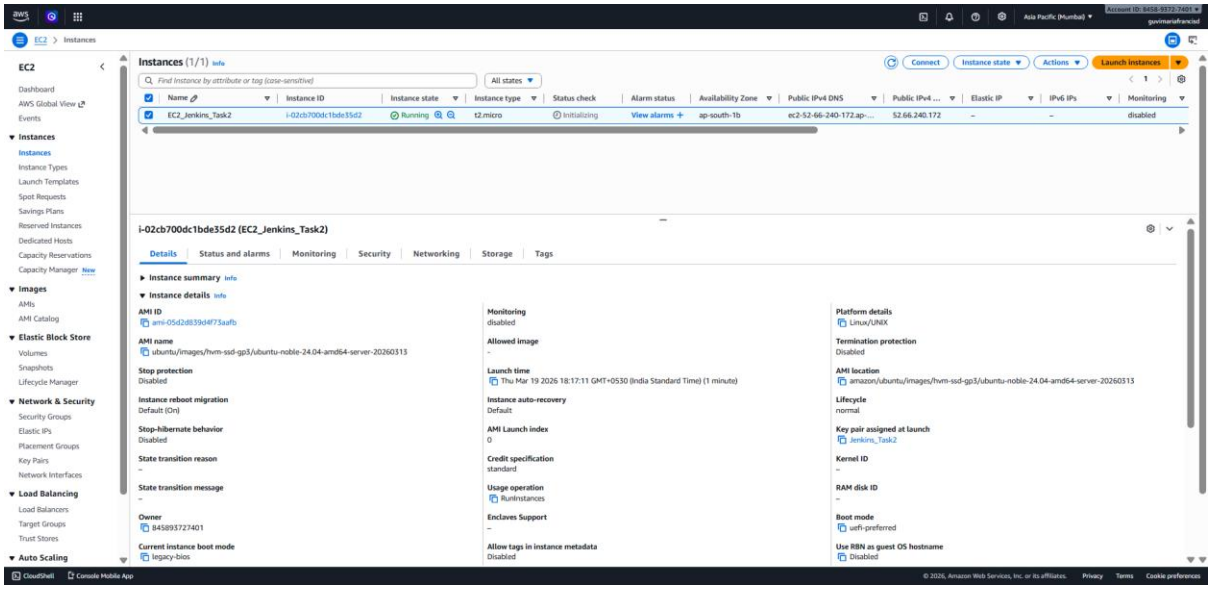

Creating a simple script file:

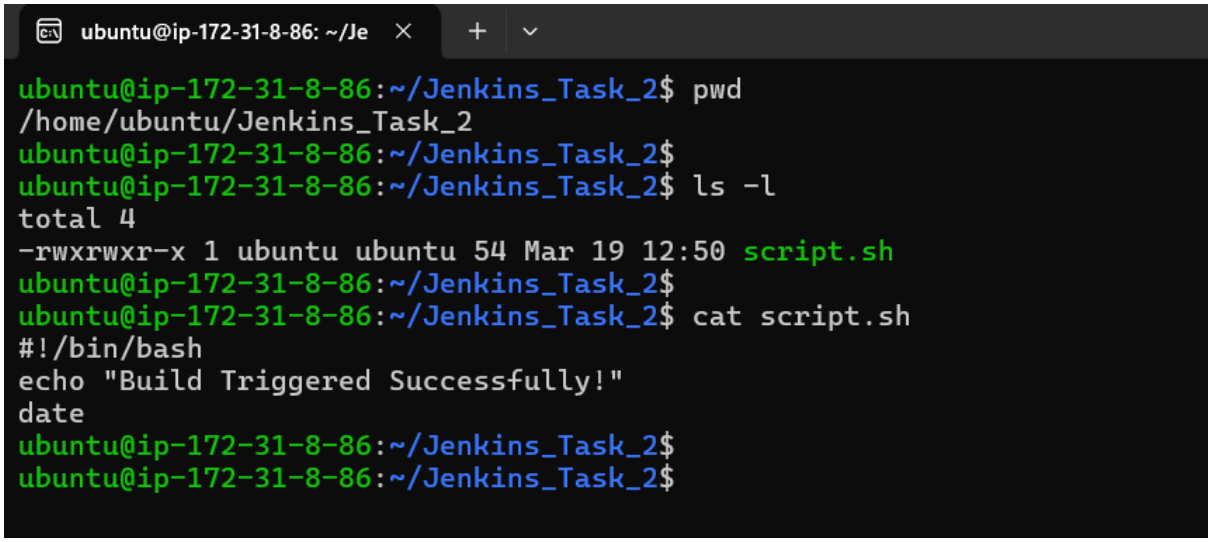

Pushing the Script file into the git repo:

```
ubuntu@ip-172-31-8-86: ~/Je

ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ git status
On branch master

No commits yet

Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:   script.sh

ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ git commit -m "Jenkins_Task_2 Initial Commit"
[master (root-commit) 29a42a9] Jenkins_Task_2 Initial Commit
 Committer: Ubuntu <ubuntu@ip-172-31-8-86.ap-south-1.compute.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

 1 file changed, 3 insertions(+)
 create mode 100755 script.sh
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ git remote add origin https://github.com/Hacker1021993/Jenkins_Task_2.git
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ git push -u origin main
error: src refspec main does not match any
error: failed to push some refs to 'https://github.com/Hacker1021993/Jenkins_Task_2.git'
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ git branch
* master
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ git branch -M main
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ git branch
* main
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ git push -u origin main
Username for 'https://github.com': hacker1021993
Password for 'https://hacker1021993@github.com':
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 301 bytes | 301.00 KiB/s, done.
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/Hacker1021993/Jenkins_Task_2.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$
```

Configuring Jenkins:

```
ubuntu@ip-172-31-8-86: ~/Je

ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ sudo systemctl restart jenkins
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ sudo systemctl status jenkins
● jenkins.service - Jenkins Continuous Integration Server
     Loaded: loaded (/usr/lib/systemd/system/jenkins.service; enabled; preset: enabled)
     Active: active (running) since Thu 2026-03-19 13:13:36 UTC; 2s ago
   Main PID: 6771 (java)
      Tasks: 39 (limit: 1117)
     Memory: 312.7M (peak: 318.7M)
        CPU: 14.734s
     CGroup: /system.slice/jenkins.service
             └─6771 /usr/bin/java -Djava.awt.headless=true -jar /usr/share/java/jenkins.war --webroot=/var/cache/jenkins/war --httpPort=8080

Mar 19 13:13:28 ip-172-31-8-86 jenkins[6771]: [LF]> This may also be found at: /var/lib/jenkins/secrets/initialAdminPassword
Mar 19 13:13:28 ip-172-31-8-86 jenkins[6771]: [LF]>
Mar 19 13:13:28 ip-172-31-8-86 jenkins[6771]: [LF]> *************************************************************
Mar 19 13:13:28 ip-172-31-8-86 jenkins[6771]: [LF]> *************************************************************
Mar 19 13:13:28 ip-172-31-8-86 jenkins[6771]: [LF]> *************************************************************
Mar 19 13:13:36 ip-172-31-8-86 jenkins[6771]: 2026-03-19 13:13:36.206+0000 [id=31]        INFO        jenkins.InitReactorRunner$1#onAttained: Completed initialization
Mar 19 13:13:36 ip-172-31-8-86 jenkins[6771]: 2026-03-19 13:13:36.240+0000 [id=24]        INFO        hudson.lifecycle.Lifecycle#onReady: Jenkins is fully up and running
Mar 19 13:13:36 ip-172-31-8-86 systemd[1]: Started jenkins.service - Jenkins Continuous Integration Server.
Mar 19 13:13:38 ip-172-31-8-86 jenkins[6771]: 2026-03-19 13:13:38.005+0000 [id=48]        INFO        h.m.DownloadService$Downloadable#load: Obtained the updated data file for hudson.task
Mar 19 13:13:38 ip-172-31-8-86 jenkins[6771]: 2026-03-19 13:13:38.009+0000 [id=48]        INFO        hudson.util.Retrier#start: Performed the action check updates server successfully at
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ sudo cat /var/lib/jenkins/secrets/initialAdminPassword
e2d4ea95dba34853b795d42e481dea65
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$
```

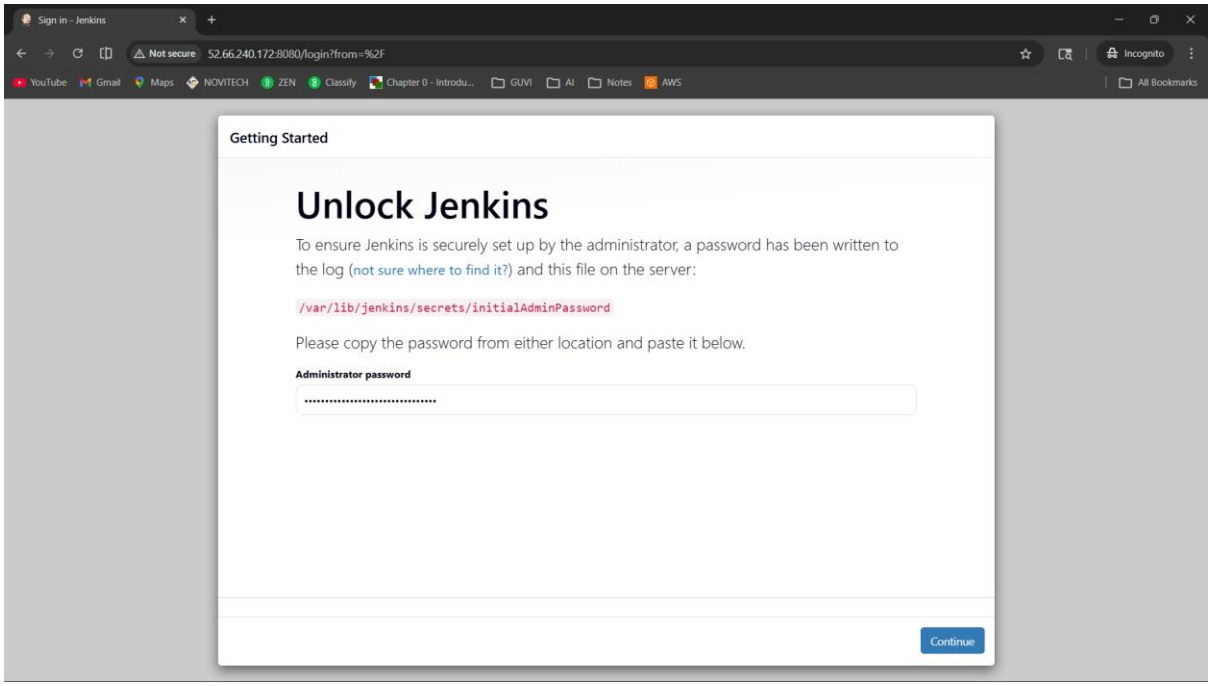
Sign in - Jenkins
Not secure
52.66.240.172:8080/login?from=%2F
Incognito
YouTube
Gmail
Maps
NOVITECH
ZEN
Classify
Chapter 0 - Introdu...
GUVI
AI
Notes
AWS
All Bookmarks
Getting Started
Unlock Jenkins
To ensure Jenkins is securely set up by the administrator, a password has been written to the log (not sure where to find it?) and this file on the server:
/var/lib/jenkins/secrets/initialAdminPassword
Please copy the password from either location and paste it below.
Administrator password
Continue

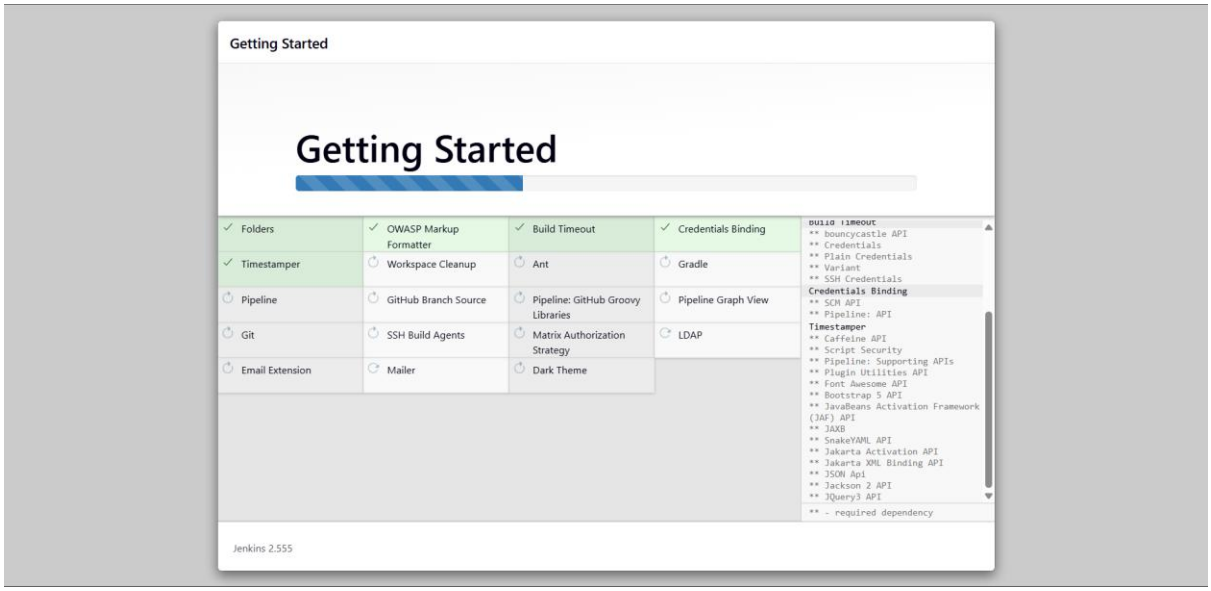
Getting Started
Getting Started
Folders
OWASP Markup Formatter
Build Timeout
Credentials Binding
Timestamper
Workspace Cleanup
Ant
Gradle
Pipeline
GitHub Branch Source
Pipeline: GitHub Groovy Libraries
Pipeline Graph View
Git
SSH Build Agents
Matrix Authorization Strategy
LDAP
Email Extension
Mailer
Dark Theme
Jenkins 2.555

Jenkins

New Item

Build History

Build Queue

No builds in the queue.

Build Executor Status 0/2

Add description

Welcome to Jenkins!

This page is where your Jenkins jobs will be displayed. To get started, you can set up distributed builds or start building a software project.

Start building your software project

Create a job

Set up a distributed build

Set up an agent

Configure a cloud

Learn more about distributed builds

REST API Jenkins 2.555

Jenkins / New Item

New Item

Enter an item name

Project_Jenkins_Task_2

Select an item type

Pipeline
Build, test, and deploy using pipelines. Supports stages, parallel work, and running on multiple agents.

Freestyle project
Classic, general-purpose job type that checks out from up to one SCM, executes build steps serially, followed by post-build steps like archiving artifacts and sending email notifications.

Multi-configuration project
Suitable for projects that need a large number of different configurations, such as testing on multiple environments, platform-specific builds, etc.

Folder
Creates a container that stores nested items in it. Useful for grouping things together. Unlike view, which is just a filter, a folder creates a separate namespace, so you can have multiple things of the same name as long as they are in different folders.

Multibranch Pipeline

OK

Jenkins / Project_Jenkins_Task_2 / Configure

Configure

General
Source Code Management
Triggers
Environment
Build Steps
Post-build Actions

Discard old builds

GitHub project

Project url

https://github.com/Hacker1021993/Jenkins_Task_2.git/

Advanced

This project is parameterized

Throttle builds

Execute concurrent builds if necessary

Advanced

Source Code Management

Connect and manage your code repository to automatically pull the latest code for your builds.

None

Git

Repositories

Repository URL

https://github.com/Hacker1021993/Jenkins_Task_2.git

Credentials

Hacker1021993/****** (GitHub)

Add

Save Apply

Configuring Git Hook and adding it in the build configurations:

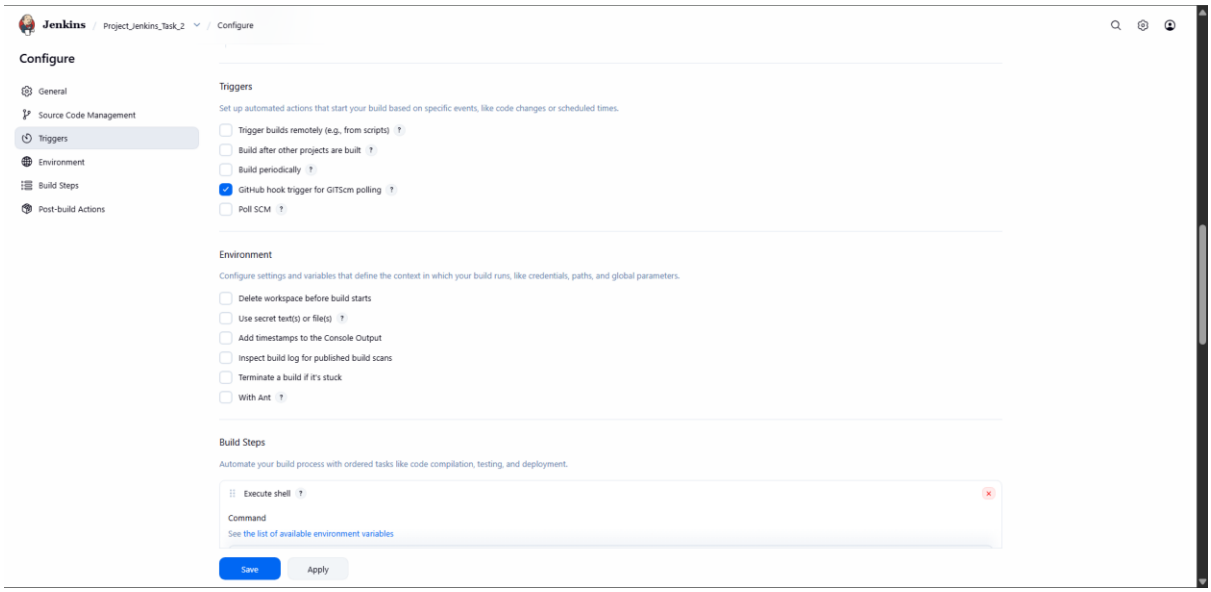

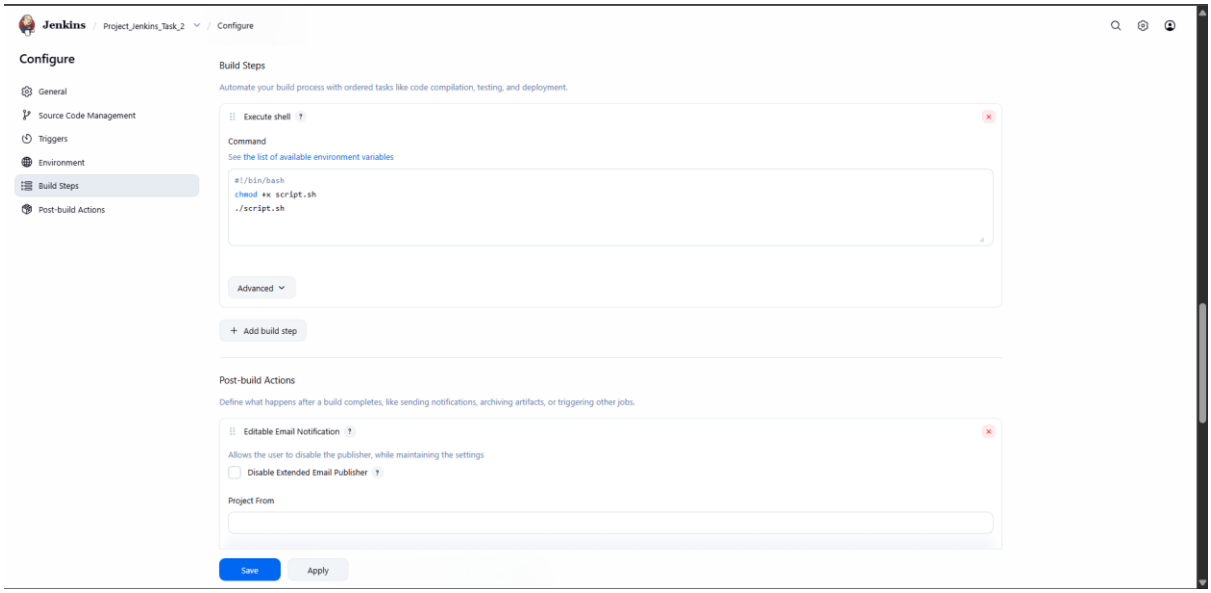

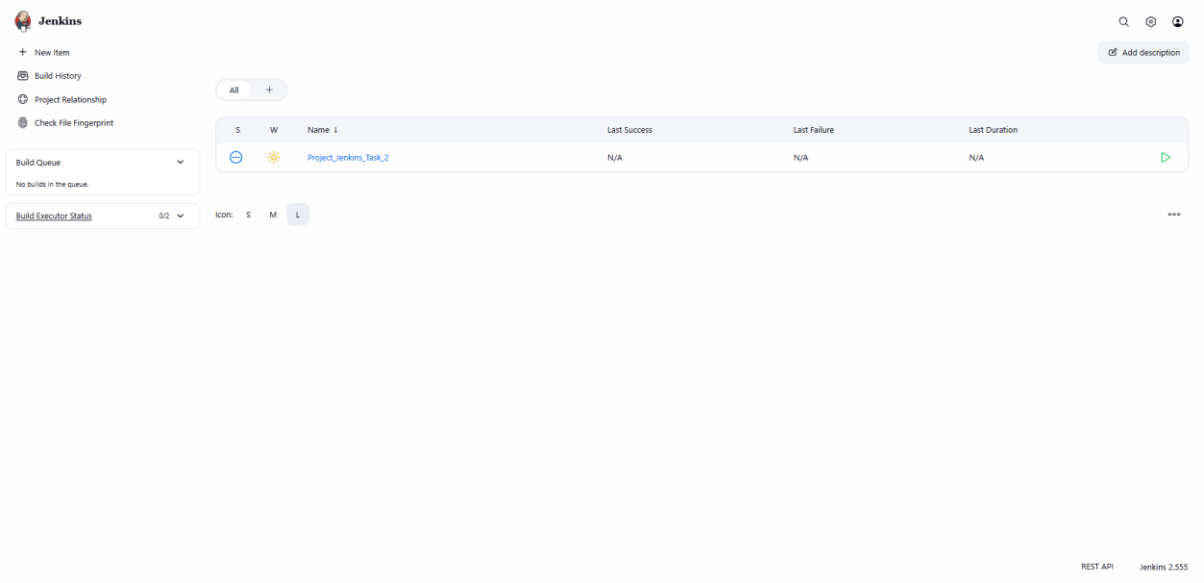

Installed Email Extension Plugin and configured the email configuration:

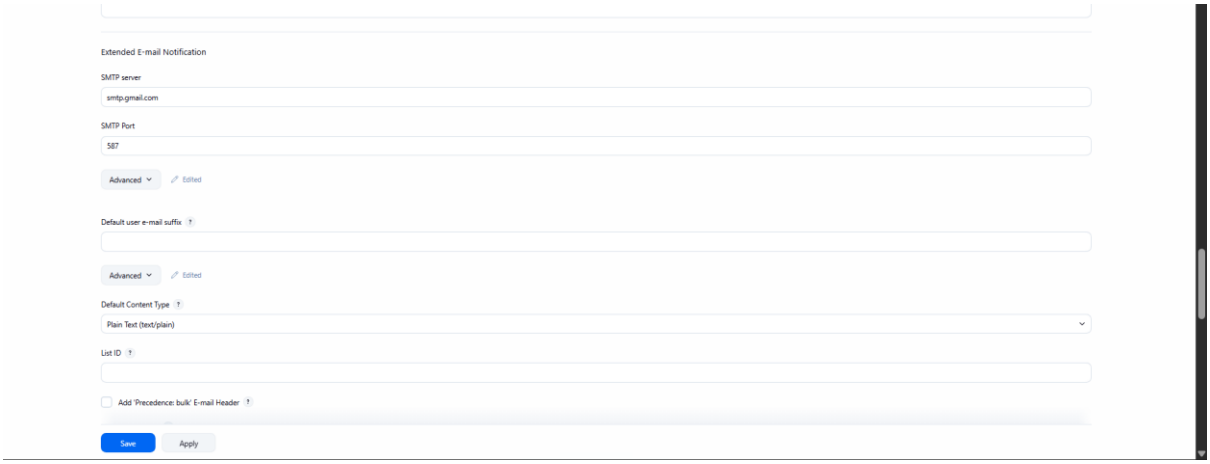

Pushing the files into the Git Repo to trigger the Jenkins job to send mail:

```
ubuntu@ip-172-31-8-86: ~/Je

ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ ls
script.sh
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ cat script.sh
#!/bin/bash
echo "Build Triggered Successfully!"
date
echo "New Change"
echo "New Change 2"
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ git add .
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ git commit -m "First Commit"
On branch main
Your branch is ahead of 'origin/main' by 1 commit.
  (use "git push" to publish your local commits)

nothing to commit, working tree clean
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$ git push
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Compressing objects: 100% (2/2), done.
Writing objects: 100% (3/3), 306 bytes | 306.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/Hacker1021993/Jenkins_Task_2.git
   ec04ee7..df623b0  main -> main
ubuntu@ip-172-31-8-86:~/Jenkins_Task_2$
```
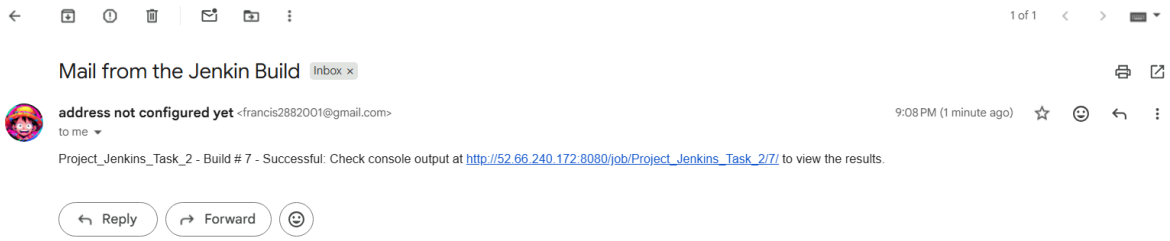
Received mail from Jenkins as the build completed successfully: