Does counted work per input stay flat?

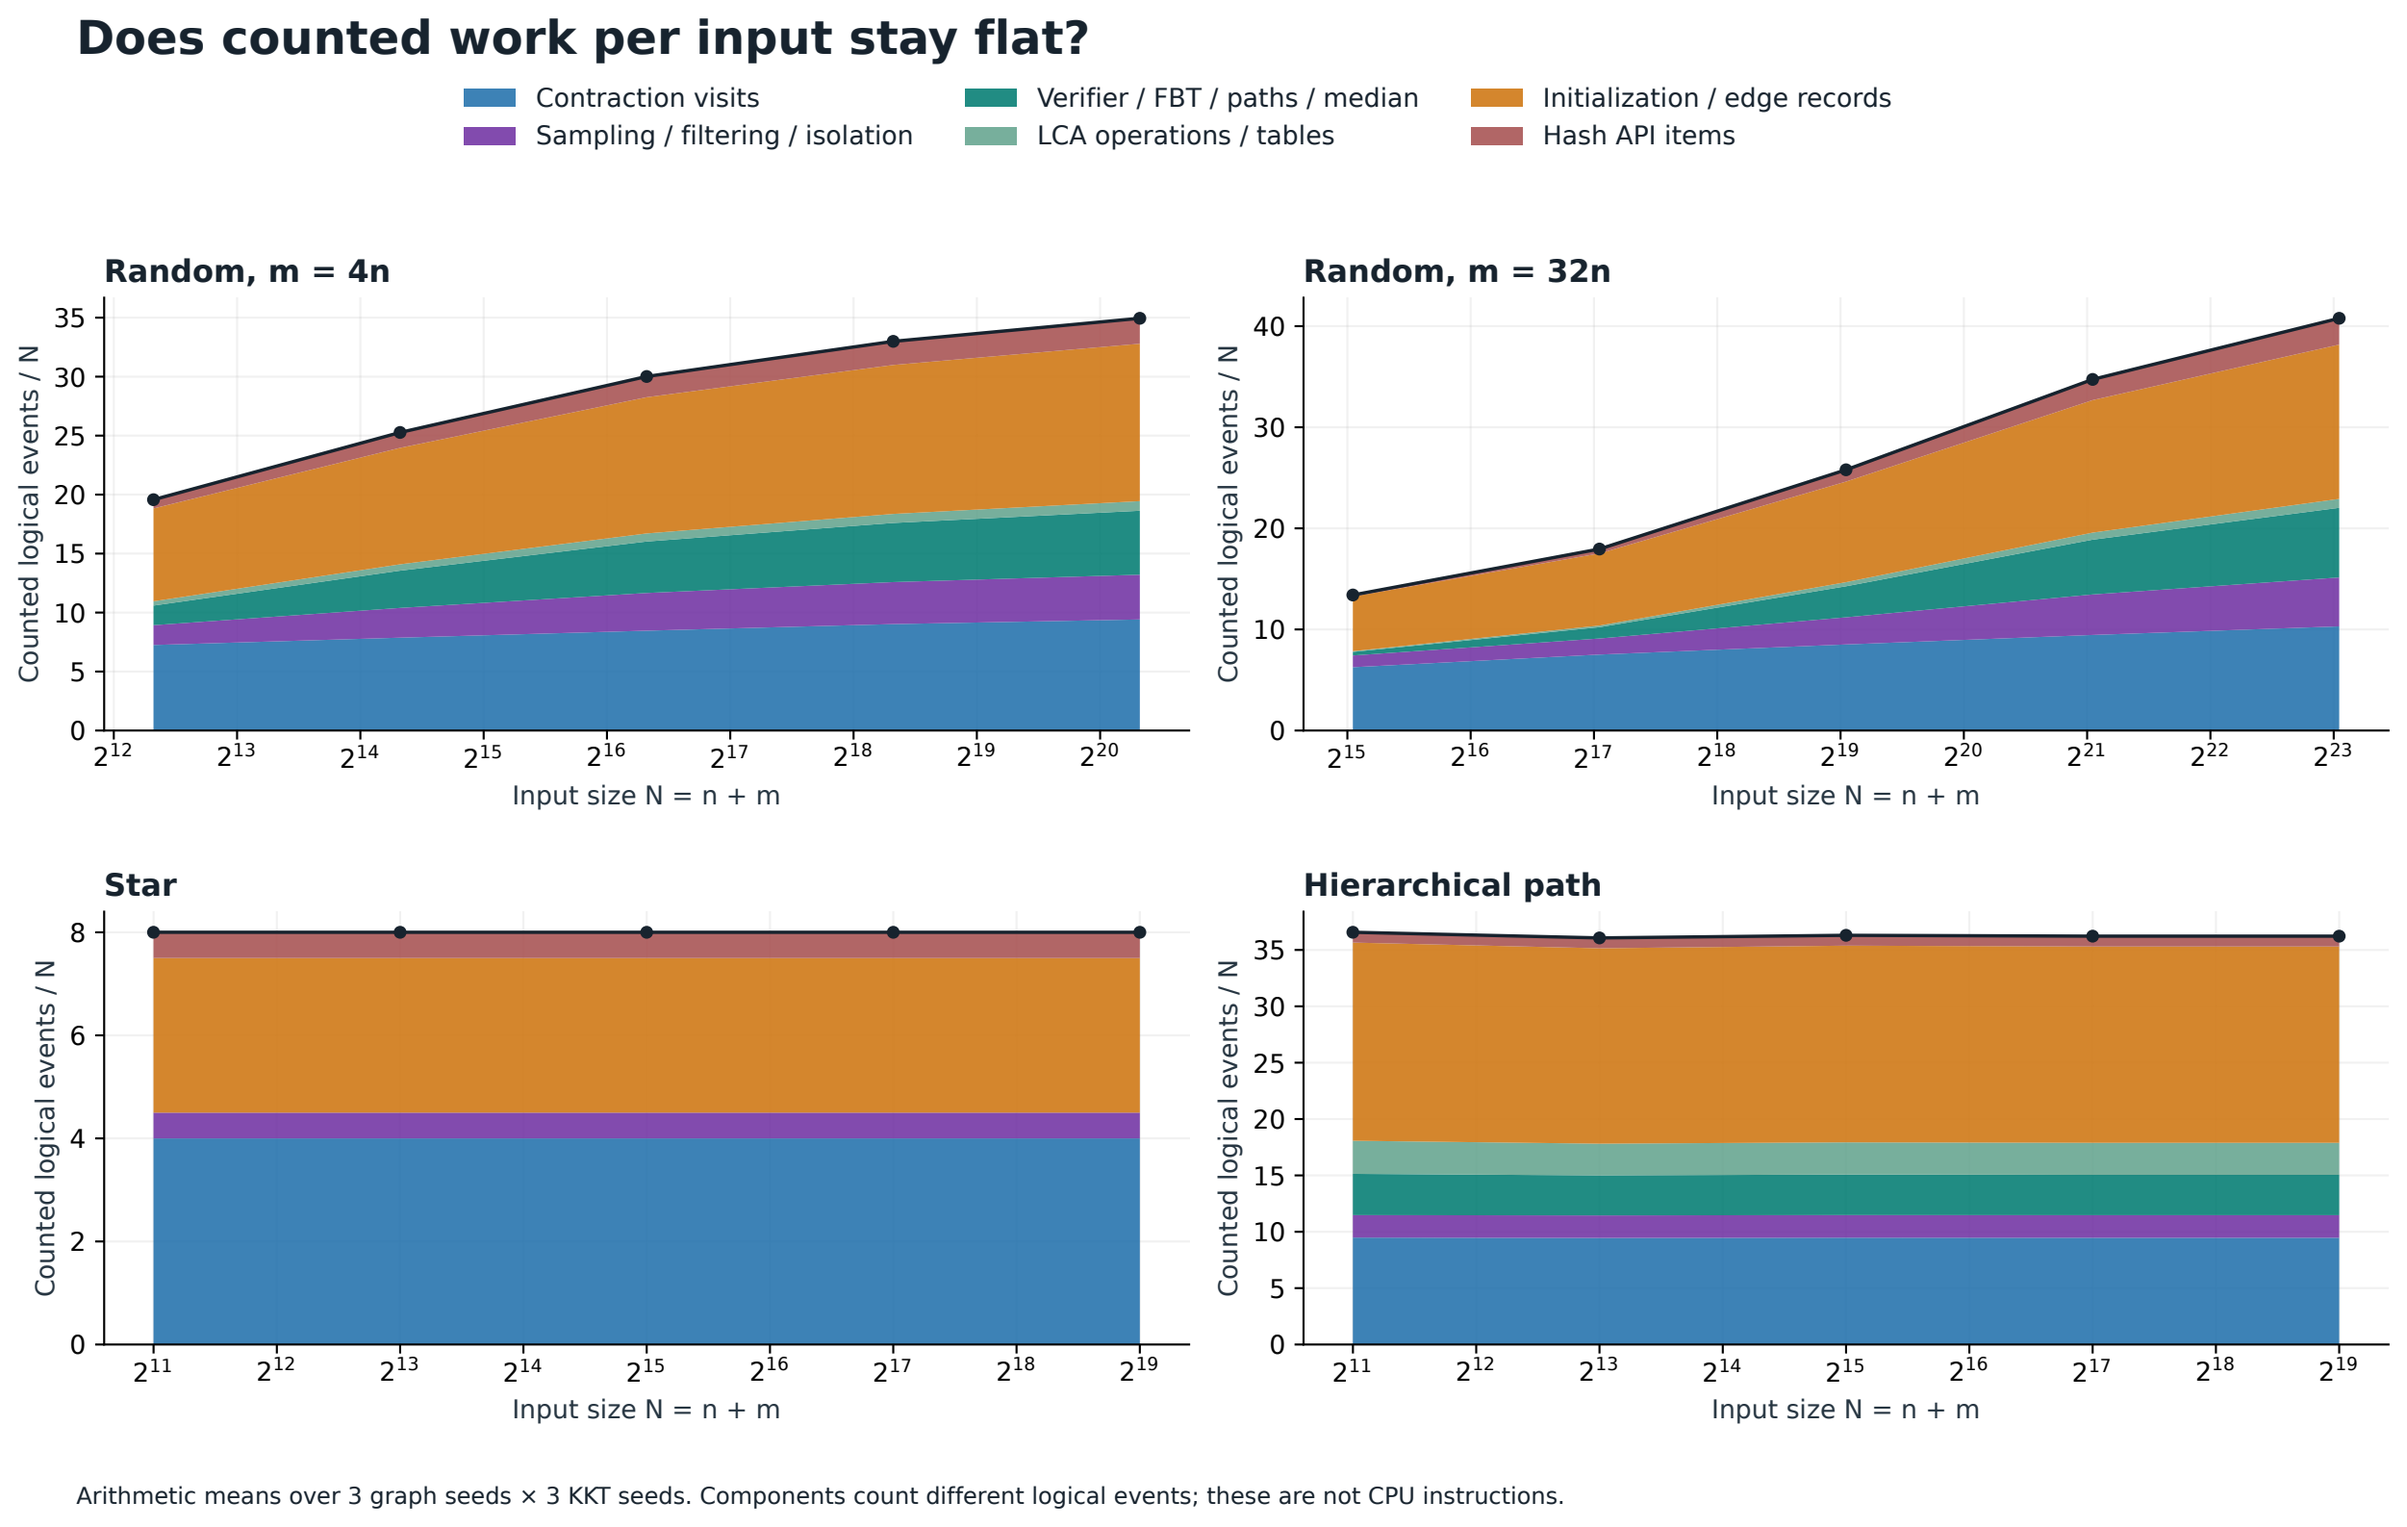

Arithmetic means over 3 graph seeds × 3 KKT seeds. Components count different logical events; these are not CPU instructions.