B interrupted + recovery
Process CPU time (secondary) — separate algorithm runtimes
3 graph seeds × 2 sampling seeds × 5 timed repetitions; 1 checked warmup per algorithm

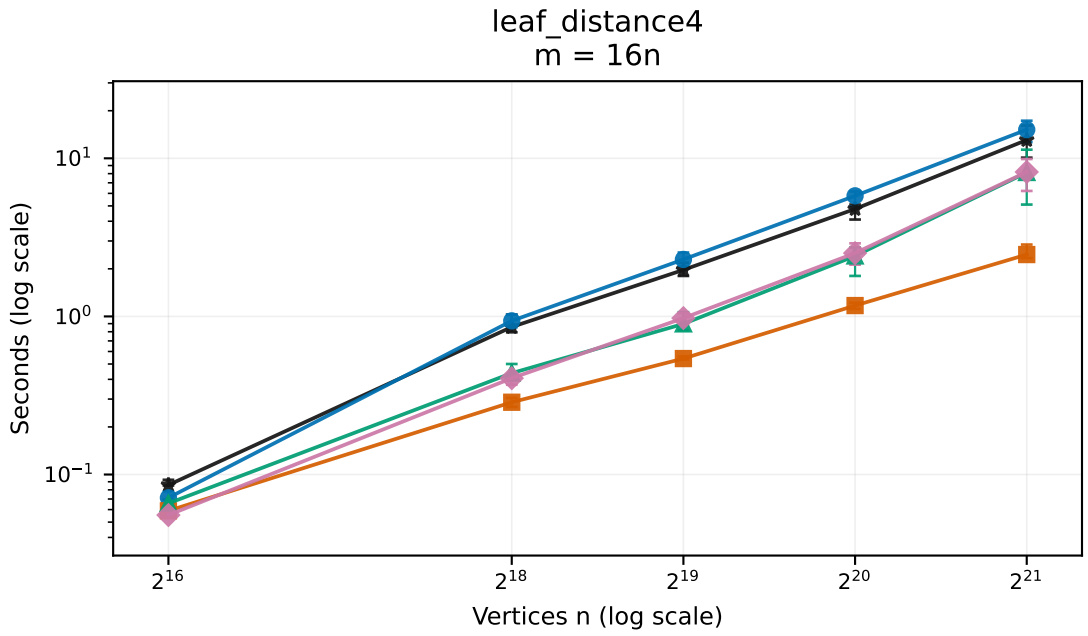

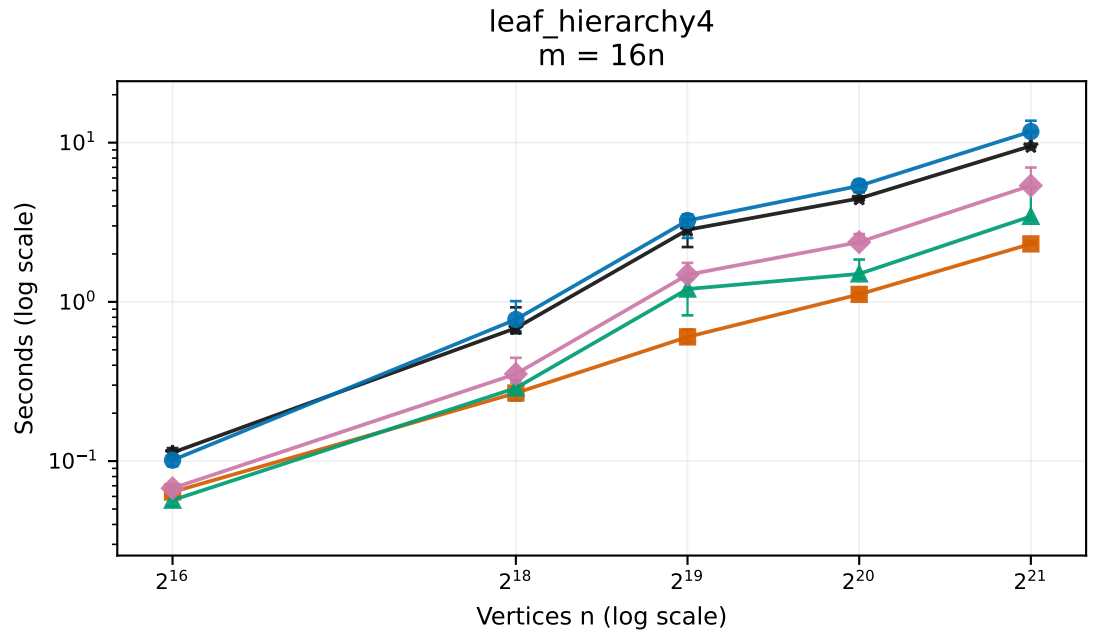

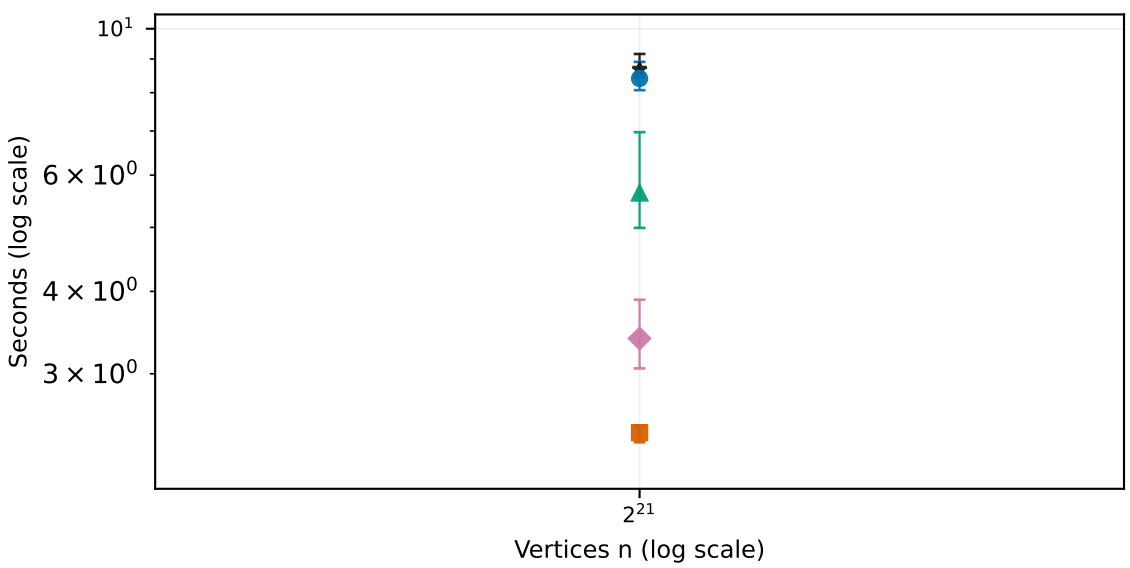

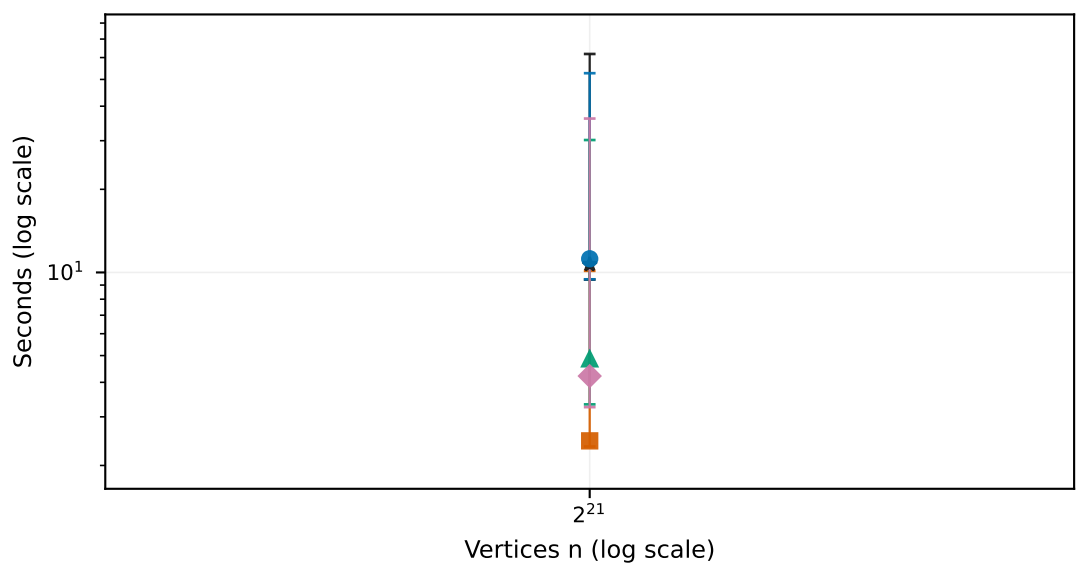

KKT Compacting Borůvka Kruskal Prim Original Borůvka

Markers: hierarchical medians. Bars: full observed individual-trial min–max, not confidence intervals.
Lines connect measured sizes only. Campaigns remain separate; all clock flags and control losses are retained.