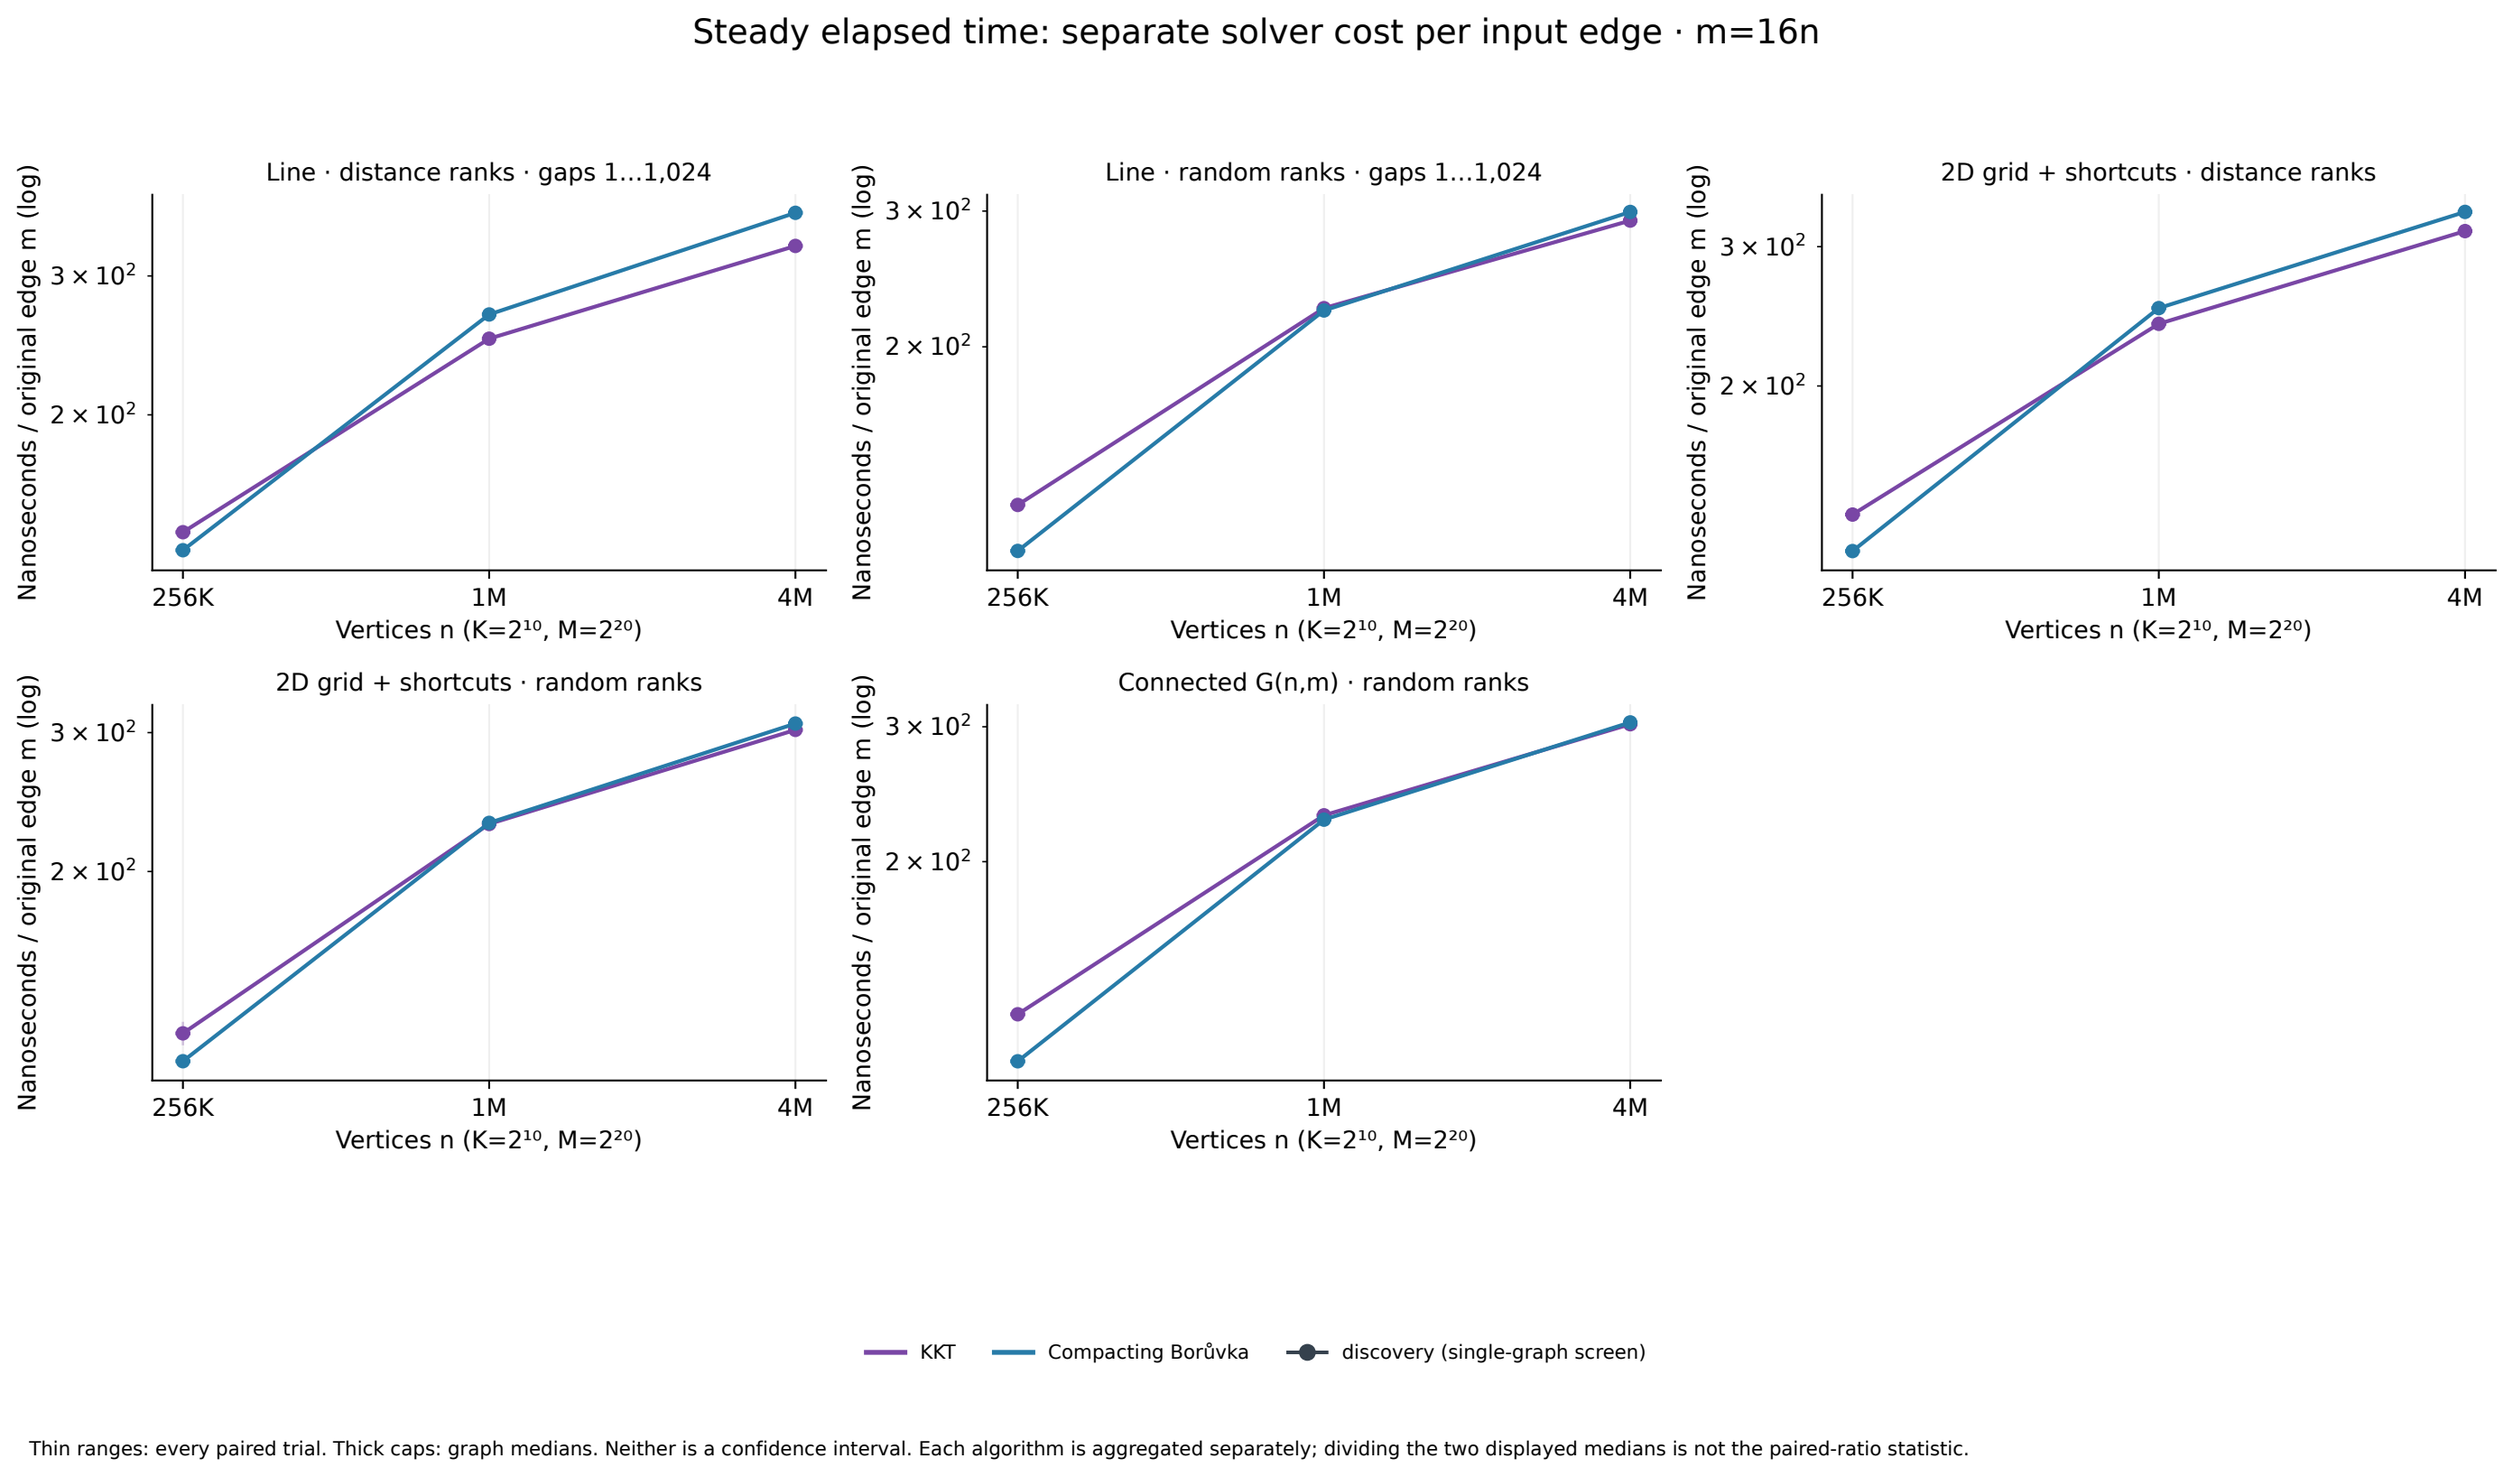
Steady elapsed time: separate solver cost per input edge · m=16n
Line · distance ranks · gaps 1…1,024
Line · random ranks · gaps 1…1,024
2D grid + shortcuts · distance ranks
2D grid + shortcuts · random ranks
Connected G(n,m) · random ranks
Nanoseconds / original edge m (log)
3 × 10²
2 × 10²
256K
1M
4M
Vertices n (K=2¹⁰, M=2²⁰)
KKT
Compacting Borůvka
discovery (single-graph screen)
Thin ranges: every paired trial. Thick caps: graph medians. Neither is a confidence interval. Each algorithm is aggregated separately; dividing the two displayed medians is not the paired-ratio statistic.