search-2026-10-13/attachment-analysis
Process CPU time (secondary) — separate algorithm runtimes
1 graph seed(s) × 1 sampling seed(s) × 5 timed repetitions; 1 checked warmup(s) per algorithm

leaf_random16
m = 2n

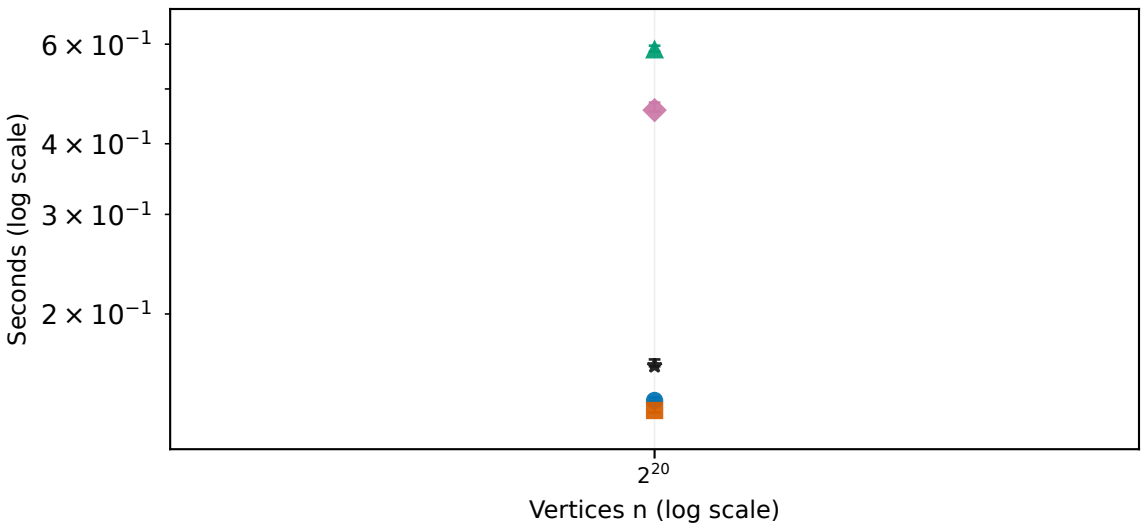

leaf_random16
m = 16n

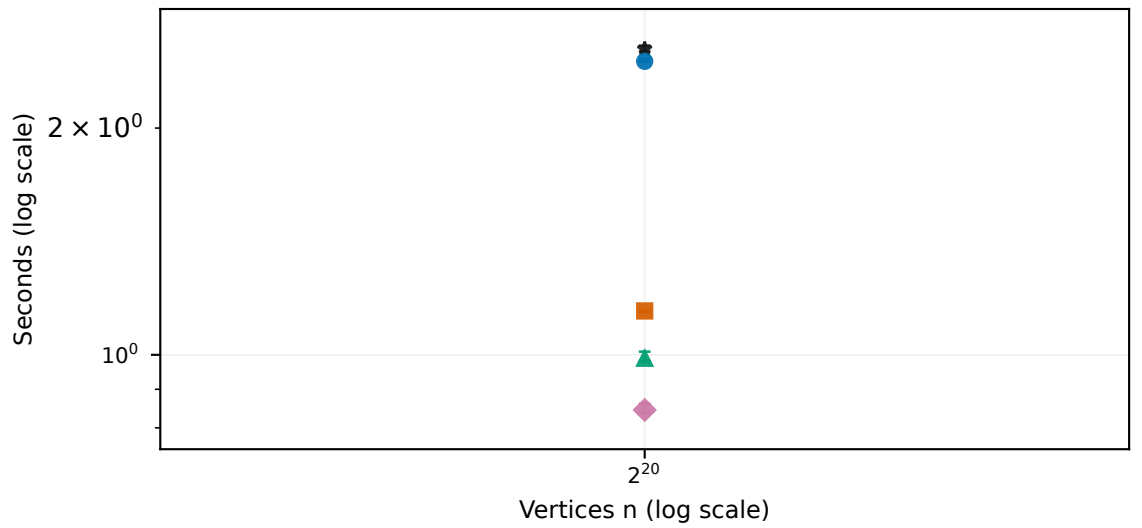

leaf_random4
m = 2n

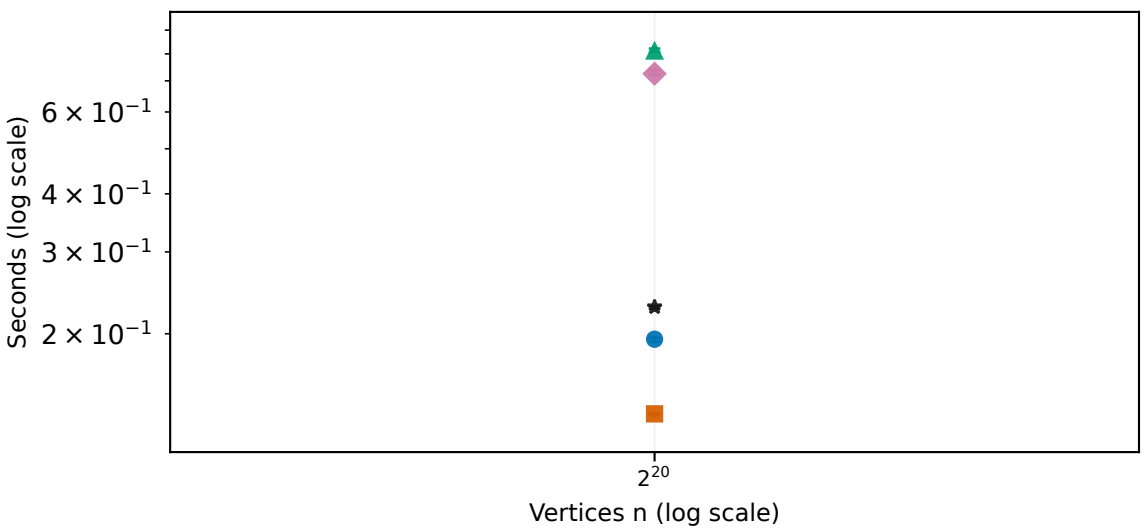

leaf_random4
m = 16n

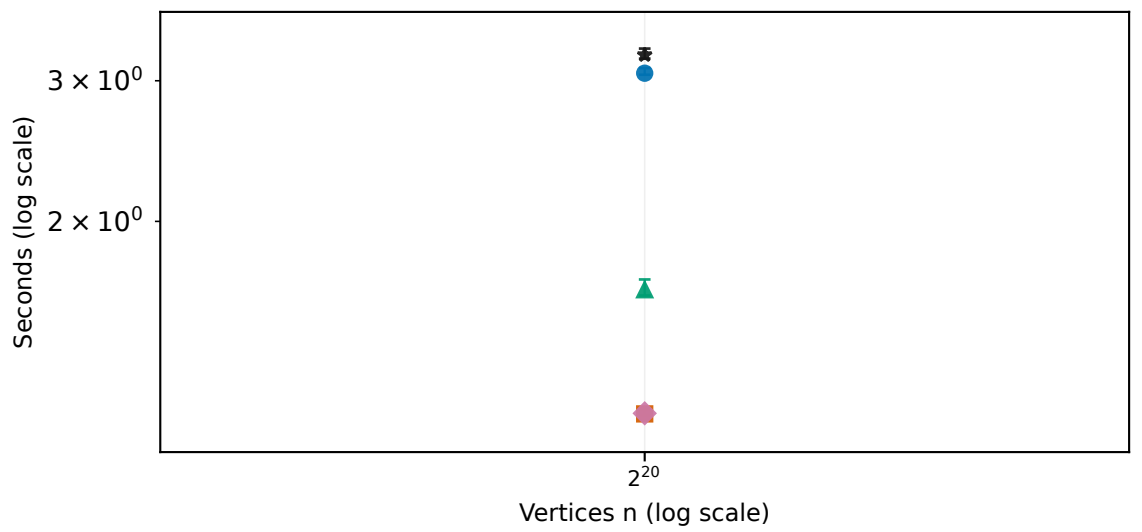

leaf_shuffled16
m = 2n

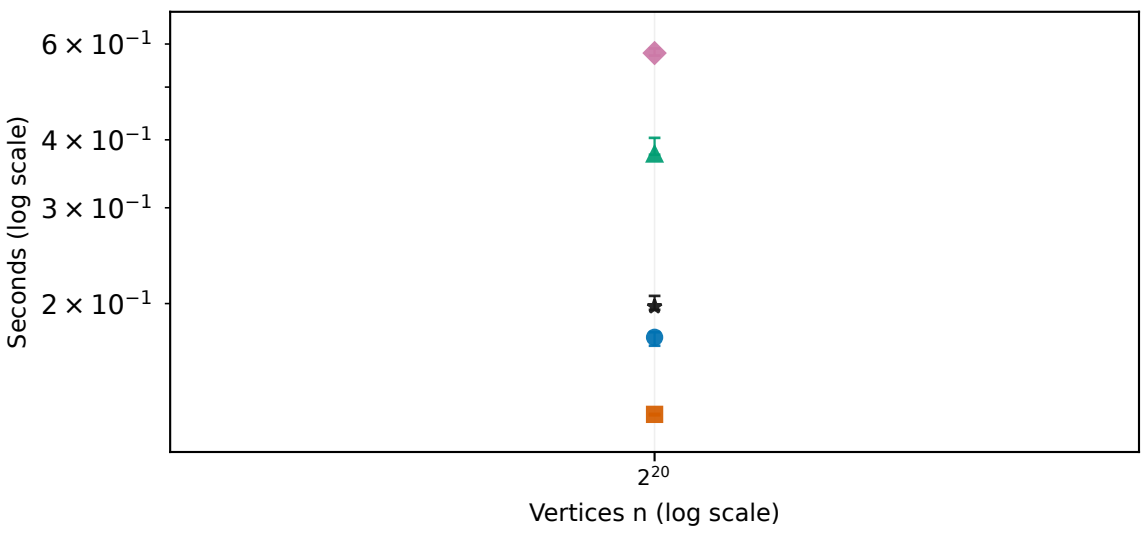

leaf_shuffled16
m = 16n

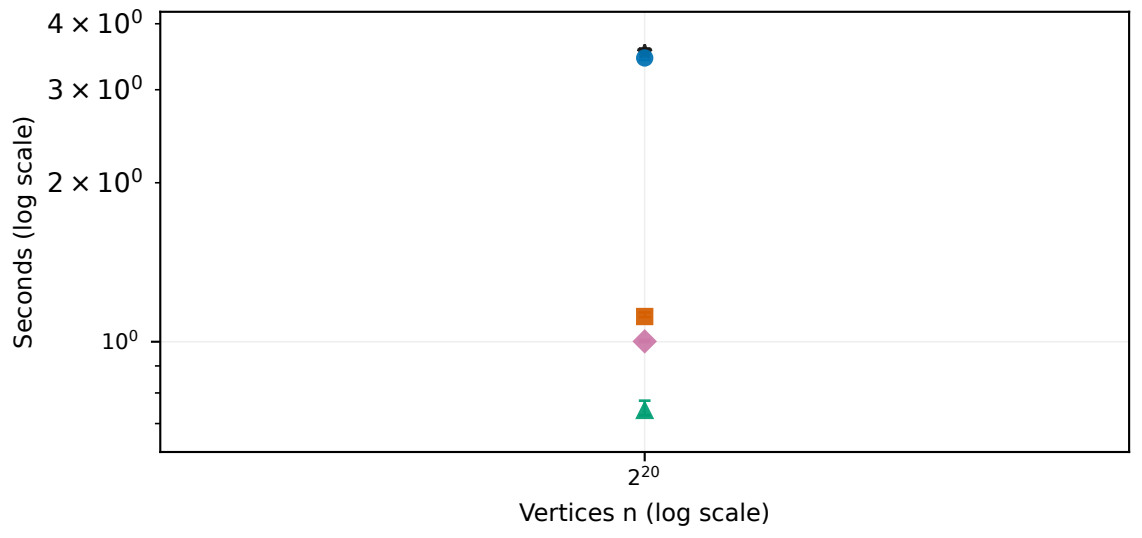

KKT
Compacting Borůvka
Kruskal
Prim
Original Borůvka

Markers: hierarchical medians. Error bars: observed individual-trial min–max, not confidence intervals.
Lines only connect measured sizes; no smoothing or inferred crossover. Campaigns remain separate.