


Topic 6.7

6.7: V-tables and V-ptrs for Implementing Virtual Functions

For each class which has a virtual function, the executable code will contain a v-table, which contains a list of the virtual functions for that class and where they actually reside. Each class variable with a virtual function contains a v-ptr to the v-table for the class.

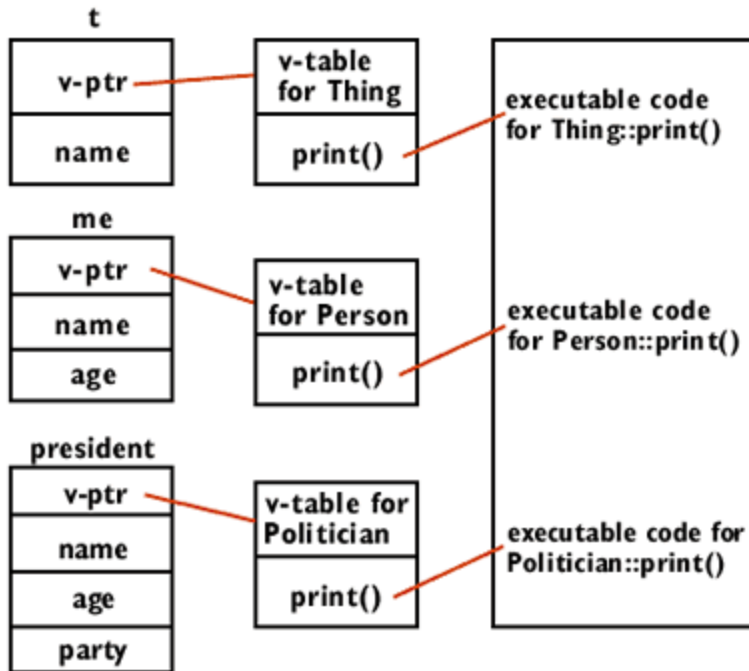


If a virtual function is not redefined in a class, its V-table entry for that function points to the corresponding function in the nearest ancestor class that contains such a function.

For example:

```
classDPerson : public Person
{
    // Don't redefine void print();
}

Thing      t;
Person     me;
Dperson    anyone;
Politician president;
```

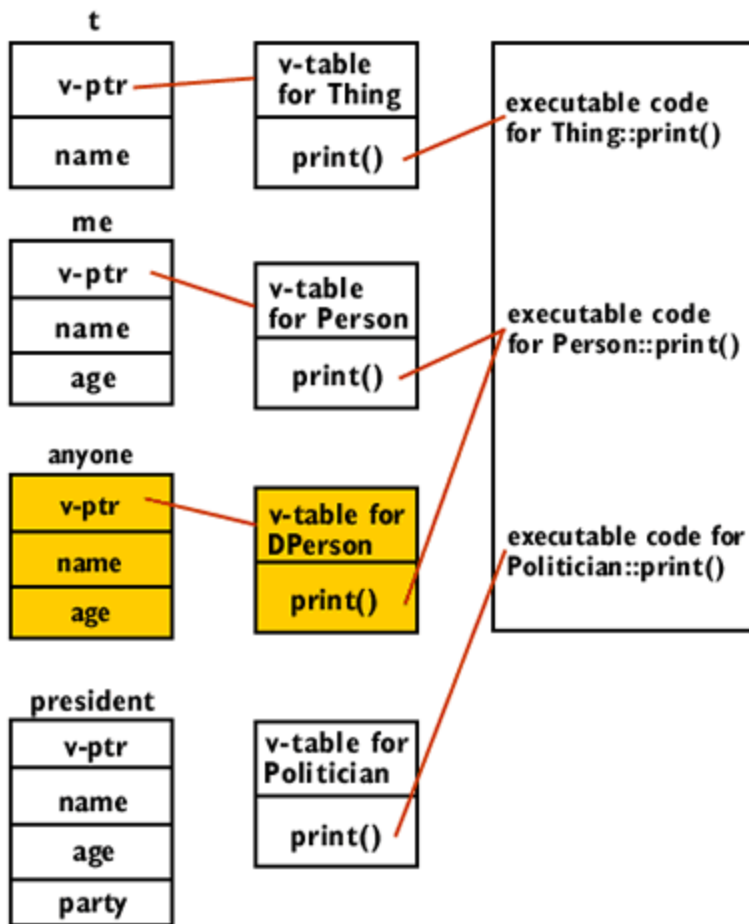

Topic 6.8 (<https://onlinelearning.berkeley.edu/courses/2291660/pages/topic-6-dot-8>)