

# Exploring type-directed, test-driven development

A case study using FizzBuzz

Franklin Chen

<http://franklinchen.com/>

June 7, 2014

Pittsburgh TechFest 2014

# Outline

- 1 Introduction
- 2 Original FizzBuzz problem
- 3 FizzBuzz 2: user configuration
- 4 FizzBuzz 3: FizzBuzzPop and beyond
- 5 Parallel FizzBuzz
- 6 Conclusion

# Outline

- 1 Introduction
- 2 Original FizzBuzz problem
- 3 FizzBuzz 2: user configuration
- 4 FizzBuzz 3: FizzBuzzPop and beyond
- 5 Parallel FizzBuzz
- 6 Conclusion

# Goals of this presentation

- Give a taste of a **practical** software development **process** that is:
  - ▶ **test**-driven
  - ▶ **type**-directed
- Show everything for real (using Scala):
  - ▶ project build process
  - ▶ testing frameworks
  - ▶ all the code
- Use FizzBuzz because:
  - ▶ problem: easy to understand
  - ▶ modifications: easy to understand
  - ▶ fun!
- Encourage you to explore a modern typed language
  - ▶ This Monday, Apple ditched Objective C for its new language **Swift**!



- ▶ Complete Swift code will shown at the end; **looks a lot like Scala**.

# Test-driven development (TDD)

- Think.
- Write a test that **fails**.
- Write code until test **succeeds**.
- Repeat, and **refactor** as needed.

Is TDD dead?

Short answer: No.

# Type systems

## What is a type system?

A **syntactic** method to **prove** that bad things can't happen.

## “Debating” types “versus” tests?

- Let's use both types and tests!
- But: use a **good** type system, not a bad one.

## Some decent practical typed languages

- **OCaml**: 20 years old
- **Haskell**: 20 years old
- **Scala**: 10 years old
- **Swift**: 5 days old
- **Rust** (still in progress)

# Outline

- 1 Introduction
- 2 **Original FizzBuzz problem**
- 3 FizzBuzz 2: user configuration
- 4 FizzBuzz 3: FizzBuzzPop and beyond
- 5 Parallel FizzBuzz
- 6 Conclusion

# Original FizzBuzz problem

## FizzBuzz defined

Write a program that prints the numbers from 1 to 100.

But for multiples of three, print “Fizz” instead of the number.

And for the multiples of five, print “Buzz”.

For numbers which are multiples of both three and five, print “FizzBuzz”.



## Starter code: main driver



Scala: a modern **object-oriented** and **functional** language.

```
object Main extends App {  
  // Will not compile yet!  
  runToSeq(1, 100).foreach(println)  
}
```

- Type-directed design: separate out effects (such as printing to terminal) from the real work.
- Type-directed feedback: compilation fails when something is not implemented yet.

# The joys of continuous compilation and testing



**SBT**: build tool supporting Scala, Java...

## Winning features

- Source file changes trigger smart recompilation!
- Source file changes trigger rerun of the tests that depend on changed code!

```
$ sbt
> ~testQuick
[info] Compiling 1 Scala source to ...
[error] ...Main.scala:16: not found: value runToSeq
[error]     runToSeq(1, 100) foreach println
[error]     ^
[error] one error found
```

## Write type-directed stub

```
object Main extends App {  
  runToSeq(1, 100).foreach(println)  
  
  def runToSeq(start: Int, end: Int): Seq[String] = {  
    ???  
  }  
}
```

### Write wanted type signature

??? is convenient for stubbing.

- In Scala standard library
- Just performs: `throw new NotImplementedError`

# Write acceptance test (simplified)

*specs*<sup>2</sup>

Specs2: a fine testing framework for Scala, Java...

```
class MainSpec extends Specification { def is = s2"""
  ${Main.runToSeq(1, 16) == 'strings for 1 to 16'}
  """

  val 'strings for 1 to 16' = Seq(
    "1", "2", "Fizz", "4", "Buzz", "Fizz",
    "7", "8", "Fizz", "Buzz", "11", "Fizz",
    "13", "14", "FizzBuzz", "16"
  )
}
```

# Test passes type check, but fails

Incremental compilation/testing kicks in:


```
Waiting for source changes... (press enter to interrupt)
[info] MainSpec
[info]   x Main.runToSeq(1, 16) ==== 'strings for 1 to 16
[error]   an implementation is missing (Main.scala:19)
```

## Outside-in: for a FizzBuzz unit

Types are shapes to assemble logically.

```
def runToSeq(start: Int, end: Int): Seq[String] = {  
  start.to(end).map(FizzBuzz.evaluate)  
}
```

- `start.to(end): Seq[Int]`, where `Seq[_]` is a **type constructor** that, given a type `A`, returns a type of `Seq[A]`.
- For any value of type `Seq[A]`, `map: (A => B) => Seq[B]`.

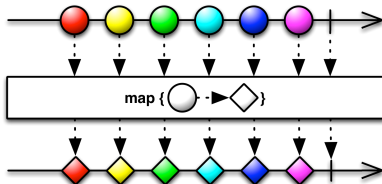

- Therefore: need to implement function  
`FizzBuzz.evaluate: Int => String`.

# Implement new FizzBuzz module

A failing acceptance test drives **discovery** of

- A **unit**, **FizzBuzz**
- A function with a particular type, **Int => String**

```
object FizzBuzz {  
  type Evaluator = Int => String  
  
  val evaluate: Evaluator = { i =>  
    ???  
  }  
}
```

**Types** are better than **comments** as **documentation**!

Comments are not checkable, unlike types and tests.

## First part of **unit test**: example-based

Manually write some **examples**.

```
class FizzBuzzSpec extends Specification { def is = s2"""
  ${FizzBuzz.evaluate(15) ==== "FizzBuzz"}
  ${FizzBuzz.evaluate(20) ==== "Buzz"}
  ${FizzBuzz.evaluate(6)  ==== "Fizz"}
  ${FizzBuzz.evaluate(17) ==== "17"}
  ""
}
```



# The joy of property-based tests



ScalaCheck: a framework for writing **property-based** tests.

```
class FizzBuzzSpec extends Specification
  with ScalaCheck { def is = s2"""
    ${'Multiple of both 3 and 5 => "FizzBuzz"}' """
    def 'Multiple of both 3 and 5 => "FizzBuzz"' =
      prop { i: Int => (i % 3 == 0 && i % 5 == 0) ==>
        { FizzBuzz.evaluate(i) == "FizzBuzz" }
      }
  }
```

## Winning features

- Auto-generates **random** tests for each property (100 by default).
- **Type-driven**: here, generates random **Int** values.

## Property-based tests (continued)

The other three properties of interest:

```
def 'Multiple of only 3 => "Fizz"' =  
  prop { i: Int => (i % 3 == 0 && i % 5 != 0) ==>  
    { FizzBuzz.evaluate(i) ==== "Fizz" }  
}
```

```
def 'Multiple of only 5 => "Buzz"' =  
  prop { i: Int => (i % 3 != 0 && i % 5 == 0) ==>  
    { FizzBuzz.evaluate(i) ==== "Buzz" }  
}
```

```
def 'Not a multiple of either 3 or 5 => number' =  
  prop { i: Int => (i % 3 != 0 && i % 5 != 0) ==>  
    { FizzBuzz.evaluate(i) ==== i.toString }  
}
```

## A buggy and ugly solution

```
// Buggy and ugly!
val evaluate: Evaluator = { i =>
  if (i % 3 == 0)
    "Fizz"
  else if (i % 5 == 0)
    "Buzz"
  else if (i % 3 == 0 && i % 5 == 0)
    "FizzBuzz"
  else
    i.toString
}
```

```
[info] FizzBuzzSpec
[info]   x FizzBuzz.evaluate(15) ==== "FizzBuzz"
[error]   'Fizz' is not equal to 'FizzBuzz'
        (FizzBuzzSpec.scala:14)
```



# Pattern matching organizes information

```
val evaluate: Evaluator = { i =>
  (i % 3 == 0, i % 5 == 0) match {
    case (true,  false) => "Fizz"
    case (false, true)  => "Buzz"
    case (true,  true)  => "FizzBuzz"
    case (false, false) => i.toString
  }
}
```

## Winning features

- Visual **beauty** and clarity.
- No duplicated conditionals.
- No ordering dependency.
- **Type checker** verifies **full coverage** of cases.

## Example of non-exhaustive pattern matching

```
val evaluate: Evaluator = { i =>
  (i % 3 == 0, i % 5 == 0) match {
    case (true,  false) => "Fizz"
    case (false, true)  => "Buzz"
    case (true,  true)  => "FizzBuzz"
    // case (false, false) => ???
  }
}
```

```
[warn] ...FizzBuzz.scala:46: match may not be exhaustive.
[warn] It would fail on the following input: (false, false)
[warn]      (i % 3 == 0, i % 5 == 0) match {
[warn]      ^
```

# Acceptance test passes

```
[info] MainSpec  
[info]   + Main.runToSeq(1, 16) ==== 'strings for 1 to 16
```

Done?

No. Client wants more features.

# Outline

- 1 Introduction
- 2 Original FizzBuzz problem
- 3 **FizzBuzz 2: user configuration**
- 4 FizzBuzz 3: FizzBuzzPop and beyond
- 5 Parallel FizzBuzz
- 6 Conclusion



# Adding new features

## Client wants to:

- Choose two **arbitrary** divisors in place of 3 and 5
  - ▶ such as 4 and 7
- Choose other **arbitrary** words in place of "Fizz" and "Buzz"
  - ▶ such as "Moo" and "Quack"

# Type-driven refactoring

Types mean: refactoring is much more fun!

- Add **new** tests.
- Change types and code: to make new tests **type check**.
- **Refactor** original code and tests: use new APIs.
- Keep passing the **old** tests.
- Delay writing code for new features.

## More features means more types

Change `FizzBuzz.evaluate` to `Defaults.fizzBuzzer`:

```
def runToSeq(start: Int, end: Int): Seq[String] = {  
  start.to(end).map(Defaults.fizzBuzzer)  
}
```

Add new types to `FizzBuzz` module:

```
type Evaluator = Int => String  
case class Config(pair1: (Int, String),  
                  pair2: (Int, String))  
type Compiler = Config => Evaluator  
  
val compile: Compiler = {  
  case Config((d1, w1), (d2, w2)) =>  
    { i =>  
      ???  
    }  
}
```

## Extract original default configuration

```
object Defaults {  
  val fizzBuzzConfig: Config =  
    Config(3 -> "Fizz", 5 -> "Buzz")  
  
  val fizzBuzz: Evaluator =  
    FizzBuzz.compile(fizzBuzzConfig)  
  
  // Useful to keep old implementation  
  val oldFizzBuzz: Evaluator = { i =>  
    (i % 3 == 0, i % 5 == 0) match {  
      case (true, false) => "Fizz"  
      case (false, true)  => "Buzz"  
      case (true, true)   => "FizzBuzz"  
      case (false, false) => i.toString  
    }  
  }  
}
```

## More types means more tests

Write new property-based test over **arbitrary** user configurations:

```
val arbitraryConfig: Arbitrary[Config] = Arbitrary {  
  for {  
    (d1, d2, w1, w2) <-  
      arbitrary[(Int, Int, String, String)]  
  } yield Config(d1 -> w1, d2 -> w2)  
}  
  
def 'Arbitrary pair of divisors: divisible by first' =  
  arbitraryConfig { config: Config =>  
    val evaluate = FizzBuzz.compile(config)  
    val Config((d1, w1), (d2, _)) = config  
    prop { i: Int => (i % d1 == 0 && i % d2 != 0) ==>  
      { evaluate(i) ==== w1 }  
    }  
  }
```

## Problem: coarse Config type

```
[info]    ! Arbitrary divisor/word pair fizzBuzzers
[error] ArithmeticException: :
        A counter-example is 'Config((0,),(0,))':
        java.lang.ArithmeticException: / by zero
        (after 0 try) (FizzBuzzSpec.scala:58)
```

- 0 as a divisor **crashes!**
- We discovered client's **underspecification**.
- Client says: meant to allow only divisors within 2 and 100.

We need to:

- Add runtime **validation** when **constructing Config**.
- Refine **Config** random generator.

## Add (runtime) validation

**Runtime** precondition contract: Scala's `require` (throws exception on failure):

```
val DIVISOR_MIN = 2; val DIVISOR_MAX = 100

def validatePair(pair: (Int, String)) = pair match {
  case (d, _) =>
    require(d >= DIVISOR_MIN,
      s"divisor $d must be >= $DIVISOR_MIN")
    require(d <= DIVISOR_MAX,
      s"divisor $d must be <= $DIVISOR_MAX")
}

case class Config(pair1: (Int, String),
  pair2: (Int, String)) {
  validatePair(pair1); validatePair(pair2)
}
```

# A note on exceptions and types

- Exceptions are evil because they escape the type system.
- In real life, I prefer to use a principled type-based validation system, such as Scalaz.
- Note: Swift does not have exceptions, so expect some type-based libraries to emerge!



# Improve Config random generator

```
val arbitraryConfig: Arbitrary[Config] =  
  Arbitrary {  
    for {  
      d1 <- choose(DIVISOR_MIN, DIVISOR_MAX)  
      d2 <- choose(DIVISOR_MIN, DIVISOR_MAX)  
      w1 <- arbitrary[String]  
      w2 <- arbitrary[String]  
    } yield Config(d1 -> w1, d2 -> w2)  
  }
```

## New test runs further, stills fails

Refactor old code to `FizzBuzz.compile`, to pass old tests and new test.

```
val compile: Compiler = {  
  case Config((d1, w1), (d2, w2)) =>  
    // Precompute, hence "compiler".  
    val w = w1 + w2  
    // Return an Evaluator.  
    { i =>  
      (i % d1 == 0, i % d2 == 0) match {  
        case (true,  false) => w1  
        case (false, true)  => w2  
        case (true,  true)  => w  
        case (false, false) => i.toString  
      }  
    }  
}
```

# Outline

- 1 Introduction
- 2 Original FizzBuzz problem
- 3 FizzBuzz 2: user configuration
- 4 FizzBuzz 3: FizzBuzzPop and beyond
- 5 Parallel FizzBuzz
- 6 Conclusion

# Generalizing to more than two divisors

## Client wants FizzBuzzPop!

- Given three divisors (such as 3, 5, 7).
- Given three words (such as "Fizz", "Buzz", "Pop").
- Example: 21 should output "FizzPop".

## More features means more tests

Write new tests for new `Defaults.fizzBuzzPopper`:

```
def is = s2"""
${Defaults.fizzBuzzPopper(2) == "2"}
${Defaults.fizzBuzzPopper(21) == "FizzPop"}
${Defaults.fizzBuzzPopper(9) == "Fizz"}
${Defaults.fizzBuzzPopper(7) == "Pop"}
${Defaults.fizzBuzzPopper(35) == "BuzzPop"}
"""
```

Change configuration: to `Seq` of pairs, instead of just two:

```
val fizzBuzzPopperConfig: Config =
  Config(Seq(
    3 -> "Fizz", 5 -> "Buzz", 7 -> "Pop"
  ))
val fizzBuzzPopper: Evaluator =
  FizzBuzz.compile(fizzBuzzPopperConfig)
```

## More tests means more (or changed) types

```
[error] ...Defaults.scala:29: not enough arguments for
      method apply:
        (pair1: (Int, String), pair2: (Int, String))
          com.franklinchen.FizzBuzz.Config in object Config
[error] Unspecified value parameter pair2.
[error]       Config(Seq(
[error]               ^
```

Change **type Config** to allow a sequence of pairs:

```
case class Config(pairs: Seq[(Int, String)]) {
  pairs.foreach(validatePair)
}
```

## Fix remaining type errors

Refactoring reveals need to implement case of more than two divisors.

```
val compile: Compiler = {  
  case Config(Seq((d1, w1), (d2, w2))) =>  
    val w = w1 + w2  
  
    { i =>  
      (i % d1 == 0, i % d2 == 0) match {  
        case (true, false) => w1  
        case (false, true)  => w2  
        case (true, true)   => w  
        case (false, false) => i.toString  
      }  
    }  
  
  case _ => // TODO handle more than 2  
    { i => ??? }  
}
```

# More computation means more types

Compile each divisor to a “rule” that awaits input.

```
type Rule = Int => String

val buildRule: ((Int, String)) => Rule = {
  case (n, word) => { i =>
    if (i % n == 0) word else ""
  }
}
```

## FizzBuzz demo time!

- Two volunteers: to play role of `Rule`.
- One volunteer: to combine sub-results.



## Assemble the types


```
type Evaluator = Int    => String
type Compiler  = Config => Evaluator
type Rule      = Int    => String

val compile: Compiler = { case Config(pairs) =>
  val rules: Seq[Rule] = pairs.map(buildRule) // compile

  // Return an Evaluator.
  { i =>
    val words: Seq[String] = rules.map { rule => rule(i) }
    val combined: String = words.reduce { (x, y) => x + y }
    if (combined == "") i.toString else combined
  }
}
```

# A note on reduce

For any value of type `Seq[A]`, `reduce`:  $((A, A) \Rightarrow B) \Rightarrow B$ .

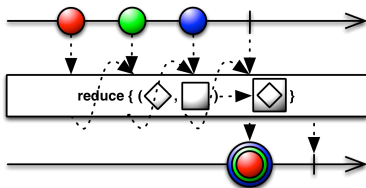

Example: for `Seq[String]`, reduction with string concatenation `+` returns the concatenation of all the strings in the sequence.

## Test failure: coarse types again

```
nfo]    x Arbitrary pair of divisors: divisible by first
rror]   A counter-example is 'Config(List((8,), (32,)))'
(after 0 try)
rror]   A counter-example is '32405464'
(after 0 try - shrunk ('1150076488' -> '32405464'))
rror]   '32405464' is not equal to ''
(FizzBuzzSpec.scala:71)
```

### Demo time!

- Configuration: `Seq(3 -> "", 5 -> "Buzz")`
- Input: 2
- Output: should be ""
- Output was: "2"

## Assemble the types

```
type Evaluator = Int    => String
type Compiler  = Config => Evaluator
type Rule      = Int    => String

val compile: Compiler = { case Config(pairs) =>
  val rules: Seq[Rule] = pairs.map(buildRule) // compile

  // Return an Evaluator.
  { i =>
    val words: Seq[String] = rules.map { rule => rule(i) }
    val combined: String = words.reduce { (x, y) => x + y }
    if (combined == "") i.toString else combined
  }
}
```

# Property-based testing rescued us again!

Be honest: would you have caught this bug manually?

- I didn't.
- I never wrote FizzBuzzPop examples testing empty strings.
- Property-based testing reveals **unexpected** corner cases.
  - ▶ (Empty “fizz” and “buzz” word strings).

# An empty string is **not** equivalent to no string

Presence of something “empty” is **not** equivalent to no thing.

Sending someone an empty email versus not sending any email.

Many programming languages get this wrong.

## Option[A] type

Option[A] is one of two possibilities:

- None
- Some(a) wraps a value a of type A.

For example, Some("") is not the same as None.

```
val fizzFor3      = Some("") // multiple of 3
val buzzFor3      = None     // not multiple of 5
val fizzbuzzFor3 = Some("") // fizzed ""

val fizzFor2      = None     // not multiple of 3
val buzzFor2      = None     // not multiple of 5
val fizzbuzzFor2 = None     // not multiple of any
```

# Cleaning up the types

```
// was: type Rule = Int => String  
type Rule = Int => Option[String]
```

Useful type errors:

```
und    : String  
quired: Option[String]  
      word  
      ^  
  
und    : String("")  
quired: Option[String]  
      ""  
      ^  
  
und    : Seq[Option[String]]  
quired: Seq[String]  
      val words: Seq[String] = rules map { rule => rule(i) }  
                                     ^
```



## Fix the type errors: our rule builder

```
type Rule = Int => Option[String]

val buildRule: ((Int, String)) => Rule = {
  case (n, word) => { i =>
    (i % n == 0).option(word)
  }
}
```

### Demo time!

- (Instructions: circle what you write to wrap it with **Some**)
- Configuration: **Seq**(3 -> "", 5 -> "Buzz")
- Input: 2
- Output: should be ""

## Fix the type errors: our compiler

```
val compile: Compiler = { case Config(pairs) =>
  val rules: Seq[Rule] = pairs map buildRule

  { i =>
    val wordOptions: Seq[Option[String]] =
      rules.map { rule => rule(i) }
    val combinedOption: Option[String] =
      wordOptions.reduce(addOption)
    combinedOption.getOrElse(i.toString)
  }
}
```

- We need to write: addOption
- Scala standard library provides: getOrElse

## “Addition” for Option[String]

```
def addOption(a1: Option[String], a2: Option[String]):  
  Option[String] = (a1, a2) match {  
    case (Some(s1), None)      => Some(s1)  
    case (None, Some(s2))     => Some(s2)  
    case (Some(s1), Some(s2)) => Some(s1 + s2)  
    case (None, None)         => None  
  }
```

## Getting A back out of Option[A]

Do not lose information!

getOrElse inspects the  
and either

- returns the value `v` inside a `Some(v)`,
- or else returns the specific default value.

## The same thing, in Swift

```
func addOption(a1: String?, a2: String?) -> String? = {  
    switch (a1, a2) {  
        case (let .Some(s1), .None):           return .Some(s1)  
        case (.None, let .Some(s2)):           return .Some(s2)  
        case (let .Some(s1), let .Some(s2)):    return .Some(s1+s2)  
        case (.None, .None):                   return .None  
    }  
}
```

# Transform information; don't destroy it

Did you notice? Our new code no longer uses `if`.

## Bug cause: destroying information, using `if`

- Building a rule: `if (i % n == 0) word else ""`
- Obtaining a final string answer:  
`if (combined == "") i.toString else combined`

## Transforming information

- To `Option[String]`: `(i % n == 0).option(word)`
- To `String`: `combinedOption.getOrElse(i.toString)`

## Type-directed design tip

We could have saved trouble **up front**, by using precise **types**.

- Avoid `if`, when possible.
- Avoid `String` (but required at I/O boundaries of program).

## Bonus: the final code in Swift

```
typealias Evaluator = Int -> String
typealias Config = (Int, String)[]
typealias Compiler = Config -> Evaluator
typealias Rule = Int -> String?

let buildRule: ((Int, String)) -> Rule = { n, word in
    { i in return (i % n == 0) ? word : nil } }
}

let compile: Compiler = { pairs in
    let rules: Rule[] = pairs.map(buildRule)
    return { i in
        let wordOptions = rules.map { rule in rule(i) }
        let combinedOption = wordOptions.reduce(nil, addOption)
        if let combined = combinedOption { return combined }
        else { return String(i) }
    }
}
```

# Outline

- 1 Introduction
- 2 Original FizzBuzz problem
- 3 FizzBuzz 2: user configuration
- 4 FizzBuzz 3: FizzBuzzPop and beyond
- 5 Parallel FizzBuzz**
- 6 Conclusion



# Parallelism

- Use of **map**: parallelizable; there are high-performance **parallel collections** for Scala.
- Use of **reduce**: parallelizable because of the monoid property:

## `Option[String]` is a Monoid

- ▶ There is an identity element (`None`).
- ▶ There is a binary associative operator (`addOption`).
- ▶ **Fantastically important in practice!**

## Demo time!

- ▶ Configuration:  
`Seq(3 -> "Fizz", 5 -> "Buzz", 7 -> "Pop", 2 -> "Boom")`
- ▶ Input: 42
- ▶ Output: `"FizzPopBoom"`

## Final parallelized code

```
val parallelCompile: Compiler = { case Config(pairs) =>
  val rules = pairs.toArray
    toArray.
    toPar.
    map(buildRule)

  { i: Int => rules.
    map { rule => rule(i) }.
    reduce(addOption).
    getOrElse(i.toString)
  }
}
```

### Coding style tip

This level of conciseness is not always best: maybe too “clever”?

# Parallelism summary

We discovered a theoretical speedup for generalized FizzBuzz:

- Sequential:  $O(n)$
- Parallel:  $O(\log n)$  (given  $\log n$  processors, and omitting some technical subtleties)

Also, driver outer loop can be sped up:

- Sequential loop on 1 to  $m$ :  $O(m)$
- Parallel loop:  $O(1)$  (given  $m$  processors)

# Future work

- Asynchronous
- Real-time
- Interactive

# Outline

- 1 Introduction
- 2 Original FizzBuzz problem
- 3 FizzBuzz 2: user configuration
- 4 FizzBuzz 3: FizzBuzzPop and beyond
- 5 Parallel FizzBuzz
- 6 Conclusion

# Conclusion

- **Tests** are great.
- **Types** are great.
- Tests and types work hand in hand, driving design and program evolution.
- Modern typed languages such as Scala promote fun, correct programming!
- It's a great time to be learning and using a modern typed language: Apple ditched Objective C for Swift.

## Code, slides, article

- Go to <https://github.com/franklinchen/talk-on-type-directed-tdd-using-fizzbuzz>
- The **article** has more detail omitted in the presentation.
- The hyperlinks in all provided PDFs are clickable.
- The Swift code:  
<https://github.com/franklinchen/fizzbuzz-swift>

# Some free online courses on modern typed functional programming

- Using Scala: **Functional Programming Principles in Scala** on Coursera, taught by Martin Odersky (inventor of Scala)
- Using Haskell: **Introduction to Functional Programming** on EdX, taught by Erik Meijer (Haskell hero)