


Riwi Messenger — Entity-Relationship Diagram

Database: bd_franklin_rodriguez_thompson · PostgreSQL 15+ / pgvector · generated from database/ddl/*.sql

PK primary key FK foreign key UK unique constraint ◆—o{ one (mandatory) to zero-or-many o—o{ zero-or-one (nullable FK) to zero-or-many

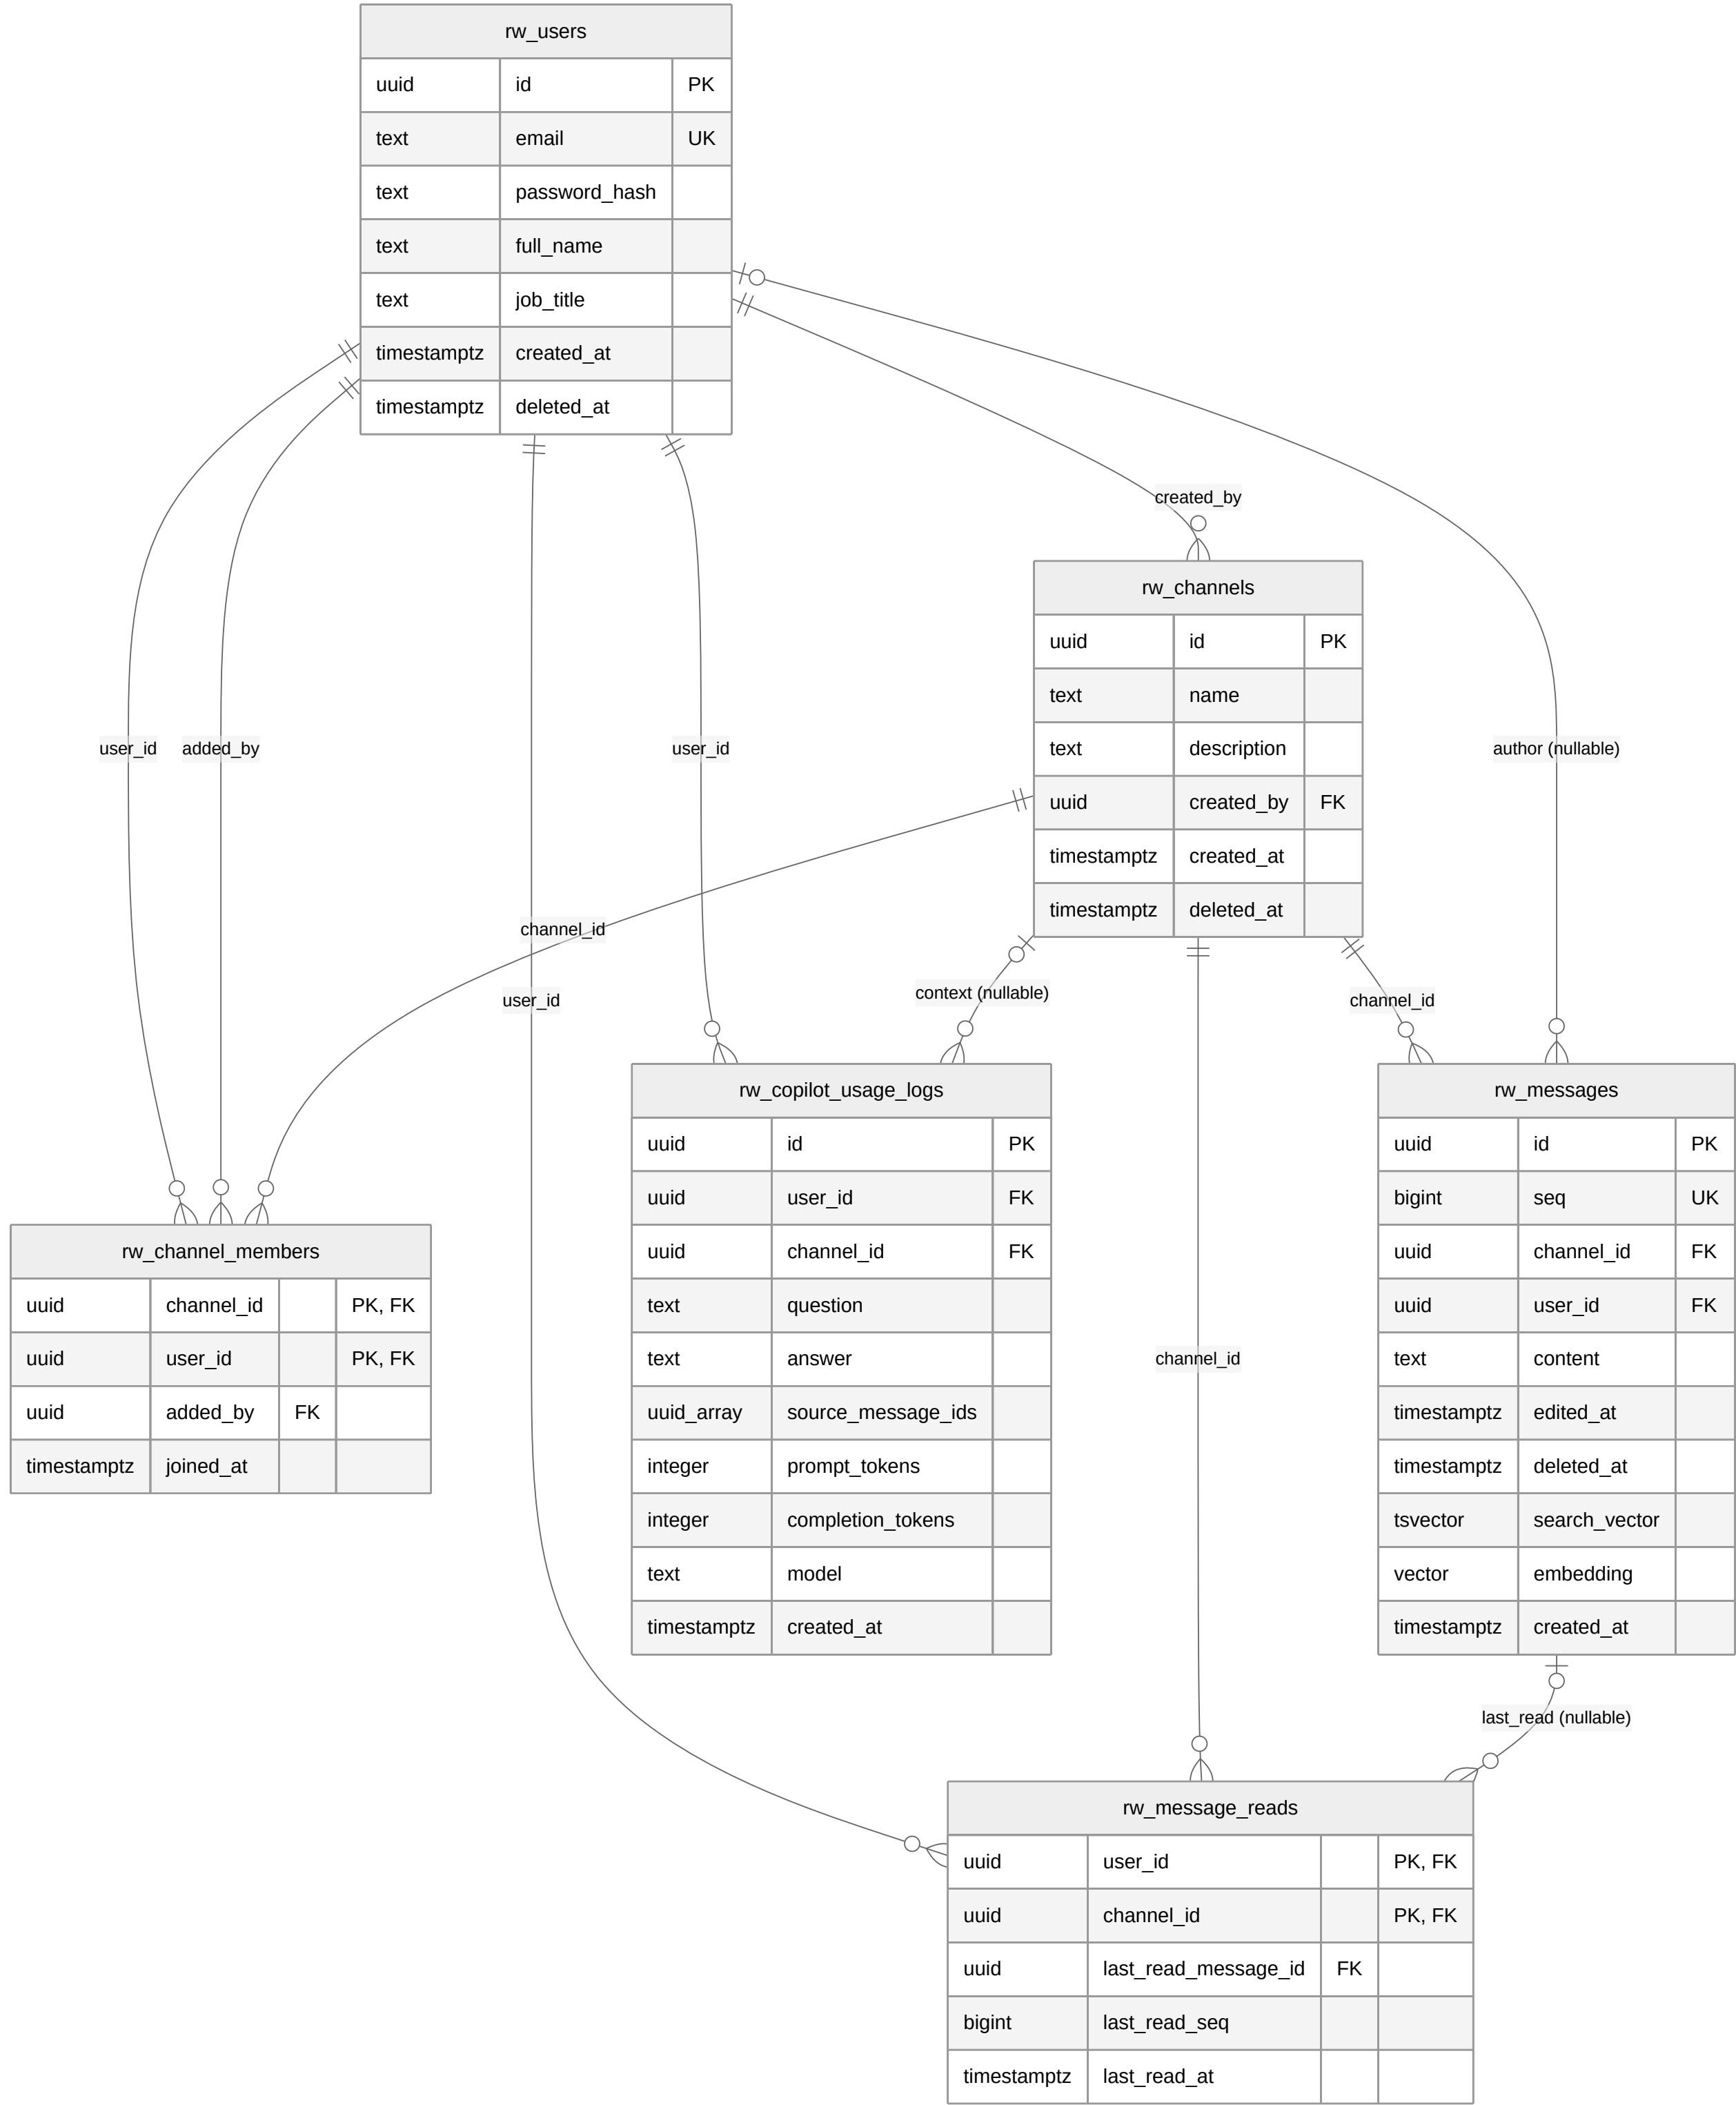

rw_v_user_conversations (a view over rw_channel_members + rw_channels + rw_messages + rw_message_reads, filtered by the authenticated actor) is omitted above: it is a derived read model, not a stored table. Every relationship shown is enforced by an actual FOREIGN KEY constraint in database/ddl/*.sql, and every table except rw_channel_members and rw_copilot_usage_logs additionally has Row Level Security policies restricting which rows a given actor may read or write (see database/README.md).