



CRMConnect: Mindbody → Klaviyo

Integration Solution Design & As-Built Documentation

PRODUCT VERSION	v1.5
DOCUMENT VERSION	1.0 (Final)
DATE	July 15, 2026
AUDIENCE	Systems integrators, technical operations
PREPARED BY	APIANT

Verified live against the APIANT development template account on 2026-07-15.

Table of Contents

Solution Design and As-Built Documentation	4
Document control	4
1. Executive summary	5
1.1 Business context	5
1.2 What this integration does	5
1.3 Scope	5
1.4 Purpose and audience	6
1.5 Solution overview at a glance	6
2. Solution architecture	7
2.1 Deployment topology	7
2.2 Data flow diagram	7
2.3 Design invariants	7
2.4 APIANT platform concepts	8
2.5 Deployment and environment model	8
3. Automation catalog (functional and technical design)	9
3.1 01 - New or updated client in MINDBODY → Klaviyo profile (instant) v1.5	10
3.2 03 - New or updated appointment in Mindbody → Klaviyo profile v1.5	13
3.3 03C - Mindbody canceled appointment booking → Klaviyo profile next class booked (instant) v1.5	18
3.4 03D - Mindbody appointment booking created → Recompute + Booked event (instant) v1.5	20
3.5 03E - Mindbody appointment booking updated → Recompute + status events (instant) v1.5	22
3.6 05 - New sale line item in MINDBODY → Klaviyo profile (instant) v1.5	24
3.7 06 - Mindbody sales → Sweep yesterday sales to Klaviyo events v1.5	27
3.8-3.12 Membership and contract event automations	29
3.13 09 - Mindbody visits → Update yesterday visits in Klaviyo profile v1.5	36
3.14 11 - Mindbody class is completed → Klaviyo profile v1.5	38
3.15 11C - Mindbody cancelled class booking → Klaviyo contacts next class booked (instant) v1.5	40
3.16 11E - Mindbody new class booking → Recompute next class (instant) v1.5	42
3.17 Subroutine: Resolve Mindbody client → Klaviyo profile v1.5	43
3.18 Subroutine: Recompute next class and appointment → Klaviyo profile v1.5	45
3.19 Subroutine: Process one Mindbody sale → Klaviyo revenue events v1.5	54
3.20 ADMIN - Fleet monitor: forward automation alerts v1.5	56
3.21 ADMIN ** KEEP TURNED OFF ** INTEGRATION SETTINGS - CRMConnect_Mindbody_Klaviyo v1.5	58
3.22 Klaviyo API rate limiter pair (Master folder)	58
3.23 ADMIN ** KEEP TURNED OFF ** PROVISION KLAVIYO PACKAGE v1.5 (Master)	59
3.24-3.27 Admin utilities	59
3.28 Retired and legacy automations	9
4. Data and field mapping reference	61
4.1 Klaviyo profile properties written by the integration [platform-verified except where noted]	61
4.2 Klaviyo event metrics (15) [platform-verified]	62
4.3 Mindbody API surface used [platform-verified]	62
4.4 Lookup table (state) reference [platform-verified]	63
4.5 Klaviyo connector actions [names platform-verified via steps; assembly UUIDs doc-derived]	64
5. Data flow and sequencing	65
5.1 Which automation fires when	65
5.2 Ordering dependencies	65
6. Non-functional characteristics	66
6.1 Idempotency and dedupe guarantees	66
6.2 Throughput, concurrency, and API budget	66
6.3 Error handling model [platform-verified]	66
6.4 Monitoring and alerting	66

6.5 Data protection and PII handling	66
6.6 Known issues log (stable IDs) [doc-derived]	67
7. Operations and support model	68
7.1 Publish and deploy flow [doc-derived]	68
7.2 New site onboarding runbook [doc-derived + DEPLOY-CHILD-DATETIME-001]	68
7.3 Ownership and support boundaries	68
7.4 Version history [doc-derived, changelog]	68
7.5 Active work streams [doc-derived, plan 2026-07-13]	69
8. Glossary	70
9. Appendix A: automation identifier reference	72
9.1 Dev template account (live, 2026-07-15) [platform-verified]	72
9.2 Production account	73
10. Appendix B: documentation discrepancies and verification coverage	74
10.1 Discrepancies between repository documentation and the live platform	74
10.2 Items not platform-verified in this document	74

Solution Design and As-Built Documentation

Document control

FIELD	VALUE
Document title	CRMConnect: Mindbody → Klaviyo, Solution Design and As-Built Documentation
Document version	1.0
Date	2026-07-15
Product version documented	CRMConnect: Mindbody → Klaviyo v1.5
Prepared by	APIANT
Status	Final
Verification basis	Live inspection of the APIANT dev template account (2026-07-15), reconciled with the product repository documentation

Provenance convention. Throughout this document, facts are tagged **[platform-verified]** when they were read directly from the running v1.5 automations on the APIANT platform (automation lists, step trees, field mappings, and branch logic, the latter confirmed against the stored condition XML rather than display summaries), and **[doc-derived]** when they come from the product repository documentation (design plans, changelogs, runbooks). Where a section mixes both, individual items are tagged inline. The platform inspection was strictly read-only: nothing was edited, executed, activated, deactivated, or deployed, and all read locks were released afterward.

1. Executive summary

1.1 Business context

Fitness and wellness businesses that run their operations on Mindbody (class and appointment scheduling, memberships, contracts, retail and service sales) increasingly run their marketing on Klaviyo. Out of the box, the two systems do not share enough data for lifecycle marketing: Klaviyo cannot see who has an upcoming appointment, who just finished an intro session, whose membership lapsed, or what revenue each location produced. Multi-location brands feel this most sharply, because marketing runs from one shared Klaviyo account while operations are split across many Mindbody sites.

CRMConnect: Mindbody → Klaviyo closes that gap. It is a one-way integration product built and operated on the APIANT integration platform, packaged so that a brand with one location or one hundred can be onboarded site by site without any site's data interfering with another's.

1.2 What this integration does

In plain terms, the integration turns a Mindbody site into a fully populated Klaviyo marketing account. Every Mindbody client becomes a Klaviyo profile, identified by email address and enriched with roughly sixty "MB" prefixed properties: identity and contact details, marketing consent flags, home location, visit history, the next class they have booked, their upcoming appointment (with staff, location, date, and time), membership and contract status, purchase history, and account balance. These properties update within seconds of the business event for webhook-driven flows, and within 15 minutes or nightly for polled and swept data.

On top of the profile data, the integration emits fifteen Klaviyo event metrics covering the full customer lifecycle: appointments booked, confirmed, arrived, completed, and cancelled; intro sessions completed; classes booked, completed, and cancelled; memberships activated and cancelled; contracts created and cancelled; and, critically for revenue reporting, the Klaviyo-canonical **Placed Order** and **Ordered Product** events with full line-item detail. Because these two revenue events use Klaviyo's canonical names, they unlock Klaviyo's built-in revenue attribution and predictive analytics (customer lifetime value, churn risk). Every event carries an idempotent, site-scoped unique identifier, so replays, nightly reconciliation, and historical backfills can never double-count revenue.

Finally, the integration ships its own marketing starter package: a single provisioning utility installs, per location, "Home Location", "Visited", and "Upcoming Appointment At" segments, plus eight lifecycle segments (for example "Intro Offer Buyers", "Lapsed 30 Days", "Contract Renewal Window") and five ready-to-edit draft flows (Intro Offer Welcome, Rescue - No Upcoming Visit, Win-Back 30 Days, Contract Renewal Window, Post-Purchase Thank You). The marketing team or agency finishes the email copy and design in Klaviyo; the data plumbing, triggers, and audiences are already in place.

Multi-location handling is a first-class design concern rather than an afterthought. Each Mindbody site runs in its own isolated APIANT account with its own caches and settings; all sites write to the shared Klaviyo account under site-guarded rules, so a client who visits two locations (a "snowbird" scenario) always sees the soonest upcoming booking win, and one site can never overwrite or clear another site's still-valid data.

1.3 Scope

In scope (delivered and documented here):

- One-way synchronization Mindbody → Klaviyo: client profiles, appointments, classes, visits, sales, memberships, contracts.
- Fifteen Klaviyo event metrics, including canonical revenue events with line-item detail.
- Klaviyo package provisioning (segments and draft flows).
- Multi-site deployment model, per-site onboarding runbook, CSV and sales-history backfill tooling.
- Operational tooling: alert forwarding, fleet-wide Klaviyo API rate limiter, cache purge runbook, admin utilities.
- Real email consent synchronization (opt-in, gated per account, subscribe-only, driven exclusively by the Mindbody promotional-email flag).

Out of scope (explicitly not delivered in v1.5):

- Any reverse flow (Klaviyo → Mindbody). Reverse-flow automations exist only as unfinished roadmap stubs and are not deployed.
- SMS consent: Mindbody text-message flags are stored as data properties only and are never used to subscribe a profile to SMS (they do not constitute TCPA-grade express written consent).
- Klaviyo custom objects (Klaviyo beta feature; adopted by design decision as a later phase, after the first large customer implementation ships on properties and events).
- Class waitlist events (blocked on an upstream platform trigger; tracked as roadmap item).
- Lead capture upstream of Mindbody (professional-services scope, not integration scope).

1.4 Purpose and audience

This document is the final solution handover for the integration. It is written for systems integrators, technical consultants, and platform operators who must understand, operate, extend, audit, or re-implement the solution. It combines a business-level functional description of every component with the complete as-built technical detail: automation inventories with platform identifiers, step-by-step walkthroughs with exact step counts, field-by-field mappings, verified branch logic, state and dedupe key schemas, error handling behavior, known issues with stable identifiers, and operational runbooks. After reading it, an engineer should be able to answer any question about how the integration works without access to the original build team.

1.5 Solution overview at a glance

ITEM	VALUE
Product	CRMConnect: Mindbody → Klaviyo (APIANT product)
Current version	v1.5, built on the dev template account 2026-07-11
Production version	v1.2 (v1.3, v1.4, and v1.5 are complete on dev and deliberately held for a consolidated v2.0 production publish)
Direction	One-way, Mindbody → Klaviyo (plus Mindbody client-record refresh touches)
Topology	One APIANT child account per Mindbody site, linked to a customer parent, all writing to a single shared Klaviyo account
Dev account (build and test)	Server <code>apiantdev</code> , account "CRMConnect Mindbody Klaviyo", person_uuid <code>8965a2c6fe72407d8a8455a3d5625f97</code>
Prod account (publish target)	Server <code>apiantprod</code> , account "Automation Templates", person_uuid <code>0b56e777a6fa4f708e9480f9ccb63df6</code>
Live automation count (dev, 2026-07-15)	31 [platform-verified]
Work tracking	GitHub issues; delivery epic #9 with phases mapped to issues #1 through #8; sequenced plan maintained in <code>docs/PLAN.md</code>

2. Solution architecture

2.1 Deployment topology

[doc-derived] One APIANT **child account per Mindbody site**, linked to a customer parent account, all writing into a **single shared Klaviyo account**. APIANT lookup tables (the platform's key-value state store) are per-account, so all site-local state (identity caches, dedupe keys, settings) is isolated per site; cross-site state meets only on the shared Klaviyo profile. Adding a site never touches existing sites: create the child account, deploy the automation folder, run the INTEGRATION SETTINGS automation, connect the applications, test, and activate.

2.2 Data flow diagram

```
flowchart LR
    subgraph MB[Mindbody site]
        W[Webhooks: client, appointmentBooking,
            classRosterBooking, sale, membership, contract]
        P[Polled APIs: appointments in range,
            completed classes, visits, sales in range]
    end

    subgraph AP[APIANT child account, one per site]
        T01[01 client sync]
        T03[03 appointment poll]
        TI[03C/03D/03E/11C/11E instant
            booking events]
        T05[05 sale instant]
        T06[06 nightly sales sweep]
        T09[09 visits nightly]
        T11[11 class completed poll]
        TM[07/07B/08/08B/08C
            membership + contract events]
        R[Resolver subroutine:
            Mindbody client → Klaviyo profile]
        RC[Recompute subroutine:
            next class + upcoming appt]
        PS[Process one sale subroutine]
        LT[(Lookup tables:
            caches, dedupe keys, settings)]
    end

    subgraph KL[Shared Klaviyo account]
        PR[Profiles + MB * properties]
        EV[15 event metrics incl.
            Placed Order / Ordered Product]
        SG[15 segments + 5 draft flows
            from the provisioner]
    end

    W --> T01 & TI & T05 & TM
    P --> T03 & T09 & T11
    T06 --> |missed sales| PS
    T05 --> |per line item| PR
    T05 --> PS
    T01 & T03 & T05 & T09 & T11 --> R
    TI --> RC
    T03 --> |completed / reschedule| RC
    R <--> LT
    RC --> PR
    PS --> EV
    T01 & T03 & T09 & T11 & TM --> PR
    TI & TM & T03 & T11 --> EV
    EV --> SG
    PR --> SG
```

2.3 Design invariants

[doc-derived, design plan] These six rules apply to every component and explain most structural decisions in section 3:

1. **Unique-client-id centric:** Mindbody ClientIDs are site-local and mutable (they change when a key card is reissued); UniqueClientID is the stable identity. Both are stored; all keys are composites.
2. **SiteId~Id composite keys** for every per-client and per-entity lookup. The same numeric id at two sites is two different things.

3. **Never fail on identity:** fresh email-based resolution, create-if-missing, parked errors, no blind writes to cached ids. Account switches, deleted profiles, and profile merges self-heal.
4. **Site-guarded shared state:** any Klaviyo profile value writable by more than one site carries a site marker and follows sooner-wins or own-site-only overwrite rules.
5. **Minimal Mindbody API usage:** event-driven recompute is preferred over sweeps and polls wherever possible.
6. **Location names come only from the settings-managed mapping table** (location 1 aliases cover clients with no assigned home location).

2.4 APIANT platform concepts

An APIANT **automation** is a tree of steps executed once per trigger record. Trigger types used in this product **[platform-verified]**:

TRIGGER TYPE	BEHAVIOR	USED BY
Instant (service webhook)	A Mindbody webhook event fires the automation immediately; one webhook can carry multiple records, which process in parallel	01, 03C, 03D, 03E, 05, 07, 07B, 08, 08B, 08C, 11C, 11E
Polling (cron minutes)	A connector trigger polls Mindbody on a cron schedule	03 (:06,:21,:36,:51), 11 (:10,:25,:40,:55)
Scheduled daily (Date Time "Every day at")	Nightly batch	06 (01:30), 09 (01:00)
Subroutine input (System)	Callable subroutine; declared inputs, synchronous outputs	Resolver, Recompute, Process one sale, Update client email
System booted (instant)	Runs when the APIANT server boots	Rate limiter setter
Automation alert in this account (System)	Fires on any automation alert in the account	Fleet monitor
New form submission (Human Interaction)	FormApp CSV upload utilities	CSV client import, CSV visits import
No-op (System)	Never fires on its own; run manually via test mode	INTEGRATION SETTINGS, limiter Reset twin, purge utility

Step types are **action** (a connector or utility call), **condition** (TRUE and FALSE branch trees), **loop** (iterates an array source; steps numbered N.L.x), **subroutine_call**, and **subroutine_output**. Step addresses encode the tree position: 16.T.4.T.2.T.2 is a step nested inside two TRUE branches.

Condition logic encoding. Conditions are stored as XML: top-level <OR> groups are OR'd together; <AND> rows inside one group are AND'd. Field references are stored as position-independent tokens, so renumbering steps is safe. Caution for anyone auditing this product with tooling: the platform's summary renderers join every row with " OR ", making AND and OR indistinguishable in summaries (known issue MCP-100, section 6.6). All branch semantics in this document were confirmed at XML level.

Lookup tables. Per-account key-value storage addressed by (Key group, Key, Value name); several value names can live under one key. This is the product's entire state layer: identity caches, dedupe keys, settings, temporary working keys. Lookup reads run in a continue-on-miss mode, so a missing key yields an empty value rather than a failure. Section 4.4 is the full key reference.

2.5 Deployment and environment model

[doc-derived, shared product workflow] Dev template account → publish (`deploy_publish_folder` , preview then confirm) to the production "Automation Templates" account → deploy (`deploy_to_accounts`) to customer child accounts. Folder semantics govern what deploys where:

- `CRMConnect: Mindbody → Klaviyo (Site)` : deploys to every site child account.
- `CRMConnect: Mindbody → Klaviyo (Master)` : per-customer automations that must NOT deploy per site (the Klaviyo API rate limiter pair and the package provisioner).
- `INTEGRATION SETTINGS` folder: the per-account configuration automation.
- `TESTING` and retired folders are excluded from publish.

New child account prerequisite (known issue DEPLOY-CHILD-DATETIME-001): three application connections are required before activation: Mindbody (site credentials), Klaviyo (shared credential), and **Date Time** (a no-credential utility app that is easy to forget; without it the sales sweep and visits automations fail activation, and the provisioner aborts before its first step record). Deployed linked automations 03 and 11 additionally need their per-deployment configuration opened and saved once in the editor.

3. Automation catalog (functional and technical design)

The live dev account contains **31 automations** [platform-verified]. Step counts below count every node in the automation tree (actions, conditions, loops, subroutine calls and outputs, including all branch steps), computed from the live step trees.

Summary index:

#	AUTOMATION	UUID	TRIGGER	STEPS	STATUS
3.1	01 - New or updated client → Klaviyo profile (instant) v1.5	e7dadbd6d7e41c38cc7782950ec0921	Instant (2 webhooks)	42	on
3.2	03 - New or updated appointment → Klaviyo profile v1.5	18fdb97525914c0c8d3f2abdda04f94d	Poll :06,:21,:36,:51	41	on
3.3	03C - Cancelled appointment booking (instant) v1.5	03d1599b340d42ac87a6ff9be24fff4b	Instant	8	on
3.4	03D - Appointment booking created (instant) v1.5	b1320a52306f4b908c607bc6eb76780f	Instant	5	on
3.5	03E - Appointment booking updated (instant) v1.5	f877ee07239c4f04862d0bc7a2c70267	Instant	9	on
3.6	05 - New sale line item (instant) v1.5	2813d613e5ba492a8a3d565219e24a58	Instant	34	on
3.7	06 - Sweep yesterday sales to Klaviyo events v1.5	1e7682b990ab4f298760d7d81c4a9409	Daily 01:30	10	on
3.8	07 - New membership → Klaviyo membership event (instant) v1.5	a3e495f2f90b4569890d21c6b0dc918a	Instant	7	on
3.9	07B - Cancelled membership (instant) v1.5	3faae3d05adb495a8dd4df8e57ac48f3	Instant	7	on
3.10	08 - New client contract (instant) v1.5	c0a0eaea75ac4bd283ce51719b6a8deb	Instant	9	on
3.11	08B - Updated client contract → contract status (instant) v1.5	d34b85cad1f44415890d4a26c41dbedc	Instant	14	on
3.12	08C - Cancelled client contract (instant) v1.5	49c944dbd1fd43ba8e1cc395491b91fa	Instant	7	on
3.13	09 - Visits → update yesterday visits v1.5	0b442b4129c4458a8bf804cae8fc4fe7	Daily 01:00	34	on
3.14	11 - Class is completed → Klaviyo profile v1.5	9446f7d98dbe41d78abc22a460111a1a	Poll :10,:25,:40,:55	29	on
3.15	11C - Cancelled class booking (instant) v1.5	96f522429bab4ef18858235194dac7af	Instant	6	on
3.16	11E - New class booking → recompute (instant) v1.5	671d3c6fbf2645ab8bff8a4a09698919	Instant	5	on
3.17	Resolve Mindbody client → Klaviyo profile v1.5 (subroutine)	fbba3519eb844b9588a3f5b8b79f01a0	Subroutine input	32	off (by design)
3.18	Recompute next class and appointment v1.5 (subroutine)	fd6c6eded69740bf80f8a137ce4750f3	Subroutine input	125	off (by design)
3.19	Process one Mindbody sale → revenue events v1.5 (subroutine)	1d23003aaeea4eff8286fe1559034529	Subroutine input	17	off (by design)
3.20	ADMIN - Fleet monitor: forward automation alerts v1.5	13097787af0e431882d4131f75134229	Automation alert	4	on
3.21	INTEGRATION SETTINGS v1.5	6096d44df41648a28b8ae60c0394c71d	No-op (manual)	15	off
3.22	Klaviyo API rate limiter pair (Master)	3235f0c1855a4ca28fed3f8919d9ba3b / d5bdd71c3d0d4ee885102ef343ad0111	System booted / No-op	3 / 3	off (pending settings entry)
3.23	PROVISION KLAVIYO PACKAGE v1.5 (Master)	ee8417595c8842068168425107c090dc	No-op (manual test mode)	68	off
3.24-3.27	Admin utilities (CSV imports, email fix, cache purge)	see sections	Form / subroutine / manual	10 / 17 / 2 / 4	off
3.28	Retired and legacy automations	see section	-	-	off

Conventions used in every section below: all Klaviyo event emits use the connector action **Create event** with Email (profile identifier), Metric name, Unique ID (idempotency key, becomes Klaviyo's `$event_id`), Time (event timestamp), optional Value (revenue amount), and Custom property slots in `name = value` form; a `#num:` prefix coerces a property to numeric. All profile writes use **Update profile** with a Profile ID plus up to 50 custom property slots. Every automation that emits an event first verifies the client email contains `@`. All sections are [platform-verified] unless noted.

3.1 01 – New or updated client in MINDBODY → Klaviyo profile (instant) v1.5

Function. This is the client synchronization entry point. Whenever a client is created or edited in Mindbody (front desk, online signup, API), this automation upserts the matching Klaviyo profile within seconds: identity and contact details, address, birthday, consent flags, home location, and account status. It is also the only component that grants real Klaviyo email marketing consent, and it does so conservatively: only when the account-level consent-sync setting is on, the client's Mindbody promotional-email flag is set, and the email address is valid. Without this automation, no other component would have reliable identity data to build on.

- **UUID** `e7dadbd6d7e41c38cc7782950ec0921`, ON, 42 steps.
- **Triggers (two):** New client (instant) and Updated client (instant), both filtered `eventData_email Is not empty`. This is the one v1.5 automation that retains a two-trigger design; its expressions use per-trigger pipe alternates such as `{{trigger[New client (instant)].eventData_email}}` | `{{trigger[Updated client (instant)].eventData_email}}`, which resolve correctly for trigger fields. (New v1.5 automations are single-trigger by policy; see 3.4/3.5.)

Structure. Steps 1-3 read `general_settings`, `Mindbody_settings`, and the location mapping (`Mindbody_location_mappings`, value name `<SiteId>~<homeLocation>`; the `SiteId~0` / `SiteId~` aliases make a missing or zero home location resolve to location 1). Step 4 is condition `trigger.messageId Is not empty` ("Is this a new client?") whose TRUE and FALSE branches are **identical 19-step pipelines** (a structural artifact; both paths do the same work for new and updated clients):


1. Cache identity in lookup group `Mindbody_Klaviyo` under key `Client_id_<SiteId>~<ClientId>`: value names `Email`, `First`, `Last`, `Mobile`, `Unique_client_id` (5 Save steps).
2. Transform Date Time: date of birth → GMT, profile creation date → GMT, first appointment date → GMT.
3. Transform Text: Extract phone number (emits E164 format).
4. **Subroutine call: Resolver** (section 3.17) with `Email = trigger email`, `Client_id`, `Site_id = {{step_2.Site_id}}`, `Unique_client_id`.
5. Read the parked `Klaviyo_profile_error`; when empty (condition "No errors from Klaviyo"):
6. Get `Klaviyo_profile_id` (group `Mindbody_Klaviyo`, key `Mindbody_client_id_<SiteId>~<ClientId>`).
7. **Update profile** (retry mode, full mapping below).
8. If Action error message Is not empty ("Couldn't update profile"): a second **Update profile** retry step (the phone-less retry for phone validation failures).
9. Get the consent sync setting (`Klaviyo_settings / Sync_email_consent`), then condition "**Consent sync on, promo opt-in, valid email**", verified at XML level as a true 3-row **AND** (setting Equals true AND `eventData_sendPromotionalEmails Equals true` AND `eventData_email Is valid email`); TRUE → **Set real Klaviyo email consent** (Subscribe action, retry mode) with Custom source = `Mindbody consent sync (promotional email opt-in)`. Subscribe-only, one way; SMS is never auto-subscribed.

Update profile mapping (step 4.T.12.T.2 and its F-branch twin):


TARGET	SOURCE
Profile ID	cached <code>Klaviyo_profile_id</code>
Email / First name / Last name	trigger email, <code>firstName</code> , <code>lastName</code>
Phone number	Extract phone <code>E164</code>
City / Region / Country / Postal code / Image URL	trigger city, state, country, <code>postalCode</code> , <code>photoUrl</code>
MB Client ID	<code>eventData_clientId</code>
MB Gender	<code>eventData_gender</code>
MB Referred by	<code>eventData_referredBy</code>
MB Number of visits at site	<code>eventData_clientNumberOfVisitsAtSite</code>
MB Send account texts / MB Send promotional texts / MB Send schedule texts	consent flags from trigger
MB Send account emails / MB Send promotional emails / MB Send schedule emails	consent flags from trigger
MB Street 1 / MB Street 2	<code>addressLine1</code> / <code>addressLine2</code>
MB Date of birth	DOB → GMT

TARGET	SOURCE
MB Profile creation date	creation date → GMT
MB First appointment date	first appointment date → GMT
MB Home location	location mapping lookup (step 3)
MB Unique client ID	eventData_clientUniqueId
MB Status	eventData_status
MB Liability released	eventData_isLiabilityReleased
MB Inactive	eventData_inactive


20 of the 50 custom property slots are used (relevant to the native-integration switch compatibility plan, issue #15).

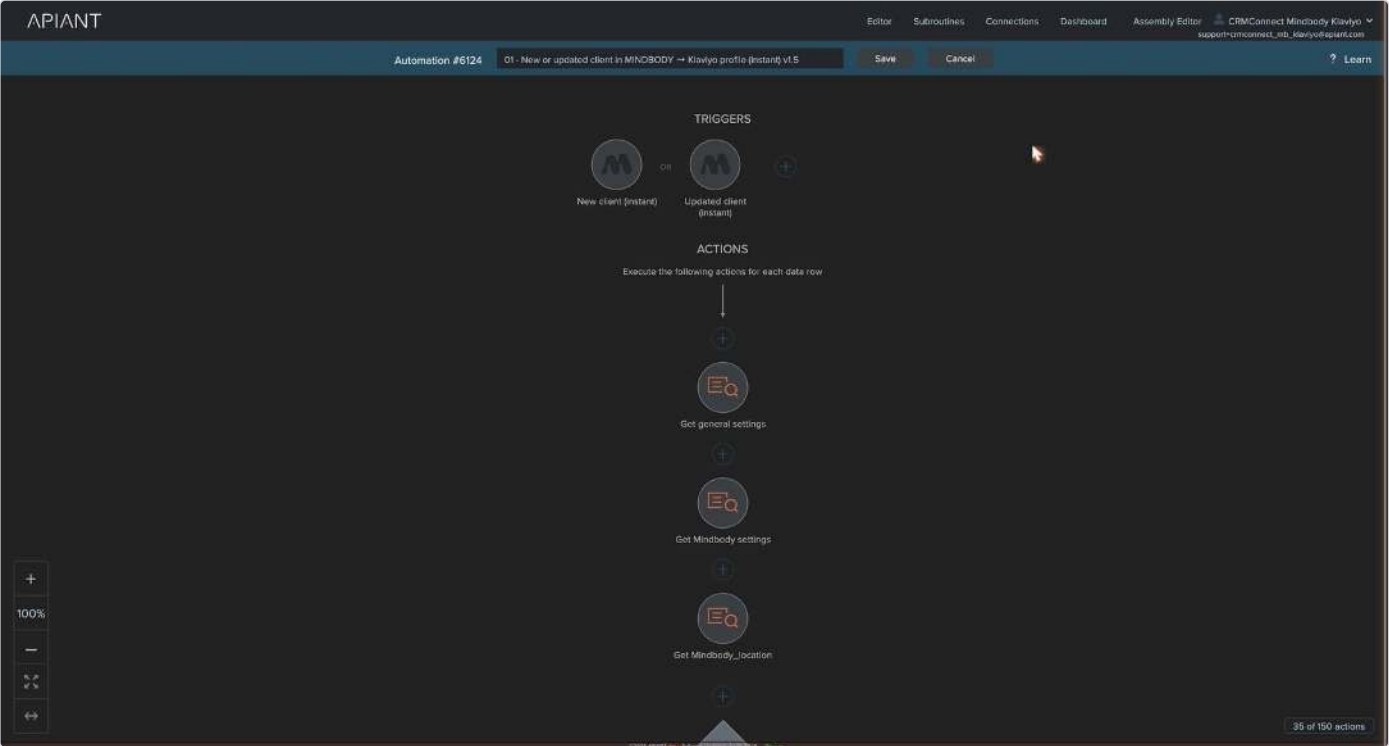


Automation 01, New or updated client, editor view 1 of 5

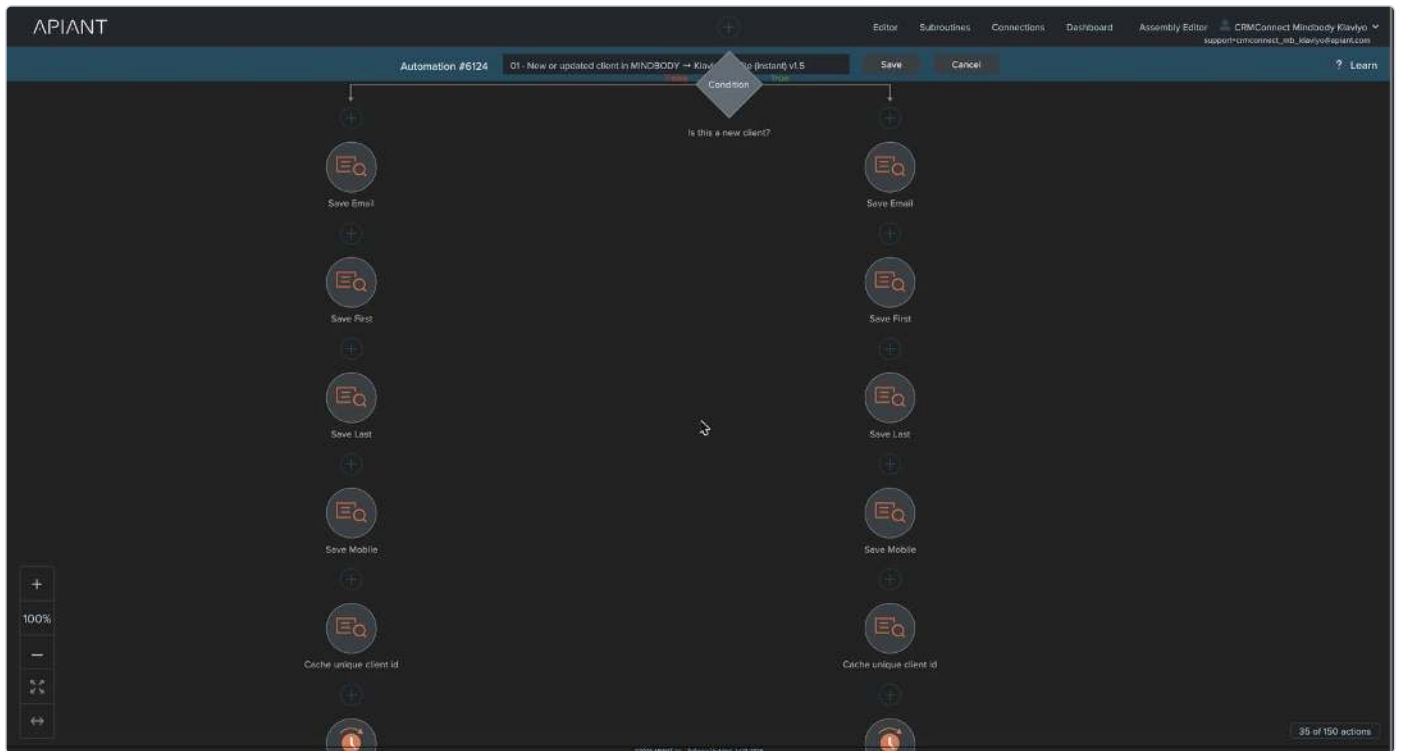


Automation 01, New or updated client, editor view 2 of 5

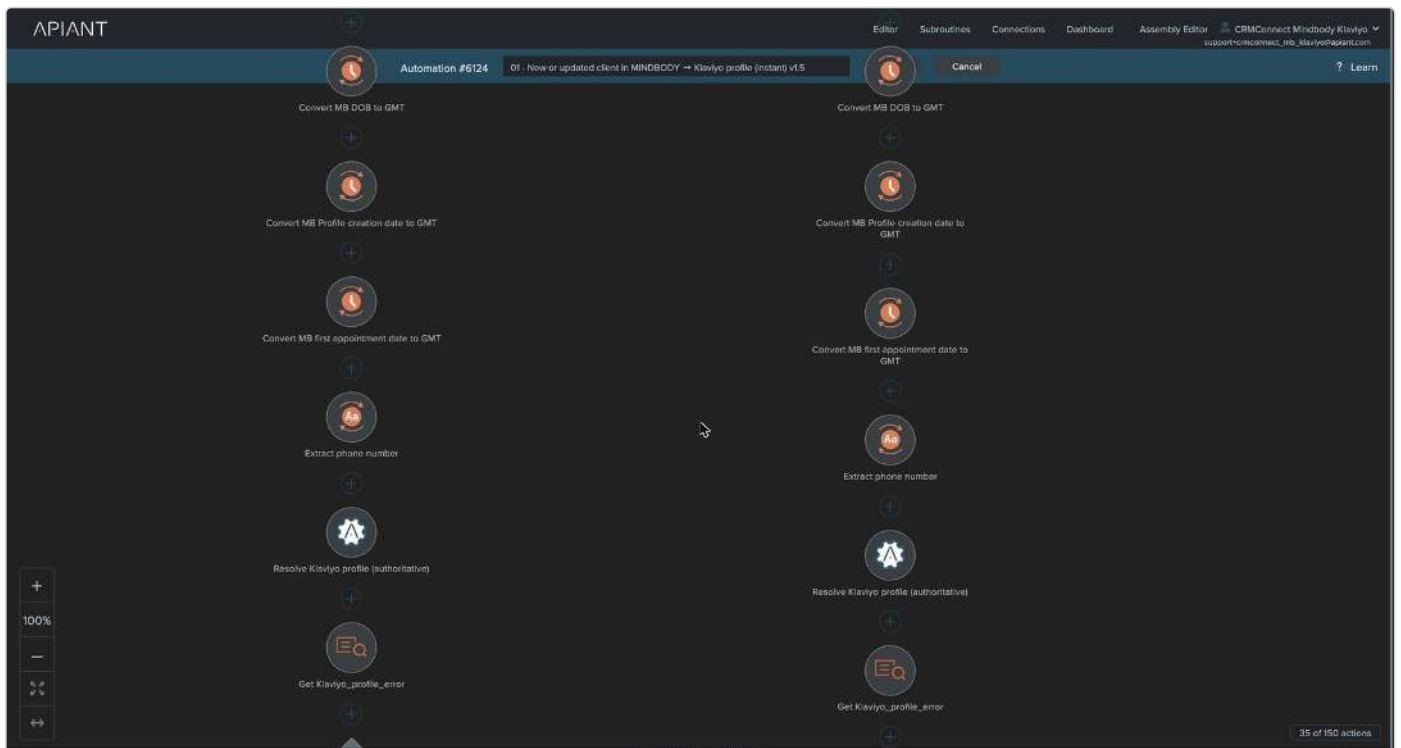

Automation 01, New or updated client, editor view 3 of 5

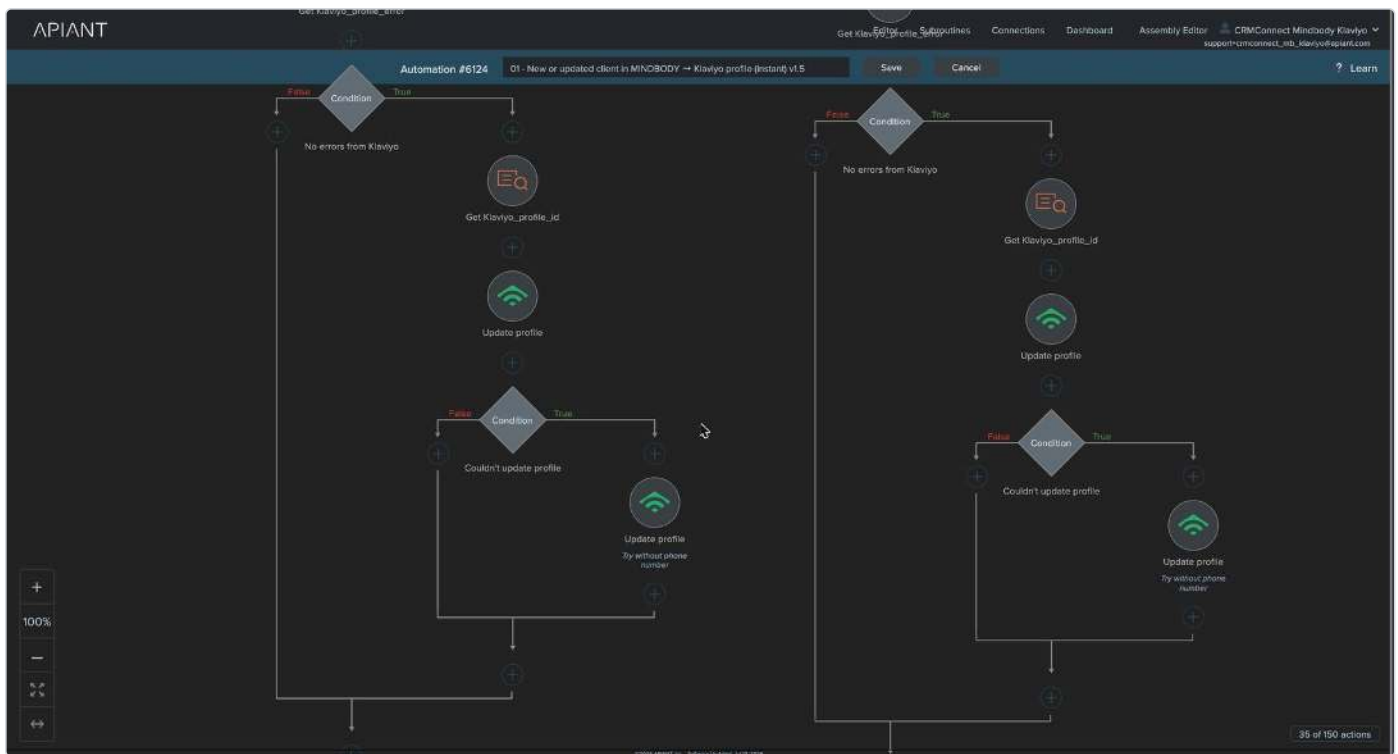

Automation 01, New or updated client, editor view 4 of 5

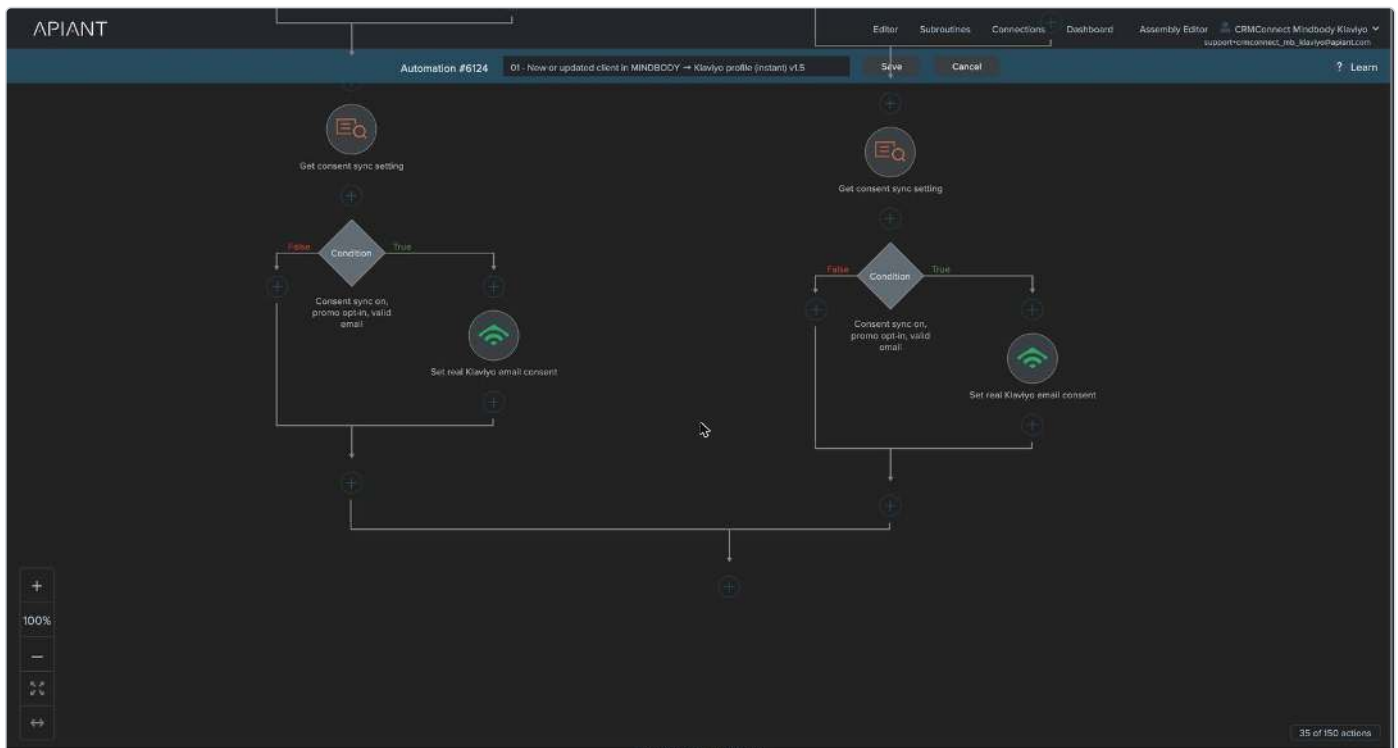

Automation 01, New or updated client, editor view 5 of 5

3.2 03 - New or updated appointment in Mindbody -> Klaviyo profile v1.5


Function. This is the appointment workflow. Every 15 minutes it picks up new and changed appointments in a rolling date window and keeps the Klaviyo profile's "last appointment status" picture current. When an appointment completes, it does the heavy lifting of attendance marketing: it stamps the attended date, location, and visited-locations history on the profile, emits the MB Appointment Completed event (and MB Intro Session Completed when the session matches the configured intro keywords, feeding intro-offer conversion flows), decrements and republishes session-pack balances,

refreshes the client's Mindbody visit totals, and asks the recompute subroutine to roll the "upcoming appointment" forward to the next future booking, or clear it. It also persists the appointment-to-client mapping that the cancellation automation (3.3) depends on.


- **UUID** 18fdb97525914c0c8d3f2abdda04f94d , ON, 41 steps.
- **Trigger:** New or updated appointment in date range (Mindbody polling trigger, cron :06,:21,:36,:51). The rolling date window is trigger configuration, not readable from summaries [window doc-derived].

Structure.


1. Steps 1-2: general + Mindbody settings. Step 3: **Save Client ID** into Mindbody_Klaviyo / Appointment_id_<SiteId>~<AppointmentId> / Client_id (this mapping is what lets the cancel webhook in 03C, which carries no client id, find the client).
2. Step 4: location name lookup (Mindbody_location_mappings , <SiteId>~<LocationId>).
3. Steps 5-10: date transforms (now → GMT, StartTime → pretty day, pretty time, start → GMT, end → GMT, start → ISO GMT used as event Time).
4. Steps 11-13: session type name from the site-scoped lookup Session_type_name ; on a miss (condition at 12, F branch) fetch Get appointment by ID + Get session type by ID from Mindbody and save the name.
5. Step 14: **Resolver call** with Email = None , Client_id = trigger.ClientId , Site_id = {{step_2.Site_id}}.
6. Steps 15-16: parked-error gate. If clean:
7. 16.T.1/16.T.2: get the profile id, **Update profile:** MB Last appointment status = trigger.Status , MB Last appointment status date (now GMT), MB Last appointment status location (location name), MB Last appointment status name (session type), MB Last appointment updated start time (start GMT). Written on **every** poll hit.
8. 16.T.3: get the client email from cache.
9. 16.T.4 condition trigger.Status Contains Completed:
 - **FALSE** (not completed): 16.T.4.F.1 **Recompute subroutine call** (covers reschedules: the stored upcoming appointment refreshes through the site-guarded recompute).
 - **TRUE** (completed):
 - 16.T.4.T.1 **Update profile:** MB Last appointment attended (session type name), MB Last appointment attended date and time (start GMT), MB Last location visited (location name).
 - 16.T.4.T.2 "Have client email (event)" (Contains @):
 - 16.T.4.T.2.T.1 "Is intro session" (session-type name Contains Intro_offer_first_keyword): emit **MB Intro Session Completed** (mapping not captured at step level; same shape as Appointment Completed [doc-derived]).
 - 16.T.4.T.2.T.2 emit **MB Appointment Completed:** Unique ID <SiteId>~appt~<AppointmentId>~completed , Time = appointment start ISO GMT, properties Appointment ID, Session type, Site, Location, Start.
 - 16.T.4.T.3 **Fetch profile** (Klaviyo Get) to read MB Locations visited and upcoming-appointment state.
 - 16.T.4.T.4 condition "Location already in visited list" (attributes_properties_MBLocationsvisited Contains <location name>; single-row, XML-verified). FALSE → if the profile already has a visited-locations value, **append** " , <location>" to the comma-separated text; else **write the first** location. (Comma text by design, not a Klaviyo list type; segment on it with string-contains. Location names that are prefixes of other location names cross-match; documented caveat.)
 - 16.T.4.T.5 **Recompute subroutine call** (the completed appointment was possibly the stored upcoming one; recompute repopulates or clears).
 - 16.T.4.T.6 **Mindbody Update client** (ID + email touch; refreshes Mindbody-side visit totals so the next client webhook carries fresh counts).
 - 16.T.4.T.7 condition trigger.ClientServiceId Is not empty ("Completed appointment series"): Get client services totals by product ID , series expiration → GMT, **Update profile** with dynamic property names: MB <Service name> count , MB <Service name> remaining , MB <Service name> exp date .

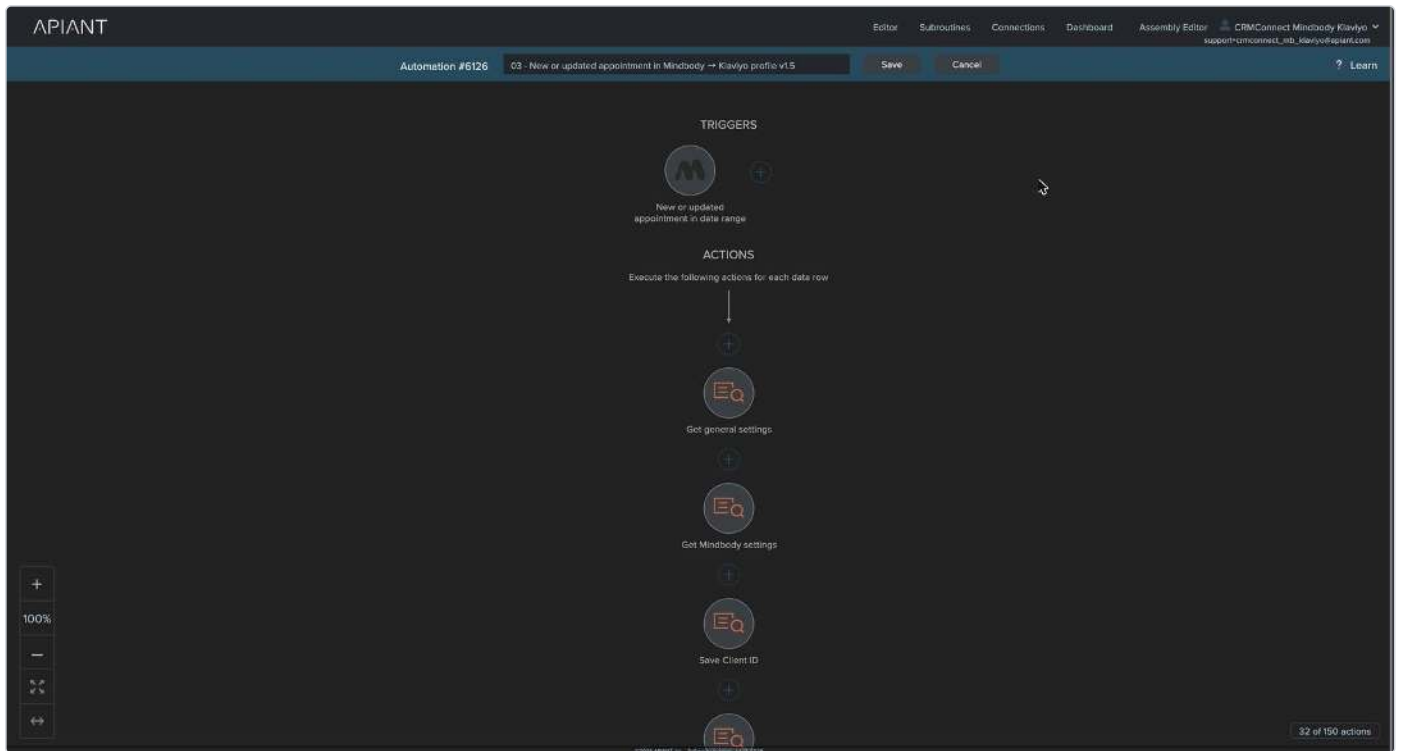


Automation 03, new or updated appointment, editor view 1 of 8

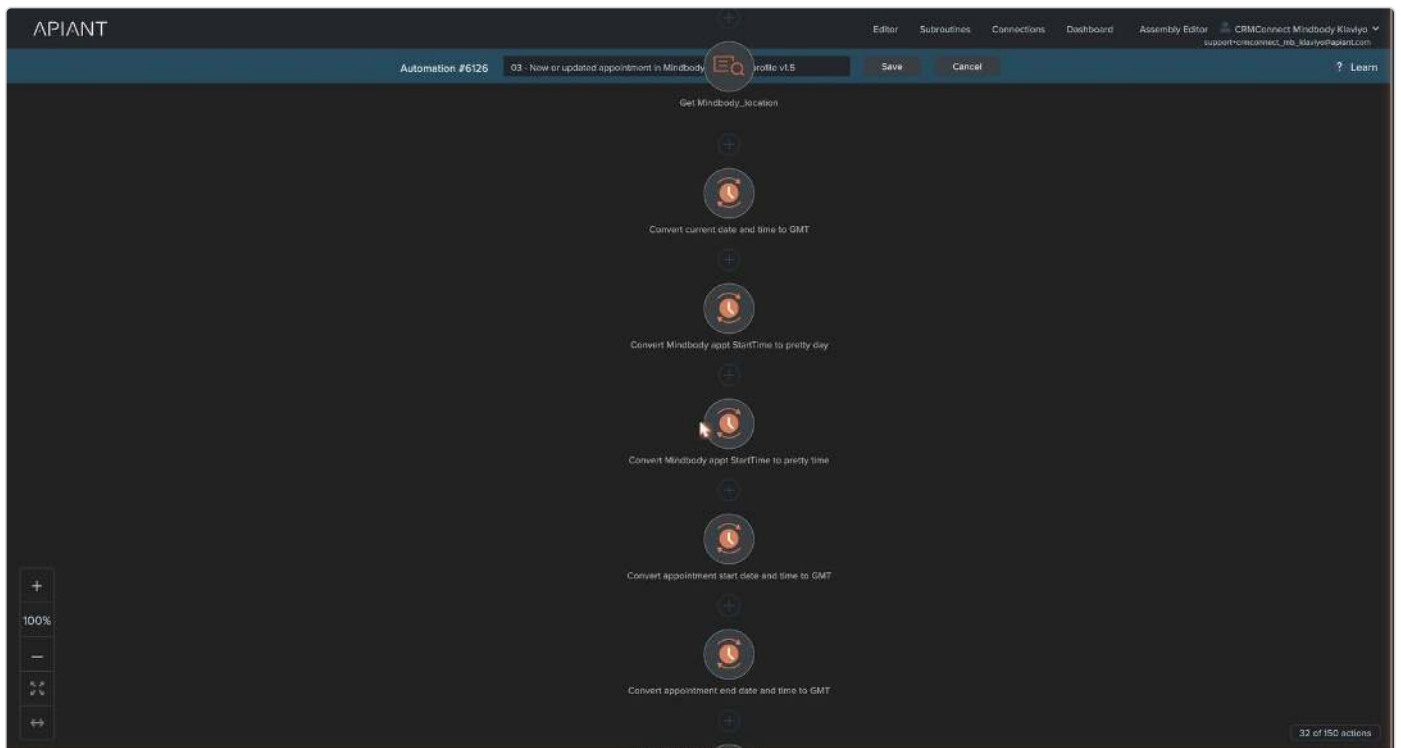


Automation 03, new or updated appointment, editor view 2 of 8

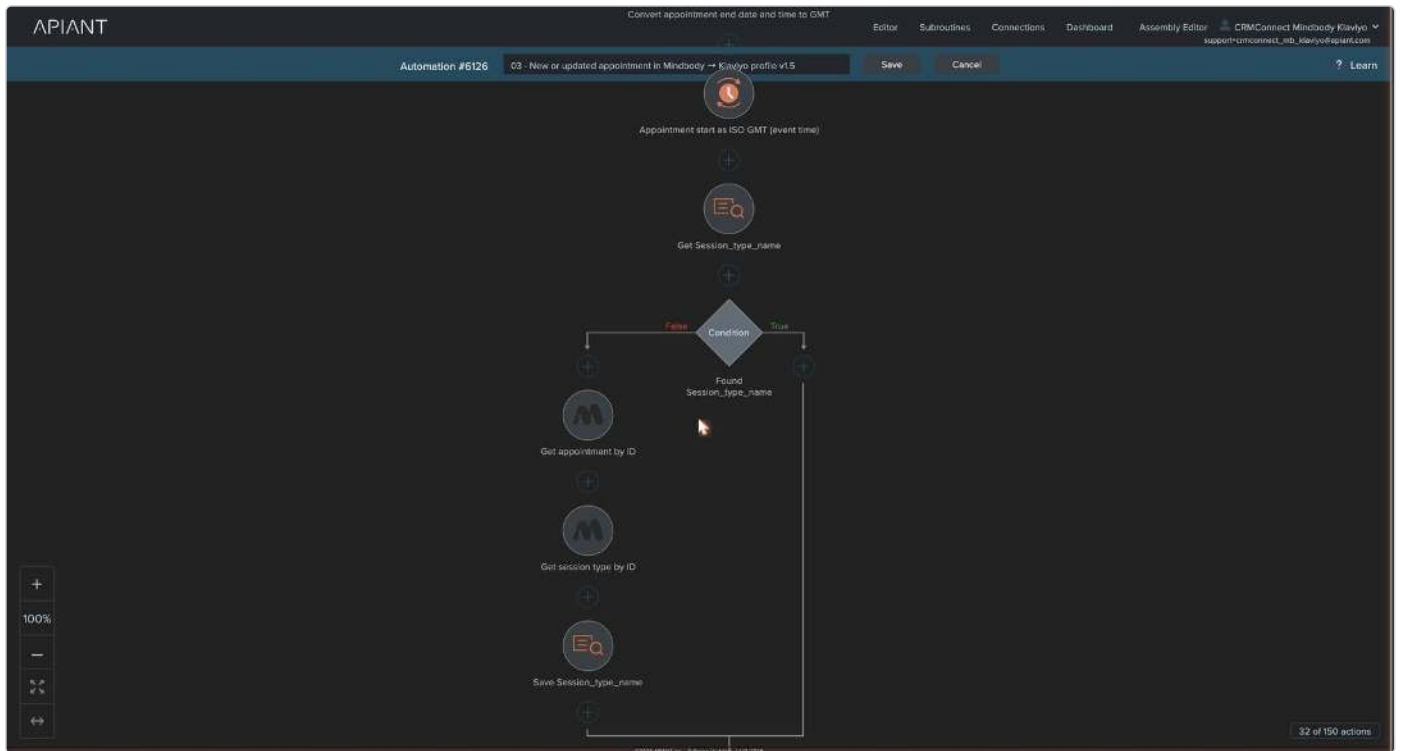


Automation 03, new or updated appointment, editor view 3 of 8

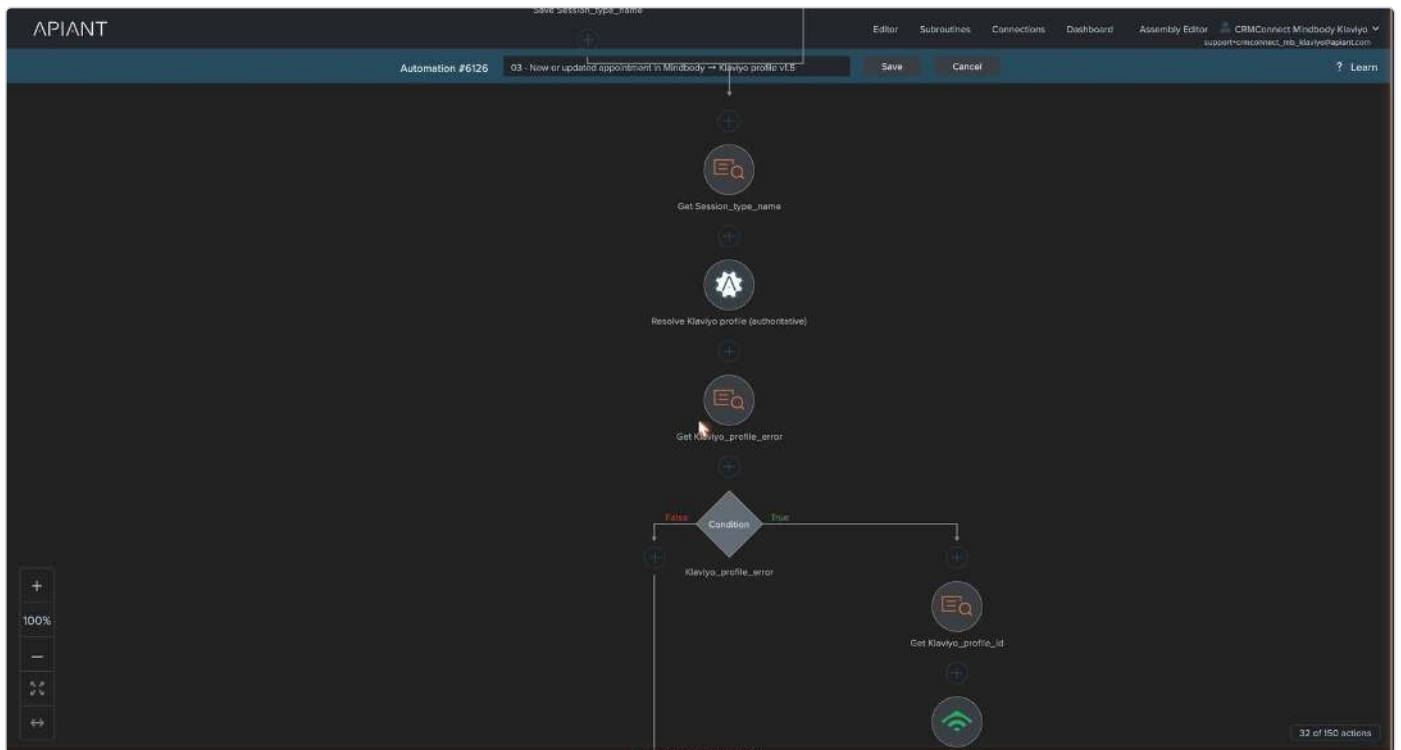


Automation 03, new or updated appointment, editor view 4 of 8

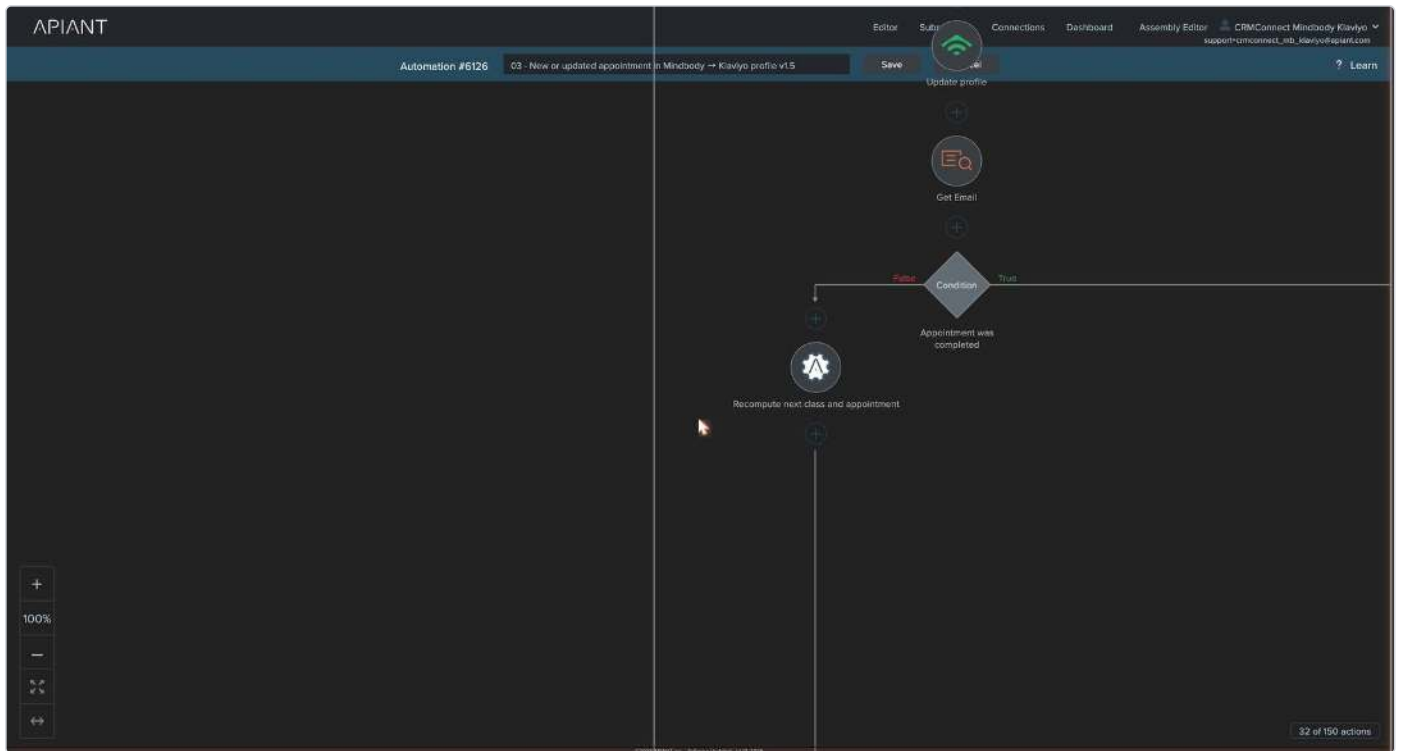


Automation 03, new or updated appointment, editor view 5 of 8

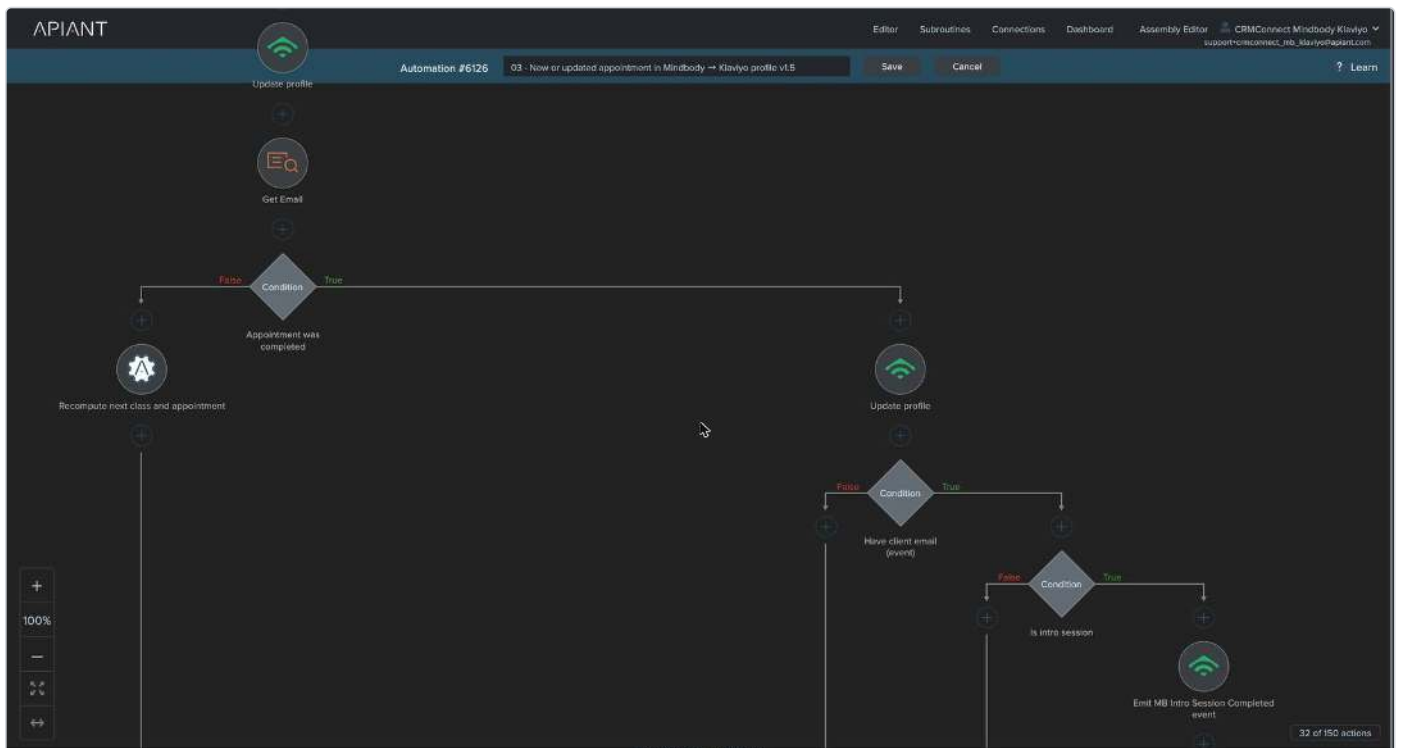

Automation 03, new or updated appointment, editor view 6 of 8

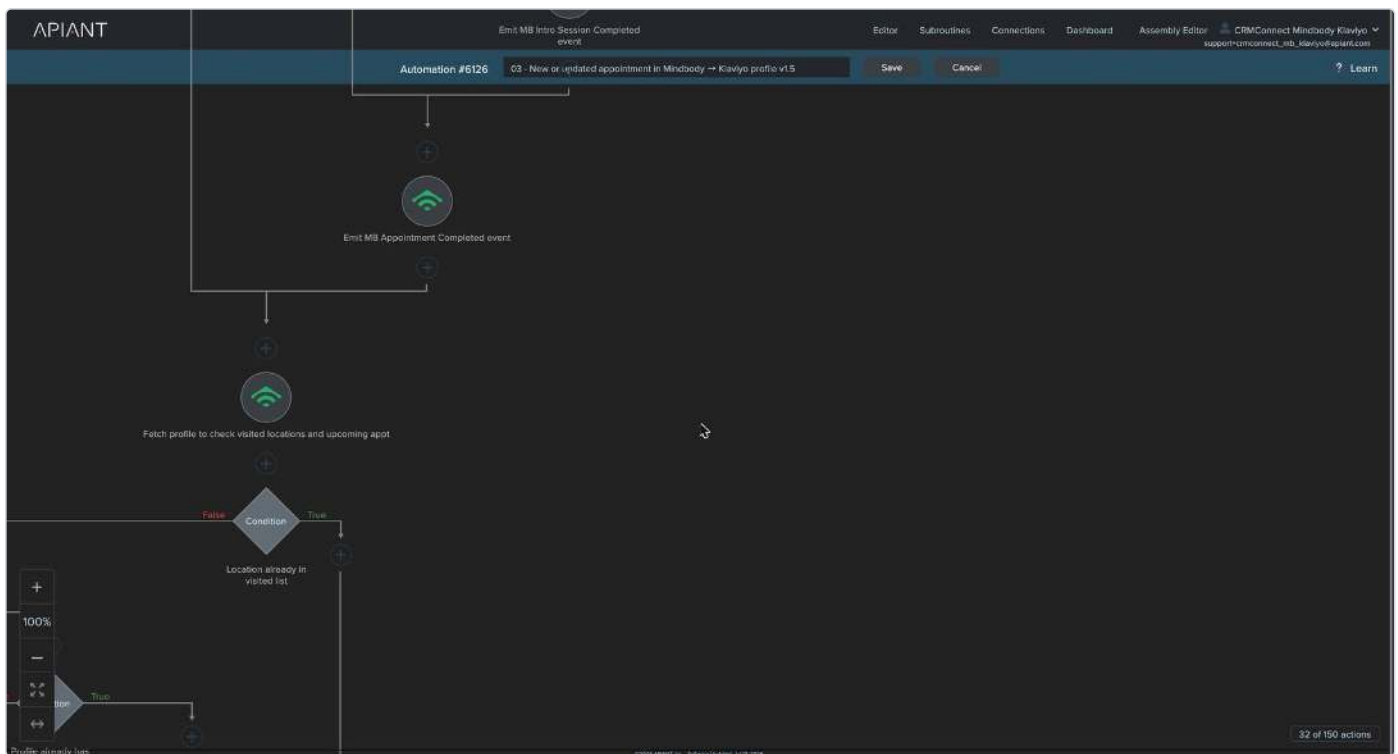

Automation 03, new or updated appointment, editor view 7 of 8

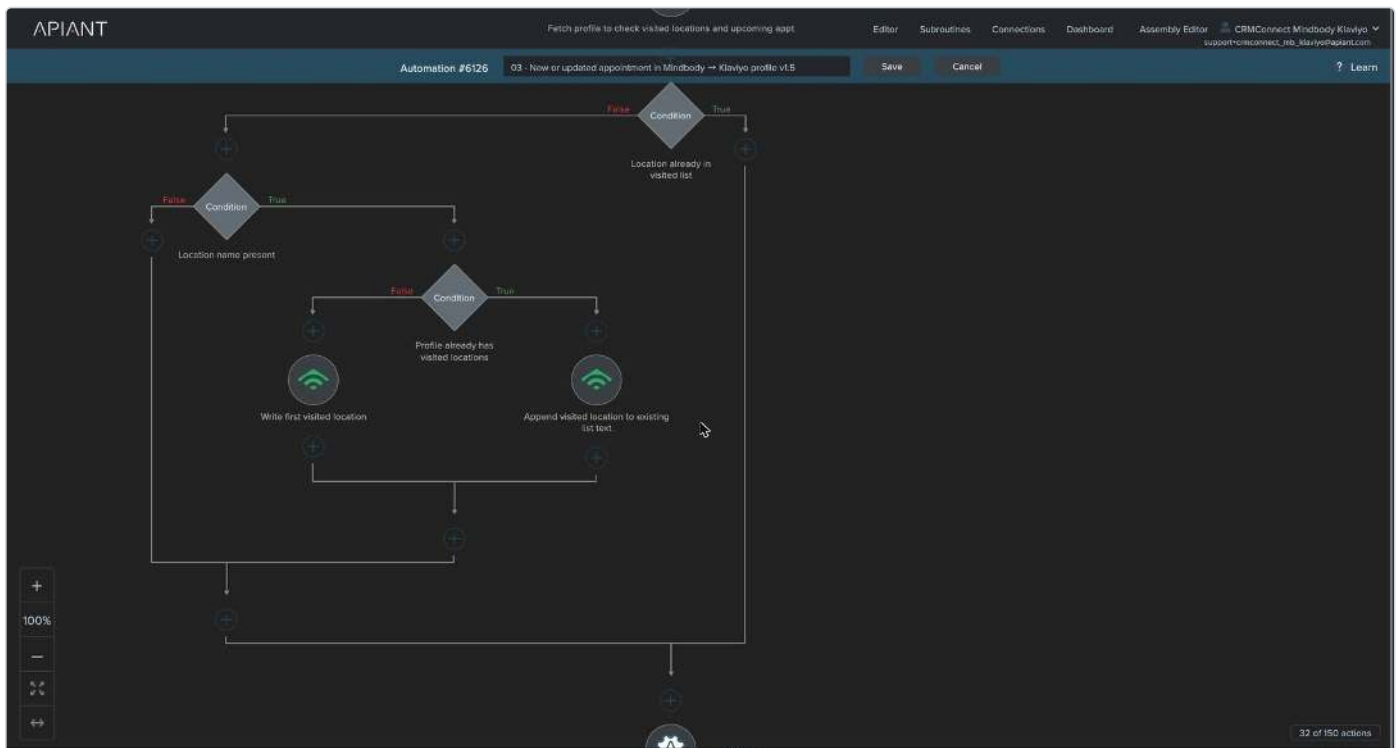


Automation 03, new or updated appointment, editor view 8 of 8


3.3 03C – Mindbody canceled appointment booking → Klaviyo profile next class booked (instant) v1.5

Function. When a client cancels an appointment, the marketing picture must change immediately: the "upcoming appointment" on the profile may no longer be valid, and cancellation-triggered flows (for example a rescue flow for clients left with no upcoming visit) need an event to react to. This automation maps the cancellation webhook back to the client (the webhook itself carries no client id), recomputes the upcoming appointment from the client's remaining future bookings, and emits MB Appointment Cancelled.


- **UUID** 03d1599b340d42ac87a6ff9be24fff4b , ON, 8 steps. Trigger: Cancelled appointment booking (instant).
- Steps 1-2: settings. Step 3: **Get Client_id** from Appointment_id<Site_id>~<eventData_appointmentId> (saved by 03 step 3). Appointments booked before v1.4 have legacy non-composite mappings; the lookup then misses and the automation exits gracefully (transitional behavior, self-heals through the recompute callers).
- Step 4 condition "Client ID is stored for Appointment" (Is not empty):
- 4.T.1 **Recompute subroutine call** (Email = None, Client_id = stored value, Site_id = trigger.eventData_siteId). The recompute either repopulates the upcoming appointment from another future booking or clears it (site-guarded).
- 4.T.2 get client email; 4.T.3 Contains @ → 4.T.3.T.1 emit **MB Appointment Cancelled**: Unique ID <siteId>~appt~<appointmentId>~cancelled, Time = eventInstanceOriginationDateTime, properties Appointment ID, Start, Site, Staff ID.

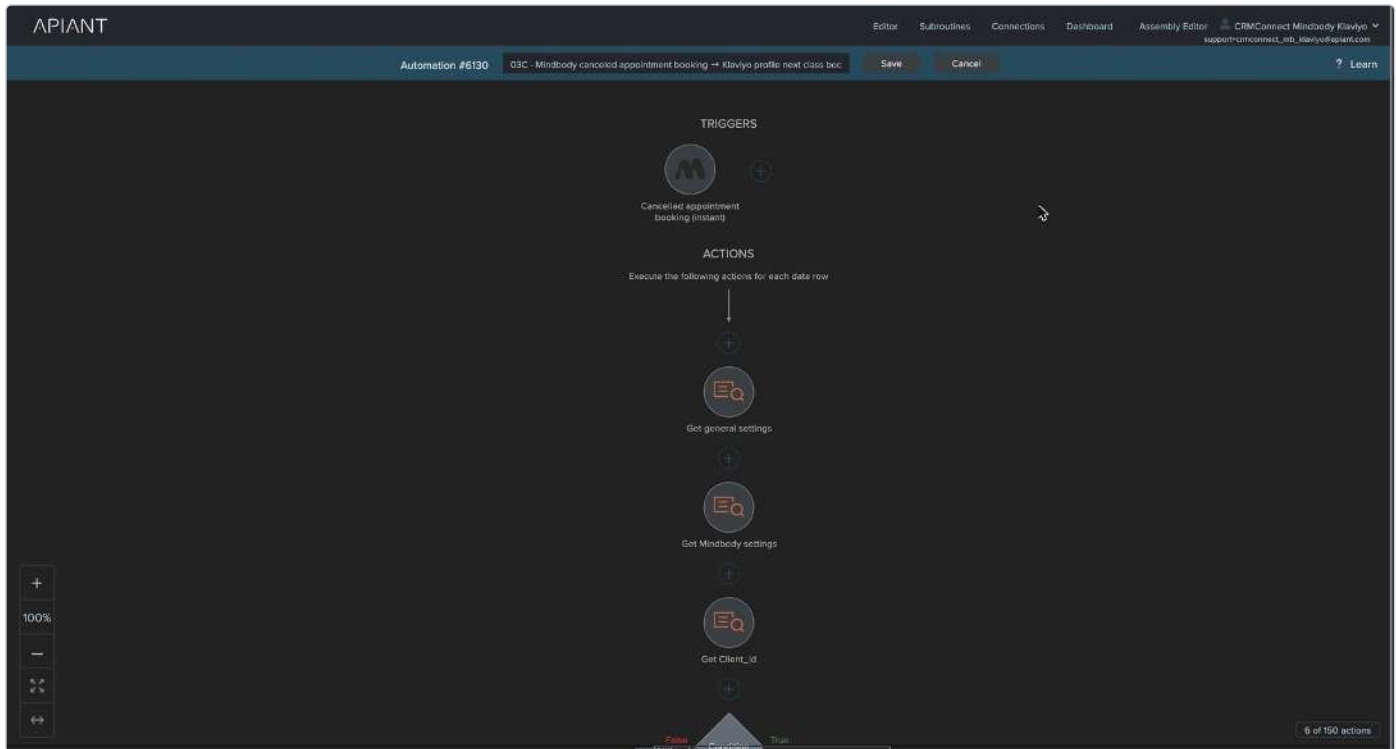

Automation 03C, canceled appointment booking, editor view 1 of 3

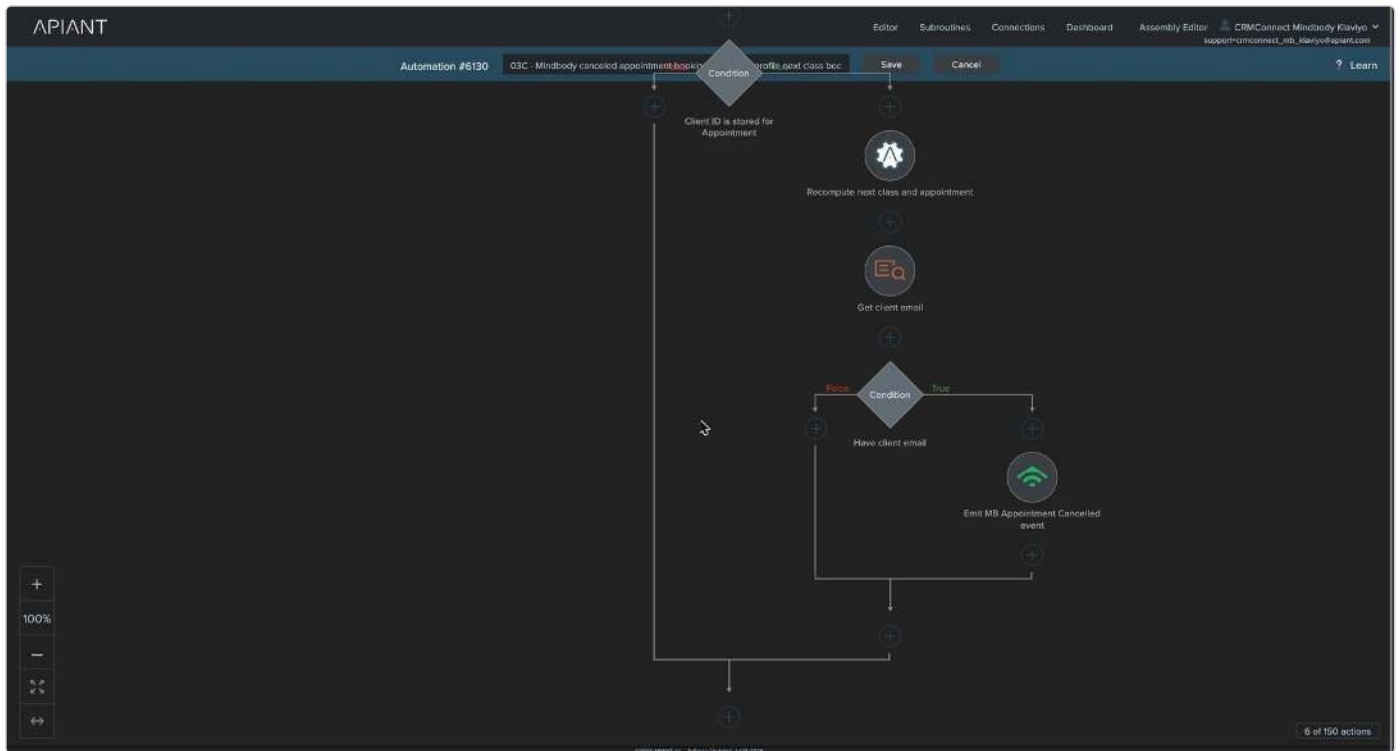

Automation 03C, canceled appointment booking, editor view 2 of 3

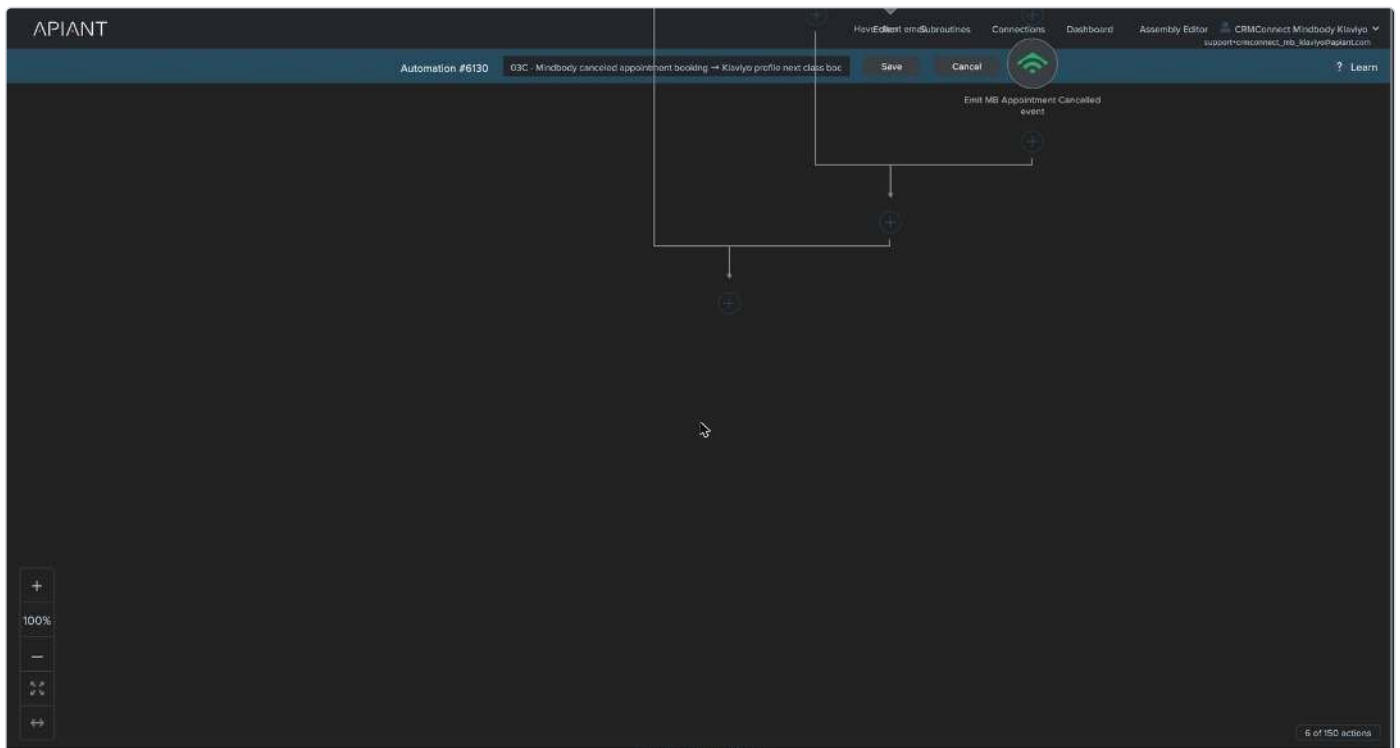


Automation 03C, canceled appointment booking, editor view 3 of 3

3.4 03D - Mindbody appointment booking created → Recompute + Booked event (instant) v1.5


Function. The instant reaction to a new appointment booking. It refreshes the client's "next class / upcoming appointment" properties through the recompute subroutine (so segments like "Upcoming Appointment Booked" update within seconds of the booking) and emits the MB Appointment Booked event that booking-confirmation and pre-visit flows trigger on. Together with 3.5 it replaced the retired 03B polling automation, cutting Mindbody API usage and latency at the same time.

- **UUID** b1320a52306f4b908c607bc6eb76780f, ON, 5 steps. Trigger: New appointment booking (instant) (appointmentBooking.created).
- Step 1 **Recompute call** (Email = None, Client_id = eventData_clientId, Site_id = eventData_siteId).
- Step 2 get client email (Mindbody_Klaviyo / Client_id_<siteId>~<clientId> / Email); step 3 get location name (Mindbody_location_mappings / <siteId>~<locationId>).
- Step 4 Contains @ → emit **MB Appointment Booked**: Unique ID <siteId>~<appt~<appointmentId> (no suffix), Time = eventInstanceOriginationDateTime, properties Appointment ID, Start, End, Duration minutes (#num:), Site, Location, Staff (first + last), Staff ID.

Split from 03E because multi-trigger pipe-alternate expressions render literally at runtime (v1.5 platform rule; all new fleet automations are single-trigger).

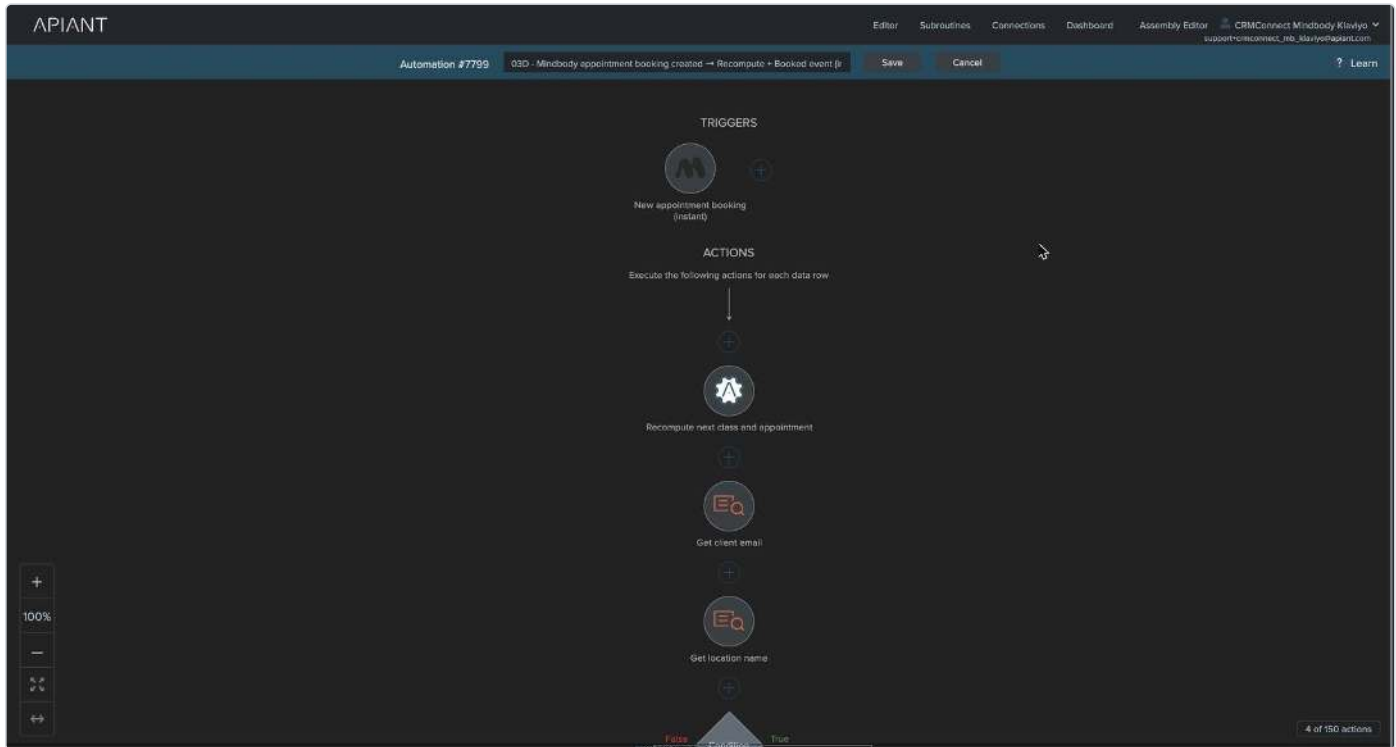

Automation 03D, appointment booking created, editor view 1 of 2

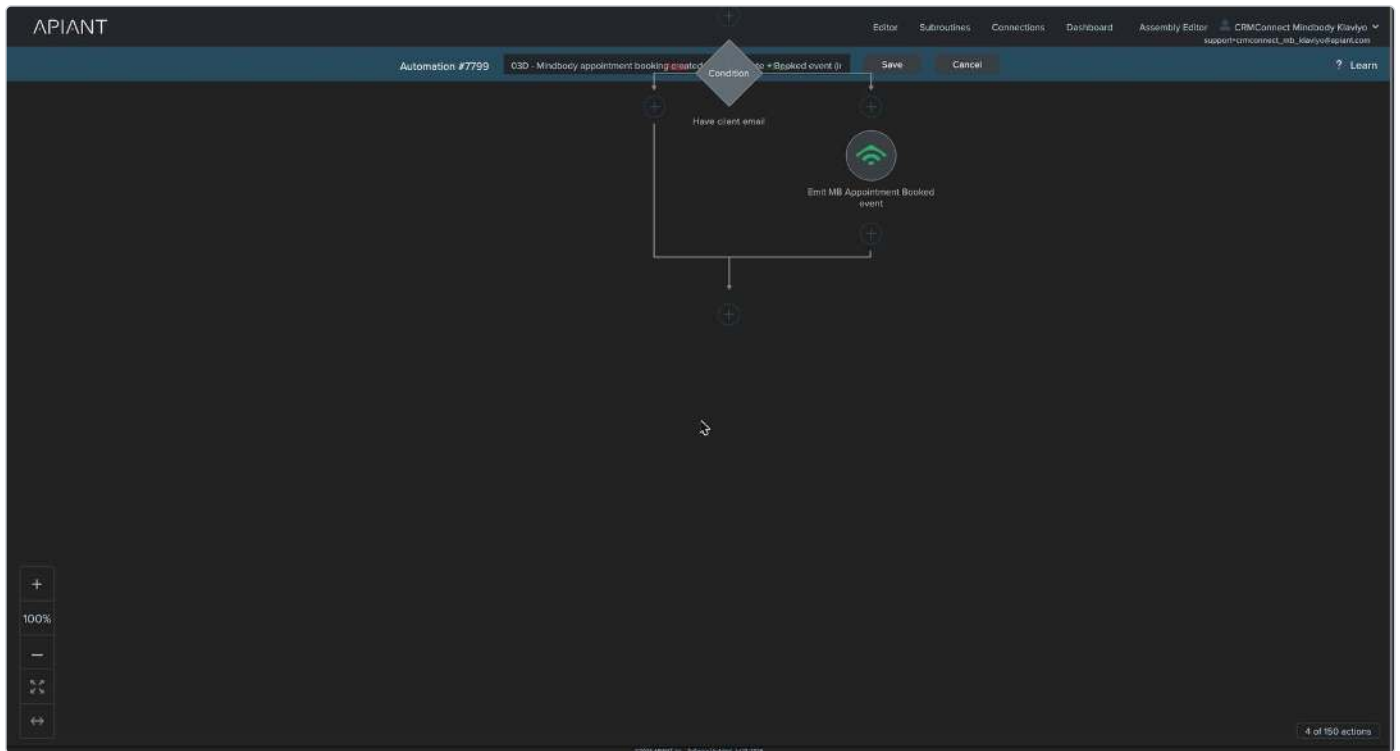

Automation 03D, appointment booking created, editor view 2 of 2

3.5 03E - Mindbody appointment booking updated → Recompute + status events (instant) v1.5


Function. The instant reaction to appointment changes. When the studio confirms an appointment or marks the client as arrived, this automation emits the corresponding MB Appointment Confirmed and MB Appointment Arrived events (native-integration parity capabilities used by reminder and no-show flows), recomputes the upcoming-appointment properties (covering reschedules), and re-emits MB Appointment Booked as a self-healing measure: if the original created webhook was ever missed, the Booked event backfills here, and if it was not, Klaviyo's event dedupe silently absorbs the duplicate.

- **UUID** f877ee07239c4f04862d0bc7a2c70267, ON, 9 steps. Trigger: Updated appointment booking (instant) (appointmentBooking.updated).


Same head as 03D (recompute call, email + location lookups). Step 4 Contains @ branch then emits, in order:

1. 4.T.1 if `eventData_isConfirmed Equals true` → **MB Appointment Confirmed**, Unique ID `<siteId>~appt~<appointmentId>~confirmed`.
2. 4.T.2 if `eventData_hasArrived Equals true` → **MB Appointment Arrived**, Unique ID `...~arrived`.
3. 4.T.3 unconditional **MB Appointment Booked** heal (same no-suffix Unique ID as 03D).


All three carry Appointment ID, Start, End, Duration minutes (#num:), Site, Location, Staff; Time = `eventInstanceOriginationDateTime`.

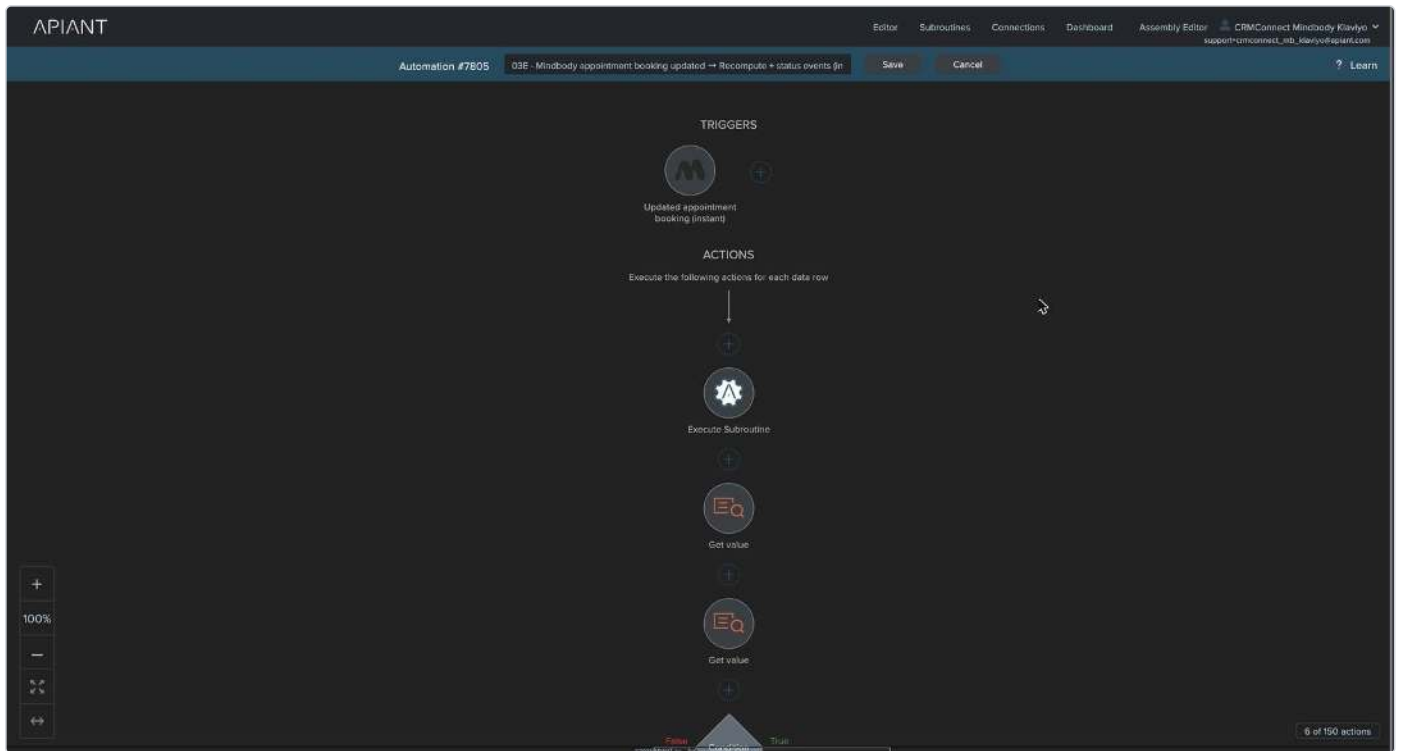

Automation 03E, appointment booking updated, editor view 1 of 3

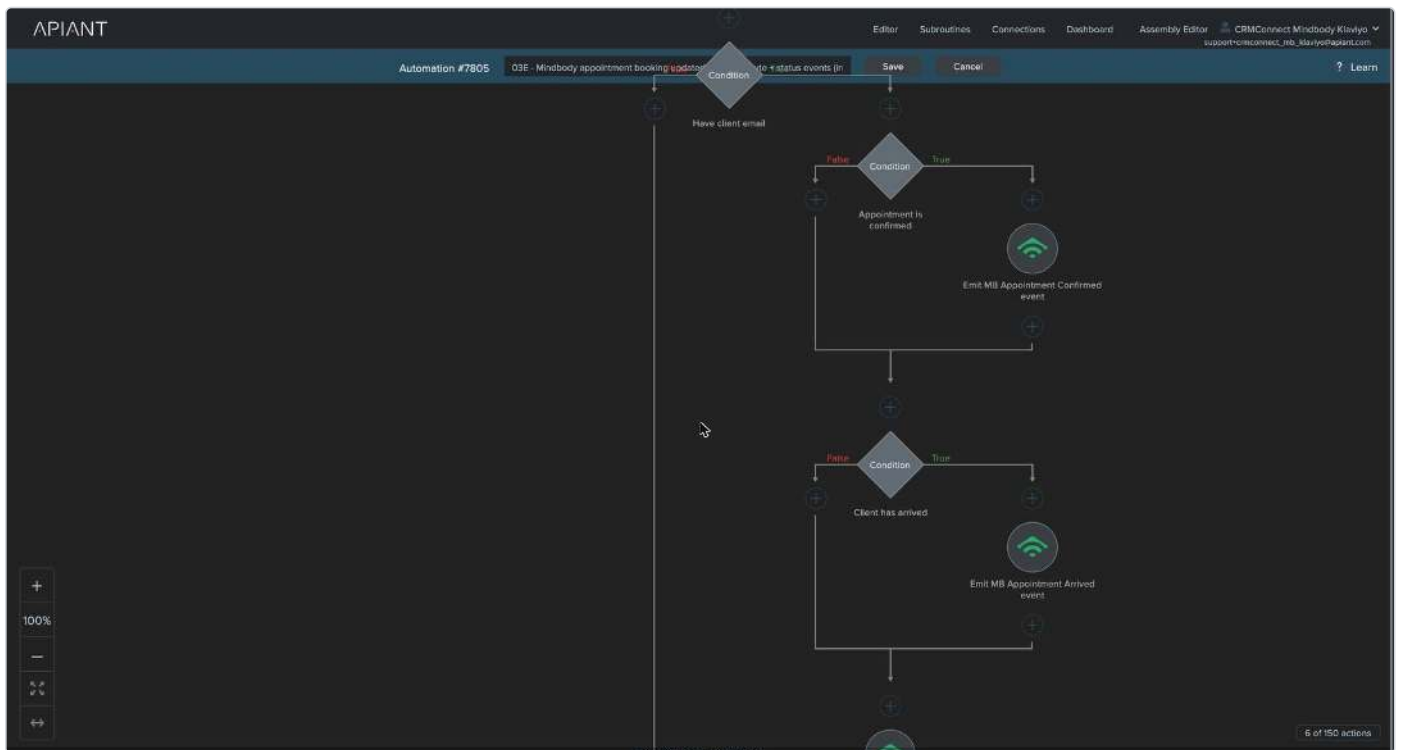

Automation 03E, appointment booking updated, editor view 2 of 3

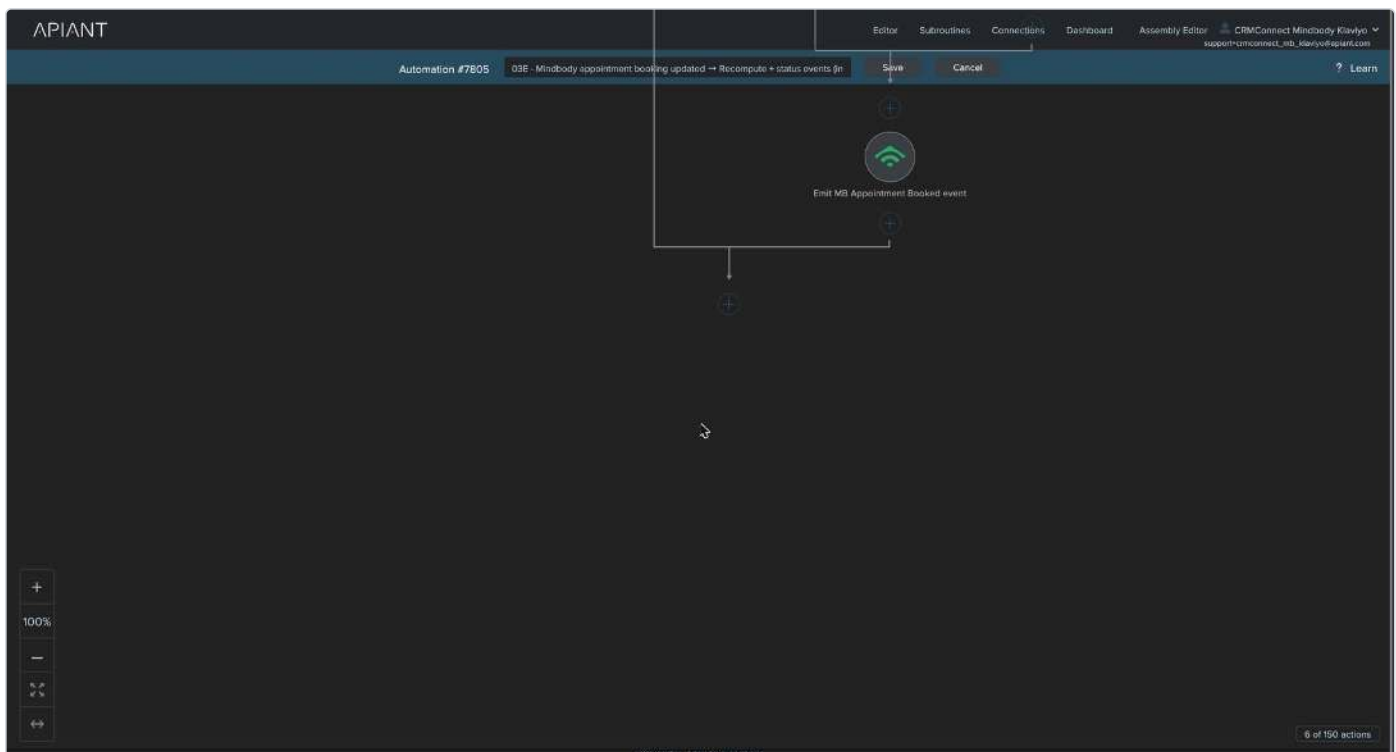

Automation 03E, appointment booking updated, editor view 3 of 3

3.6 05 - New sale line item in MINDBODY → Klaviyo profile (instant) v1.5

Function. The instant revenue pipeline. Every sale in Mindbody (retail product, service, pack, intro offer, or contract) arrives as one webhook record per line item; this automation stamps per-item purchase properties on the buyer's profile (last product, last service, last intro offer, purchase location, contract details), and, exactly once per sale, emits the Klaviyo-canonical Placed Order (full cart, sale total) and Ordered Product events, refreshes the client's account balance, and records the sale-level dedupe key that makes the nightly sweep (3.7) and any backfill replay-safe. The intro-offer keyword match here is what populates the "Intro Offer Buyers" segment behind the Intro Offer Welcome flow.


- **UUID** 2813d613e5ba492a8a3d565219e24a58 , ON, 34 steps. Trigger: New sale line item (instant) . The trigger fans a multi-item sale into **one record per line item**, processed in parallel.

Structure.


- Steps 1-3: settings + location mapping. Step 4: sale date → GMT.
- Step 5 **Resolver call**: Email = None , Client_id = eventData_items_e_recipientClientId (the item recipient, not necessarily the purchaser), Site_id = eventData_siteId .
- Steps 6-7: parked-error gate. If clean, get the profile id (7.T.1), then:
- Item-type branch tree** (7.T.2, on eventData_items_e_type):
 - product → Update profile: MB Last product purchased, MB Last product purchase date, MB Last purchase location .
 - else contract → Get most recent client contract from Mindbody, contract start/end → GMT, Update profile: Contract , MB Contract autopay status , MB Contract start date, MB Contract end date, MB Last service purchased, MB Last service purchase date, MB Last purchase location .
 - else "Is this an intro offer?" (eventData_items_e_name Contains Intro_offer_first_keyword):
 - TRUE → Update profile: MB Last intro offer purchased, MB Last intro offer purchased date, MB Last purchase location .
 - FALSE → Update profile: MB Last service purchased, MB Last service purchase date, MB Last purchase location .
- Sale-level once-only block**: 7.T.3 get the dedupe key (temp_CRMConnect_Mindbody_Klaviyo / MB_Site_sale_id <siteId> <saleId> / MB_Sale_ID); 7.T.4 "First time we process this sale ID" (Is empty), so on a multi-item sale exactly one parallel record wins the sale-level work:
- 7.T.4.T.1 Get client services totals by product ID; if found (Count Is not empty): expiry reformat + Update profile with dynamic MB <Name> count / remaining / exp date .
- 7.T.4.T.3/4 client email gate (Contains @), then the **revenue block**:
 - 7.T.4.T.4.T.1 Mindbody **Get sale** (all line items).

- 7.T.4.T.4.T.2 Transform Data join: Items JSON, one object per line item:
{"ProductID","ProductName","Quantity","ItemPrice","Discount"}, comma-joined.
 - 7.T.4.T.4.T.3 join quoted item names.
 - 7.T.4.T.4.T.4 emit **Ordered Product** (this line item): Unique ID <siteId>~sale~<saleId>~item~<itemId>, Time = eventData_saleDateTime (webhook UTC), Value = eventData_items_e_amountPaid, properties ProductID, ProductName, Quantity (#num:), ItemPrice (#num:), Discount (#num:), Site, Location.
 - 7.T.4.T.4.T.5 emit **Placed Order** (full cart): Unique ID <siteId>~sale~<saleId>, Time = eventData_saleDateTime, Value = eventData_totalAmountPaid (sale total), properties ItemNames = [<joined names>], Items = [<joined JSON>], Site, Location, PaymentMethod = eventData_payments_e_paymentMethodName, SaleID.
11. 7.T.4.T.5/6 Mindbody Get client (account balance) → **Refresh MB Account balance** on the profile.
12. 7.T.4.T.7 **Save the dedupe key** (continue-on-noncritical-error), closing the once-only gate (v1.5 fix: the key used to be read but never saved).


Note: only one Ordered Product is emitted per webhook record, but since the trigger fans out one record per line item and each record's Ordered Product unique id carries its own itemId, a multi-item sale still yields one Ordered Product per item plus a single Placed Order (sale-gated), all idempotent.

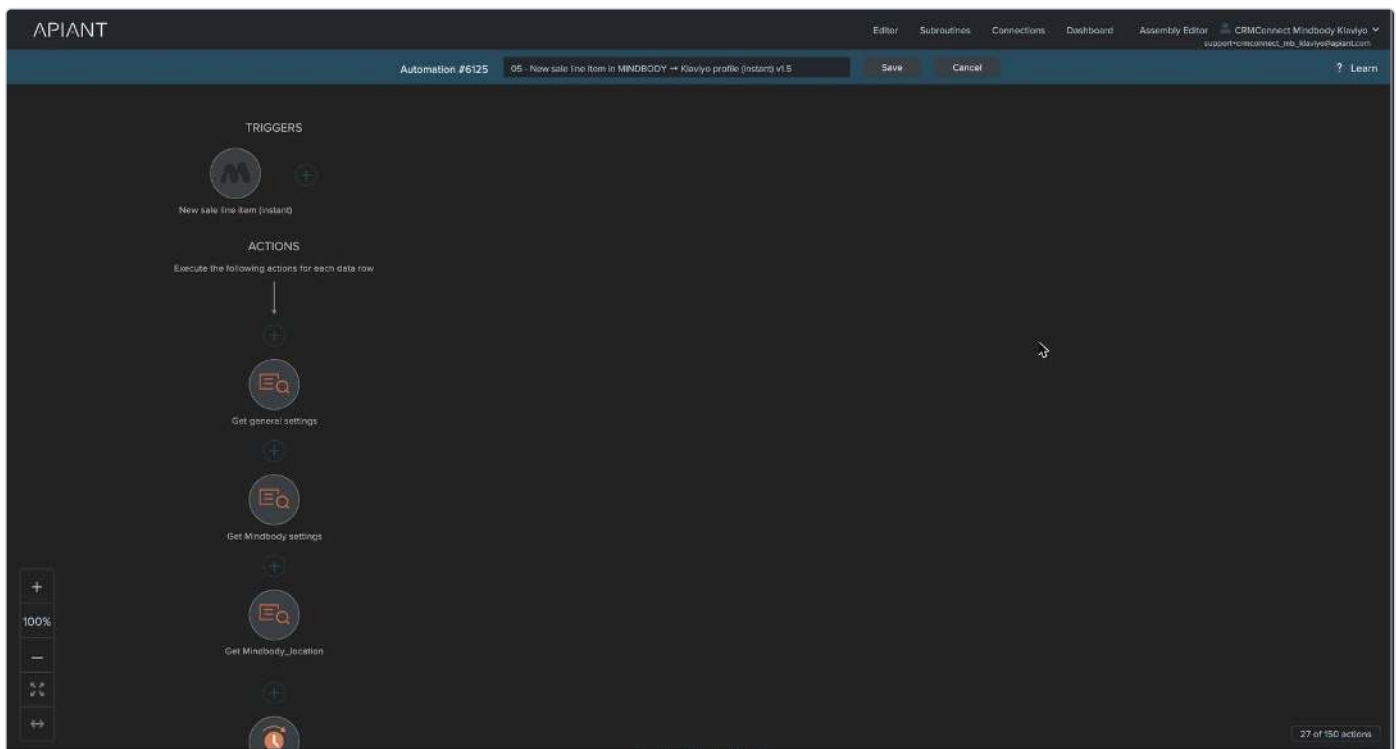


Automation 05, new sale line item, editor view 1 of 4

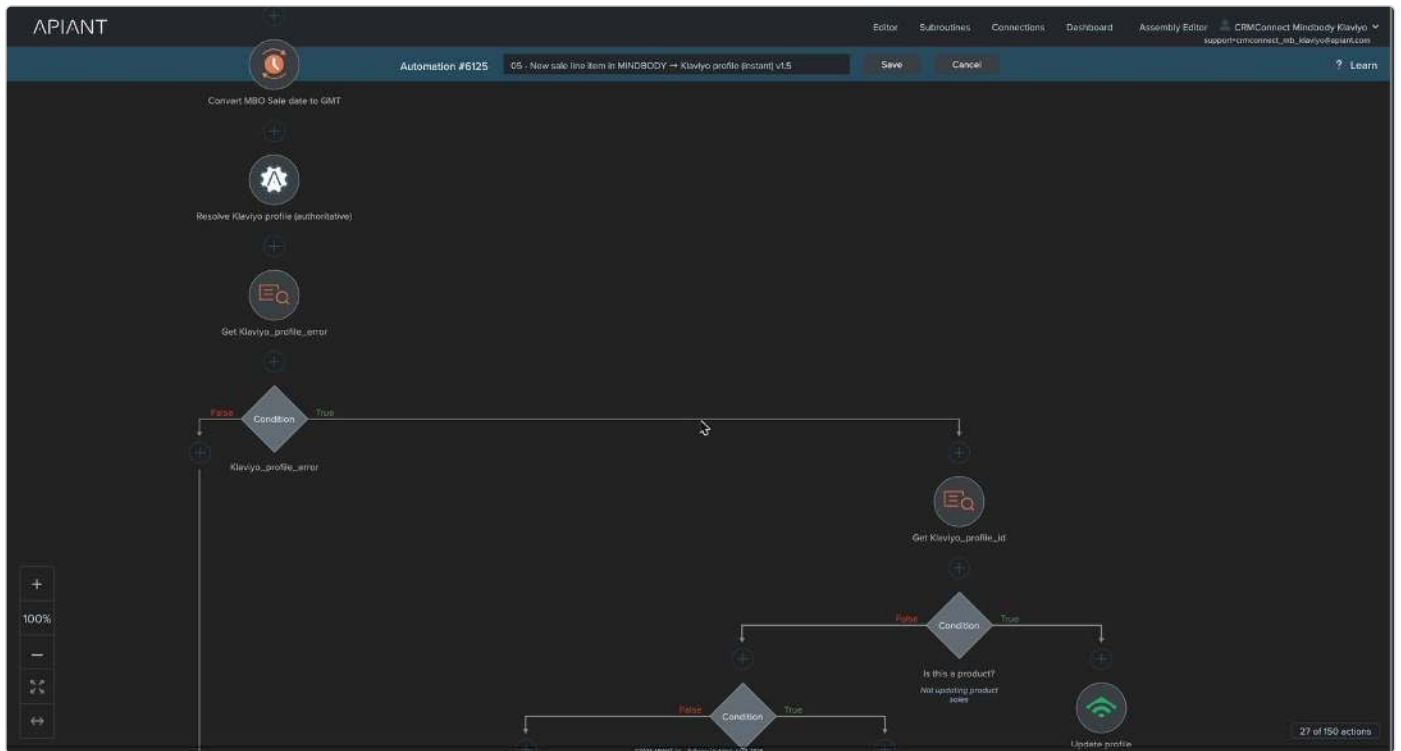

Automation 05, new sale line item, editor view 2 of 4

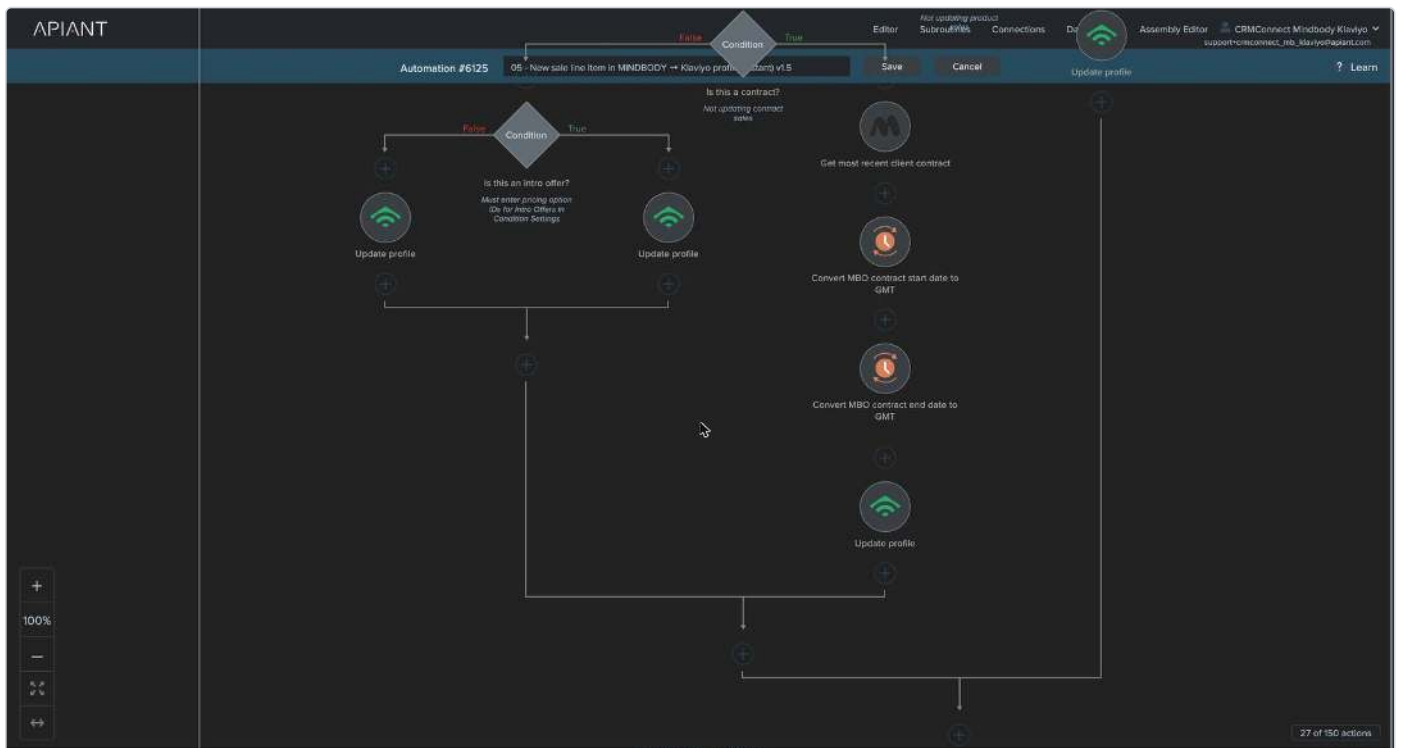

Automation 05, new sale line item, editor view 3 of 4

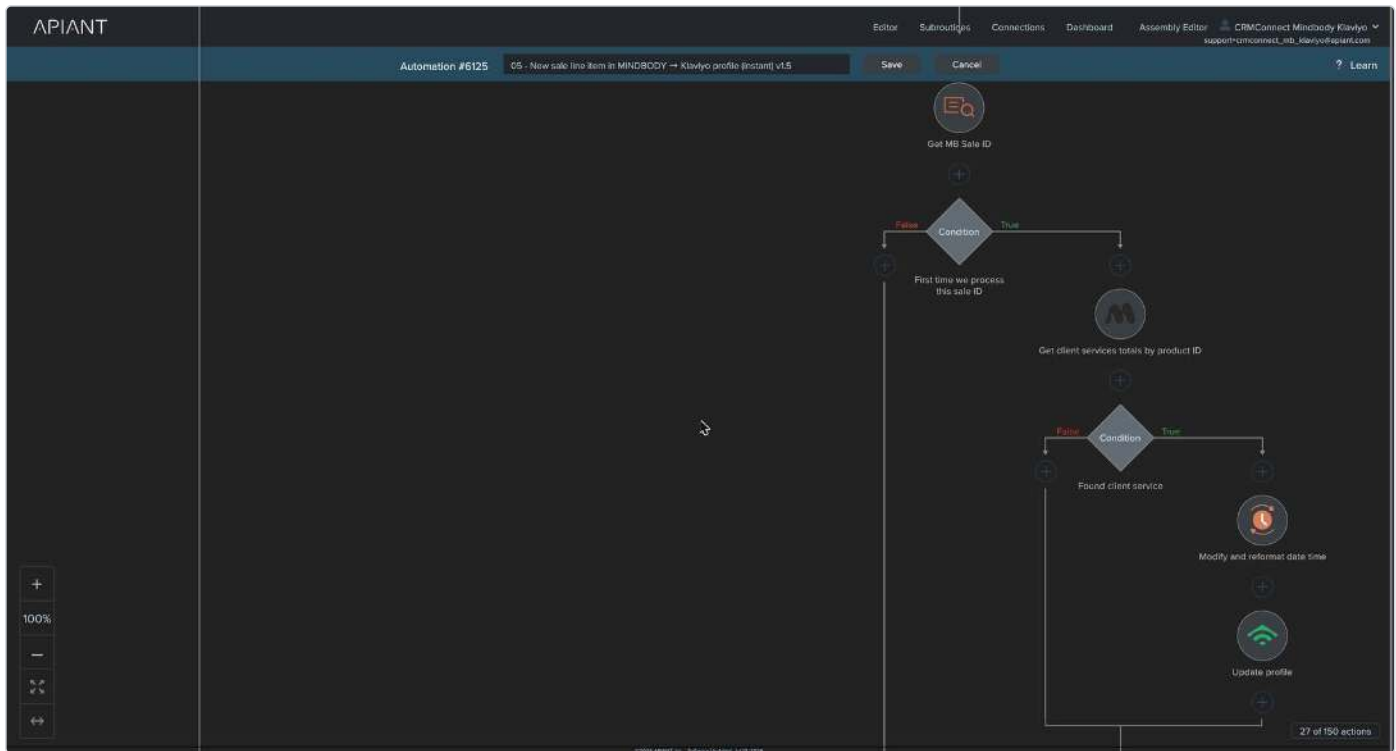


Automation 05, new sale line item, editor view 4 of 4

3.7 06 - Mindbody sales -> Sweep yesterday sales to Klaviyo events v1.5


Function. The revenue safety net and the historical backfill tool in one. Webhooks can be missed (outages, subscription gaps, onboarding before the webhook existed); every night this automation lists yesterday's sales from the Mindbody API, checks each one against the sale dedupe key, and replays only the sales the instant pipeline never processed, through the same per-sale subroutine (3.19). Because the date window is read from settings rather than hardcoded, widening the window turns the same automation into the onboarding backfill that loads months of revenue history (a 166-sale backfill was proven in 7 minutes with zero errors), with replayed events flagged MB Backfilled so marketing can exclude them from real-time flows.

- **UUID** 1e7682b990ab4f298760d7d81c4a9409 , ON, 10 steps. Trigger: Date Time Every day at 01:30 account time [time doc-derived; trigger type platform-verified].
- Steps 1-3: Site_id , Sales_sweep_start_date , Sales_sweep_end_date from Mindbody_settings (single-value lookups; default window "yesterday").
- Steps 4-5: Transform Date Time with Timezone offset seconds = ACCOUNT , output yyyy-mm-dd .
- Step 6: Mindbody **Get sales in date range** (<start>T00:00:00 to <end>T23:59:59 , retry mode).
- Step 7 loop over Sale ID :
- 7.L.1 get the dedupe key MB_Site_sale_id<Site_id>_<Sale ID> .
- 7.L.2 "Sale not yet processed (missed by webhook)" (Is empty) → 7.L.2.T.1 **subroutine call: Process one Mindbody sale** (continue-on-any-error, so one bad sale never kills the sweep) with Site_id , Sale_id , Client_id .


Already-processed sales are skipped by the dedupe key; replayed events are additionally idempotent at the Klaviyo layer via unique ids.

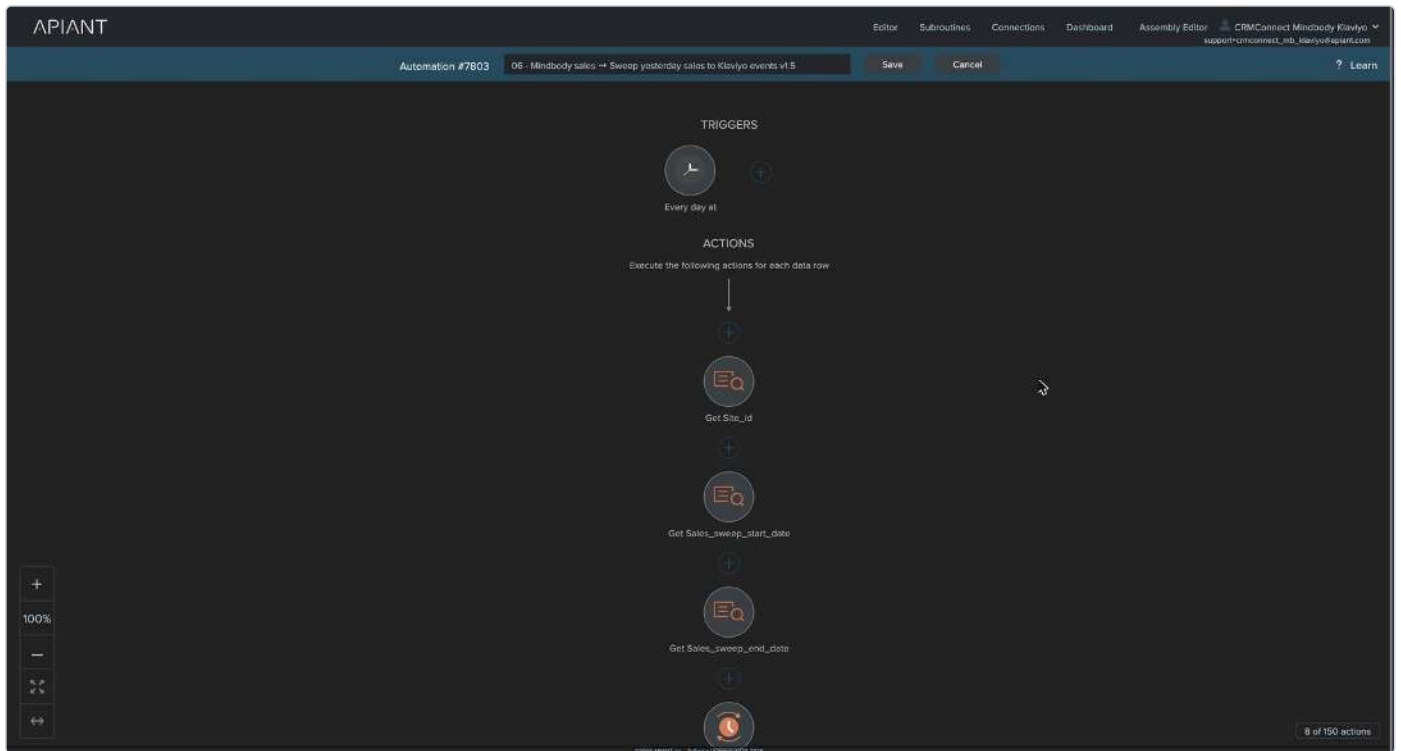

Automation 06, nightly sales sweep, editor view 1 of 3

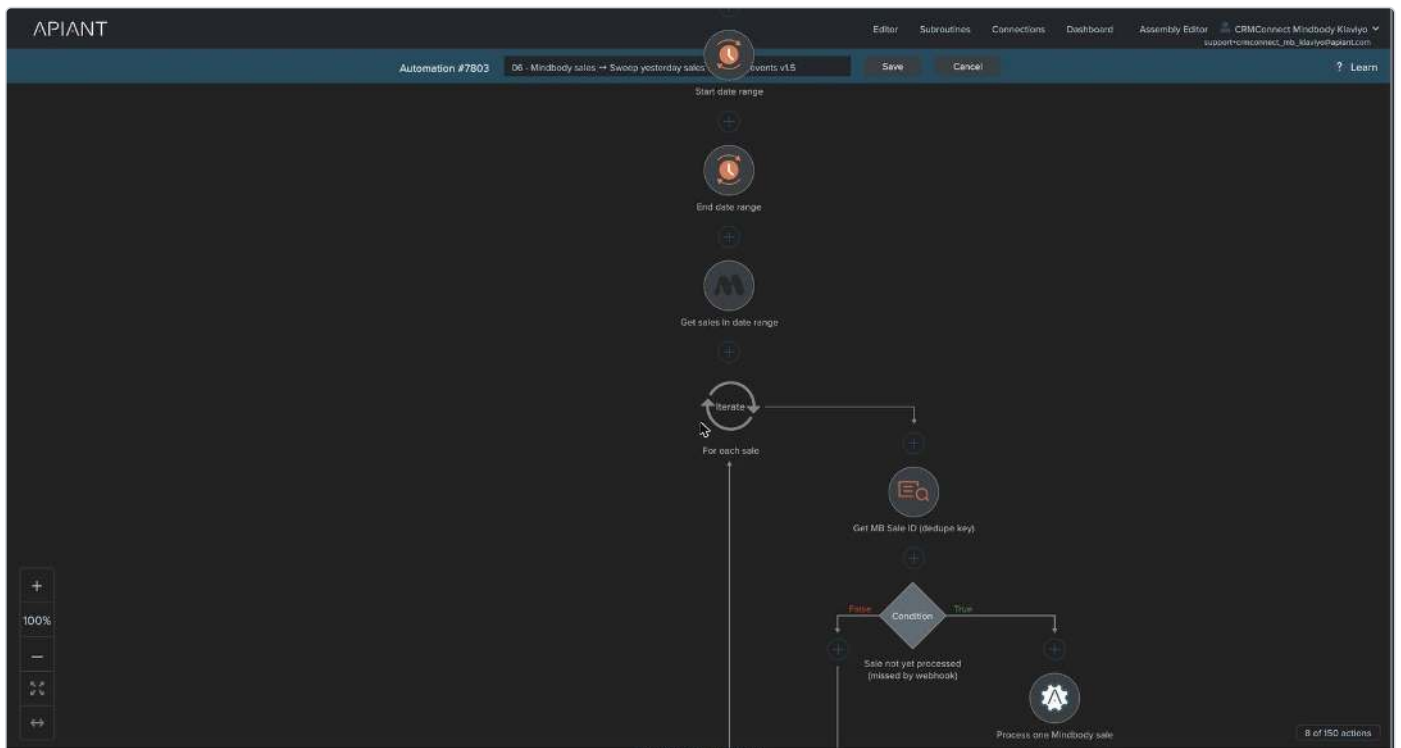

Automation 06, nightly sales sweep, editor view 2 of 3

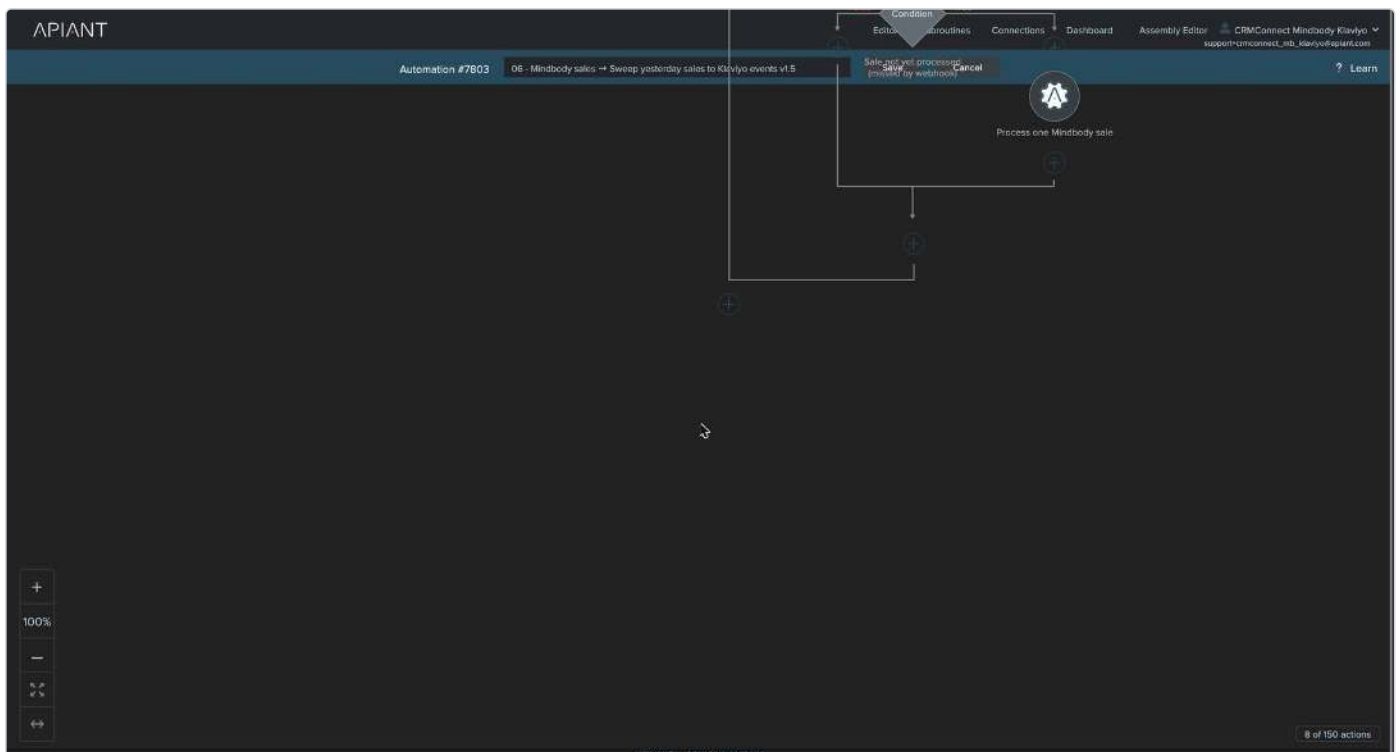

Automation 06, nightly sales sweep, editor view 3 of 3

3.8-3.12 Membership and contract event automations

Function (group). These five automations give marketing a real-time view of the recurring-revenue relationship. Membership activations and cancellations (3.8, 3.9) and contract creations and cancellations (3.10, 3.11, 3.12) each produce a time-stamped, idempotent Klaviyo event (feeding win-back, renewal-window, and onboarding flows) and keep status properties on the profile current (feeding segments such as "Contract Renewal Window"). Automation 08B exists because of a confirmed Mindbody gap: contract terminations performed in the Mindbody UI never emit the cancellation webhook, so 08B reconciles contract state from the live Mindbody API on every contract update and emits the cancellation event itself when it detects a termination, sharing the cancellation event's unique id with 08C so the two can never double-fire.

All five share the same skeleton [platform-verified]: step 1 **Resolver call**, steps 2-3 read the cached client email and Klaviyo profile id, then an email gate (Contains @) wrapping an event emit and (profile-id gated) property write. Time is always `eventInstanceOriginationDateTime`; all writes are retry mode.


3.8 07 - new membership (7 steps, UUID `a3e495f2f90b4569890d21c6b0dc918a`), trigger New membership (instant) (clientMembershipAssignment.created). The resolver receives `Email = eventData_clientEmail` (this webhook carries the email). Emits **MB Membership Activated**: Unique ID `<siteId>~membership~<membershipId>~<clientId>~activated`, properties Membership (name), Membership ID, Site. Writes MB Membership = <name>, MB Membership status = Active.

3.9 07B - cancelled membership (7 steps, UUID `3faae3d05adb495a8dd4df8e57ac48f3`), trigger Cancelled membership (instant). Emits **MB Membership Cancelled**: Unique ID `<siteId>~membership~<membershipId>~<clientId>~cancelled`, properties Membership ID, Site. Writes MB Membership status = Cancelled.


3.10 08 - new client contract (9 steps, UUID `c0a0eaea75ac4bd283ce51719b6a8deb`), trigger New client contract (instant) (clientContract.created). Adds contract start/end → GMT transforms (steps 4-5). Emits **MB Contract Created**: Unique ID `<siteId>~contract~<clientContractId>~created`, properties Contract (name), Contract ID, Client contract ID, Start, End, Auto renewing, Sold by (staff first + last), Site. Writes Contract, MB Contract status = Active, MB Contract auto renewing, MB Contract start date, MB Contract end date.

3.11 08B - updated client contract (14 steps, UUID `d34b85cad1f44415890d4a26c41dbedc`), trigger Updated client contract (instant) (clientContract.updated). The contract-termination reconciler (closes known issue MB-CONTRACT-CANCEL-001: the updated payload is byte-identical for terminations and reactivations). Steps 4-5 date transforms; step 6 Mindbody **Get most recent client contract** (live state); step 7 termination date → yyyy-mm-dd. Inside the email gate, condition 8.T.1 "Contract terminated", **XML-verified as AND**: live TerminationDate Is not empty AND live contract Id Equals `trigger.eventData_clientContractId`: - TRUE: (profile-id gated) write MB Contract status = Terminated, MB Contract end date = `<termination date>`; emit **MB Contract Cancelled** with the **same unique id 08C would use** (`<siteId>~contract~<clientContractId>~cancelled`), properties Client contract ID, Terminated from, Site. If Mindbody ever ships the real cancel webhook, 08C's event dedupes against this one. - FALSE (refresh): write MB Contract status = Active, auto renewing, start and end dates. The Contract name is deliberately never overwritten here (the updated payload lacks it). - Residual limitation: if the client's most recent contract is not the updated one, only the refresh branch can run.


3.12 08C - cancelled client contract (7 steps, UUID 49c944dbd1fd43ba8e1cc395491b91fa), trigger Cancelled client contract (instant). Kept subscribed as a no-op safety net for the webhook Mindbody does not currently send for UI terminations. Emits **MB Contract Cancelled** (same unique id scheme as 08B), properties Contract, Contract ID, Client contract ID, Site. Writes MB Contract status = Cancelled.

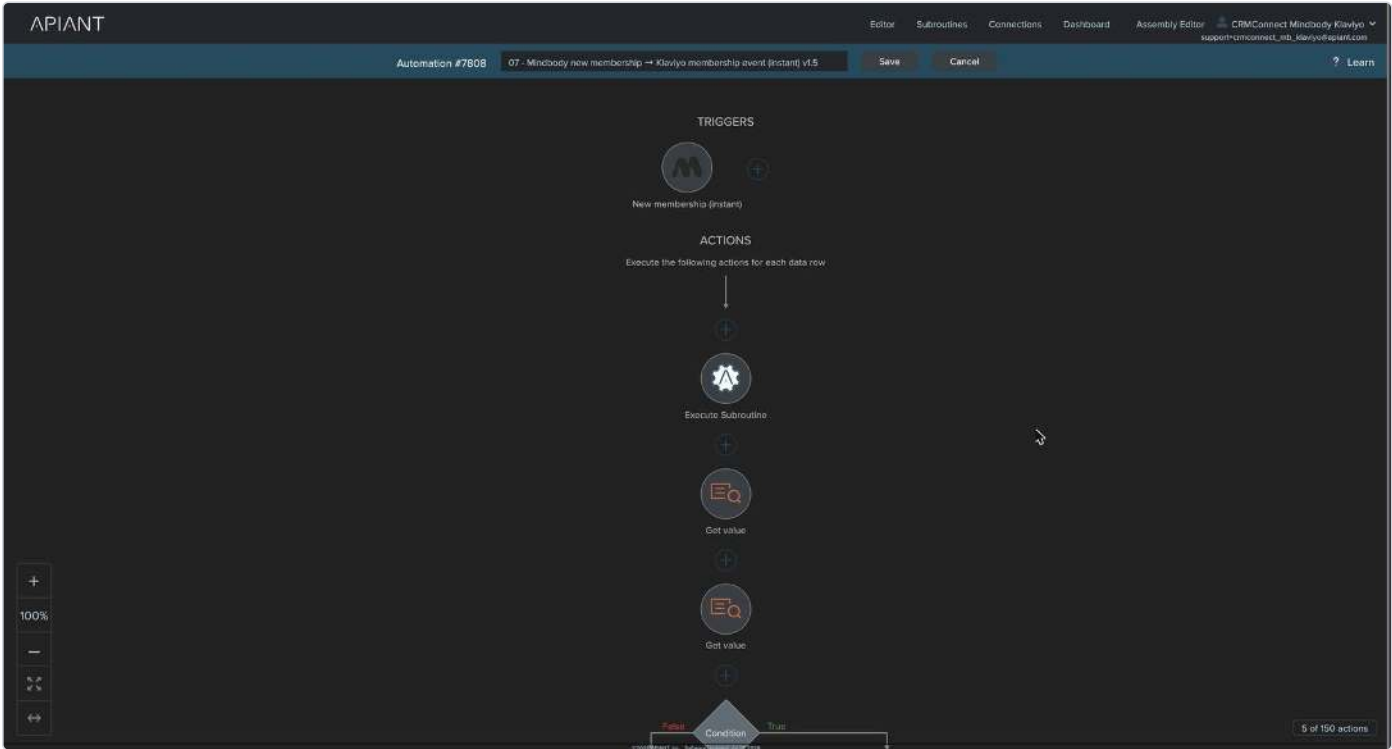


Automation 07, new membership, editor view 1 of 3

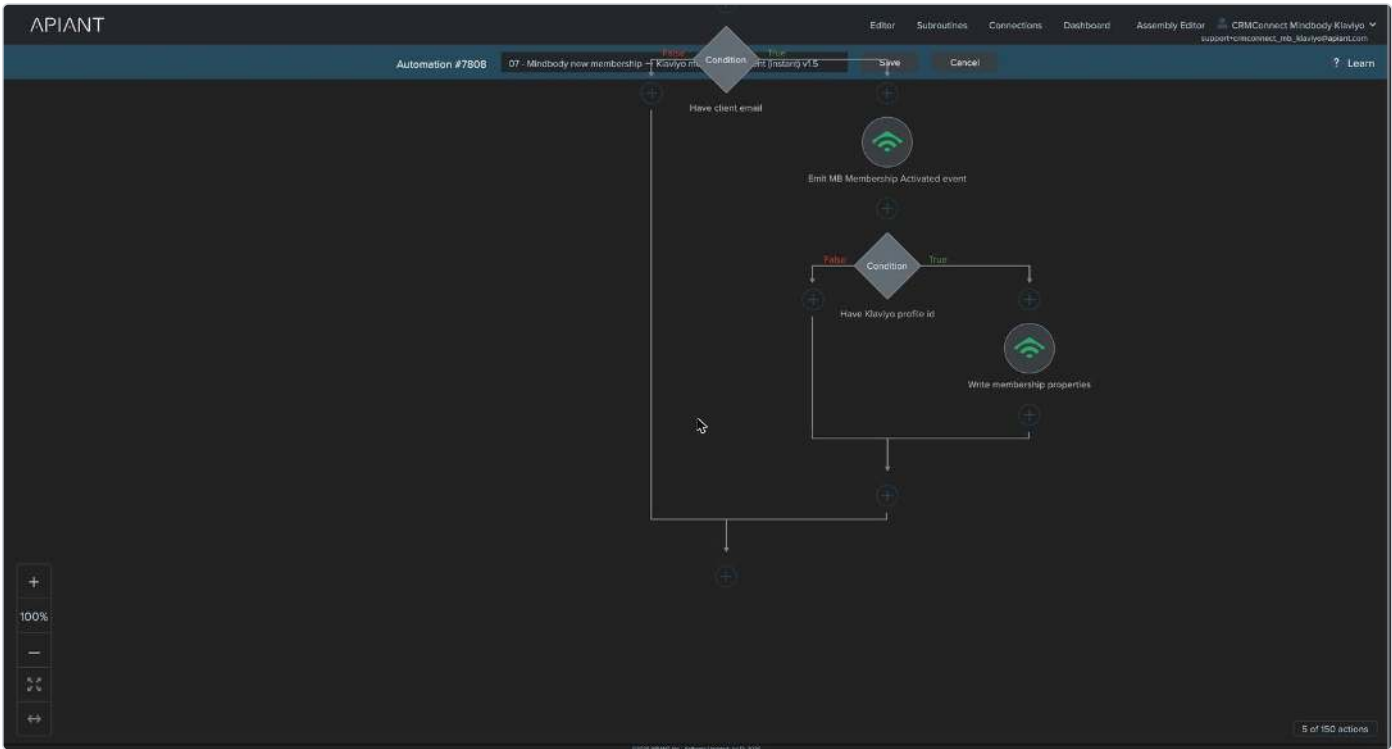


Automation 07, new membership, editor view 2 of 3

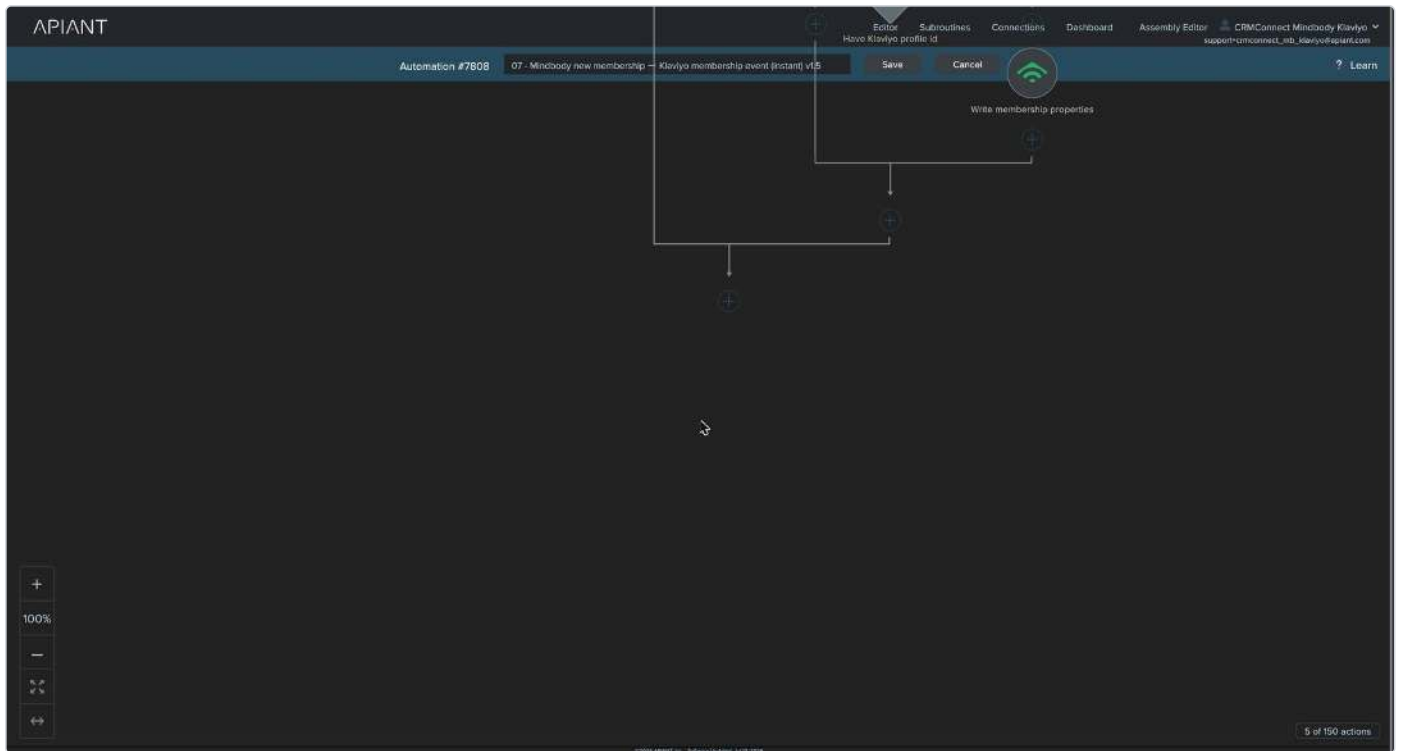


Automation 07, new membership, editor view 3 of 3

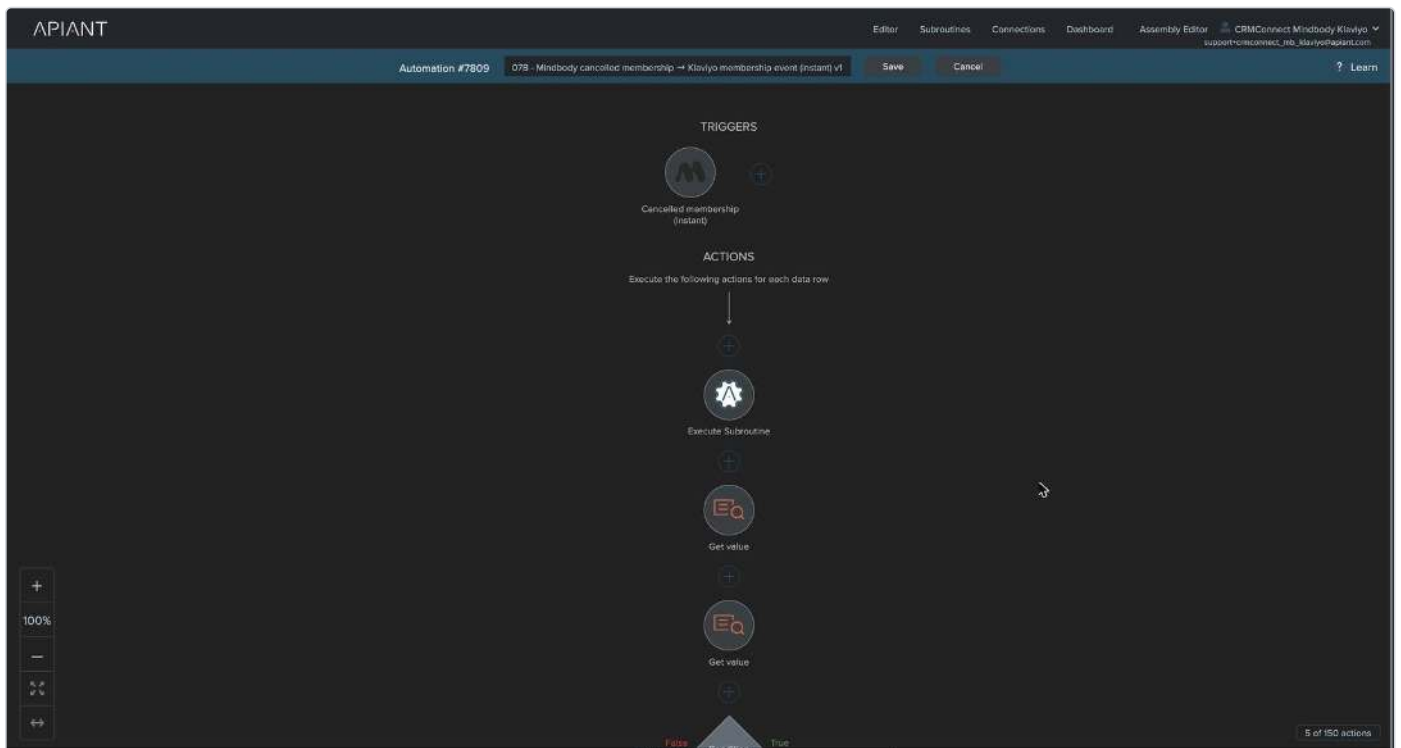


Automation 07B, cancelled membership, editor view 1 of 2

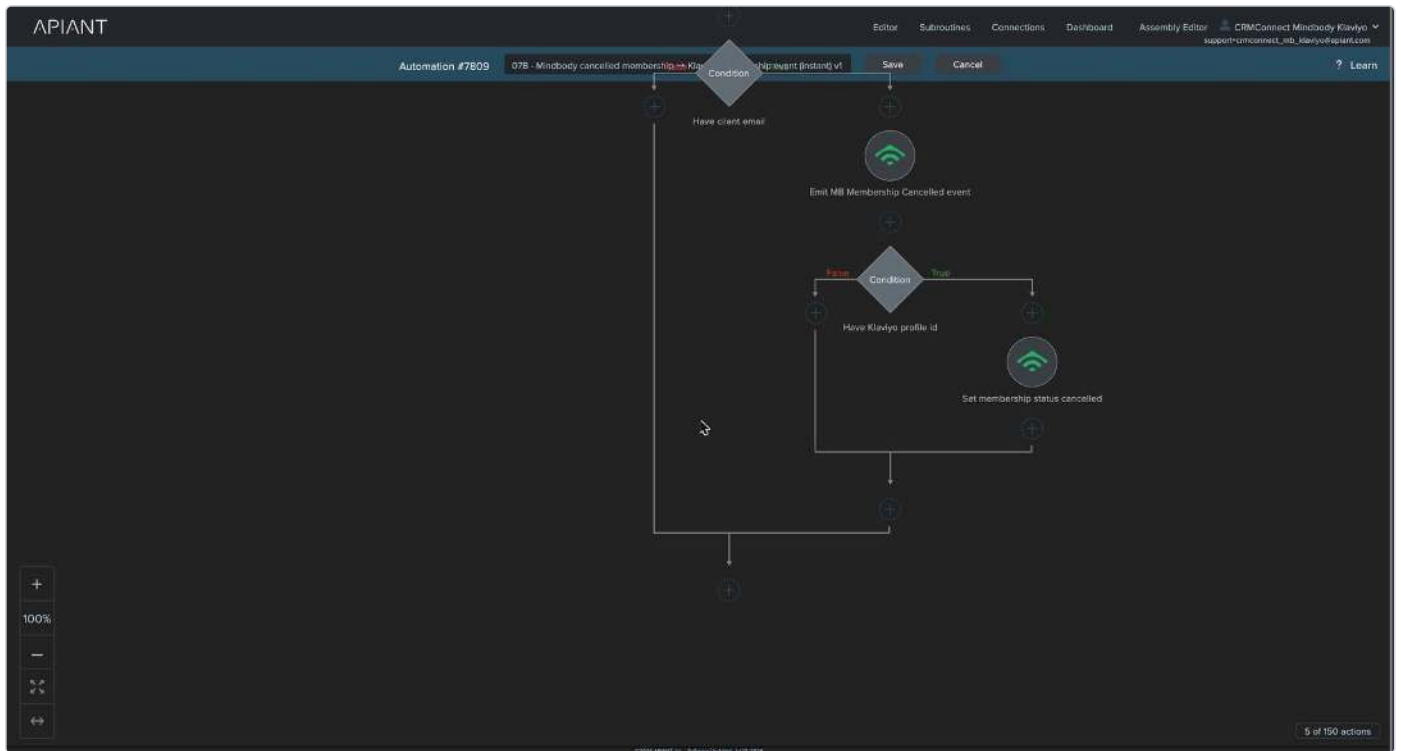


Automation 07B, cancelled membership, editor view 2 of 2

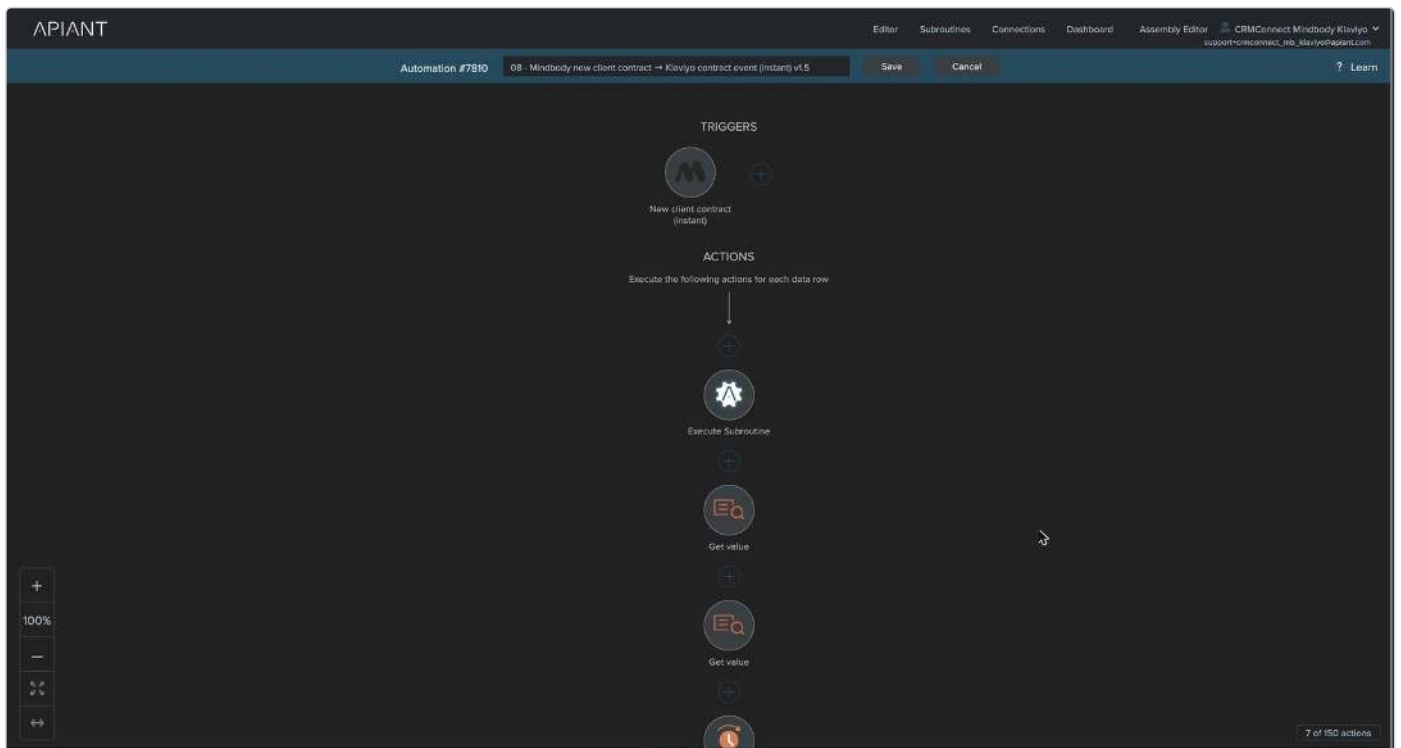


Automation 08, new client contract, editor view 1 of 3

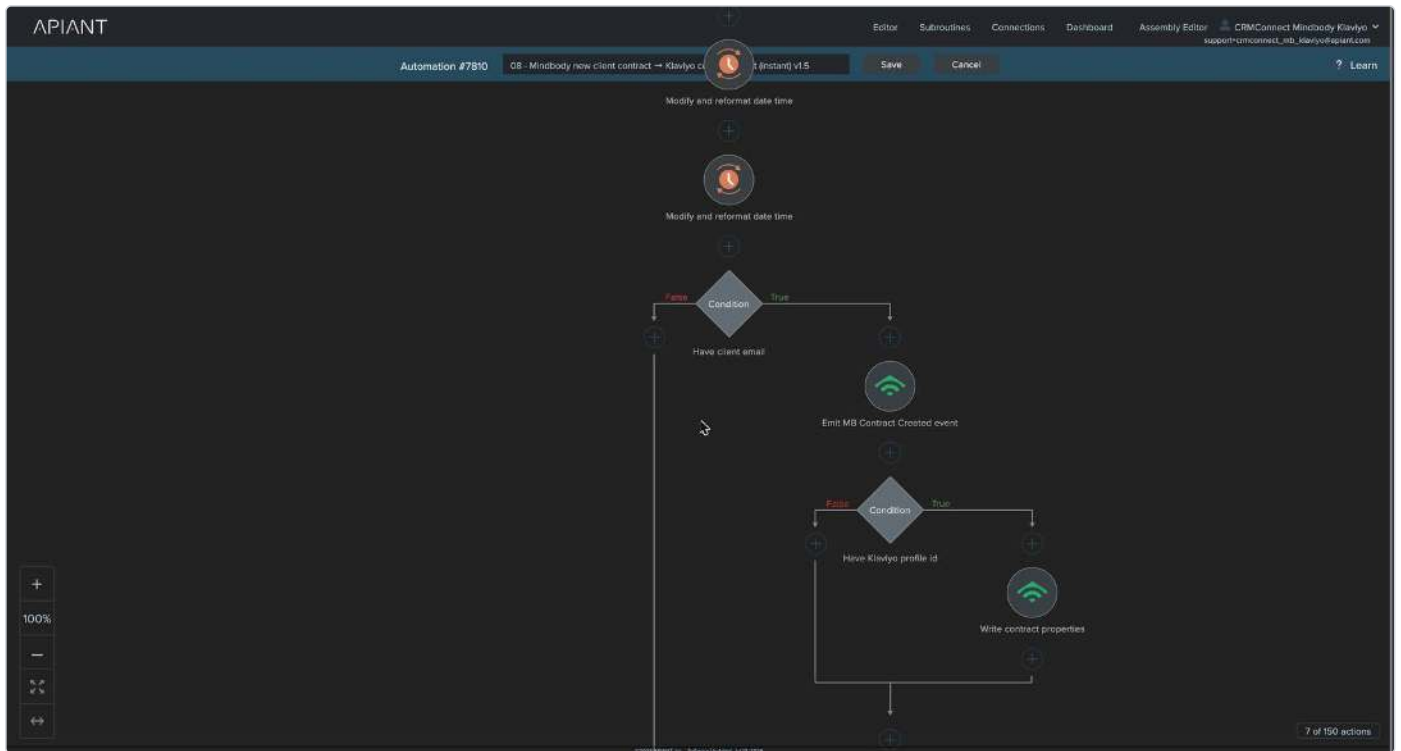


Automation 08, new client contract, editor view 2 of 3

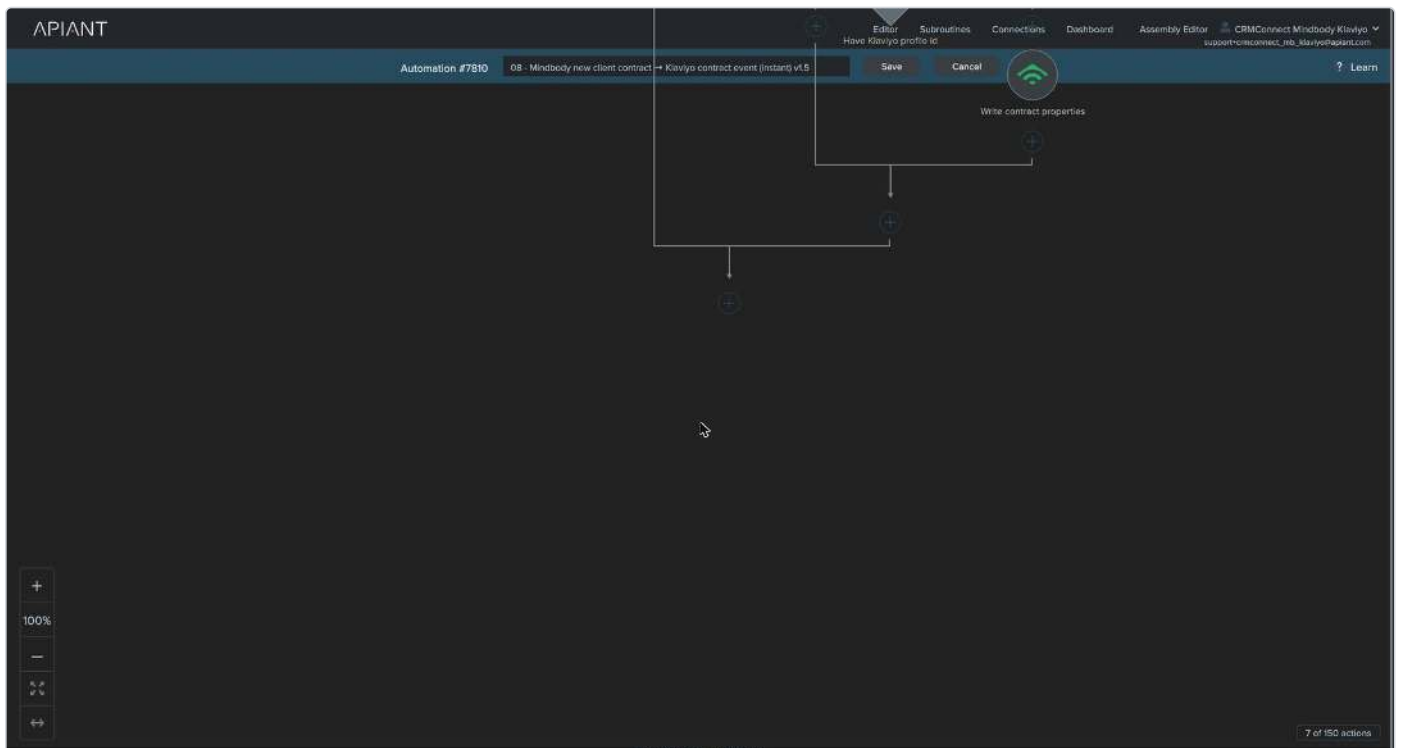


Automation 08, new client contract, editor view 3 of 3

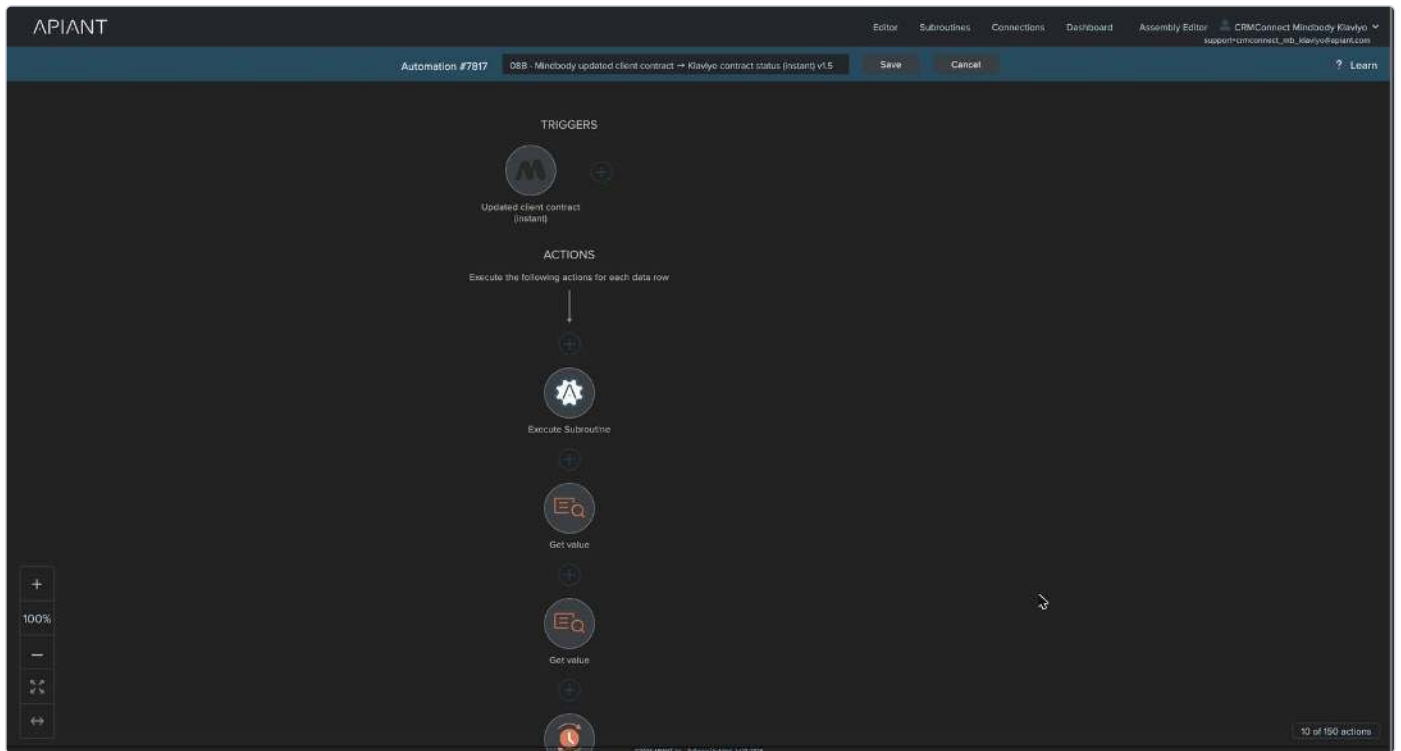


Automation 08B, updated client contract, editor view 1 of 3

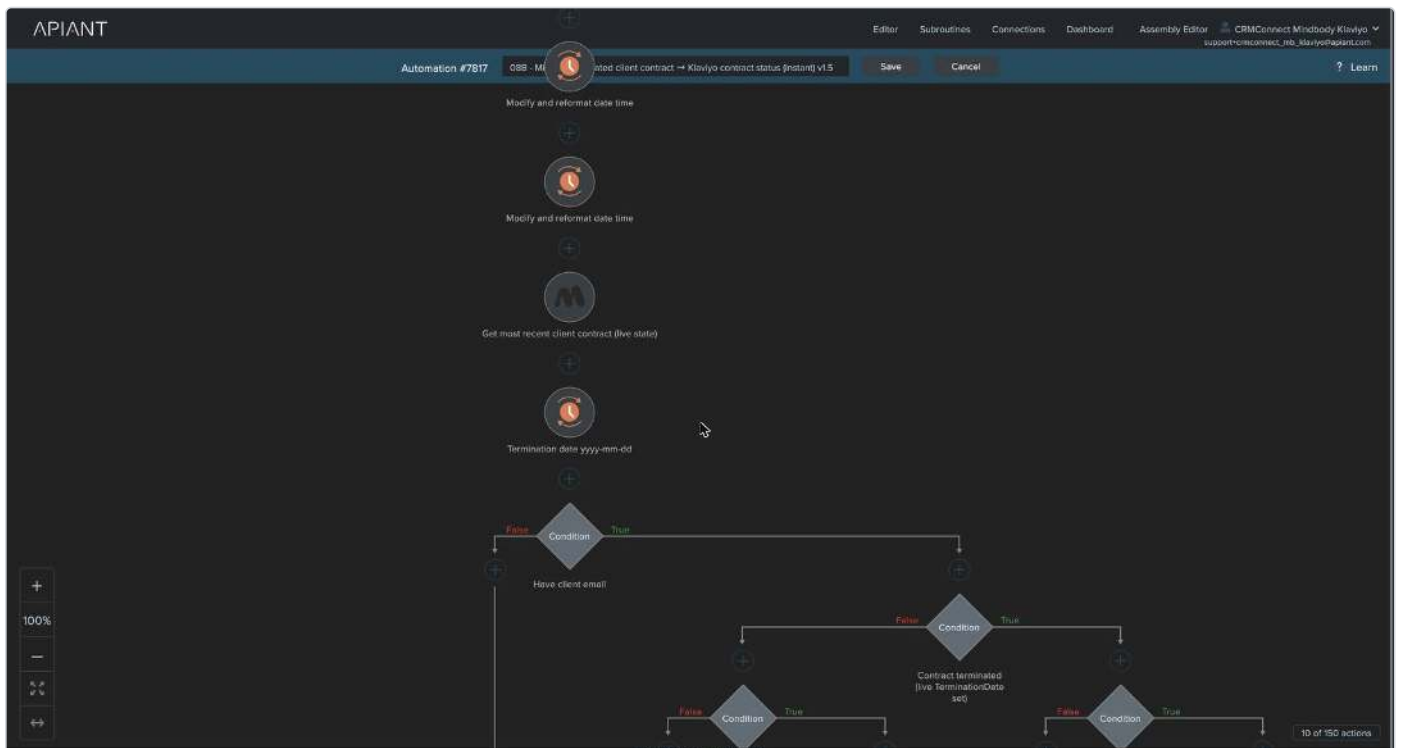


Automation 08B, updated client contract, editor view 2 of 3

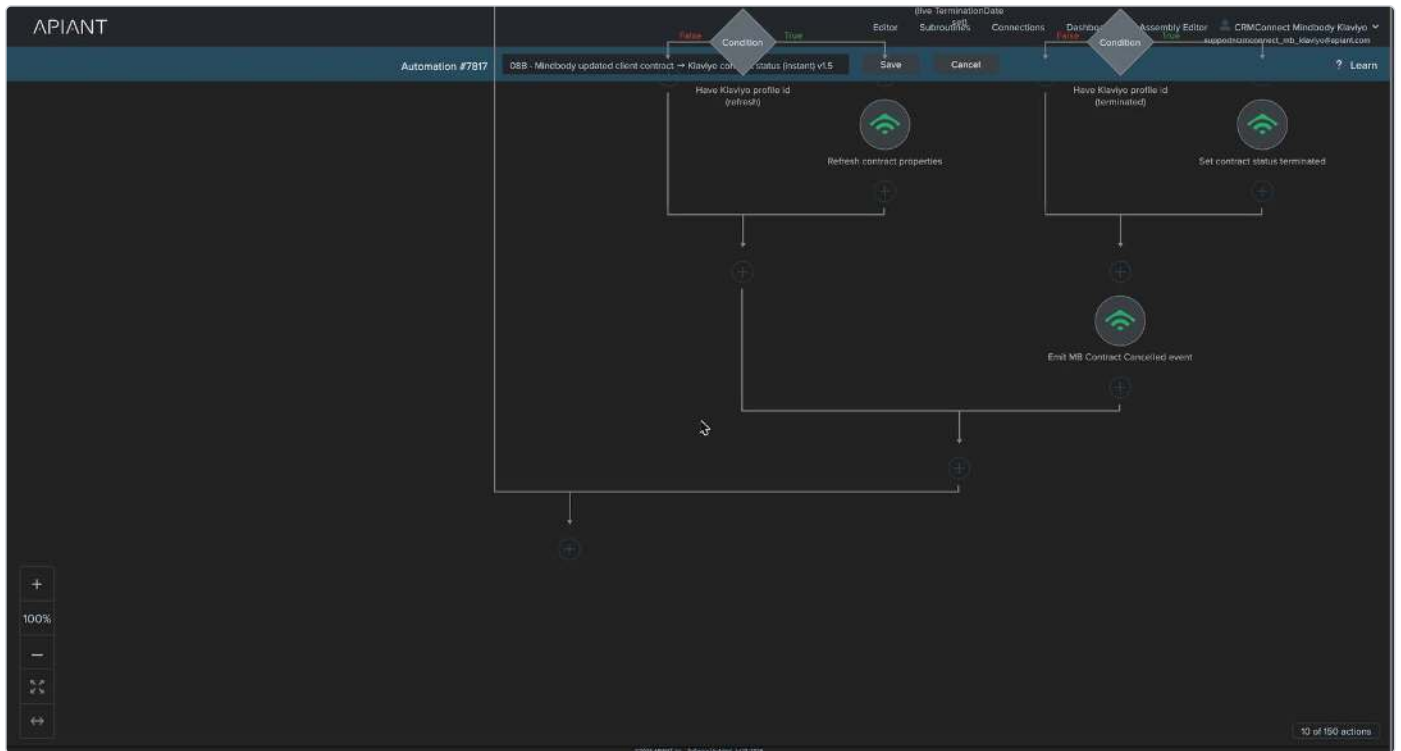

Automation 08B, updated client contract, editor view 3 of 3

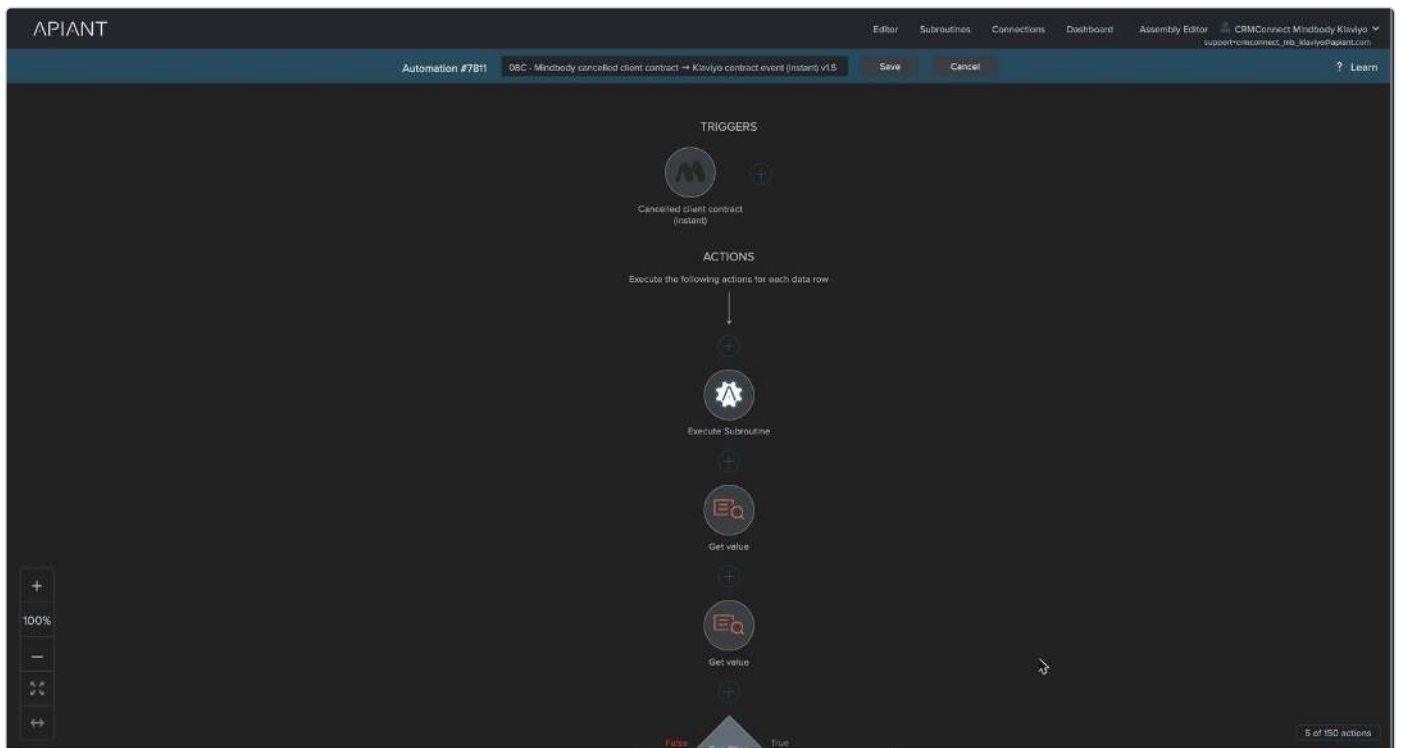

Automation 08C, cancelled client contract, editor view 1 of 2

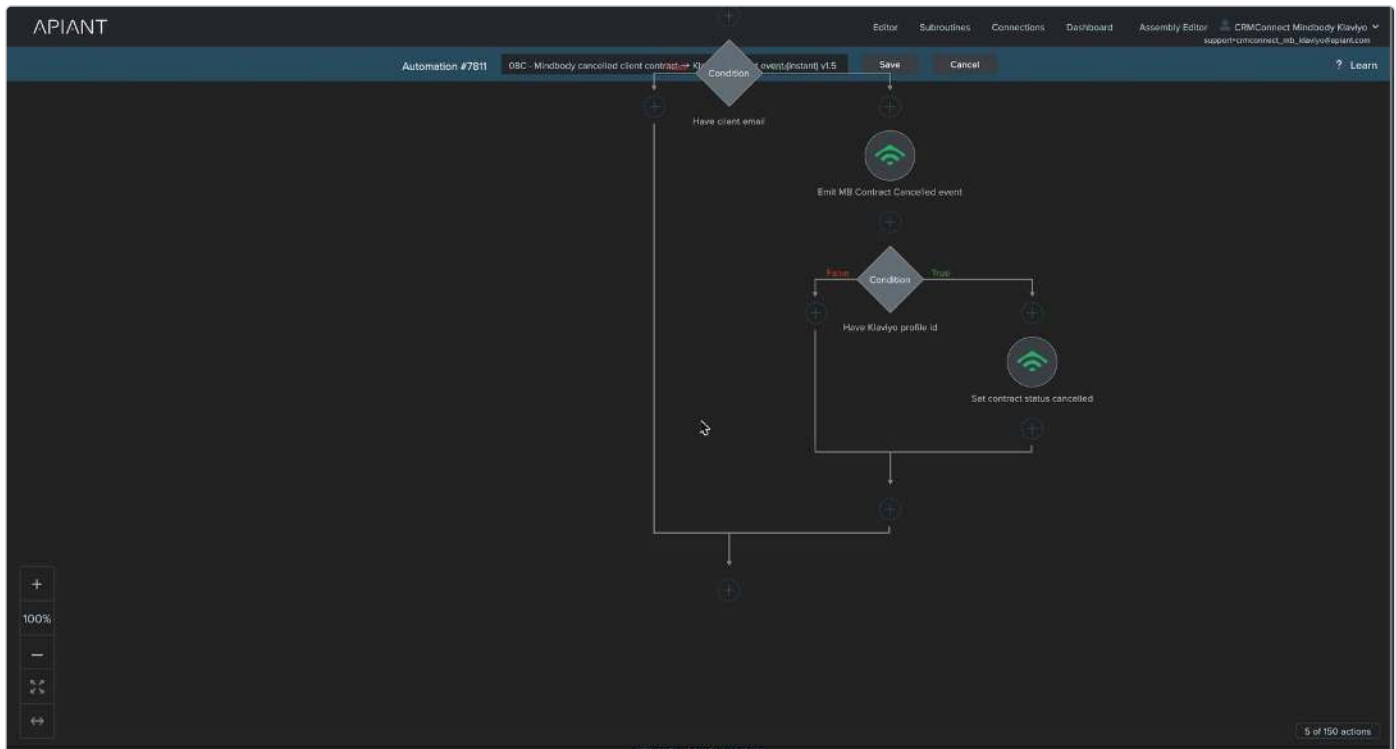


Automation 08C, cancelled client contract, editor view 2 of 2


3.13 09 - Mindbody visits → Update yesterday visits in Klaviyo profile v1.5

Function. The nightly attendance ledger. Once per night it reads yesterday's visits from Mindbody (all of them: appointments, classes, and other visit types, including walk-ins and guests, which resolve by the email on the visit record) and updates each attendee's profile with their most recent visit: date, name, time, type, location, and staff, plus the first-appointment and first-class dates that anchor new-customer journeys. A monotonic guard ensures an older visit never overwrites a newer one, so the properties always reflect the latest attendance even when records arrive out of order.


- **UUID** 0b442b4129c4458a8bf804cae8fc4fe7, ON, 34 steps. Trigger: Date Time daily (01:00 account time [time doc-derived]).
- Steps 1-5: settings, Site_id, Visit_history_start_date / Visit_history_end_date (from general_settings, default yesterday; rebuilt in v1.4 as dedicated single-value lookups after the MCP-97 settings-corruption incident).
- Steps 6-7: window transforms. Step 8: Mindbody **Get visits within date range**.
- Step 9 loop over the visits array:
 - 9.L.1 "Client has email", **XML-verified AND** (the summary renders OR; the runtime is AND): EmailName Is not empty AND Is valid email AND Contains @.
 - 9.L.1.T.1 "Status is Signed-In or Completed", **XML-verified true OR** (three OR groups): Status Equals Signed-In OR Equals Completed OR Equals arrived.
 - Inside: date transforms (visit start pretty time, VisitDate yyyy-mm-dd, HH:MM, GMT, epoch seconds; first appointment date GMT; first class date GMT), a visit-type classifier (has AppointmentID → appointment flavor; else has ClassID → class flavor; else third flavor; saved to and re-read from Visit_type), location lookup, then a **Resolver call** with Email = <visit EmailName>, Client_id = <visit ID>, Site_id (the resolver's email-first design collapses the old walk-in / guest / reserve sentinel-client branch tree: sentinel clients resolve by visit email).
 - Error gate, then get the profile id and Last_visited_date_epoch_seconds; condition "Visit is more recent than last visited date on record" (Date value Is greater than Stored value):
 - **Update profile:** MB First appointment date, MB First class date, MB Last visit date, MB Last visit name (visit Description), MB Last visit time, MB Last visit type, MB Last location visited, MB Last visit staff name.
 - Save Last_visited_date_epoch_seconds; **Mindbody Update client touch**.

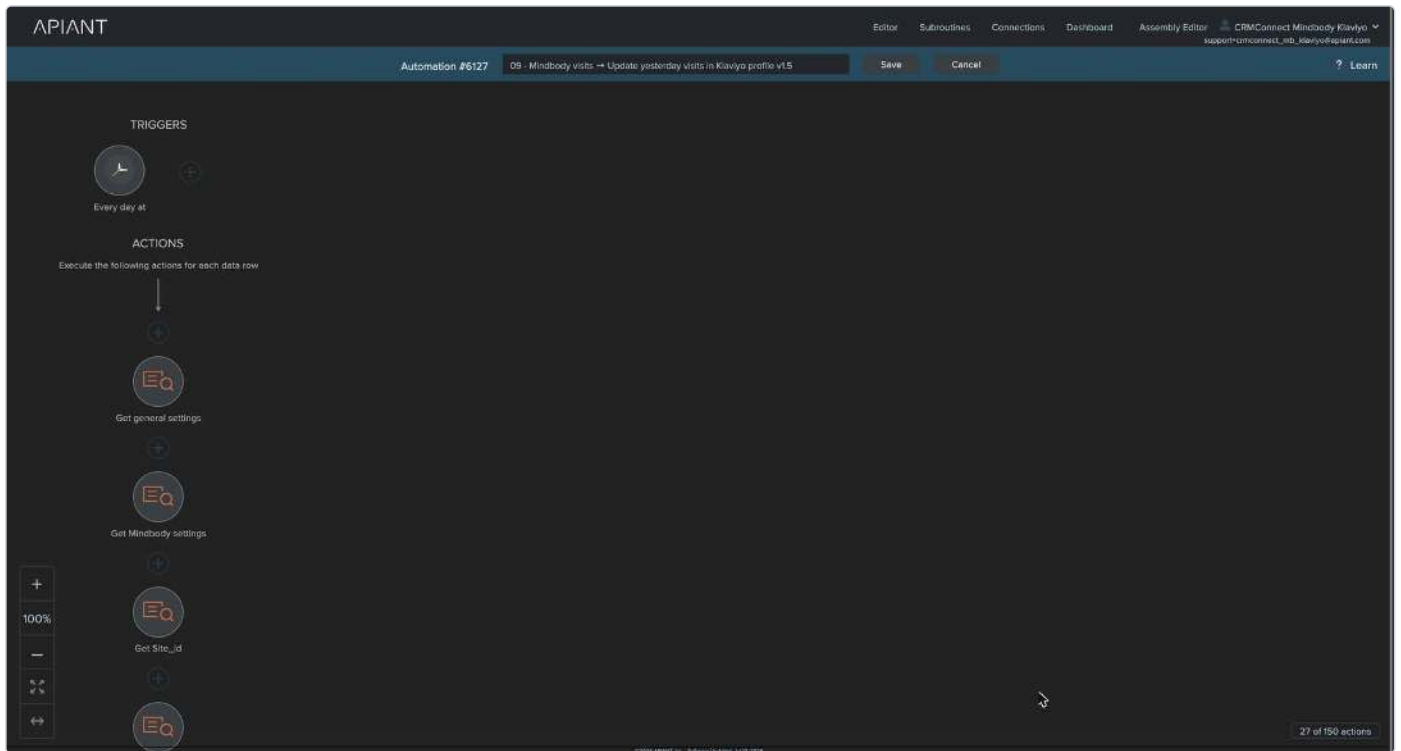

Automation 09, yesterday visits, editor view 1 of 3

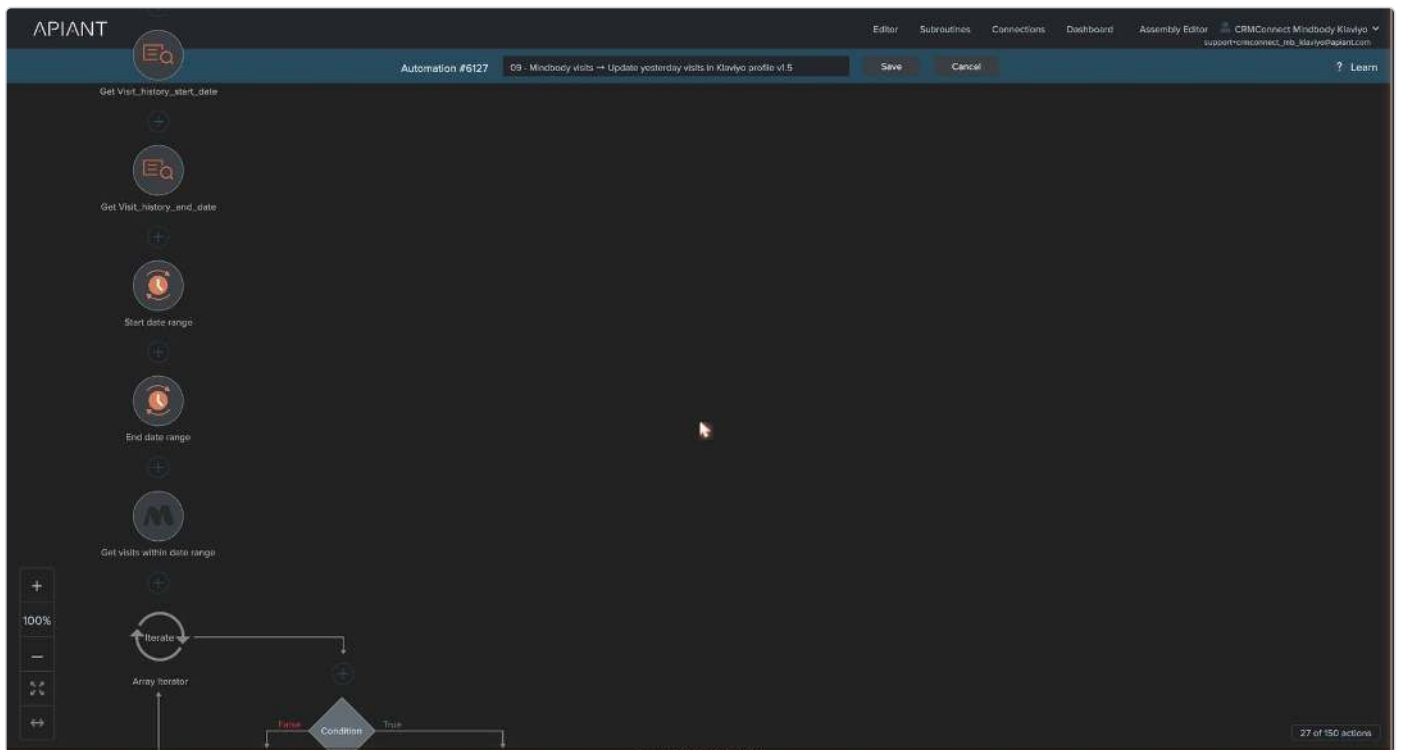

Automation 09, yesterday visits, editor view 2 of 3

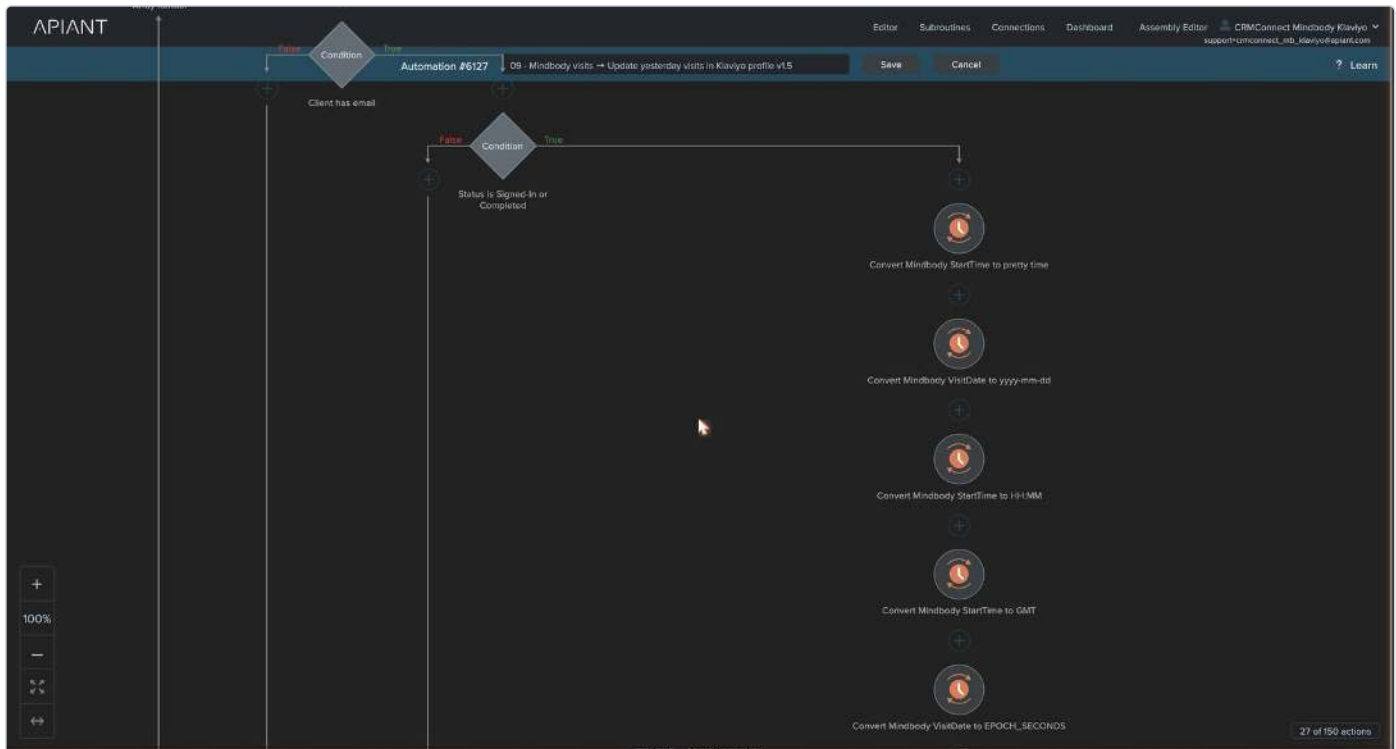


Automation 09, yesterday visits, editor view 3 of 3


3.14 11 - Mindbody class is completed → Klaviyo profile v1.5

Function. The class-attendance counterpart to the appointment pipeline. Every 15 minutes it detects classes that just finished, walks the class roster, and for each attendee writes the class attendance picture to their profile (last class attended, staff, sign-in status), decrements session-pack balances for pack-based classes, refreshes Mindbody visit totals, and emits MB Class Completed for attendees who actually signed in, the event behind attendance streak and post-class feedback flows. Late cancellations and no-shows are recorded as status properties without an attendance event.


- **UUID** 9446f7d98dbe41d78abc22a460111a1a , ON, 29 steps. Trigger: New completed class (Mindbody polling trigger, cron :10,:25,:40,:55).
- Steps 1-5: settings, now → GMT, class start → GMT, class start → ISO GMT (event time). Step 6: Mindbody **Get class visits** (the roster of the completed class).
- Step 7 loop over roster entries:
- Status classifier: SignedIn Equals true → "Signed In"; else LateCancelled Equals true → "Late Cancelled"; else "Not Signed In" (written to a lookup and re-read at 7.L.2).
- 7.L.3 **Resolver call** (Email = None, Client_id = <roster ClientId>, Site_id = trigger.Location_SiteID).
- Error gate (7.L.5), then get profile id, first name, client email; condition "Signed In" (7.L.5.T.4):
 - **TRUE: Update profile:** MB Last class attended (ClassDescription_Name), MB Last class attended date (start GMT), MB Last class attended staff name (staff first + last), MB Last class visit status, MB Last class visit status date (now GMT). **Mindbody Update client touch.** If ServiceId Is not empty ("Is part of a series"): Get client services totals by product ID, expiry → GMT, Update profile with dynamic MB <Name> count / remaining / exp date. Email gate → emit **MB Class Completed:** Unique ID <SiteID>~class~<ClassId>~<ClientId>~completed, Time = class start ISO GMT, properties Class, Class ID, Site, Location (Location_Name from the trigger), Staff, Start.
 - **FALSE: Update profile** with the non-attended status fields only (MB Last class visit status, status date) [F-path property list partially inferred from the step name; not captured field by field].

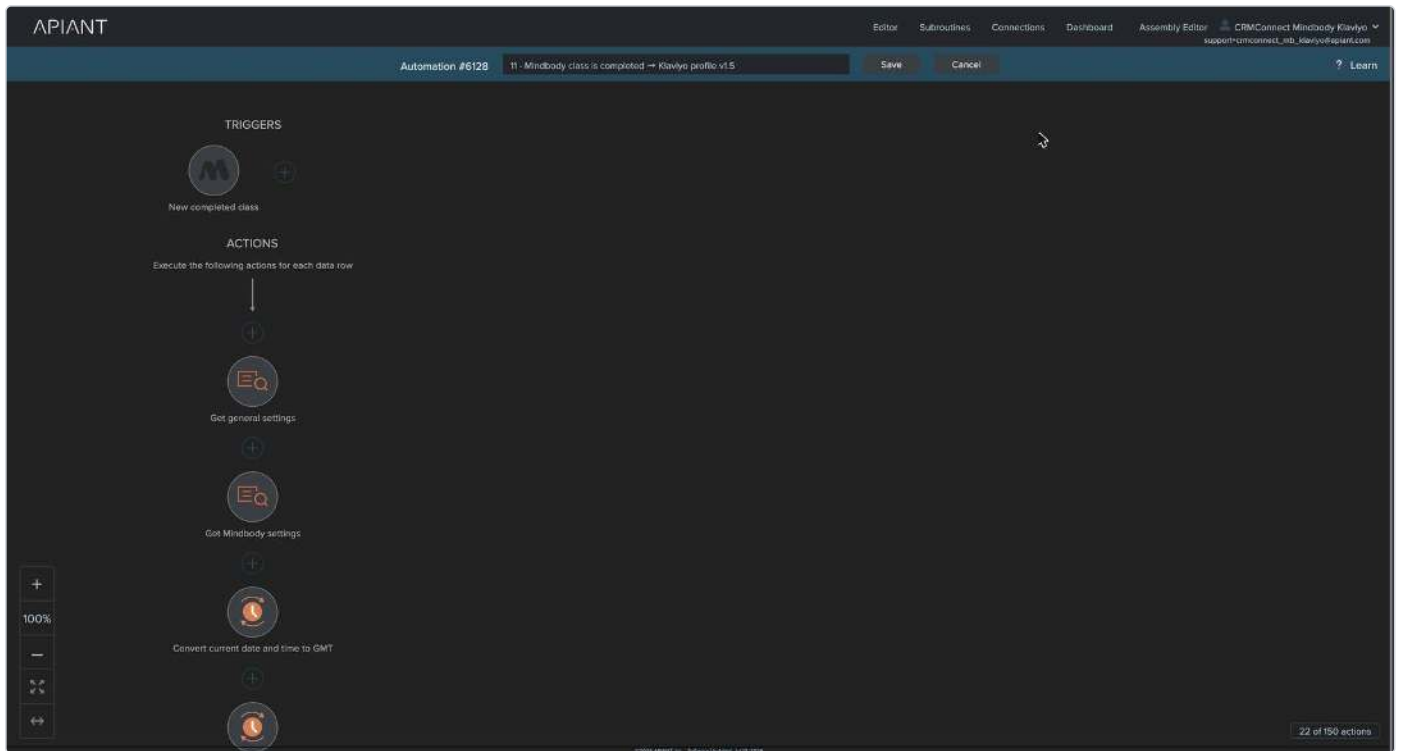


Automation 11, class is completed, editor view 1 of 4

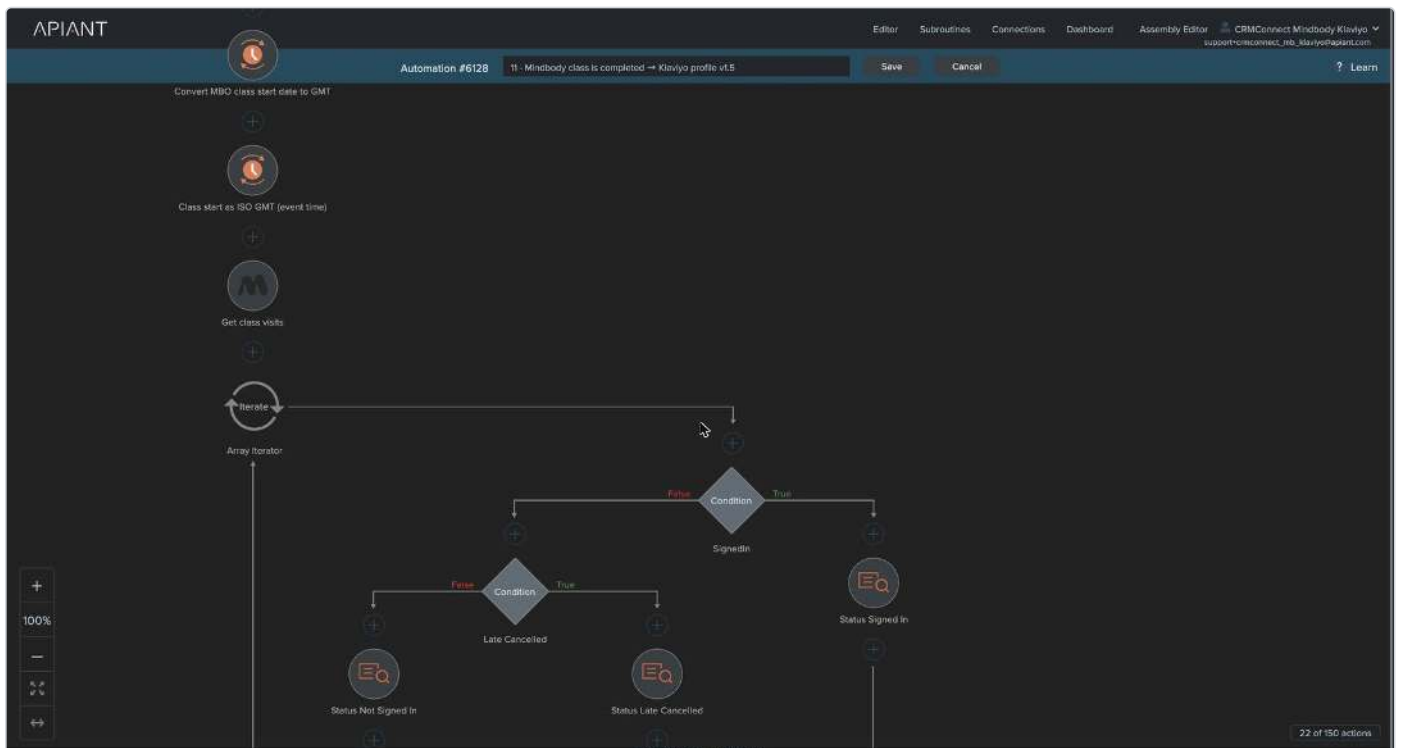

Automation 11, class is completed, editor view 2 of 4

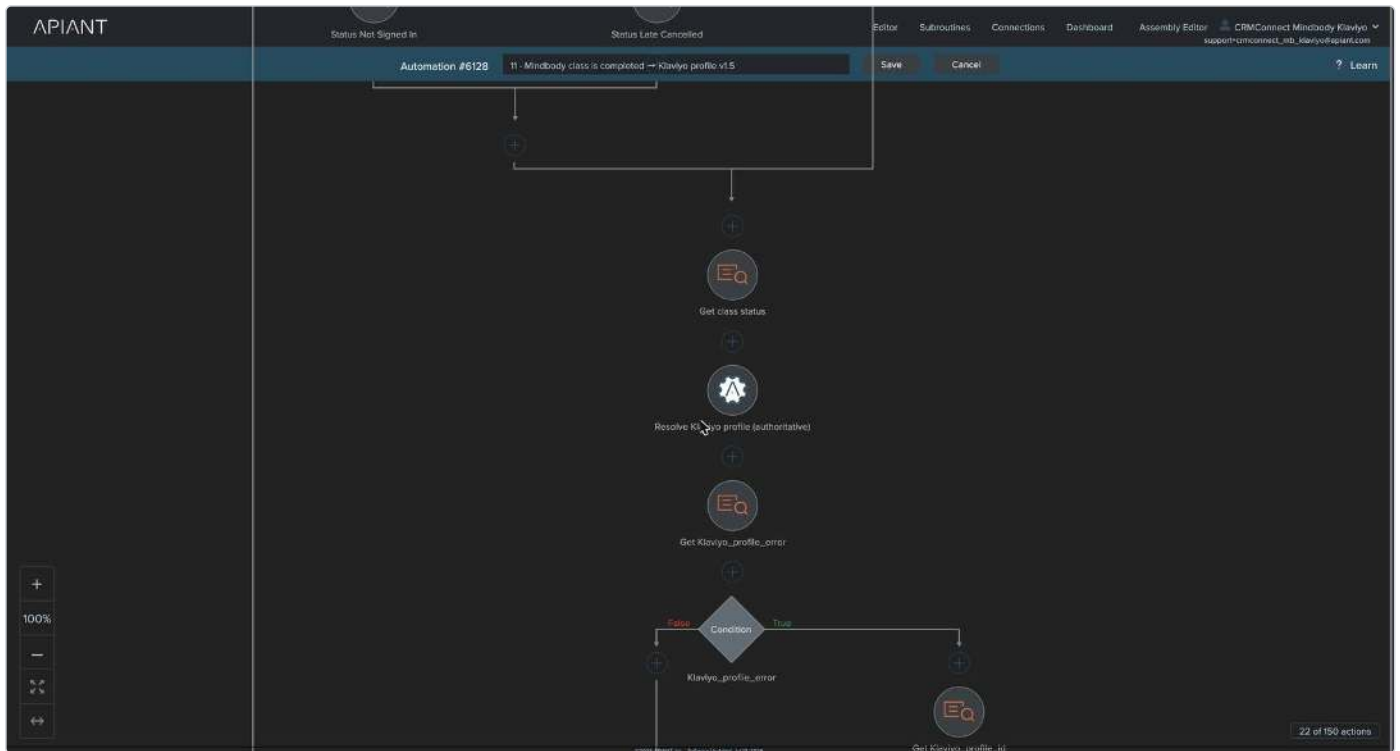

Automation 11, class is completed, editor view 3 of 4

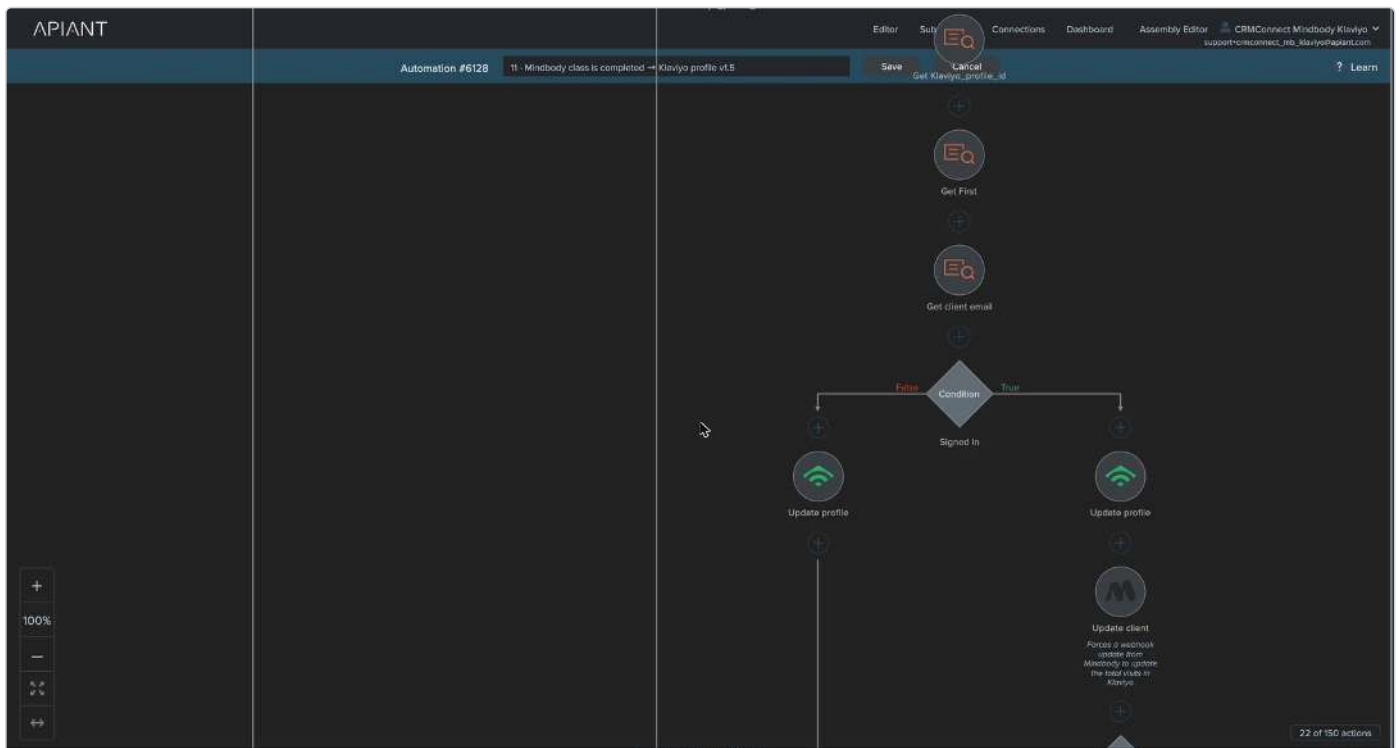


Automation 11, class is completed, editor view 4 of 4

3.15 11C - Mindbody cancelled class booking -> Klaviyo contacts next class booked (instant) v1.5


Function. The class-side cancellation reaction: when a client drops out of a class, the profile's "next class booked" properties recompute immediately (repopulating from the client's other future bookings or clearing), and MB Class Cancelled fires for cancellation-recovery flows.

- **UUID** 96f522429bab4ef18858235194dac7af, ON, 6 steps. Trigger: Cancelled class booking (instant).

Settings (steps 1-2), **Recompute call** (Email = None , Client_id = eventData_clientId , Site_id = eventData_siteId), email lookup, Contains @ → emit **MB Class Cancelled**: Unique ID <siteId>~<classbooking>~<classRosterBookingId>~cancelled , Time = eventInstanceOriginationDateTime , properties Class ID, Booking ID, Site.

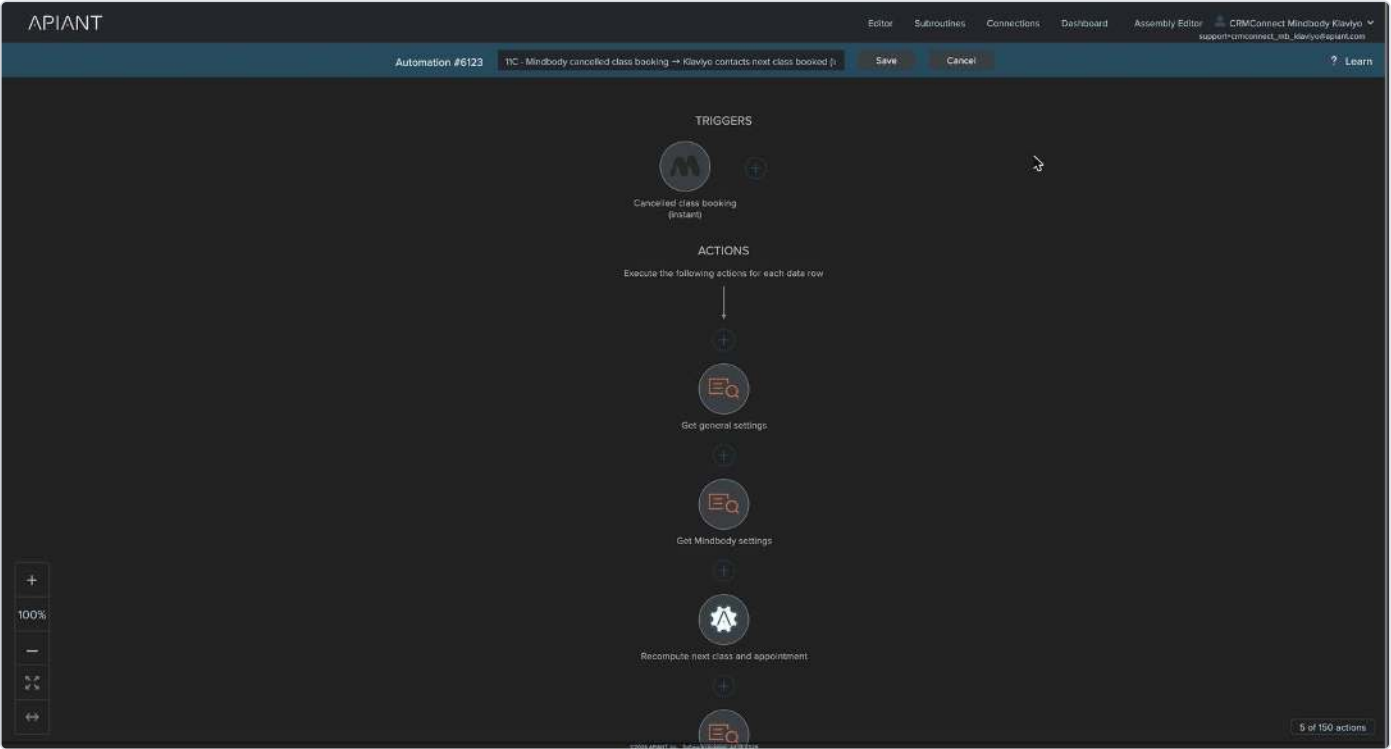

Automation 11C, cancelled class booking, editor view 1 of 2

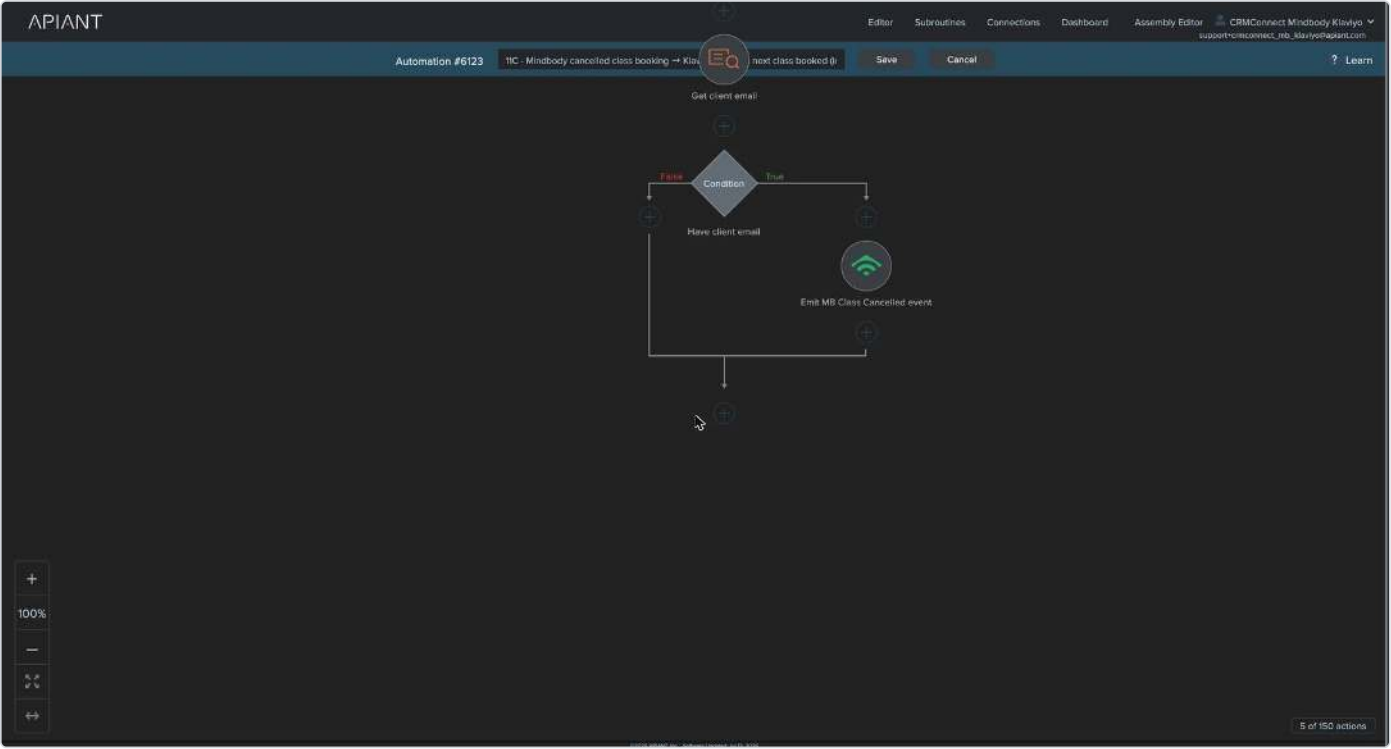


Automation 11C, cancelled class booking, editor view 2 of 2

3.16 11E - Mindbody new class booking → Recompute next class (instant) v1.5


Function. The class-side booking reaction: a new class booking instantly refreshes the "next class booked" properties through the recompute subroutine and emits MB Class Booked for booking-confirmation flows. Replaced the retired 11B daily sweep, so next-class data is now seconds fresh instead of up to a day stale.

- **UUID** 671d3c6fbf2645ab8bff8a4a09698919 , ON, 5 steps. Trigger: New class booking (instant) (classRosterBooking.created).

Recompute call, email + location lookups, Contains @ → emit **MB Class Booked**: Unique ID <siteId>~<classbooking~<classRosterBookingId> (no suffix), Time = eventInstanceOriginationDateTime , properties Class ID, Booking ID, Site, Location.

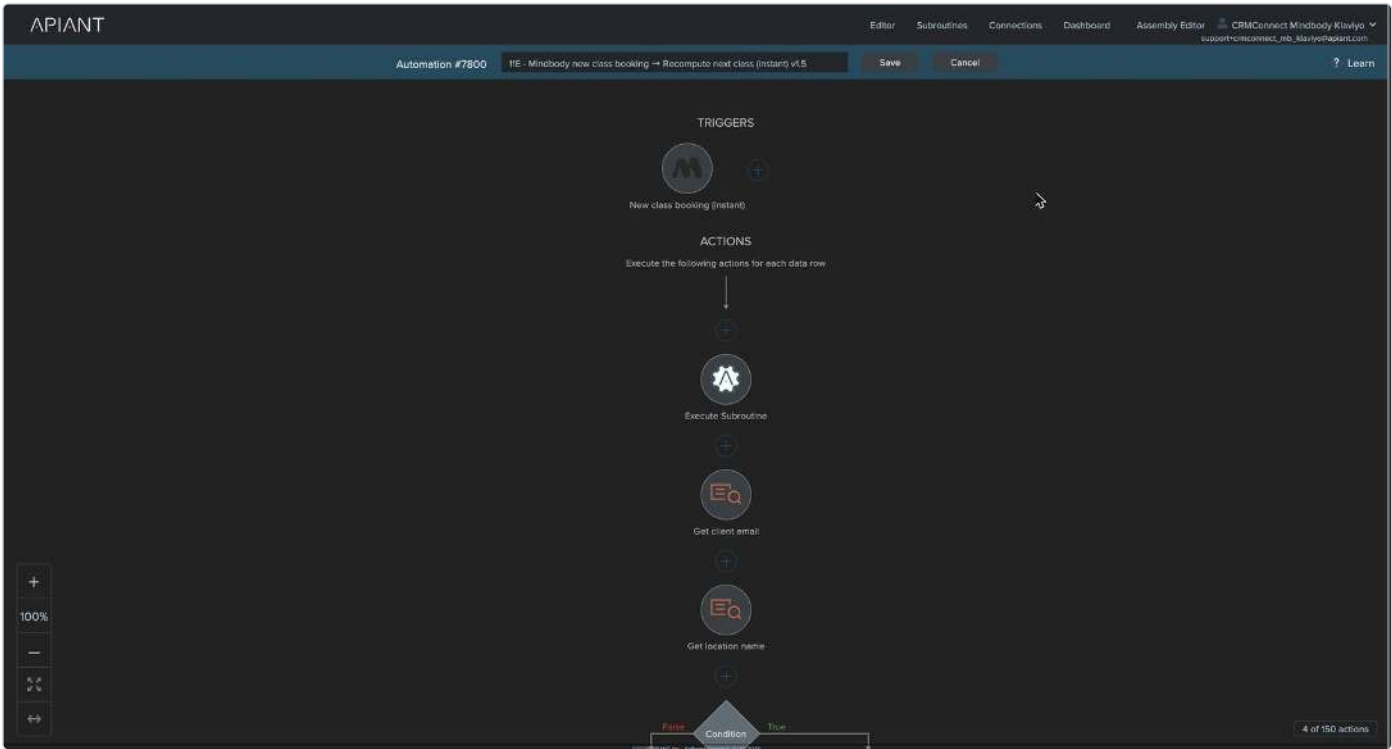

Automation 11E, new class booking, editor view 1 of 2

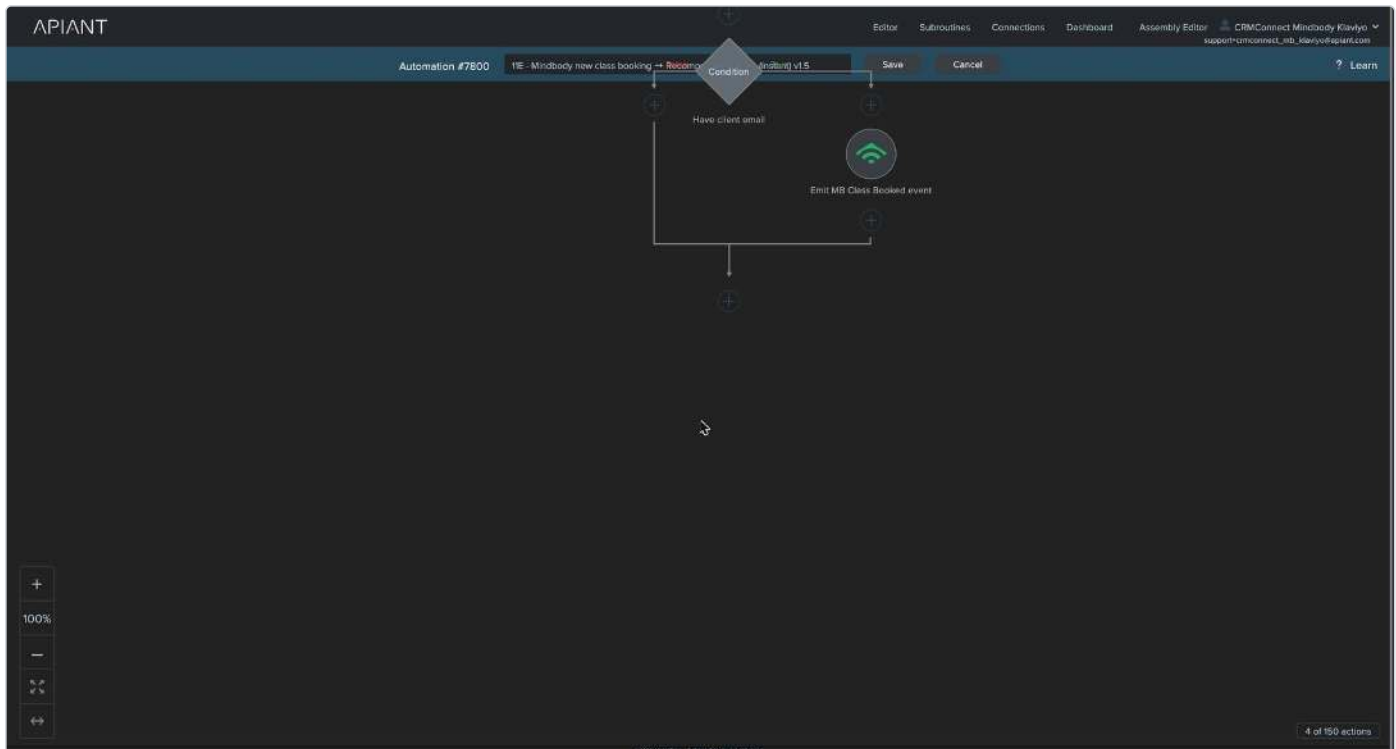

Automation 11E, new class booking, editor view 2 of 2


3.17 Subroutine: Resolve Mindbody client → Klaviyo profile v1.5

Function. The single identity authority for the entire integration. Every automation that needs to know "which Klaviyo profile does this Mindbody client map to" calls this subroutine instead of resolving inline. Its guarantees are the reason the product survives real-world messiness: key-card id changes, clients visiting multiple sites, Klaviyo account switches, deleted or merged profiles, and clients with no usable email. It resolves the client's email from the caller, the cache, or Mindbody itself; always fetches the Klaviyo profile fresh by email (never trusting a cached profile id for writes); creates a minimal profile when none exists; and, when identity cannot be established, parks a per-client error that makes downstream automations skip their writes without failing.


- **UUID** fbba3519eb844b9588a3f5b8b79f01a0, 32 steps, subroutine (schedule off by design). Called by 01, 03, 05, 09, 11, 07, 07B, 08, 08B, 08C, the recompute subroutine, and the CSV client import.
- **Inputs:** Email (optional, convention "None" when unknown), Client_id, Site_id, Unique_client_id (optional). **Outputs:** Profile_id, Klaviyo_profile_error.

Resolution algorithm [platform-verified]:

1. **Cache caller-supplied identity:** if Email is usable (XML-verified AND: Is not empty AND Does not equal None), cache it under Mindbody_Klaviyo / Client_id<Site_id>~<Client_id> / Email; if Unique_client_id is supplied, cache it likewise.
2. **Resolve email:** read the composite-key cached email; if empty, try the **legacy bare key** (v1.2/v1.3 era); if the legacy hit exists, **migrate** it to the composite key; if both miss, **fetch the client from Mindbody** and cache email, first name, last name, and unique client id.
3. **Gate on usable email** (AND: not empty AND not "None"). If unusable: park Klaviyo_profile_error = "No valid email for Mindbody client <Site>~<Client>" in temp_CRMConnect_Mindbody_Klaviyo / Mindbody_client_id<Site>~<Client>.
4. If usable: **fetch the Klaviyo profile fresh by email** (Get profile by email, continue-on-noncritical-error). Cached profile ids are telemetry only and never trusted for writes; this is the account-switch / deleted-profile / merge self-heal.
5. Profile exists (id is not empty): cache Klaviyo_profile_id under Mindbody_client_id<Site>~<Client>, clear any parked error.
6. Profile missing: **Create minimal Klaviyo profile** (continue-on-any-error): Email, First name, Last name (from cache), MB Client ID, MB Unique client ID, MB Site ID. On create error: park the error; on success: cache the new id and clear the parked error.
7. Emit Profile_id and Klaviyo_profile_error from the lookups. Callers read the parked error and skip their writes when it is non-empty; the pipeline never halts on identity.

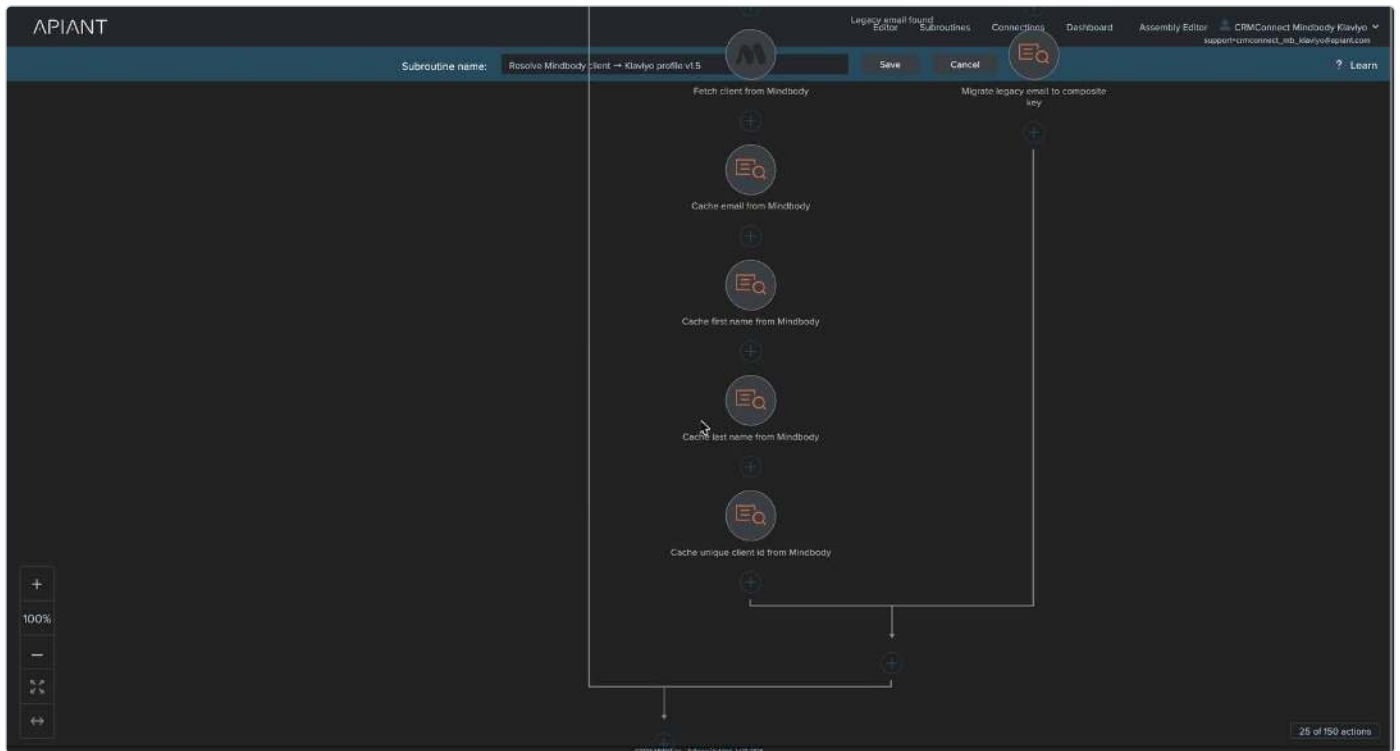

Subroutine: Resolve Mindbody client to Klaviyo profile, editor view 3 of 4

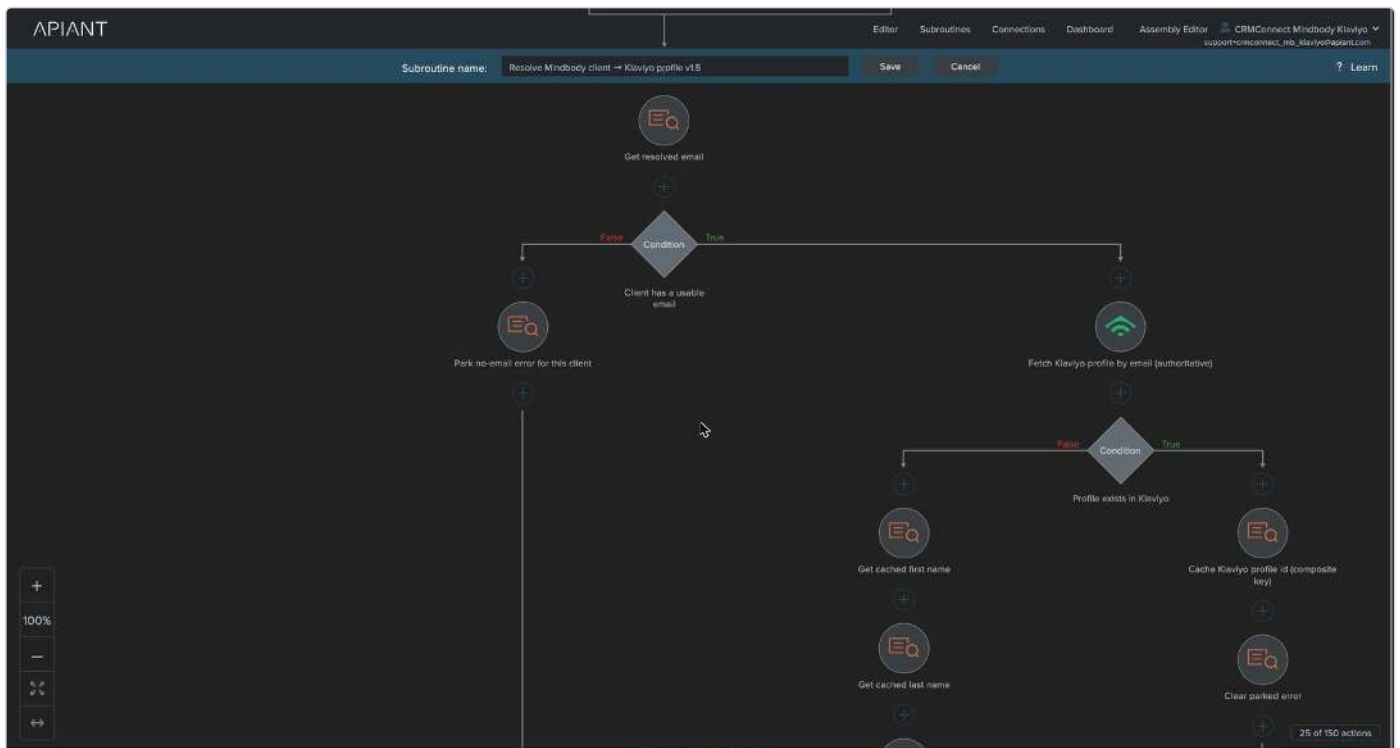

Subroutine: Resolve Mindbody client to Klaviyo profile, editor view 4 of 4

3.18 Subroutine: Recompute next class and appointment to Klaviyo profile v1.5

Function. The forward-looking brain of the integration and the property set no competing integration offers: "what is this client's next class, and what is their upcoming appointment?" Rather than polling every client on a schedule, this subroutine runs once per booking event (created, updated, cancelled, completed), makes a single Mindbody call for the client's scheduled visits over the next year, derives the soonest future class and the soonest future appointment in one pass, and writes (or clears) the corresponding profile properties under strict multi-site guard rules: a site may overwrite another site's


value only by being sooner, and may clear only its own or already-stale values. These properties power the "Upcoming Appointment Booked", "Next Class Booked", and "No Upcoming Appointment" segments and the Rescue flow.

- **UUID** `fd6c6eded69740bf80f8a137ce4750f3`, **125 steps**, subroutine. Called by 03 (completed and not-completed paths), 03C, 03D, 03E, 11C, 11E.
- **Inputs:** Email (optional), Client_id, Site_id. One `Get scheduled client visits` call per invocation; temp working keys are namespaced per `Site~Client` for concurrency (`NC_<Site>~<Client>_*` naming [doc-derived]).


Algorithm [platform-verified]:

1. **Resolver call**, then `Start = now`, `End = now + 365 days`, `now → epoch`.
2. Gate on `Profile_id Is not empty`. Then: Mindbody **Get scheduled client visits** (365-day forward window), fetch the Klaviyo profile (current MB Next class booked * and MB Upcoming appt * values), stored next-class and upcoming-appointment datetimes → epoch, count scheduled visits.
3. **Class scan**: seed "best class epoch" with a far-future sentinel (`9999999999`); if the visits array is non-empty, loop every scheduled visit: `ClassId Is greater than 0` (is a class), candidate `start → epoch`, "Class is in the future" (candidate > now), "This class is sooner" (candidate < stored best) → save best Epoch, Name, Id, StaffId, LocationId, Date, Time, Datetime (8 lookup saves per new best).
4. **Class decision** (`best < 9999999999` = has a next class):
5. **Write path**: read back the winning fields; staff name from the cache `Staff_site_id<Site>~<StaffId>` with fetch-on-miss (`Get staff member`, then cache); location name from the mapping table. Then a **flag cascade** (reset the flag, then four independent single-row conditions each setting the write flag): stored next-class **site equals trigger.Site_id** ("mine"), stored site **unset** (length 0), stored datetime **already past**, my candidate **sooner** than stored. If any flag fired → **Write next class to profile**: MB Next class booked (name), ... id, ... date, ... time, ... datetime, ... staff, ... location, ... site = `trigger.Site_id`, MB Next class updated date = now.
6. **Clear path** (no future class found): flag cascade with only "mine" and "already past" (a site never clears another site's still-future value) → **Clear next class on profile**: name/id/date/time/staff/location/site = `None`, datetime = `1970-01-01`, updated date = now.
7. **Appointment scan**: identical structure over the same visits array. The candidate filter "Is a bookable appointment (fixed)" is **XML-verified AND**: `AppointmentId Is greater than 0 AND AppointmentStatus Is any of Booked,Confirmed`. Best-appointment fields add Day (9 saves).
8. **Appointment decision**: the write path mirrors the class one → **Write upcoming appointment to profile**: MB Upcoming appt datetime, ... day, ... time, ... ID, ... name, ... location, ... site, ... staff, MB Upcoming appt updated date = now. Clear path → datetime = `1970-01-01`, day/time/ID/name/location/site/staff/**category** = `None`, updated date = now. Note: MB Upcoming appt category is cleared but never written in v1.5 (a legacy property from the retired polling design).
9. Subroutine output.


Multi-site outcome: the shared profile converges to the soonest future booking across sites, and a site can only clear values it owns or that are stale.

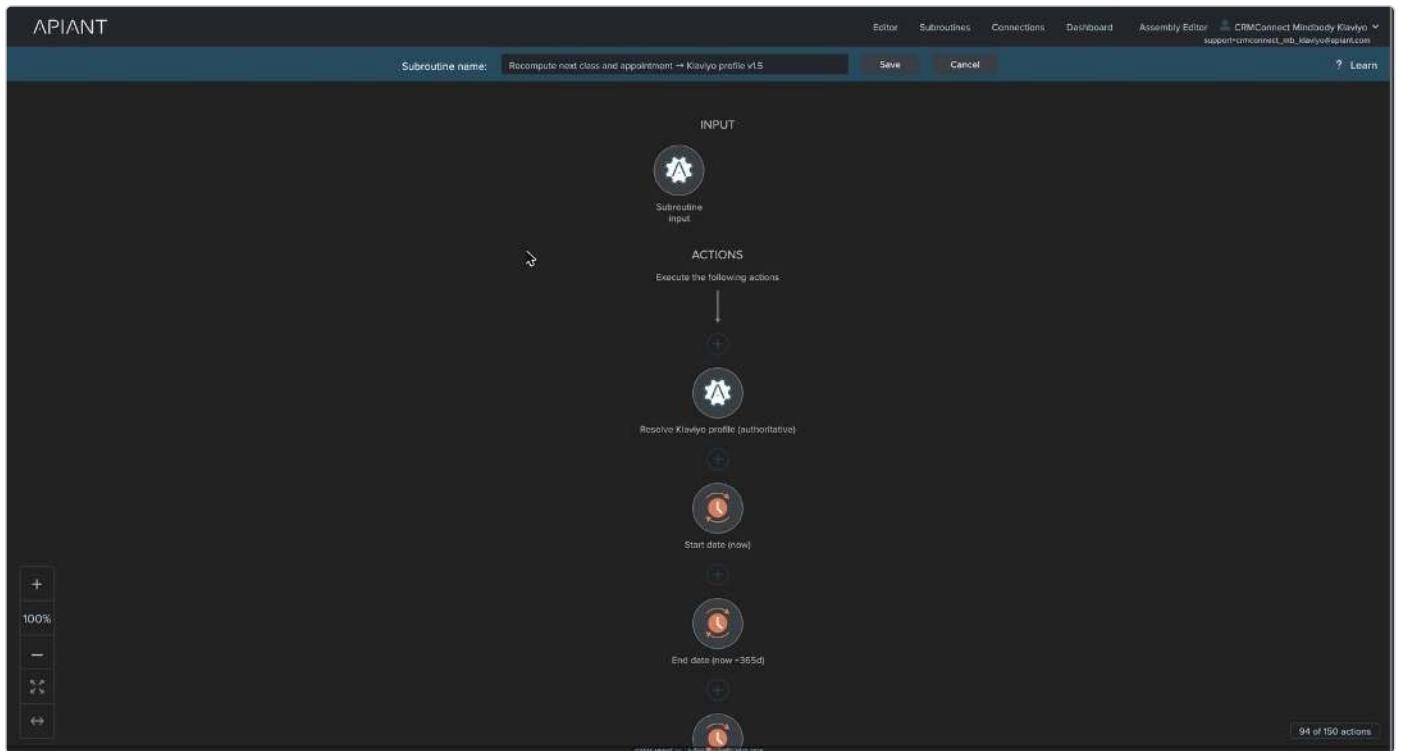


Subroutine: Recompute next class and appointment, editor view 1 of 15

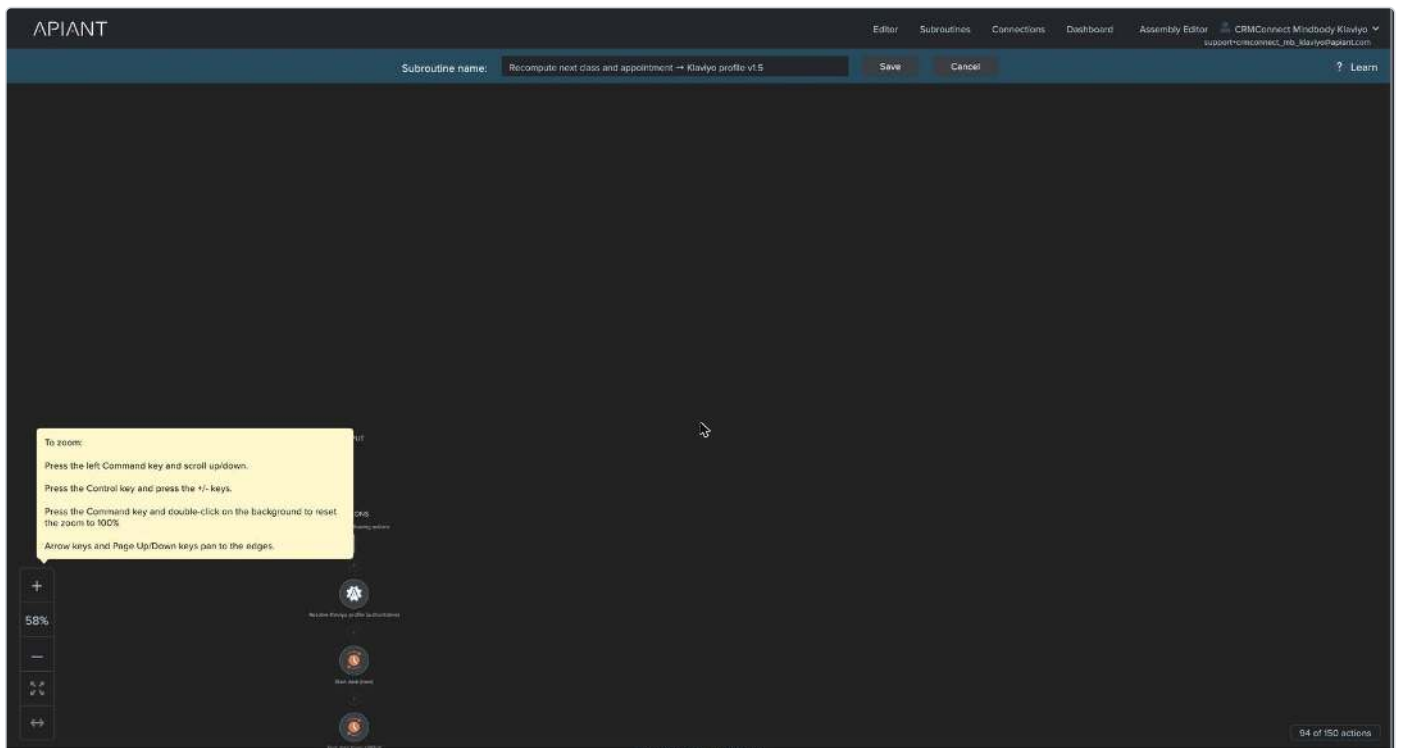



Subroutine: Recompute next class and appointment, editor view 2 of 15

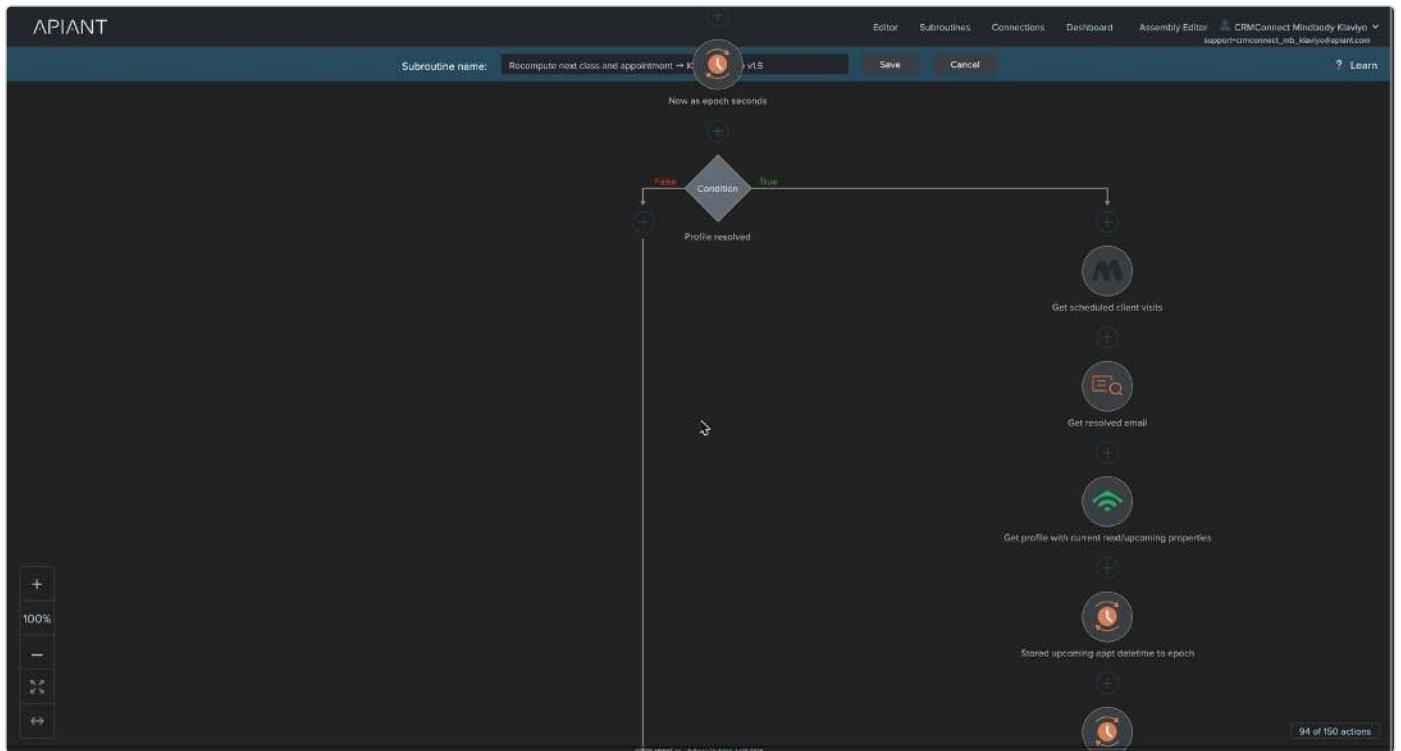


Subroutine: Recompute next class and appointment, editor view 3 of 15

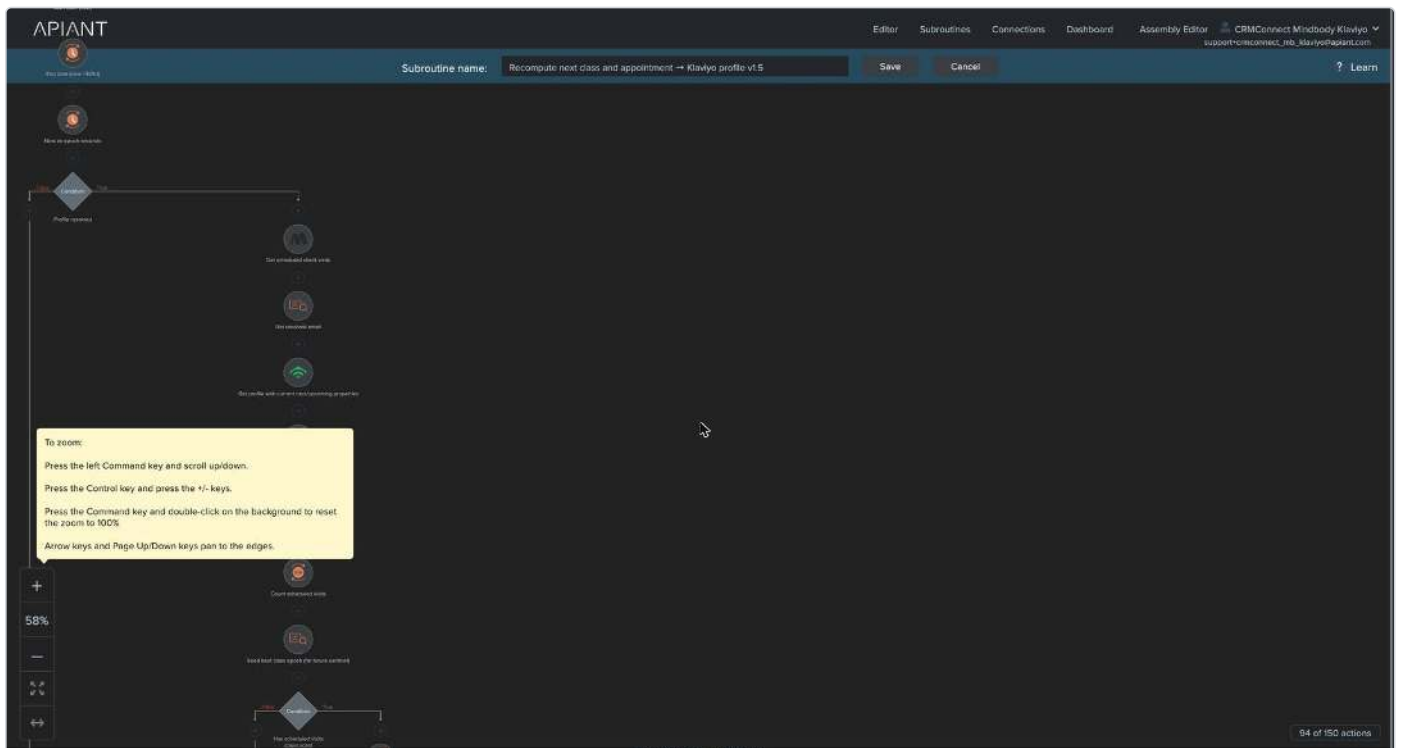



Subroutine: Recompute next class and appointment, editor view 4 of 15

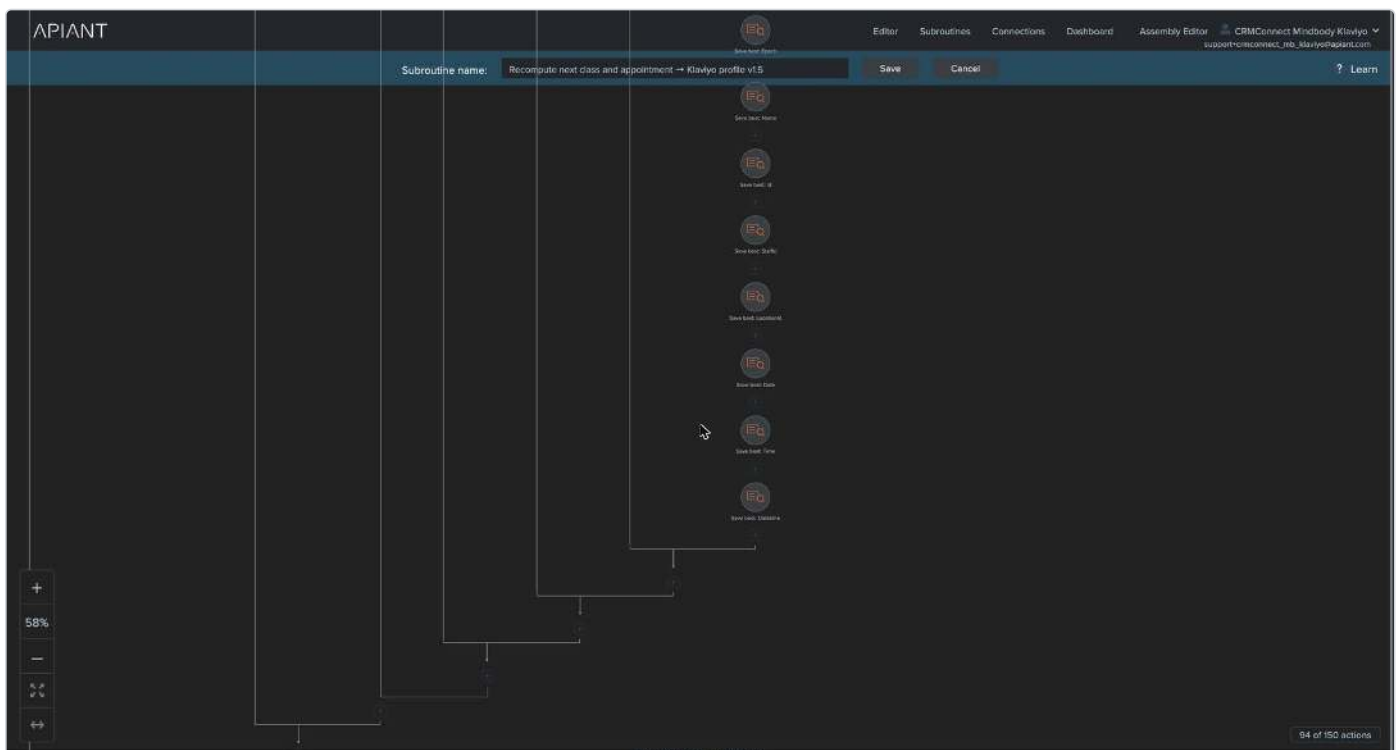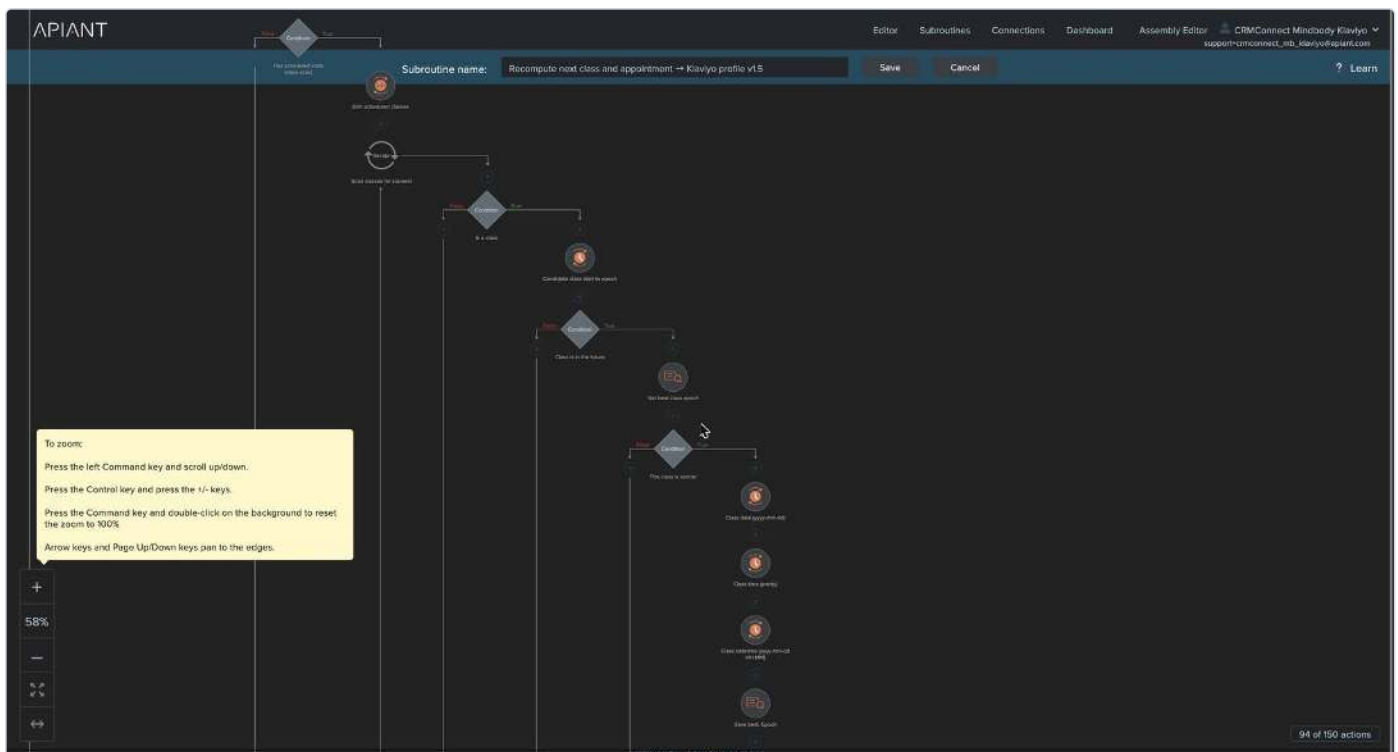

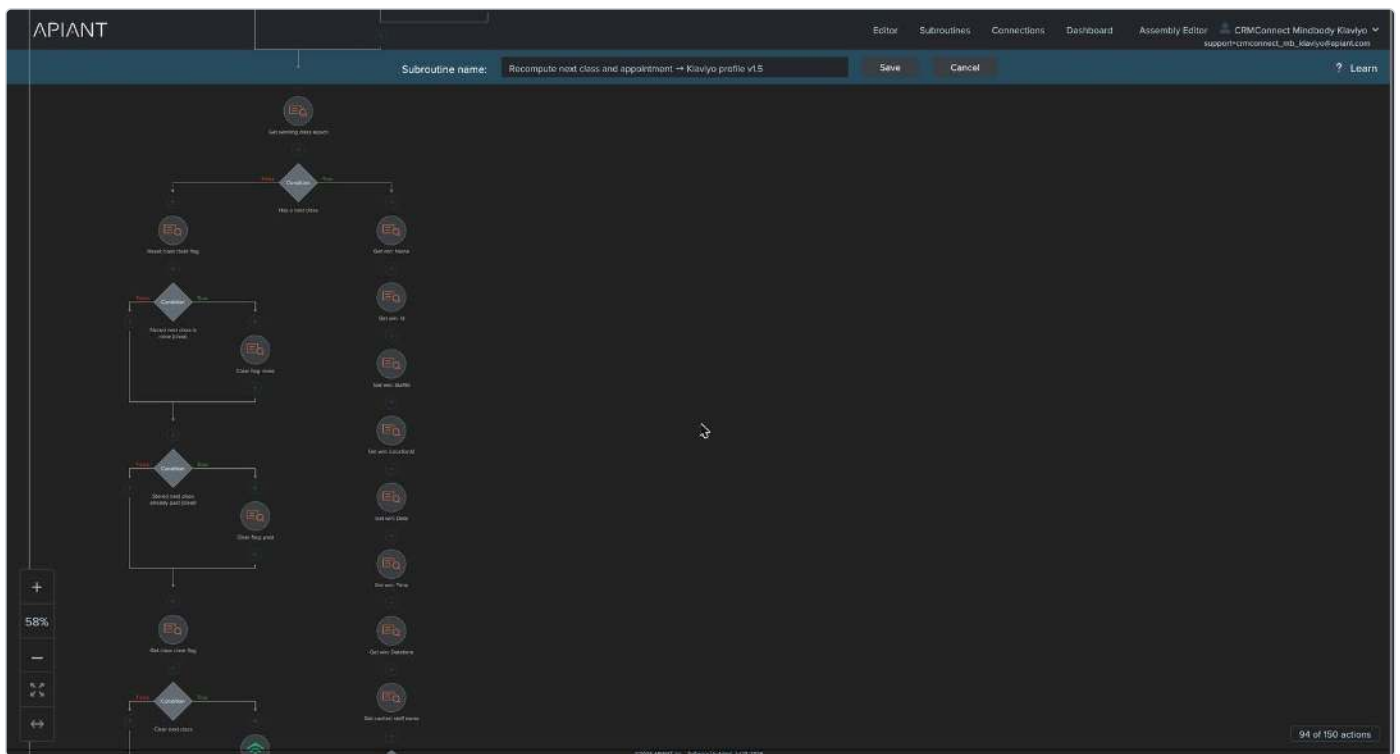


Subroutine: Recompute next class and appointment, editor view 7 of 15

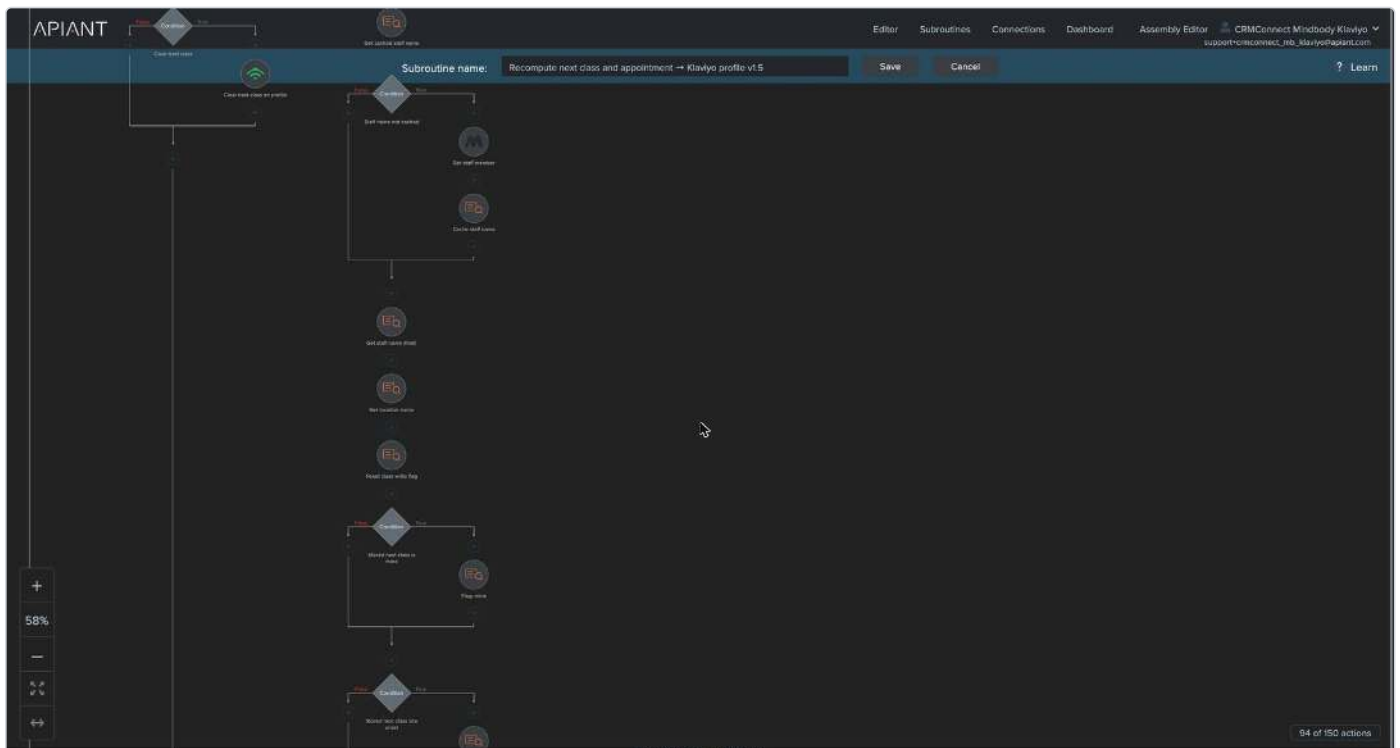


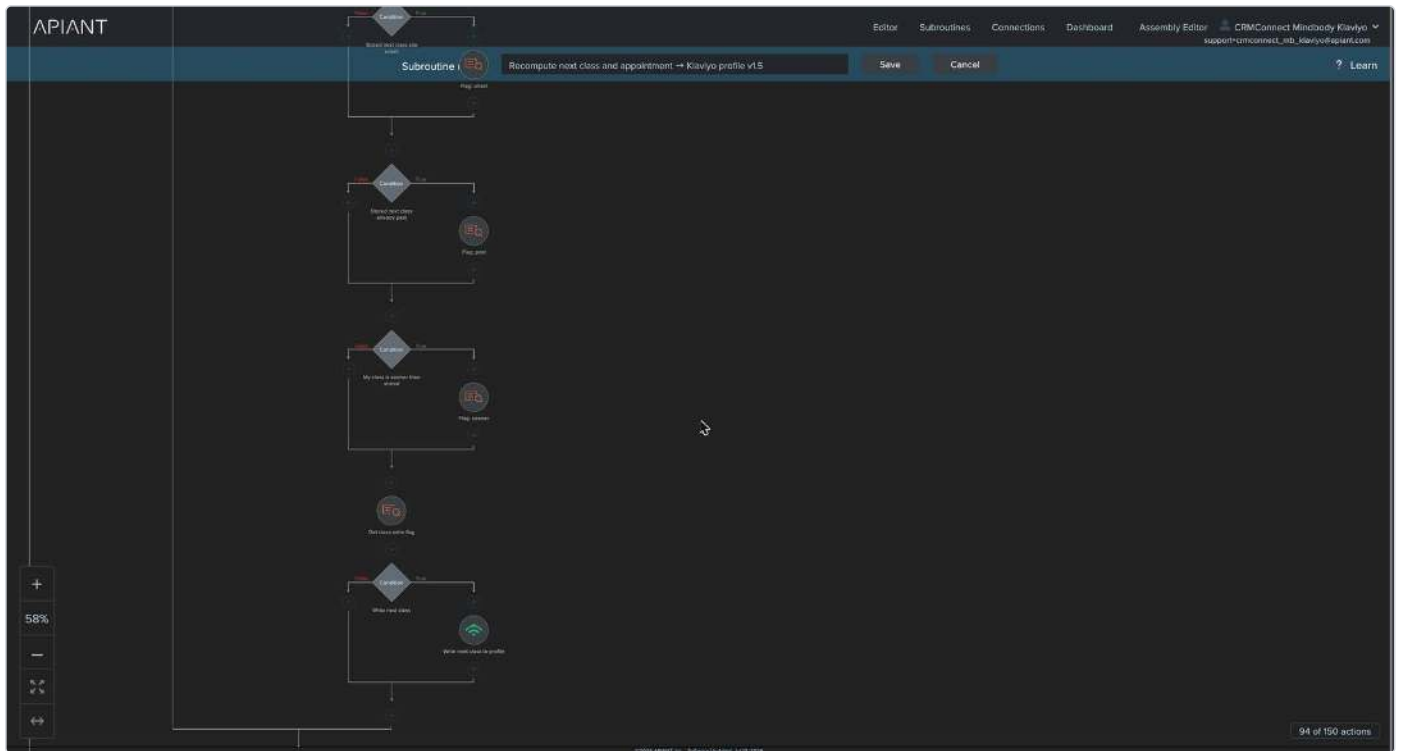


Subroutine: Recompute next class and appointment, editor view 9 of 15

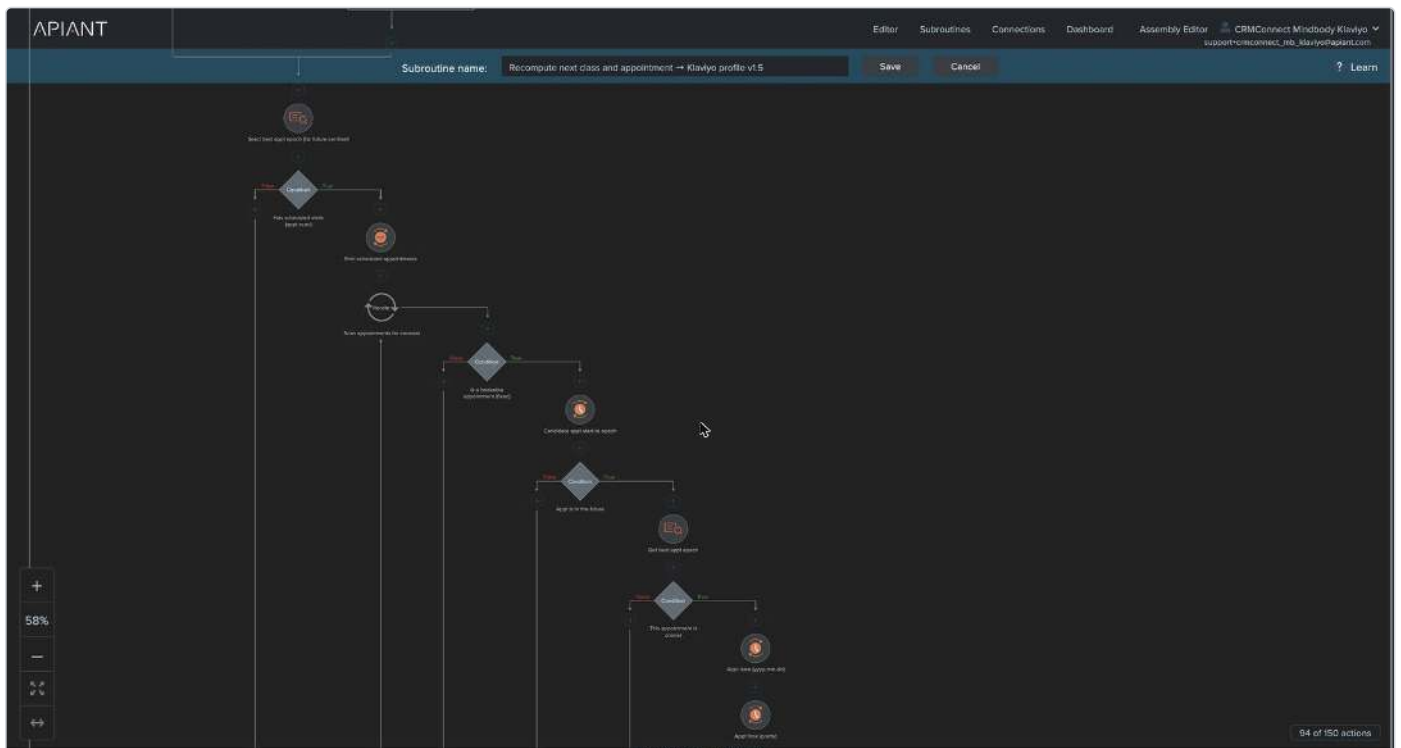



Subroutine: Recompute next class and appointment, editor view 10 of 15

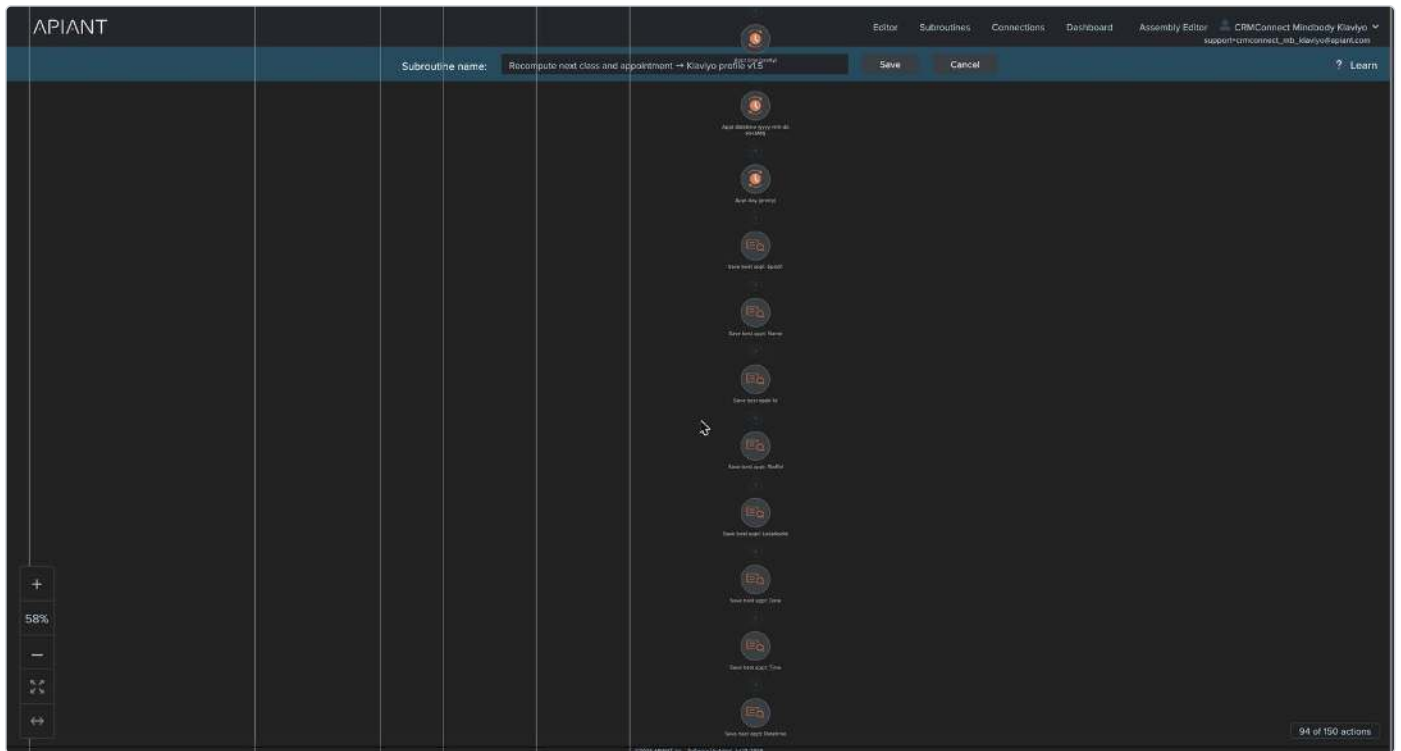


Subroutine: Recompute next class and appointment, editor view 11 of 15

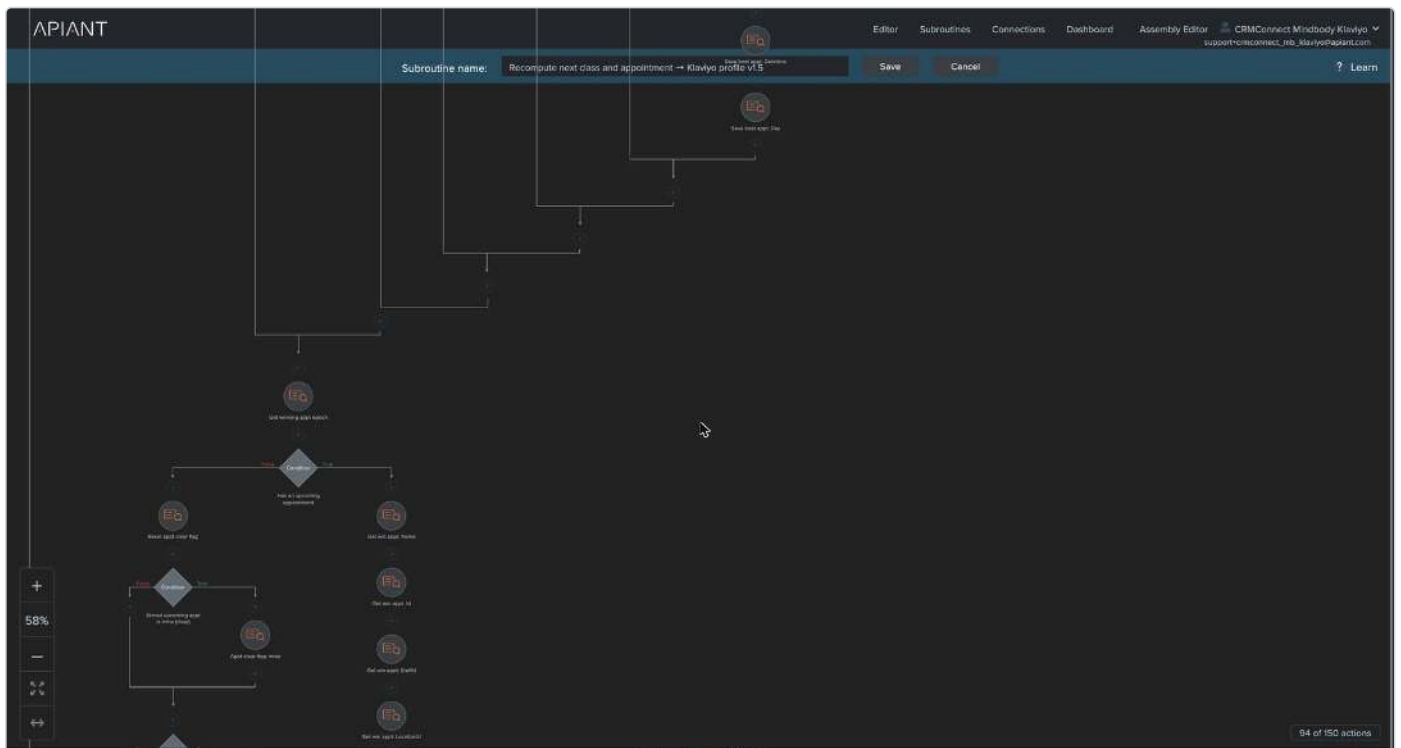

Subroutine: Recompute next class and appointment, editor view 12 of 15

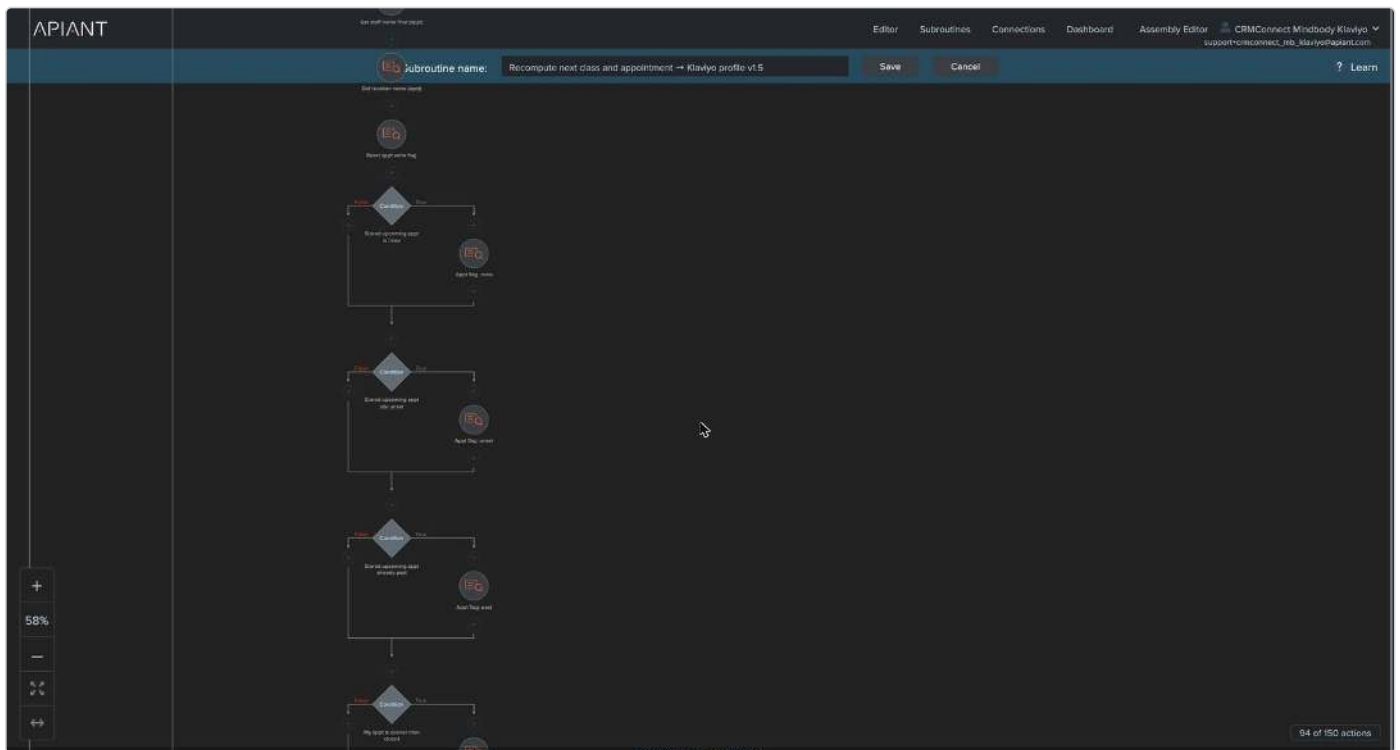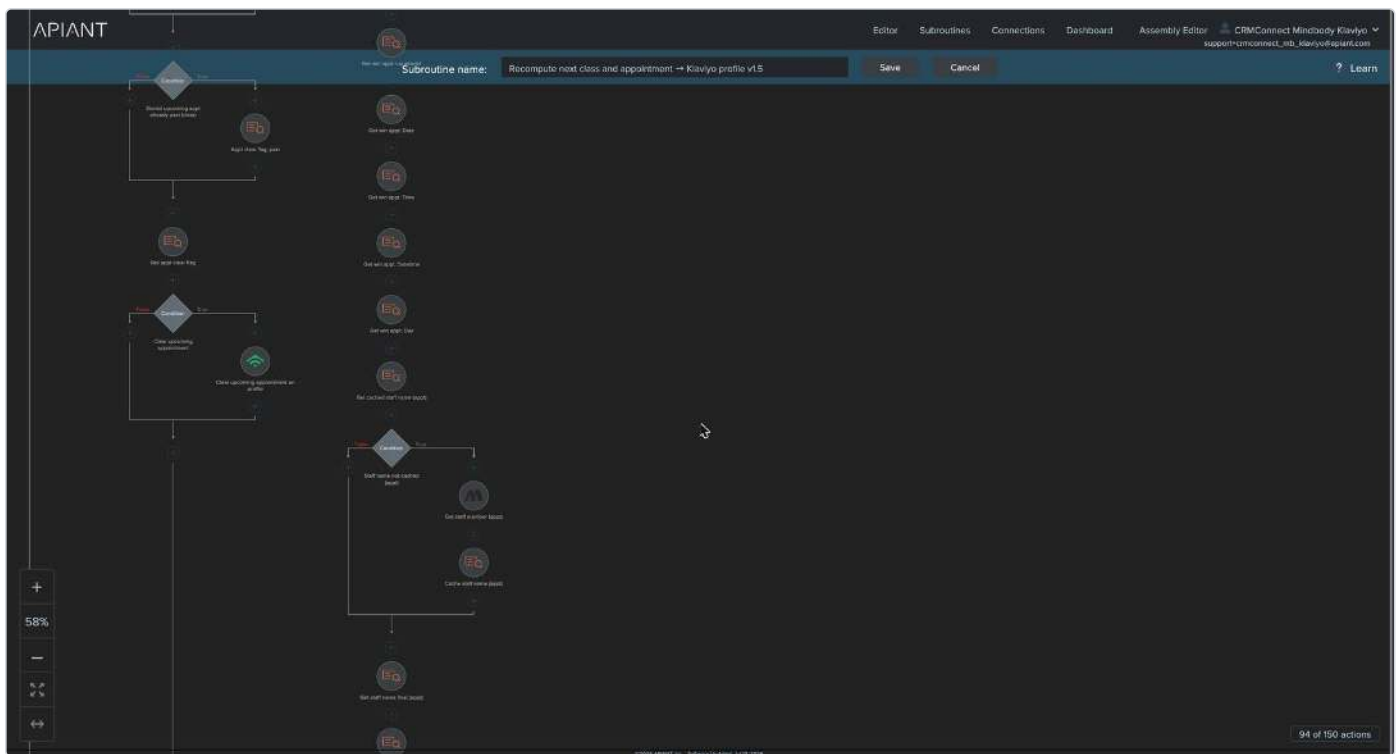

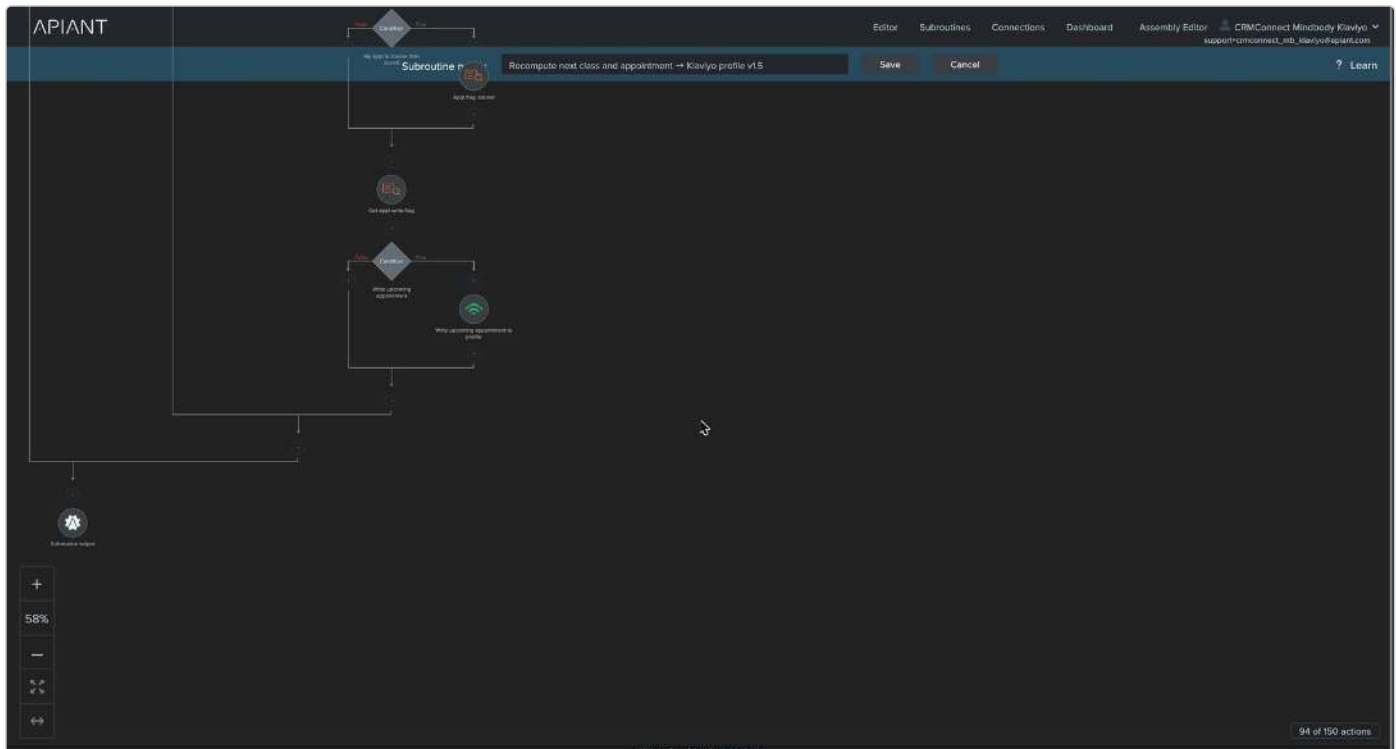


Subroutine: Recompute next class and appointment, editor view 15 of 15

3.19 Subroutine: Process one Mindbody sale → Klaviyo revenue events v1.5


Function. The replay-safe unit of revenue processing. Given nothing but a site, sale, and client id, it reconstructs the complete sale from the Mindbody API and emits the same Placed Order and Ordered Product events the instant pipeline would have produced, with the same unique ids, so a sale processed here after the fact is indistinguishable from (and deduplicates against) one processed live. The nightly sweep uses it to heal missed webhooks; the onboarding backfill uses it to load months of history; the MB Backfilled flag distinguishes historical loads from live heals. It also refreshes the client's account balance and records the dedupe key.

- **UUID** 1d23003aaeea4eff8286fe1559034529, 17 steps, subroutine. Called by the 06 sweep (and by design available for backfills).
- **Inputs:** Site_id, Sale_id, Client_id.
- Mindbody **Get client** (email + AccountBalance, continue-on-any-error).
- Gate Email Contains @:
- Mindbody **Get sale** (Sale ID, Start date time = 2000-01-01T00:00:00, so any historical sale resolves).
- Join Items JSON ({"ProductID", "ProductName", "Quantity", "ItemPrice", "Discount"}) per item from PurchasedItems_e_*, join quoted item names, Transform Number **Sum sale total** over PurchasedItems_e_TotalAmount.
- Location name lookup; Sales_sweep_backfill_flag lookup (from Mindbody_settings).
- Emit **Placed Order**: Unique ID <Site_id>~sale~<Sale_id>, **Time** = OriginalSaleDateTime (true UTC, exact webhook parity; the MB-SALE-TIME-001 fix), Value = summed sale total, properties ItemNames, Items, Site, Location, PaymentMethod = Payments_e_Type, SaleID, MB Backfilled = <flag> (false for nightly heals; set true together with a widened window for historical backfills, then restored).
- Emit the line-item id array, loop: one **Ordered Product** per item: Unique ID <Site_id>~sale~<Sale_id>~item~<PurchasedItems_e_Id>, Time = OriginalSaleDateTime, Value = item TotalAmount, properties ProductID, ProductName, Quantity (#num: from Quantity), ItemPrice (#num: from UnitPrice), Discount (#num: from DiscountAmount), Site, Location.
- Profile-id gated **Refresh MB Account balance**.
- **Save the dedupe key** MB_Site_sale_id_<Site_id>_<Sale_id>.
- Subroutine output.


One deliberate difference vs the instant pipeline: the sweep path stamps MB Backfilled and uses OriginalSaleDateTime; the 05 instant path uses the webhook's eventData_saleDateTime (also UTC) and does not stamp the flag.

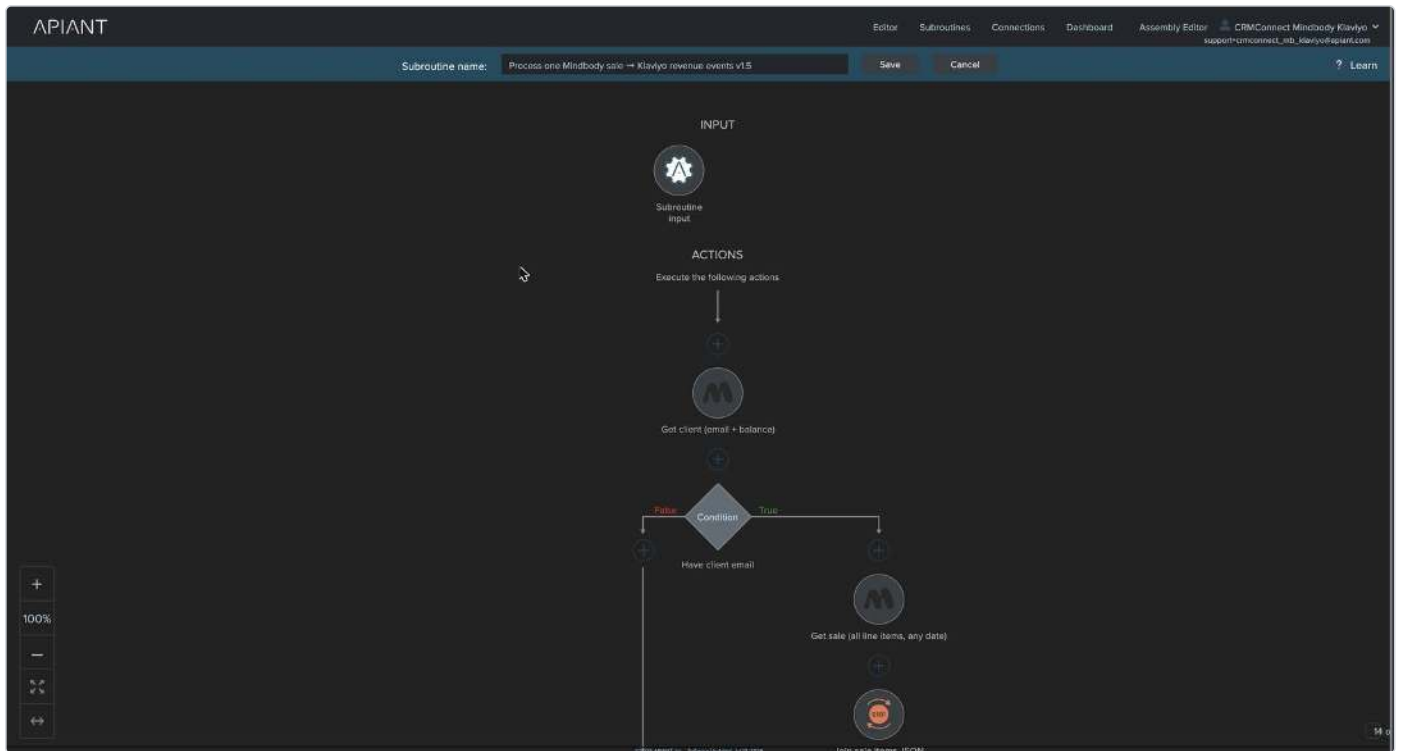


Subroutine: Process one Mindbody sale, editor view 1 of 4

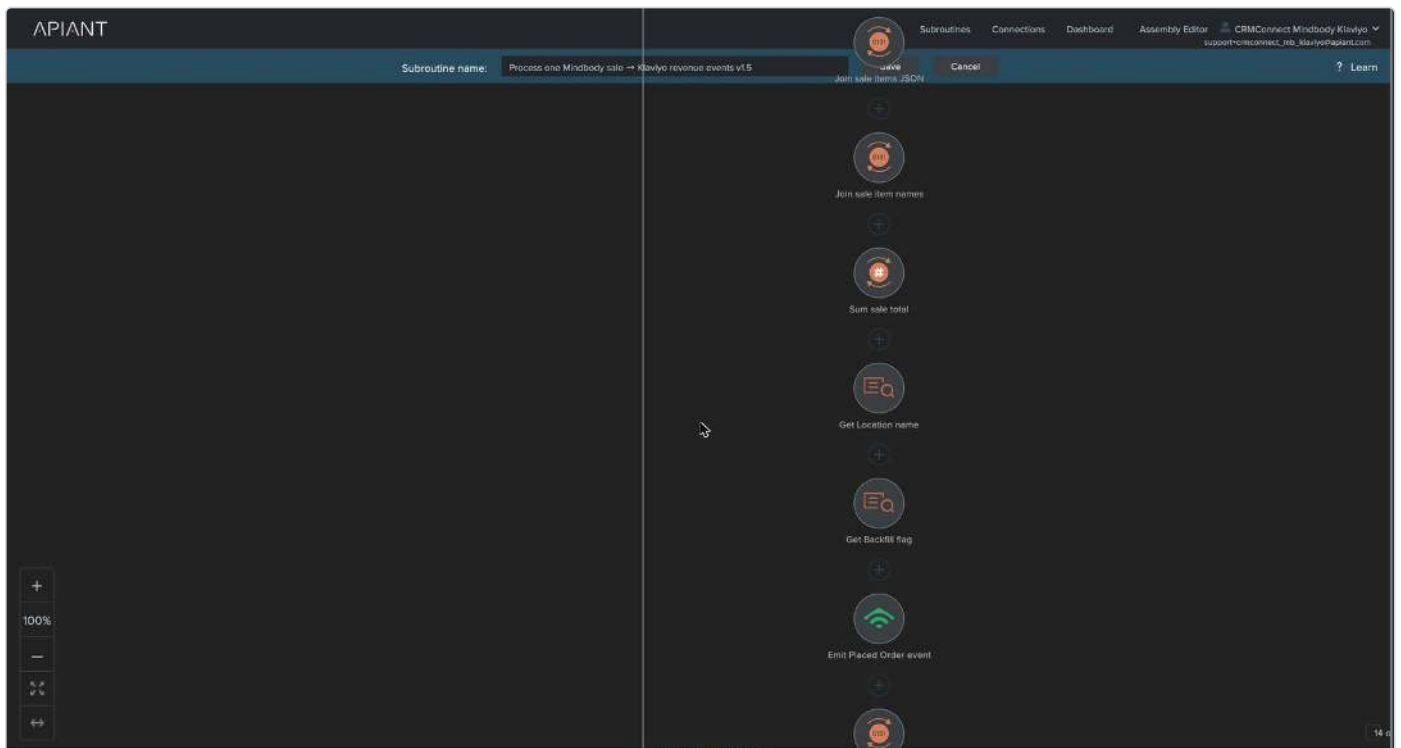

Subroutine: Process one Mindbody sale, editor view 2 of 4

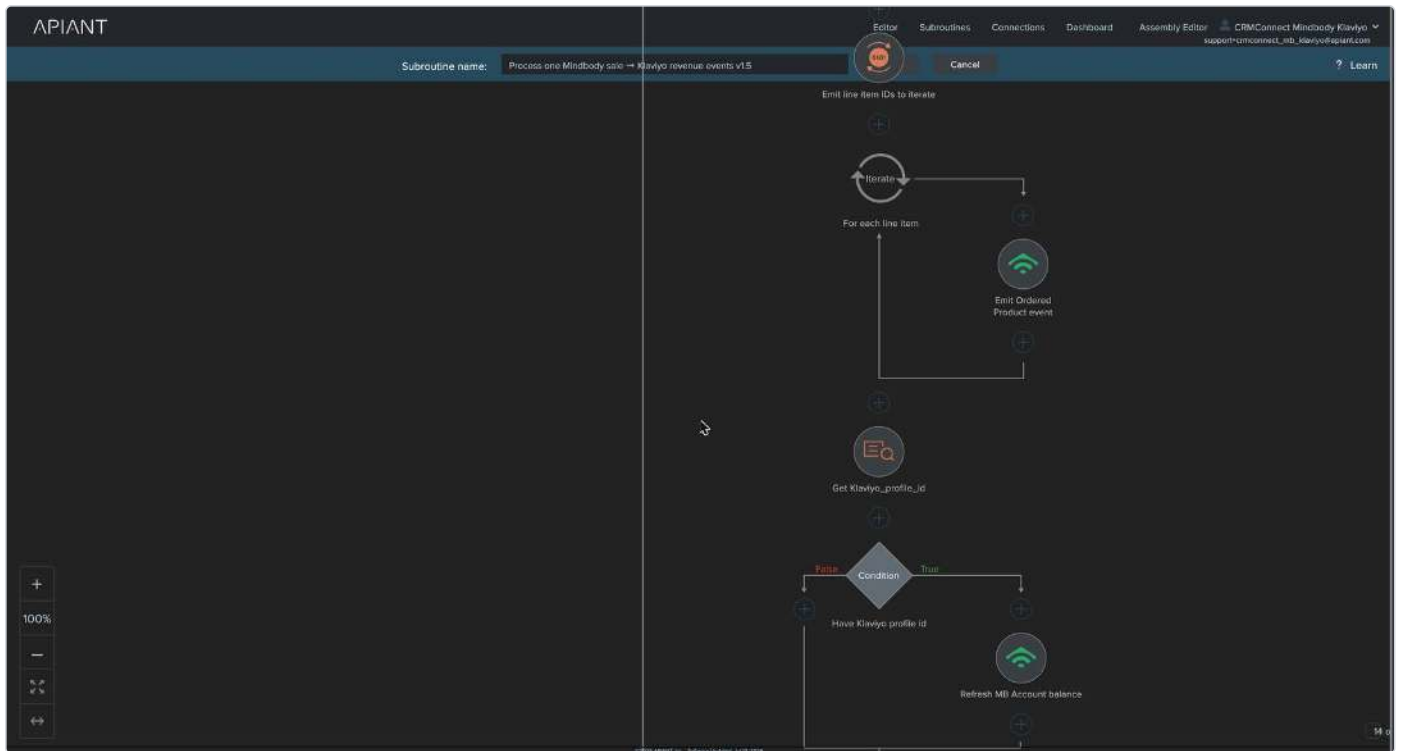

Subroutine: Process one Mindbody sale, editor view 3 of 4

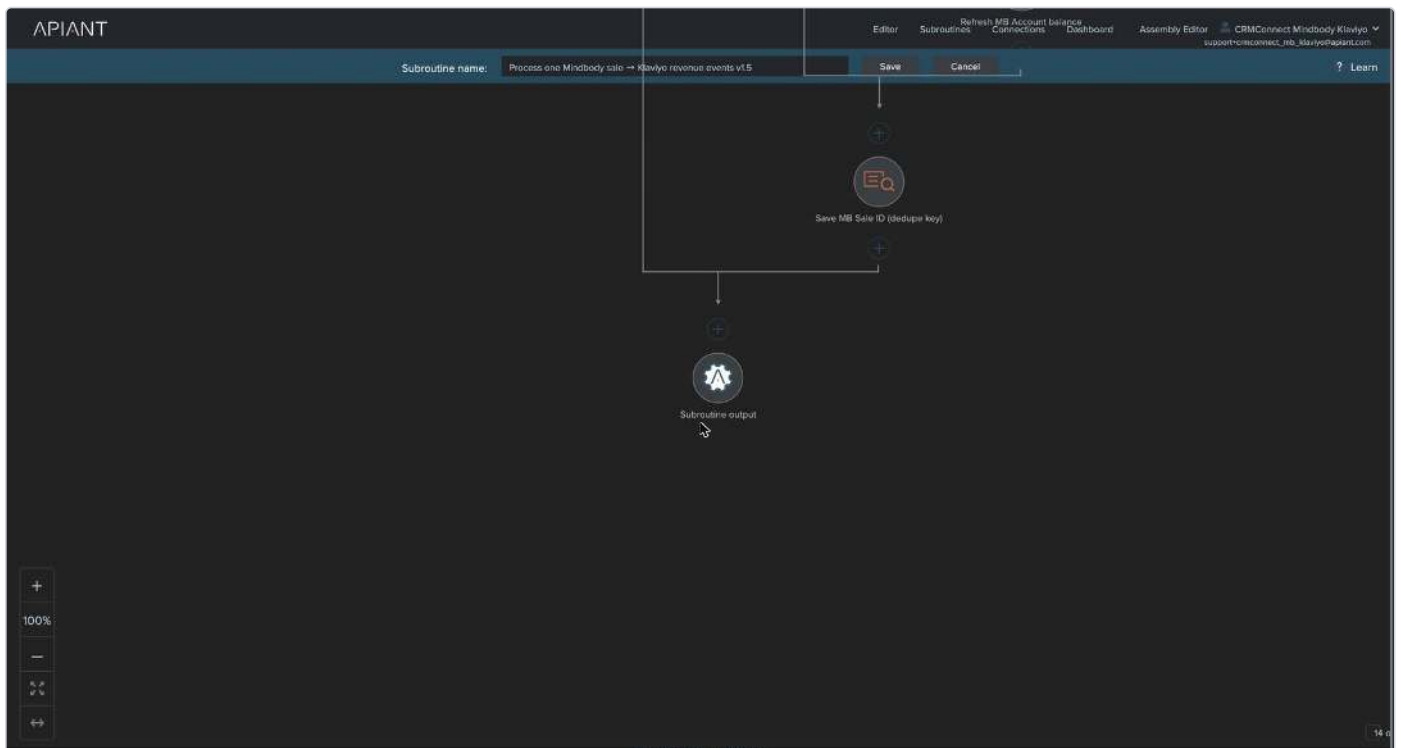

Subroutine: Process one Mindbody sale, editor view 4 of 4


3.20 ADMIN – Fleet monitor: forward automation alerts v1.5

Function. Per-site operational monitoring without a human watching dashboards. Any automation alert raised in the site account (a halted execution, a connector failure) is forwarded as a structured JSON payload to a webhook configured per account: a Slack incoming webhook, a HubSpot workflow, or any collector. Support sees every site's failures in one channel; an empty configuration disables forwarding without touching the automation, and APIANT's standard owner-email alerts continue regardless.


- **UUID** 13097787af0e431882d4131f75134229 , ON, 4 steps. Trigger: Automation alert in this account (System) . Deployed per site account, kept ON.
- Get general_settings / Alert_webhook_url ; 2. System Get automation info (resolves folder and automation names); 3. Gate Stored value Contains http (empty lookup = disabled); 3.T.1 POST (continue-on-any-error) with JSON payload:

```
{
  "text": "CRMConnect alert [<folder>] <automation>: <alert>",
  "account_person_uuid": "<person uuid>",
  "automation_uuid": "<uuid>",
  "automation_name": "<name>",
  "alert": "<alert text>"
}
```

The webhook-URL setting on the POST step is editor-only pending platform issue MCP-99.

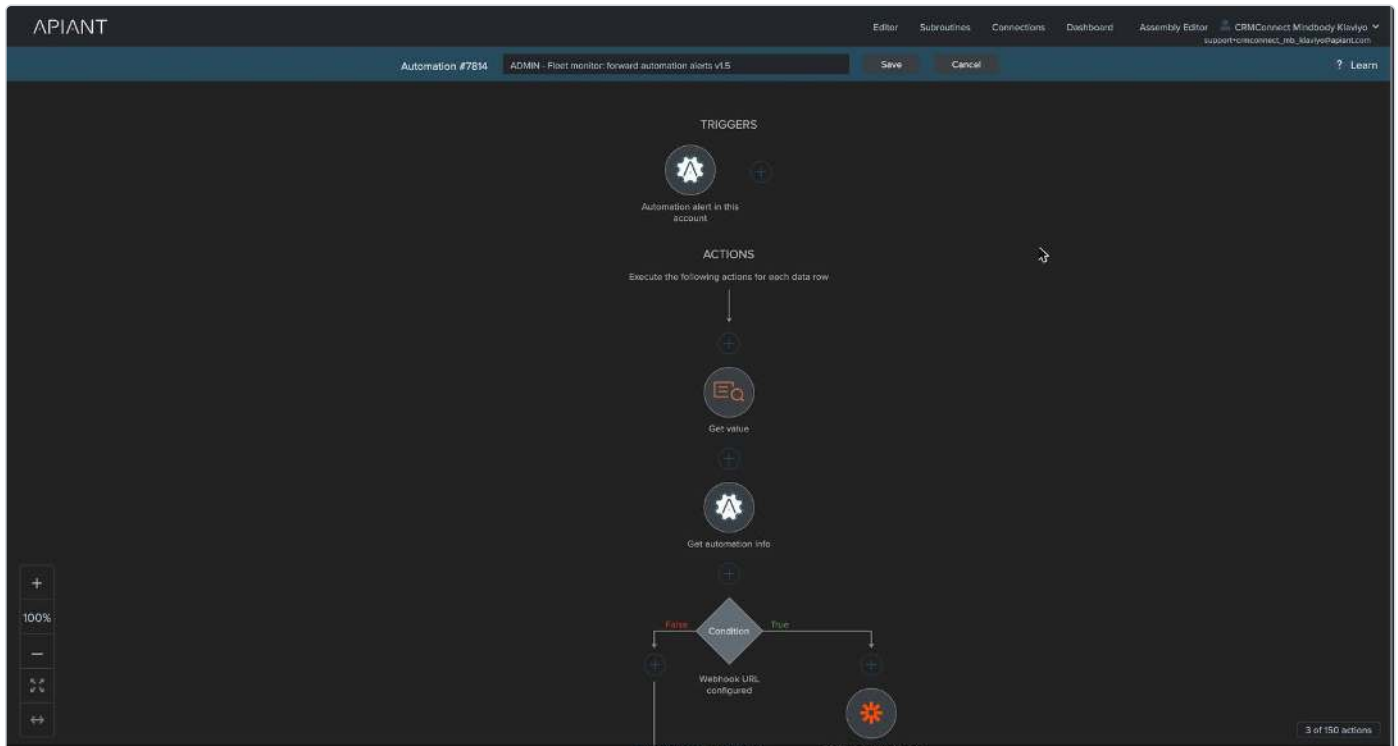

ADMIN Fleet monitor, editor view 1 of 2

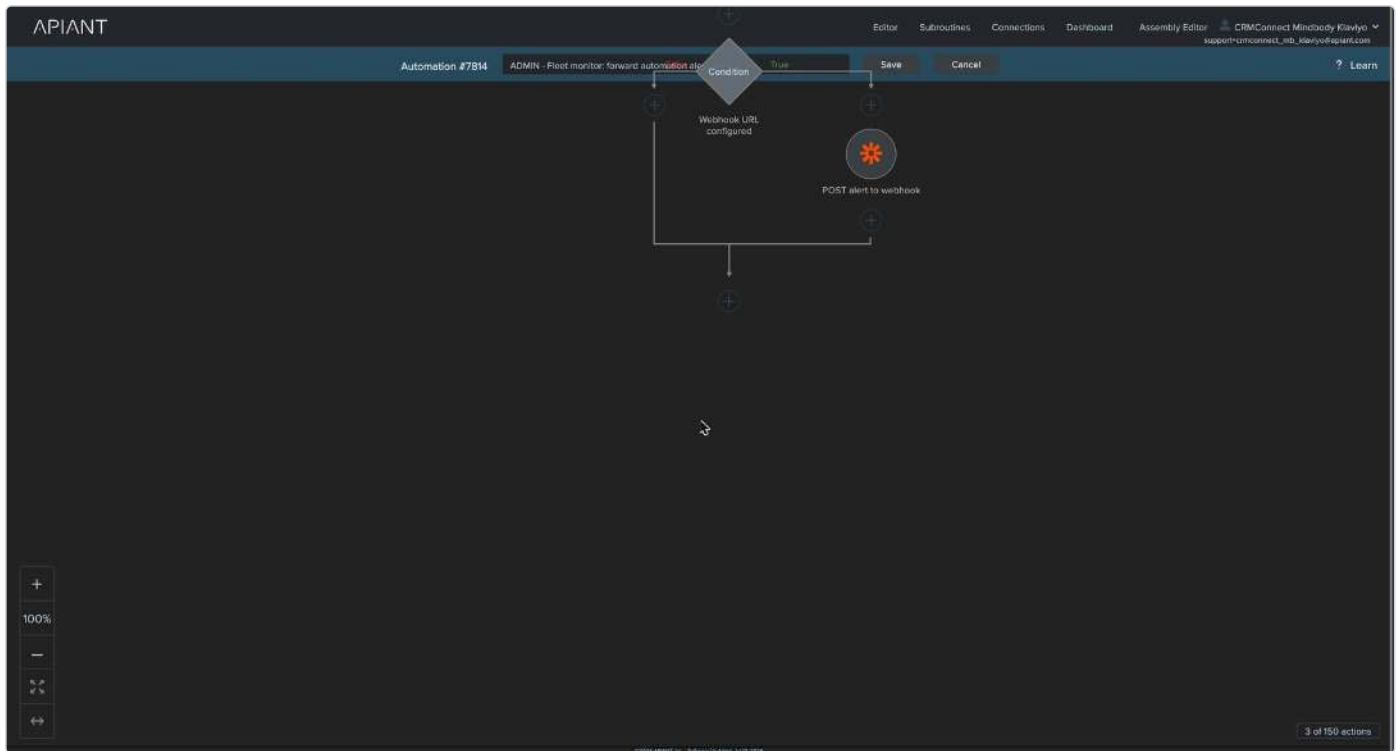

ADMIN Fleet monitor, editor view 2 of 2

3.21 ADMIN ** KEEP TURNED OFF ** INTEGRATION SETTINGS – CRMConnect_Mindbody_Klaviyo v1.5

Function. The per-account configuration surface, run manually once at onboarding (and re-run after configuration changes). It writes the three settings groups every automation reads (site id, visit and sweep windows, intro-offer keywords, consent-sync toggle, alert webhook) and builds the location mapping table, including the default-location aliases that make clients with no assigned home location resolve to location 1 across the entire product.

- **UUID** 6096d44df41648a28b8ae60c0394c71d , off (No-op trigger), 15 steps. Live automation is named v1.5 (the repo reference table still says v1.3; see Appendix B).
- **Save general settings** (multi-value): Version=1.5 , Email_domain=apiant.com , Visit_history_start_date=yesterday , Visit_history_end_date=yesterday (dev values; Alert_webhook_url also lives in this group).
- **Save Mindbody settings:** Site_id=722422 (dev), Max_Mindbody_clients=5000 , Max_Mindbody_updates_per_day=1000 , Intro_offer_first_keyword=Intro , ..._second_keyword=Free , ..._third_keyword=Consultation , ..._fourth_keyword=Special offer . (The Sales_sweep_start_date / Sales_sweep_end_date / Sales_sweep_backfill_flag value names read by 06 and the sale subroutine live in this same group but are not written by this v1.5 settings step; they are maintained directly in the lookup tables. See Appendix B item 3.)
- **Save Klaviyo settings:** Sync_email_consent=true (dev). Klaviyo_API_interval / Klaviyo_API_throttle_limit also live in this group.
- Mindbody **Get locations**, emit ids, then loop: skip location id 98, count Total_locations , save Mindbody_location_mappings value <SiteId>~<LocationId> = <Name> , and when Id Equals 1 also save the **default-location aliases** <SiteId>~0 and <SiteId>~ (empty).

3.22 Klaviyo API rate limiter pair (Master folder)

Function. Fleet-wide protection of the shared Klaviyo account's API budget. Because every site account of a customer writes to one Klaviyo account, the rate limiter is scoped to **Linked accounts**: one throttle shared across the whole fleet. Rate limiters live in server memory, so a boot-triggered automation recreates the limiter after every platform restart, and a manual "Reset" twin applies changed limits immediately.

AUTOMATION	UUID	TRIGGER	STEPS
ADMIN – System booted set Klaviyo API rate limiter v1.5	3235f0c1855a4ca28fed3f8919d9ba3b	System booted (instant)	3
ADMIN – ** KEEP OFF ** Reset Klaviyo API rate limiter v1.5	d5bdd71c3d0d4ee885102ef343ad0111	No-op (manual twin)	3

Both: get Klaviyo_API_interval and Klaviyo_API_throttle_limit from Klaviyo_settings , then System **Rate limiter: create or update** (Rate limiter name = Klaviyo API). Intended defaults 1 second / 10 calls. Design state: setter ON, reset OFF; **currently both OFF** because the four dropdown settings (Interval unit second(s) , Interval, Throttle limit, Scope Linked accounts) are confirmed still empty and can only be entered in the

editor UI (known issue PLATFORM-RL-001 / MCP-99). Do not activate the setter until the values are entered; afterward, invoke steps are to be wired into the resolver, revenue, and recompute subroutines. Klaviyo 429 responses are currently absorbed by the retry mode on write steps.

3.23 ADMIN ** KEEP TURNED OFF ** PROVISION KLAVIYO PACKAGE v1.5 (Master)

Function. The one-button installer for the marketing starter package described in section 1.2. Run manually in test mode, it creates every segment and draft flow the product ships, and it is fully idempotent: every create is guarded by a find-by-name check, so re-running it (after adding a location, or after the first sales arrive) creates only what is missing and has been validated to create zero duplicates on a full re-run.

- **UUID** `ee8417595c8842068168425107c090dc`, off (run manually via test mode), 68 steps.
- **Per-location segments** (steps 1-3): reads the location list, probes location ids 1-10 against the settings mapping; for each existing location creates up to three segments, each guarded by `Get segment by name` and followed by a 20-second pause (Klaviyo caps concurrent segment processing at 5):
 - Home Location: `<name>` with definition JSON `properties['MB Home location'] equals <name>` (string filter),
 - Visited: `<name>` [definition JSON not captured; contains-match on `MB Locations visited per design`],
 - Upcoming Appt At: `<name>`.
- **8 lifecycle segments** (steps 4-19), same find-guard + pause pattern: Upcoming Appointment Booked, Next Class Booked, No Upcoming Appointment, Intro Offer Buyers, Waiver Not Signed, Mindbody Promo Opt-In, Lapsed 30 Days, Contract Renewal Window.
- **Flow trigger resolution** (steps 20-23): re-find segment ids at run time for Intro Offer Buyers, No Upcoming Appointment, Lapsed 30 Days, Contract Renewal Window.
- **5 draft flows** (steps 24-34) via the `Create flow` connector action (POST /api/flows, revision 2025-04-15, draft status): Intro Offer Welcome, Rescue No Upcoming Visit, Win-Back 30 Days Lapsed, Contract Renewal Window, Post-Purchase Thank You. Each guard condition was **XML-verified as an AND of two different fields**: `flow-find id Length equals 0 AND trigger-segment-find id Length is greater than 0` (create the flow only if it is missing AND its trigger segment exists). The Post-Purchase flow is metric-triggered and requires the **Placed Order metric to exist** (step 32 `Get metric ID by name`, which prefers API-integration metrics on name collisions); if no sale has been ingested yet the flow is skipped, so re-run the provisioner after first sales. Flows are created as drafts with placeholder sender and copy for the marketing team to finish in Klaviyo.

Dev package state: 15 segments and 5 draft flows.

3.24-3.27 Admin utilities

Function (group). Four operational utilities that support onboarding and maintenance rather than day-to-day sync: two CSV-driven backfill forms (client profiles; remaining session-pack visits), an email-correction subroutine, and a one-shot cache purge that documents the runbook for repointing a fleet to a different Klaviyo account. All are kept off at rest; the form-triggered ones run only on submission.

3.24 ADMIN – FormApp: Import Mindbody clients → Klaviyo profiles (CSV upload) v1.5 (`35e35c81744a412b83076f37662e246d`, 10 steps, form-triggered). Onboarding backfill: upload a CSV with columns `ID` and `Email`; the automation parses and counts rows, shows a progress form, loops each row into a **Resolver call** (creates missing profiles with identity properties, seeds the composite caches, parks per-client errors), then shows a completion form. Site id comes from `Mindbody_settings`. Idempotent (the resolver always resolves fresh by email). Pairs with the 06 window backfill: clients first (this form), then sales history (06).

3.25 ADMIN – FormApp: Import visits remaining (CSV upload) v1.5 (`5ec5c2a66d45463e883c822f8a92bcbf3`, 17 steps, form-triggered). Legacy-pattern session-pack backfill: clears the temp product-id-processed key group, parses the CSV, per row resolves a profile id (cached, else via subroutine `Mindbody client email → Klaviyo profile id`), and for clean rows calls the legacy subroutine `Update Mindbody active client services in Klaviyo` (section 3.28). Live name says v1.5 (repo table said v1.3).

3.26 ADMIN – Update Mindbody client email (subroutine) (`36f355c722f94db887de0c4e8155eaf4`, 2 steps): inputs `Client_id`, `New_email`; one `Mindbody Update client` call. Built for the test-domain drill-client migration (KLAVIYO-TEST-DOMAIN-001); reusable for any email fix.

3.27 ADMIN RUN ONCE – Purge cached Klaviyo profile ids (account switch 2026-07-10) (`05010bb4a07842948ae81fa9c770fa7e`, 4 steps): emits the 208 known client keys, loops deleting the cached `Klaviyo_profile_id` and parked `Klaviyo_profile_error` per key. One-shot, already run; the pattern (key enumeration + a generated one-shot purge automation) is the documented runbook for Klaviyo-account cutovers until the platform gains a delete-keys-by-prefix action.

3.28 Retired and legacy automations

Function (group). Kept for audit trail and one residual dependency. The two "ZZ RETIRED" automations are the v1.3/v1.4 polling implementations of upcoming-appointment and next-class computation, fully replaced by the recompute subroutine and its instant callers; they remain deactivated in a retired folder. The legacy client-services subroutine is still invoked by the visits-remaining CSV import (3.25).

NAME	UUID	FOLDER	NOTE
ZZ RETIRED - 03B - upcoming appointment booking → Klaviyo profile v1.4	dd6e6bb635af42d783575212fb1de05a	OLD - Retired	Poll-based upcoming-appointment computation (sooner-wins + daily refresh + site guard); replaced by recompute + 03D/03E
ZZ RETIRED - 11B - upcoming classes and bookings → Klaviyo profile v1.3	e2bdeda95e534bdf801ca44a6949c074	OLD - Retired	Daily next-class sweep; replaced by recompute + 11E
Update Mindbody active client services in Klaviyo	d5eafd964f7d4a108f633d335585bf47	All	Legacy subroutine still called by the visits-remaining CSV import

[Names platform-verified; retired behavior doc-derived.] The repo reference file additionally lists 8 ROADMAP READY / NOT READY stubs (reverse-flow routing, fetch-based client sync, SalesRep info, v1.0-era membership/contract profile automations) and 3 legacy HubSpot-named subroutines; **none of these appear in the live automation list (31 total)**. Treat the live list as authoritative for v1.5 (Appendix B item 1).

4. Data and field mapping reference

4.1 Klaviyo profile properties written by the integration [platform-verified except where noted]

Standard Klaviyo fields: Email, First name, Last name, Phone number (E164), City, Region, Country, Postal code, Image URL (all from 3.1); plus real email consent subscription (3.1, gated).

PROFILE PROPERTY	WRITTEN BY	SOURCE
MB Client ID	01, resolver (create)	webhook clientId / input
MB Unique client ID	01, resolver (create)	clientUniqueld / Mindbody fetch
MB Site ID	resolver (create)	Site_id input
MB Gender	01	eventData_gender
MB Referred by	01	eventData_referredBy
MB Number of visits at site	01	clientNumberOfVisitsAtSite (kept fresh via 03/09/11 Update-client touches)
MB Send account/promotional/schedule texts (3)	01	consent flags (data only, never SMS consent)
MB Send account/promotional/schedule emails (3)	01	consent flags (promotional flag also drives real consent when enabled)
MB Street 1 / MB Street 2	01	addressLine1/2
MB Date of birth	01	DOB → GMT
MB Profile creation date	01	creationDate → GMT
MB First appointment date	01, 09	webhook / visit record → GMT
MB First class date	09	visit record → GMT
MB Home location	01	location mapping (aliases cover homeLocation 0/empty)
MB Status / MB Liability released / MB Inactive	01	account-status fields (native-integration parity)
MB Account balance	05, sale subroutine	Mindbody Get client AccountBalance, refreshed after every sale
MB Last appointment status / date / location / name / updated start time (5)	03 (every poll hit)	trigger + transforms
MB Last appointment attended / attended date and time (2)	03 (completed)	session name, start GMT
MB Last location visited	03 (completed), 09	location name
MB Locations visited	03 (completed)	comma text, appended with contains-dedupe
MB <Service name> count / remaining / exp date (dynamic names)	03, 05, 11	Get client services totals by product ID
MB Last product purchased / purchase date (2)	05 (product items)	item name, sale date GMT
MB Last service purchased / purchase date (2)	05 (service and contract items)	item name, sale date GMT
MB Last intro offer purchased / purchased date (2)	05 (intro-keyword items)	item name, sale date GMT
MB Last purchase location	05 (all item branches)	location mapping
Contract	05 (contract items), 08	ContractName
MB Contract autopay status	05	AutopayStatus
MB Contract status	08 (Active), 08B (Active/Terminated), 08C (Cancelled)	lifecycle
MB Contract auto renewing	08, 08B	isAutoRenewing
MB Contract start date / end date	05, 08, 08B (end = termination date when terminated)	dates → GMT
MB Membership / MB Membership status	07 (name + Active), 07B (Cancelled)	webhook
MB Last visit date / name / time / type / staff name (5)	09	visit record
MB Last class attended / date / staff name (3)	11 (signed-in)	roster record

PROFILE PROPERTY	WRITTEN BY	SOURCE
MB Last class visit status / status date (2)	11 (all roster entries)	classifier
MB Next class booked (+ id, date, time, datetime, staff, location, site, updated date) (9)	recompute	soonest future class, site-guarded
MB Upcoming appt datetime, day, time, ID, name, location, site, staff, updated date (9)	recompute	soonest future Booked/Confirmed appointment, site-guarded
MB Upcoming appt category	recompute (clear only)	legacy property; cleared to None, never written in v1.5

Cross-site last-write-wins is accepted and documented for MB Client ID and MB Number of visits at site on shared profiles; all MB Next class / MB Upcoming appt values are site-guarded.

4.2 Klaviyo event metrics (15) [platform-verified]

Every unique id is a site-scoped composite, making all emits idempotent (Klaviyo `$event_id`). Time semantics: booking-webhook events use `eventInstanceOriginationDateTime`; appointment and class completion events use the entity start time in ISO GMT; revenue events use the sale timestamp (webhook `saleDateTime` on the instant path, `OriginalSaleDateTime` on the sweep path, both UTC).

METRIC	EMITTER(S)	UNIQUE ID	PROPERTIES
MB Appointment Booked	03D (created), 03E (heal)	<code><site>~appt~<apptId></code>	Appointment ID, Start, End, Duration minutes (num), Site, Location, Staff, Staff ID (03D only)
MB Appointment Confirmed	03E (isConfirmed)	<code><site>~appt~<apptId>~confirmed</code>	same as Booked (no Staff ID)
MB Appointment Arrived	03E (hasArrived)	<code><site>~appt~<apptId>~arrived</code>	same as Booked (no Staff ID)
MB Appointment Completed	03 (status Contains Completed)	<code><site>~appt~<apptId>~completed</code>	Appointment ID, Session type, Site, Location, Start
MB Intro Session Completed	03 (session name contains intro keyword)	[not captured at step level]	[doc-derived: same shape as Completed]
MB Appointment Cancelled	03C	<code><site>~appt~<apptId>~cancelled</code>	Appointment ID, Start, Site, Staff ID
MB Class Booked	11E	<code><site>~classbooking~<bookingId></code>	Class ID, Booking ID, Site, Location
MB Class Cancelled	11C	<code><site>~classbooking~<bookingId>~cancelled</code>	Class ID, Booking ID, Site
MB Class Completed	11 (signed-in roster entries)	<code><site>~class~<classId>~<clientId>~completed</code>	Class, Class ID, Site, Location, Staff, Start
MB Membership Activated	07	<code><site>~membership~<membershipId>~<clientId>~activated</code>	Membership, Membership ID, Site
MB Membership Cancelled	07B	<code><site>~membership~<membershipId>~<clientId>~cancelled</code>	Membership ID, Site
MB Contract Created	08	<code><site>~contract~<clientIdContractId>~created</code>	Contract, Contract ID, Client contract ID, Start, End, Auto renewing, Sold by, Site
MB Contract Cancelled	08B and 08C (shared id)	<code><site>~contract~<clientIdContractId>~cancelled</code>	08C: Contract, Contract ID, Client contract ID, Site; 08B: Client contract ID, Terminated from, Site
Placed Order (Klaviyo-canonical)	05, sale subroutine	<code><site>~sale~<saleId></code>	Value = sale total; ItemNames[], Items[] (ProductID/ProductName/Quantity/ItemPrice/Discount per item), Site, Location, PaymentMethod, SaleID, MB Backfilled (sweep path only)
Ordered Product (Klaviyo-canonical)	05 (per trigger record), sale subroutine (loop per item)	<code><site>~sale~<saleId>~item~<itemId></code>	Value = item total; ProductID, ProductName, Quantity (num), ItemPrice (num), Discount (num), Site, Location

4.3 Mindbody API surface used [platform-verified]

Webhook triggers: `client.created/.updated` (01), `appointmentBooking.cancelled` (03C), `appointmentBooking.created` (03D), `appointmentBooking.updated` (03E), `sale line item` (05), `clientMembershipAssignment.created` (07), `membership cancelled` (07B), `clientContract.created` (08), `clientContract.updated` (08B), `clientContract.cancelled` (08C), `classRosterBooking.cancelled` (11C), `classRosterBooking.created` (11E). Polling triggers: `new/updated appointment`

in date range (03), new completed class (11). Actions: Get appointment by ID, Get session type by ID, Get most recent client contract, Get client, Get client services totals by product ID, Get sale, Get sales in date range, Get visits within date range, Get class visits, Get scheduled client visits, Get staff member, Get locations, Update client.

Known Mindbody behaviors encoded in the design: Get sale SaleDateTime is business-local time (the sweep uses OriginalSaleDateTime, the true UTC instant; MB-SALE-TIME-001); contract terminations performed in the Mindbody UI emit only clientContract.updated with a payload identical to reactivations (08B fetches live state); the new Mindbody client-info page's save does not emit client.updated (test webhooks with the legacy edit screen or the API).

4.4 Lookup table (state) reference [platform-verified]

KEY GROUP	KEY	VALUE NAMES	WRITTEN BY / READ BY
Mindbody_Klaviyo	Client_id_<SiteId>~<ClientId>	Email, First, Last, Mobile, Unique_client_id	01 saves; resolver caches/migrates; all emitters read Email
Mindbody_Klaviyo	Mindbody_client_id_<SiteId>~<ClientId>	Klaviyo_profile_id	resolver writes fresh per resolution; callers read for profile writes
Mindbody_Klaviyo	Appointment_id_<SiteId>~<AppointmentId>	Client_id	03 saves; 03C reads
Mindbody_Klaviyo (site-scoped)	Staff_site_id_<SiteId>~<StaffId> [doc-derived name]	staff name	recompute fetch-on-miss cache
temp_CRMConnect_Mindbody_Klaviyo	Mindbody_client_id_<SiteId>~<ClientId>	Klaviyo_profile_error	resolver parks/clears; every caller gates on it
temp_CRMConnect_Mindbody_Klaviyo	MB_Site_sale_id_<SiteId>_<SaleId>	MB_Sale_ID	05 and sale subroutine save; 05 gate and 06 sweep read
CRMConnect_Mindbody_Klaviyo	Mindbody_location_mappings	<SiteId>~<LocationId> (+ aliases <SiteId>~0, <SiteId>~), Total_locations	INTEGRATION SETTINGS writes; every location lookup reads
CRMConnect_Mindbody_Klaviyo_general_settings	general_settings	Version, Email_domain, Visit_history_start_date, Visit_history_end_date, Alert_webhook_url	settings automation; 09, fleet monitor
CRMConnect_Mindbody_Klaviyo_Mindbody_settings	Mindbody_settings	Site_id, Max_Mindbody_clients, Max_Mindbody_updates_per_day, Intro_offer_first/second/third/fourth_keyword, Sales_sweep_start_date, Sales_sweep_end_date, Sales_sweep_backfill_flag	settings automation (partial); 03/05/06/09/11
CRMConnect_Mindbody_Klaviyo_Klaviyo_settings	Klaviyo_settings	Sync_email_consent, Klaviyo_API_interval, Klaviyo_API_throttle_limit	settings automation (partial); 01 consent gate, limiter pair
temp (recompute)	NC_<SiteId>~<ClientId>_* [doc-derived naming]	best class/appt Epoch, Name, Id, StaffId, LocationId, Date, Time, Datetime, Day, write/clear flags	recompute per-invocation working state, namespaced for concurrency
Session type cache	Session_type_name keyed per site/session type	name	03 fetch-on-miss

KEY GROUP	KEY	VALUE NAMES	WRITTEN BY / READ BY
Visit dedupe	Last_visited_date_epoch_seconds per client	epoch	09 monotonic visit guard

4.5 Klaviyo connector actions [names platform-verified via steps; assembly UUIDs doc-derived]

Connector app assembly 5e485232ee6149088e89afc477f28538 . Actions used: Add profile (103d0f6807c14eea8a3b4c62ce11b037), Get profile by email (9c614f8824044efe8cadcb4bb4db25b7), Update profile (3a1213b8531146ba86d0ffef7bb855f6 , PATCH with Custom property 1..50 name = value slots), Append value to profile list property (8312e8e97d4b4fcf892cd922e7620d9c , built but unused in v1.5), plus the v1.5 additions: Create event, Subscribe profile to email marketing, Create segment, Get segment by name, Delete segment, Create flow (POST /api/flows revision 2025-04-15, draft), Get flow by name, Delete flow, Get metric ID by name (prefers API-integration metrics on name collisions). The v1.5 additions' assembly UUIDs are not yet inventoried in the repository reference.

5. Data flow and sequencing

5.1 Which automation fires when

MOMENT	FIRES	EFFECT
Client created/updated in Mindbody	01 (instant)	Profile upsert (20+ properties), optional real consent subscribe
Appointment booked	03D (instant)	Recompute next class/appt; MB Appointment Booked
Appointment updated (confirm, arrive, reschedule)	03E (instant), 03 (next poll)	Recompute; Confirmed/Arrived events; Booked heal; status properties on the profile
Appointment cancelled	03C (instant)	Recompute (repopulate or clear); MB Appointment Cancelled
Appointment window poll (every 15 min)	03	Status properties; on Completed: attended properties, visited locations, Completed/Intro events, series properties, recompute, Mindbody client touch
Class booked	11E (instant)	Recompute; MB Class Booked
Class booking cancelled	11C (instant)	Recompute; MB Class Cancelled
Class completes (every 15 min poll)	11	Per roster entry: attended/status properties, series properties, MB Class Completed
Sale	05 (instant, one record per line item)	Per-item purchase properties; once per sale: series properties, Ordered Product + Placed Order, balance refresh, dedupe key
Membership created / cancelled	07 / 07B (instant)	Events + membership properties
Contract created / updated / cancelled	08 / 08B / 08C (instant)	Events + contract properties; 08B reconciles terminations from live state
Nightly 01:00	09	Visit history sweep (yesterday), first-visit dates, last-visit properties, monotonic guard
Nightly 01:30	06	Sales sweep (yesterday): replay webhook-missed sales through the sale subroutine
Any automation alert	Fleet monitor	JSON POST to the configured webhook
Server boot	Rate limiter setter (once armed)	Recreate the in-memory Klaviyo API limiter

5.2 Ordering dependencies

- INTEGRATION SETTINGS must run before anything else on a new account (location mappings, site id, keywords, consent flag).
- Automation 03 must have seen an appointment (saving `Appointment_id_*` → `Client_id`) before 03C can map that appointment's cancel webhook; otherwise 03C exits gracefully and the recompute callers self-heal later.
- The provisioner's Post-Purchase flow requires the Placed Order metric to exist (first sale ingested); re-run the provisioner after first sales.
- Onboarding backfill order: CSV client import first (profiles + caches), then 06 with a widened window and `Sales_sweep_backfill_flag=true` (sales history), then restore the window and flag.
- Never run Klaviyo's native Mindbody integration in parallel with CRMConnect: the native integration writes its revenue events onto the same canonical Placed Order / Ordered Product metrics and double-counts (known issue MB-SALE-DOUBLE-EMIT-001); cutover sequencing is disable-native, then enable-CRMConnect, then backfill.

6. Non-functional characteristics

6.1 Idempotency and dedupe guarantees

Four independent layers make the pipeline replay-safe [platform-verified mechanisms]:

- **Identity:** the resolver always resolves fresh by email; cached profile ids are telemetry. Parked errors (`Klaviyo_profile_error` per composite client key) make every caller skip writes for unresolvable clients without failing, and are cleared on the next successful resolution.
- **Sales:** the lookup dedupe key `MB_Site_sale_id_<site>_<saleId>` gates 05's sale-level block (exactly one of N parallel line-item records wins) and 06's replay decision. The Klaviyo `unique_id` on every revenue event is a second, independent idempotency layer, so even overlapping replays cannot double count.
- **Events:** every metric emit carries a deterministic site-scoped unique id; deliberate re-emits (03E's Booked heal, 08B/08C's shared Cancelled id, sweep replays, backfills) deduplicate inside Klaviyo.
- **Shared profile state:** the recompute's mine/unset/past/sooner flag cascades prevent cross-site clobber; automation 09 only writes when a visit is strictly more recent than the recorded one.

There are no feedback loops: the only Mindbody writes are `Update client` refresh touches (03/09/11) and an admin email fix, none of which re-enter the sync path destructively.

6.2 Throughput, concurrency, and API budget

- Webhook records within one event process in parallel; the design therefore forbids cross-record accumulation in shared variables. Per-entity array work lives in subroutines with scalar inputs, and the recompute uses per-client namespaced temp keys, so concurrent invocations for different clients cannot collide.
- Mindbody API usage is minimized by design (invariant 5): event-driven recompute (one scheduled-visits call per booking event) replaced two polling automations; caches with fetch-on-miss cover staff names and session types; nightly sweeps are bounded by lookup-driven date windows.
- Klaviyo API protection: retry mode on all write steps absorbs 429/5xx today; the fleet-wide named rate limiter (section 3.22, scope Linked accounts, intended 10 calls/second shared across all site accounts) is built and pending one-time manual configuration.
- Proven backfill throughput: 166 sales replayed in 7 minutes with zero errors on the dev account [doc-derived].

6.3 Error handling model [platform-verified]

MODE	MEANING	USED ON
<code>haltOnAnyErrorWithRetry</code>	Halt the record; the server retries retryable errors (429, 5xx; 429 confirmed on the retryable list)	All 21+ Klaviyo write steps (profile updates, event emits, subscribe)
<code>haltOnAnyError</code>	Halt the record, no retry	Cache writes, transforms, subroutine calls, Mindbody fetches that must succeed
<code>continueOnNoncriticalError</code>	Continue when the error is noncritical (lookup miss, find-none)	All lookup Get steps, Klaviyo Get profile by email, dedupe reads/writes
<code>continueOnAnyError</code>	Never halt	Fleet monitor POST, provisioner segment creates, per-sale subroutine call in the 06 sweep loop, resolver profile create, Get client in the sale subroutine

Additional behaviors: profile update failures in 01 fall through to a phone-less retry write (phone validation is the dominant failure mode); identity failures park per-client errors instead of halting; batch loops isolate per-item failures so one bad record never kills a sweep.

6.4 Monitoring and alerting

Every automation alert in a site account is forwarded as structured JSON to a per-account webhook (section 3.20), in addition to APIANT's standard owner-email alerts. Post-deployment monitoring of customer accounts follows the product's recurring monitor loop [doc-derived]. A failed execution with zero step records is the diagnostic signature of a pre-flight connection abort (missing app connection).

6.5 Data protection and PII handling

- Personal data transferred to Klaviyo (the customer's marketing processor): email, name, phone (E164), address, date of birth, gender, photo URL, visit and purchase history. Transfer is over the connectors' HTTPS APIs.
- Personal data held in APIANT lookup tables (per site account): client email, first and last name, mobile number, and unique client id under composite keys; parked error strings contain only composite ids. Lookup entries are stored with the platform's standard at-rest handling (the product does not enable per-value encryption on these entries) [platform-verified setting `Encrypt values? = false`].

- Consent: real Klaviyo email consent is granted only from the Mindbody promotional-email flag, gated per account, subscribe-only (Klaviyo-side unsubscribes are never reversed); SMS flags are stored as data and never used for consent.
- Test data convention: all test identities use `test+<name>@apiant.com` (Klaviyo silently drops events for reserved test domains such as `example.com`; known issue KLAVIYO-TEST-DOMAIN-001).
- Engineering-record hygiene [doc-derived policy]: no customer names, emails, phone numbers, or account details in the public work tracker; customer-facing communication stays in the support system.

6.6 Known issues log (stable IDs) [doc-derived]

ID	STATUS	SUMMARY
KLAVIYO-TEST-DOMAIN-001	Active workaround	Klaviyo silently drops API events for @example.com profiles (202 accepted, never ingested; profile creation works). Convention: all test emails are <code>test+<name>@apiant.com</code> . Dev-only impact.
MB-CONTRACT-CANCEL-001	Resolved (08B, 2026-07-12)	Mindbody UI contract terminations never emit <code>clientContract.cancelled</code> ; the updated payload is identical for terminations and reactivations. 08B fetches the live <code>TerminationDate</code> and branches; idempotent shared event id with 08C.
MB-SALE-TIME-001	Resolved (2026-07-11)	Get sale <code>SaleDateTime</code> is business-local; sweep events now map <code>OriginalSaleDateTime</code> (true UTC, webhook parity).
MB-SALE-DOUBLE-EMIT-001	Root-caused; native integration removed 2026-07-13	Klaviyo's native Mindbody integration writes its revenue events onto the same API-owned Placed Order / Ordered Product metrics with random event ids; parallel-run double-counts. Customer rule: never parallel-run.
PLATFORM-RL-001 (MCP-99)	Active workaround	Rate limiter dropdown settings cannot be written (or read) via the management API; enter the four values once per automation in the editor UI, then activate the setter and run the Reset twin. Confirmed still empty on the setter as of 2026-07-13.
MCP-97-VESTIGIAL-001	Monitoring (latent)	Positional (name-stripped) multi-value settings steps remain in the heads of 01/03/03C/05/09/11/11C; no live consumers (verified). Repair in the editor UI during the v2.0 cleanup, never via management-API draft edits. Health is only visible in execution step outputs.
MCP-100	Active (platform)	Summary renderers display AND groups as OR. Verify condition logic via the stored XML. The 2026-07-13 fleet audit cleared all flagged conditions at XML level; this document re-verified the critical ones (01 consent gate, 08B termination gate, 09 email gate AND vs status true-OR, recompute appointment filter, provisioner flow guards).
KLAVIYO-TEMPLATE-SYNTAX-001	Resolved (2026-07-13)	Flow email skipped every send with "Email Syntax Error": Klaviyo's template language cannot address <code>\$</code> -prefixed event fields with dot notation; use <code>{{ event lookup: '\$value' }}</code> . Flow-bound template clones are not writable via the templates API; edit them in the flow's email editor.
KLAVIYO-SEGMENT-EDIT-LAG-001	Monitoring	Segment definition edits can swallow concurrent real-time entries, and API definition edits leave materialized membership stale indefinitely; re-save once in the UI or generate fresh profile writes afterward. Never edit trigger-segment definitions between a test action and its send window.
DEPLOY-CHILD-DATETIME-001	Resolved (checklist)	New child accounts need Mindbody, Klaviyo, AND Date Time connected before activation; a failed execution with zero step records is the signature of a pre-flight connection abort. Deployed 03/11 need their configuration opened and saved once.

7. Operations and support model

7.1 Publish and deploy flow [doc-derived]

1. Rename automations with the new version suffix; consolidate new automations into the product folder.
2. Update the overview and changelog documentation; bump the product version record.
3. Publish the folder from dev to the production Automation Templates account (preview, then confirm). Versions 1.3 through 1.5 are deliberately held; the plan is to publish wholesale as v2.0 after the fleet-operations phase completes.
4. Deploy to customer child accounts (Site folder per site; Master folder once per customer).
5. Tag the repository.

7.2 New site onboarding runbook [doc-derived + DEPLOY-CHILD-DATETIME-001]

1. Create the child account, link it to the customer parent.
2. Deploy the Site folder (and, once per customer, the Master folder: limiter pair + provisioner).
3. Connect **three** applications: Mindbody (site credentials), Klaviyo (shared key), Date Time (no credentials).
4. Edit and run INTEGRATION SETTINGS (site id, keywords, visit window, consent toggle, alert webhook); it populates the location mappings and default-location aliases.
5. Open and save the per-deployment configuration on automations 03 and 11 once in the editor.
6. Backfill: CSV client import (ID + Email), then 06 with a widened `Sales_sweep_*` window and backfill flag true, then restore both.
7. Run the provisioner in test mode (segments + flows); re-run after first sales if the Post-Purchase flow was skipped.
8. Enter the rate limiter values in the editor (one time, per PLATFORM-RL-001), activate the setter, run the Reset twin once.
9. Activate the Site automations; keep the fleet monitor ON.
10. Monitor via the alert webhook and the recurring account monitor.

7.3 Ownership and support boundaries

RESPONSIBILITY	OWNER
Product build, versioning, publish to prod, deploy to customers	APIANT (integration team)
Per-account configuration (INTEGRATION SETTINGS values, alert webhook, consent toggle)	APIANT with customer input at onboarding
Klaviyo flow content (sender identity, email copy and design in the 5 draft flows)	Customer's marketing team or agency
Klaviyo account administration (lists, sending domains, compliance)	Customer
Mindbody site administration (staff, services, webhooks availability)	Customer
Incident intake and customer communication	Support desk (ticketing system); engineering record in the issue tracker
Platform-level fixes (trigger gaps, management-API issues)	APIANT platform team

7.4 Version history [doc-derived, changelog]

- **1.2** (current production): appointment chain (01/03/03B/03C), sales line items (05), visits (09), classes (11/11B/11C), INTEGRATION SETTINGS with per-site location mappings.
- **1.3** (unreleased): MB Home location, MB Locations visited (comma text), MB Upcoming appt location/site, site guard on the 03B daily refresh, upcoming reset on completion, default-location aliases, multi-site runbook.
- **1.4** (dev, 2026-07-10): authoritative resolver subroutine (email-first, create-if-missing, parked errors), `SiteId~ClientId` composite keys everywhere with legacy-key migration, UniqueClientId capture, retry mode on all 21 Klaviyo write steps, 8 callers converted, account-switch self-heal.
- **1.5** (dev, 2026-07-11): event-driven recompute subroutine + instant callers 03D/03E/11E, 03B/11B retired; 15 Klaviyo event metrics with idempotent site-scoped unique ids, including canonical Placed Order / Ordered Product with full line-item arrays; multi-item cart support in 05 and the persisted sale dedupe key fix; 06 nightly self-healing sweep with lookup-driven window and MB Backfilled flag; real email consent sync (opt-in, subscribe-only); account-status parity properties (MB Status, Liability released, Inactive, Account balance); 08B contract-state reconciler; Klaviyo package provisioning (9 new connector actions, idempotent provisioner, 15 segments + 5 draft flows); Master/Site folder split, fleet monitor, rate limiter pair (pending settings entry), CSV client-import form.

7.5 Active work streams [doc-derived, plan 2026-07-13]

Top priority: the native-to-CRMConnect switch kit (compat dual-write of 11 native-named properties, metric re-pointing at cutover, disable-native-first sequencing proven mandatory). Fleet operations in progress (limiter arming, form smoke test, onboarding checklist automation). Waitlist event parity blocked on an upstream platform trigger. Klaviyo custom objects deliberately last. The v2.0 consolidated release follows fleet operations.

8. Glossary

APIANT terms

TERM	DEFINITION
Automation	A workflow on the APIANT platform: one trigger plus a tree of steps executed per trigger record
Step	A node in an automation: action, condition, loop, subroutine call, or subroutine output
Trigger	The event source that starts an automation: webhook (instant), polling (cron), schedule, form submission, system event, or subroutine input
Action	A step that calls a connector operation (Mindbody, Klaviyo) or a utility (Transform, Lookup Tables, Date Time, System)
Condition	A branching step; TRUE/FALSE subtrees; logic stored as OR groups of AND rows
Loop	A step that iterates an array source; loop-body steps are numbered N.L.x
Subroutine	An automation with a "Subroutine input" trigger, called synchronously from other automations with declared inputs and outputs
Assembly	The build unit of a connector: the implementation of one trigger or action (API endpoint, field schema, code)
Connector (app)	A packaged set of assemblies for one product (the Mindbody app, the Klaviyo app), bound to an account-level connection with credentials
Lookup table	Per-account key-value storage addressed by (Key group, Key, Value name); the product's state layer
Task / execution	One run of an automation for one trigger record; execution history stores per-step inputs and outputs
Draft	An editing session state of an automation; reading step details opens a draft, which holds a lock until released
Child / parent account	APIANT accounts can be linked in a hierarchy; this product uses one child account per Mindbody site under a customer parent
Deploy / publish	Publish: copy templates from the dev account to the production template account. Deploy: copy templates from there into customer accounts
Rate limiter	A named, in-memory throttle that steps can invoke before API calls; scope can span linked accounts
FormApp	An APIANT automation pattern driven by a generated web form (used for CSV uploads)

Mindbody terms

TERM	DEFINITION
Site	One Mindbody business instance, identified by a numeric Site ID; a brand can have many sites
Location	A physical location within a site (numeric id per site); location 98 is a Mindbody-internal placeholder excluded from mappings
Client	A customer record within a site
ClientID vs UniqueClientID	ClientID is site-local and can change (key-card reissue); UniqueClientID is the stable identity. The product stores both and keys on composites
Appointment	A one-on-one scheduled service (identified by AppointmentId), with statuses such as Booked, Confirmed, Arrived, Completed
Class / class roster booking	A group session; a client's spot on the roster is a class roster booking (ClassRosterBookingId)
Client service (series/pack)	A purchased bundle of sessions with a count, remaining balance, and expiration
Membership	A recurring entitlement assigned to a client (clientMembershipAssignment)
Contract	A term agreement (autopay, start/end dates); terminations set a TerminationDate
Sale / line item	A checkout transaction (SaleID) containing one or more purchased items; payments are recorded at sale level
Visit	An attendance record (appointment or class) with a status such as Signed-In or Completed
Webhook	Mindbody's event push (client.updated, appointmentBooking.created, and so on), consumed by the instant triggers

Klaviyo terms

TERM	DEFINITION
Profile	A person record, identified primarily by email; carries standard fields and custom properties
Custom property	An arbitrary named value on a profile; this product writes "MB" prefixed properties
Metric / event	A named event stream (metric) and its individual timestamped events; segments and flows trigger on them
Unique ID / \$event_id	The idempotency key on an event; Klaviyo drops later events with a duplicate id on the same metric
Placed Order / Ordered Product	Klaviyo's canonical revenue metrics; using these exact names unlocks revenue reporting and predictive analytics
Segment	A dynamic audience defined by conditions over properties and events
Flow	An automated message sequence triggered by a metric, segment entry, or list join; created here as drafts

TERM	DEFINITION
List	A static subscription audience (not used by this product; segmentation is property-based)
Consent / subscription	Explicit marketing permission per channel; the product subscribes email only, from the Mindbody promotional flag
Draft flow	A flow created in draft status: triggers and structure in place, content and go-live left to the marketing team

9. Appendix A: automation identifier reference

9.1 Dev template account (live, 2026-07-15) [platform-verified]

Account CRMConnect Mindbody Klaviyo, person_uuid 8965a2c6fe72407d8a8455a3d5625f97, 31 automations.

ID	NAME	UUID	SCHEDULE	STATUS
6124	01 - New or updated client in MINDBODY → Klaviyo profile (instant) v1.5	e7dadbded7e41c38cc7782950ec0921	Instant	on
6126	03 - New or updated appointment in Mindbody → Klaviyo profile v1.5	18fdb97525914c0c8d3f2abdda04f94d	6,21,36,51 ****	on
6130	03C - Mindbody canceled appointment booking → Klaviyo profile next class booked (instant) v1.5	03d1599b340d42ac87a6ff9be24ffff4b	Instant	on
7799	03D - Mindbody appointment booking created → Recompute + Booked event (instant) v1.5	b1320a52306f4b908c607bc6eb76780f	Instant	on
7805	03E - Mindbody appointment booking updated → Recompute + status events (instant) v1.5	f877ee07239c4f04862d0bc7a2c70267	Instant	on
6125	05 - New sale line item in MINDBODY → Klaviyo profile (instant) v1.5	2813d613e5ba492a8a3d565219e24a58	Instant	on
7803	06 - Mindbody sales → Sweep yesterday sales to Klaviyo events v1.5	1e7682b990ab4f298760d7d81c4a9409	Custom (daily 01:30)	on
7808	07 - Mindbody new membership → Klaviyo membership event (instant) v1.5	a3e495f2f90b4569890d21c6b0dc918a	Instant	on
7809	07B - Mindbody cancelled membership → Klaviyo membership event (instant) v1.5	3faae3d05adb495a8dd4df8e57ac48f3	Instant	on
7810	08 - Mindbody new client contract → Klaviyo contract event (instant) v1.5	c0a0eaea75ac4bd283ce51719b6a8deb	Instant	on
7817	08B - Mindbody updated client contract → Klaviyo contract status (instant) v1.5	d34b85cad1f44415890d4a26c41dbedc	Instant	on
7811	08C - Mindbody cancelled client contract → Klaviyo contract event (instant) v1.5	49c944dbd1fd43ba8e1cc395491b91fa	Instant	on
6127	09 - Mindbody visits → Update yesterday visits in Klaviyo profile v1.5	0b442b4129c4458a8bf804cae8fc4fe7	Custom (daily 01:00)	on
6128	11 - Mindbody class is completed → Klaviyo profile v1.5	9446f7d98dbe41d78abc22a460111a1a	10,25,40,55 ****	on
6123	11C - Mindbody cancelled class booking → Klaviyo contacts next class booked (instant) v1.5	96f522429bab4ef18858235194dac7af	Instant	on
7800	11E - Mindbody new class booking → Recompute next class (instant) v1.5	671d3c6fbf2645ab8bff8a4a09698919	Instant	on
7814	ADMIN - Fleet monitor: forward automation alerts v1.5	13097787af0e431882d4131f75134229	Instant (alert)	on
6122	Resolve Mindbody client → Klaviyo profile v1.5 (subroutine)	fbba3519eb844b9588a3f5b8b79f01a0	off (subroutine)	off
7798	Recompute next class and appointment → Klaviyo profile v1.5 (subroutine)	fd6c6eded69740bf80f8a137ce4750f3	off (subroutine)	off
7804	Process one Mindbody sale → Klaviyo revenue events v1.5 (subroutine)	1d23003aaeea4eff8286fe1559034529	off (subroutine)	off
7812	ADMIN - System booted set Klaviyo API rate limiter v1.5 (Master)	3235f0c1855a4ca28fed3f8919d9ba3b	System booted	off (pending settings)
7813	ADMIN - ** KEEP OFF ** Reset Klaviyo API rate limiter v1.5 (Master)	d5bdd71c3d0d4ee885102ef343ad0111	manual	off
7801	ADMIN ** KEEP TURNED OFF ** PROVISION KLAVIYO PACKAGE v1.5 (Master)	ee8417595c8842068168425107c090dc	manual (test mode)	off
7815	ADMIN - FormApp: Import Mindbody clients → Klaviyo profiles (CSV upload) v1.5	35e35c81744a412b83076f37662e246d	Form	off
6136	ADMIN - FormApp: Import visits remaining (CSV upload) v1.5	5ec5c2a66d45463e883c822f8a92bcf3	Form	off
7816	ADMIN - Update Mindbody client email (subroutine)	36f355c722f94db887de0c4e8155eaf4	off (subroutine)	off
6132	ADMIN ** KEEP TURNED OFF ** INTEGRATION SETTINGS - CRMConnect_Mindbody_Klaviyo v1.5	6096d44df41648a28b8ae60c0394c71d	manual	off
6137	ADMIN RUN ONCE - Purge cached Klaviyo profile ids (2026-07-10)	05010bb4a07842948ae81fa9c770fa7e	manual	off (done)
6138	Update Mindbody active client services in Klaviyo (legacy subroutine)	d5eafd964f7d4a108f633d335585bf47	off	off
6131	ZZ RETIRED - 03B - upcoming appointment booking v1.4	dd6e6bb635af42d783575212fb1de05a	retired	off
6129	ZZ RETIRED - 11B - upcoming classes and bookings v1.3	e2bdeda95e534bdf801ca44a6949c074	retired	off

9.2 Production account

The production reference inventory is empty (header only), and versions 1.3 through 1.5 have not been published; production customers run v1.2. **No production UUID table exists to report.** Regenerate the inventory after the next production publish.

10. Appendix B: documentation discrepancies and verification coverage

10.1 Discrepancies between repository documentation and the live platform

1. **Deleted or delisted automations:** the repository dev inventory (snapshot 2026-07-13) lists 8 `ROADMAP READY / NOT READY` stubs and 3 legacy HubSpot-named subroutines that are absent from the live automation list (31 total). The live account is authoritative; the inventory file needs regeneration.
2. **Version suffixes:** `INTEGRATION SETTINGS` and the visits-remaining FormApp are v1.5 live; the repository table says v1.3 for both.
3. **Settings coverage:** `Sales_sweep_start_date / Sales_sweep_end_date / Sales_sweep_backfill_flag` (read by 06 and the sale subroutine) and `Klaviyo_API_interval / Klaviyo_API_throttle_limit` (read by the limiter pair) are not written by the v1.5 `INTEGRATION SETTINGS` steps observed; they are maintained directly in the lookup tables. An integrator provisioning a fresh account must seed these value names (or accept the documented "yesterday" sweep default behavior).
4. **Two-trigger 01 vs single-trigger policy:** the design plan states all fleet automations are single-trigger by policy after the 03D/03E split; automation 01 remains a two-trigger automation using per-trigger pipe-alternate expressions (working as built; the policy applies to new automations).
5. **MB Upcoming appt category:** documented in the v1.2 overview as a written property; in v1.5 it is only cleared (recompute clear path), never written.
6. **Fleet monitor ON vs "all off at rest":** the repository groups it under admin utilities; live it is ON by design (its own description says keep ON).
7. **Klaviyo connector inventory:** the repository's connector table is explicitly incomplete for the v1.5 actions; section 4.5 lists the action names verified from live steps.

10.2 Items not platform-verified in this document

- **Trigger configurations** (webhook subscriptions, poll windows such as 03's days back/forward, exact daily times for 06/09): summaries expose trigger names and cron minutes only; the 01:30/01:00 times and the poll window are doc-derived.
- **MB Intro Session Completed** event property list, the exact fields of automation 11's not-signed-in profile write, the Visited/Upcoming segment definition JSONs, the flow definition JSONs, and 03E step 1's input mapping: structure verified, per-field mappings not pulled (marked inline).
- **Recompute temp key names** (`NC_*`) and the staff cache key naming: pattern doc-derived; the steps performing the saves and the fetch-on-miss behavior are platform-verified.
- **Multi-value settings health** (MCP-97 signatures) is only observable in execution outputs, which were not sampled in this read-only pass; the known-issues log's 2026-07-13 audit stands.
- **Production account:** not inspected (nothing published beyond v1.2; empty repository inventory).