Test G on KOA: registered verdict FAIL at M = 50 (DIFFERENCE); NO DIFFERENCE at 300 and 1500; replication (Test R) running

N = 100 disks (50 per compartment), radius 0.5, L0 = 10, H = 10, η = π/8; one KOA binary, engine-gen3 a643bc7 (target koa), run as gen2 (a) and gen3 (b); the same seeds in both arms, 400 trajectories per engine and mass

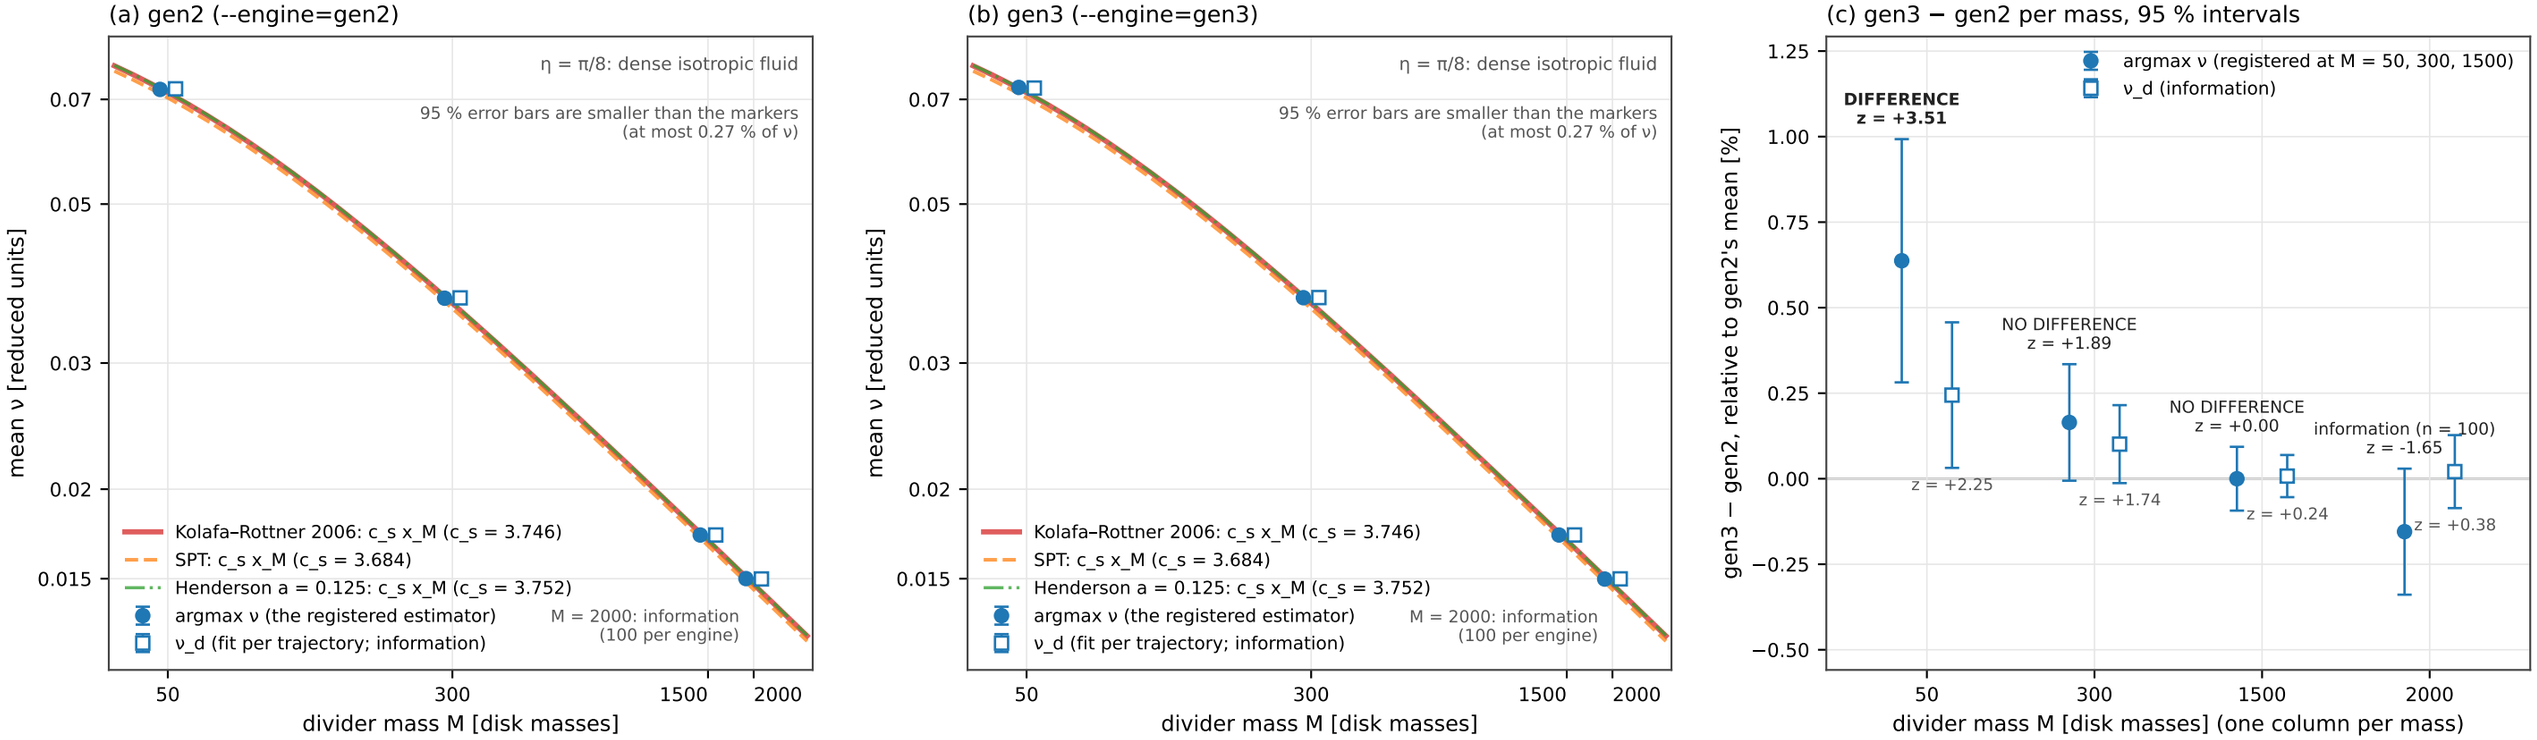

Cell epi8_H_H10_L10 (the cell of Test T and of methods sec. 16): N = 100, N_s = 50 per compartment, disk radius r = 0.5, L0 = 10, H = 10, wall thickness t = 0.05, eta = pi/8 = 0.3927. KOA, 13 nodes (Report G-KOA's inventory), build line '00ALLINONE git a643bc7 target koa' in every cell.
argmax nu: the registered estimator (red_nu.csv, reduce_B.py). nu_d: the sec. 4.4.13 item 4a fit of each trajectory's ACF, started at the mass's pooled argmax mean (the verdict's information procedure); 0 fit failures in 2600. M = 2000: 100 per engine, information.
Error bars 95 %: (a, b) mean +- 1.96 SE, SE = SD/sqrt(n); (c) 100 (d̄ -+ 1.96 s) / mean_gen2 with s = sqrt(SE_gen3^2 + SE_gen2^2), the verdict's interval. Rule per mass: NO DIFFERENCE if |z| < 2, DIFFERENCE if |z| >= 3 (sec. 4.7.29). Values reproduce Report G-KOA's printed tables (sec. 4.7.54).
Theory lines: nu = c_s(eta) x_M, c_s adiabatic (kT = m = 1) from each EOS at eta = pi/8; x_M = K(alpha)/(2 pi L_eff), cot K = alpha K, alpha = M/(2 N_s), L_eff = L0 - 2r - t/2 = 8.975 (tests_20260913.x_of).
tables: hspist3/experiments_m1_figures_261011/tables/ (main b7ac7c59); script: hspist3/experiments_m1_figures_261011/m1_figures_261011.py (main 973c1839)