


AST 42SH


When execute,
All TOK_EXPR should be transform
in TOK_CMD/TOK_ARG
with expr_parser() function.

TOK_UNCOMPLETED must be
use with ft_lexer_complete() function.

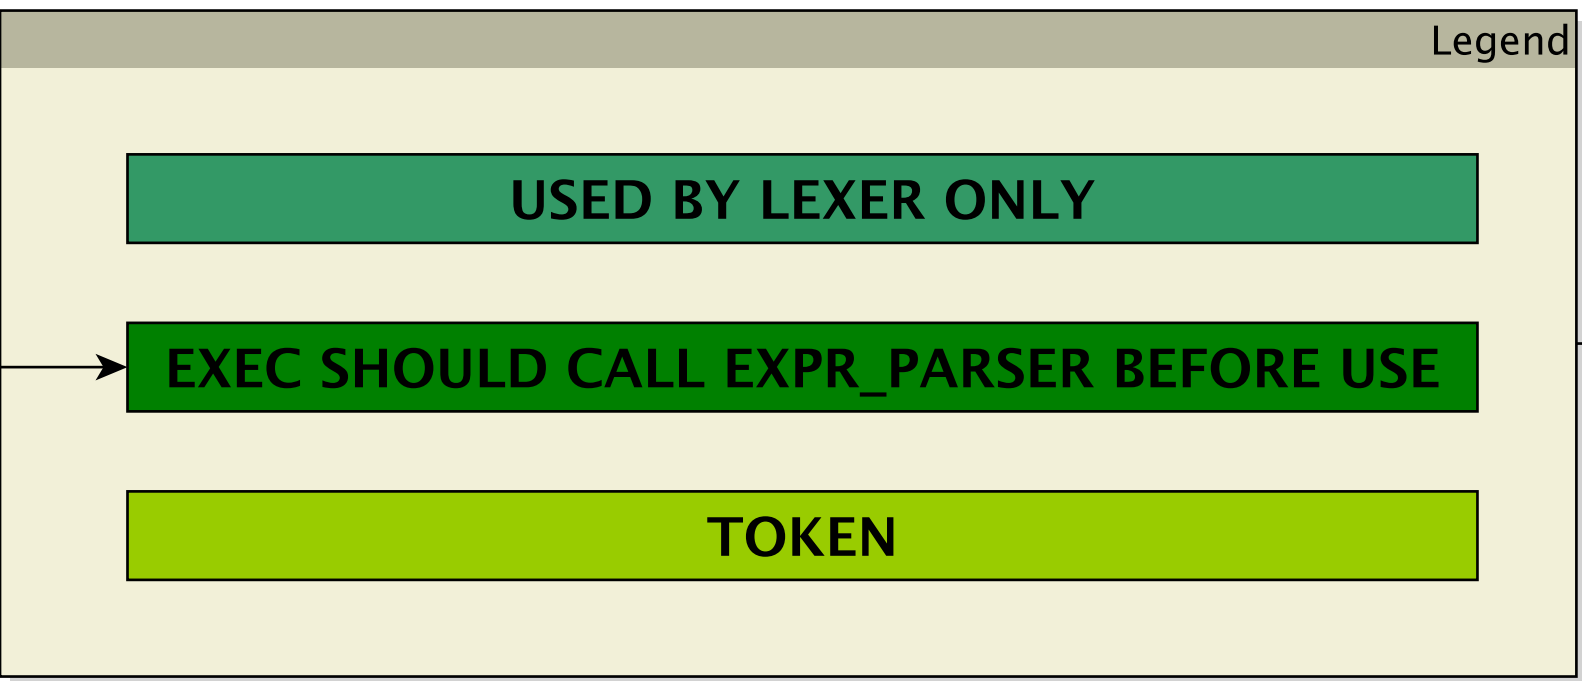


Liste des tokens	
TOK_SEPARATOR	
TOK_UNCOMPLETED	
TOK_EXPR	
TOK_HEREDOC	
TOK_READ	
TOK_WRITE	
TOK_APPEND	
TOK_CMD	
TOK_ARG	
TOK_PIPE	
TOK_AND	
TOK_OR	
TOK_SUBSH	
TOK_END	
TOK_BG	

exemple simple

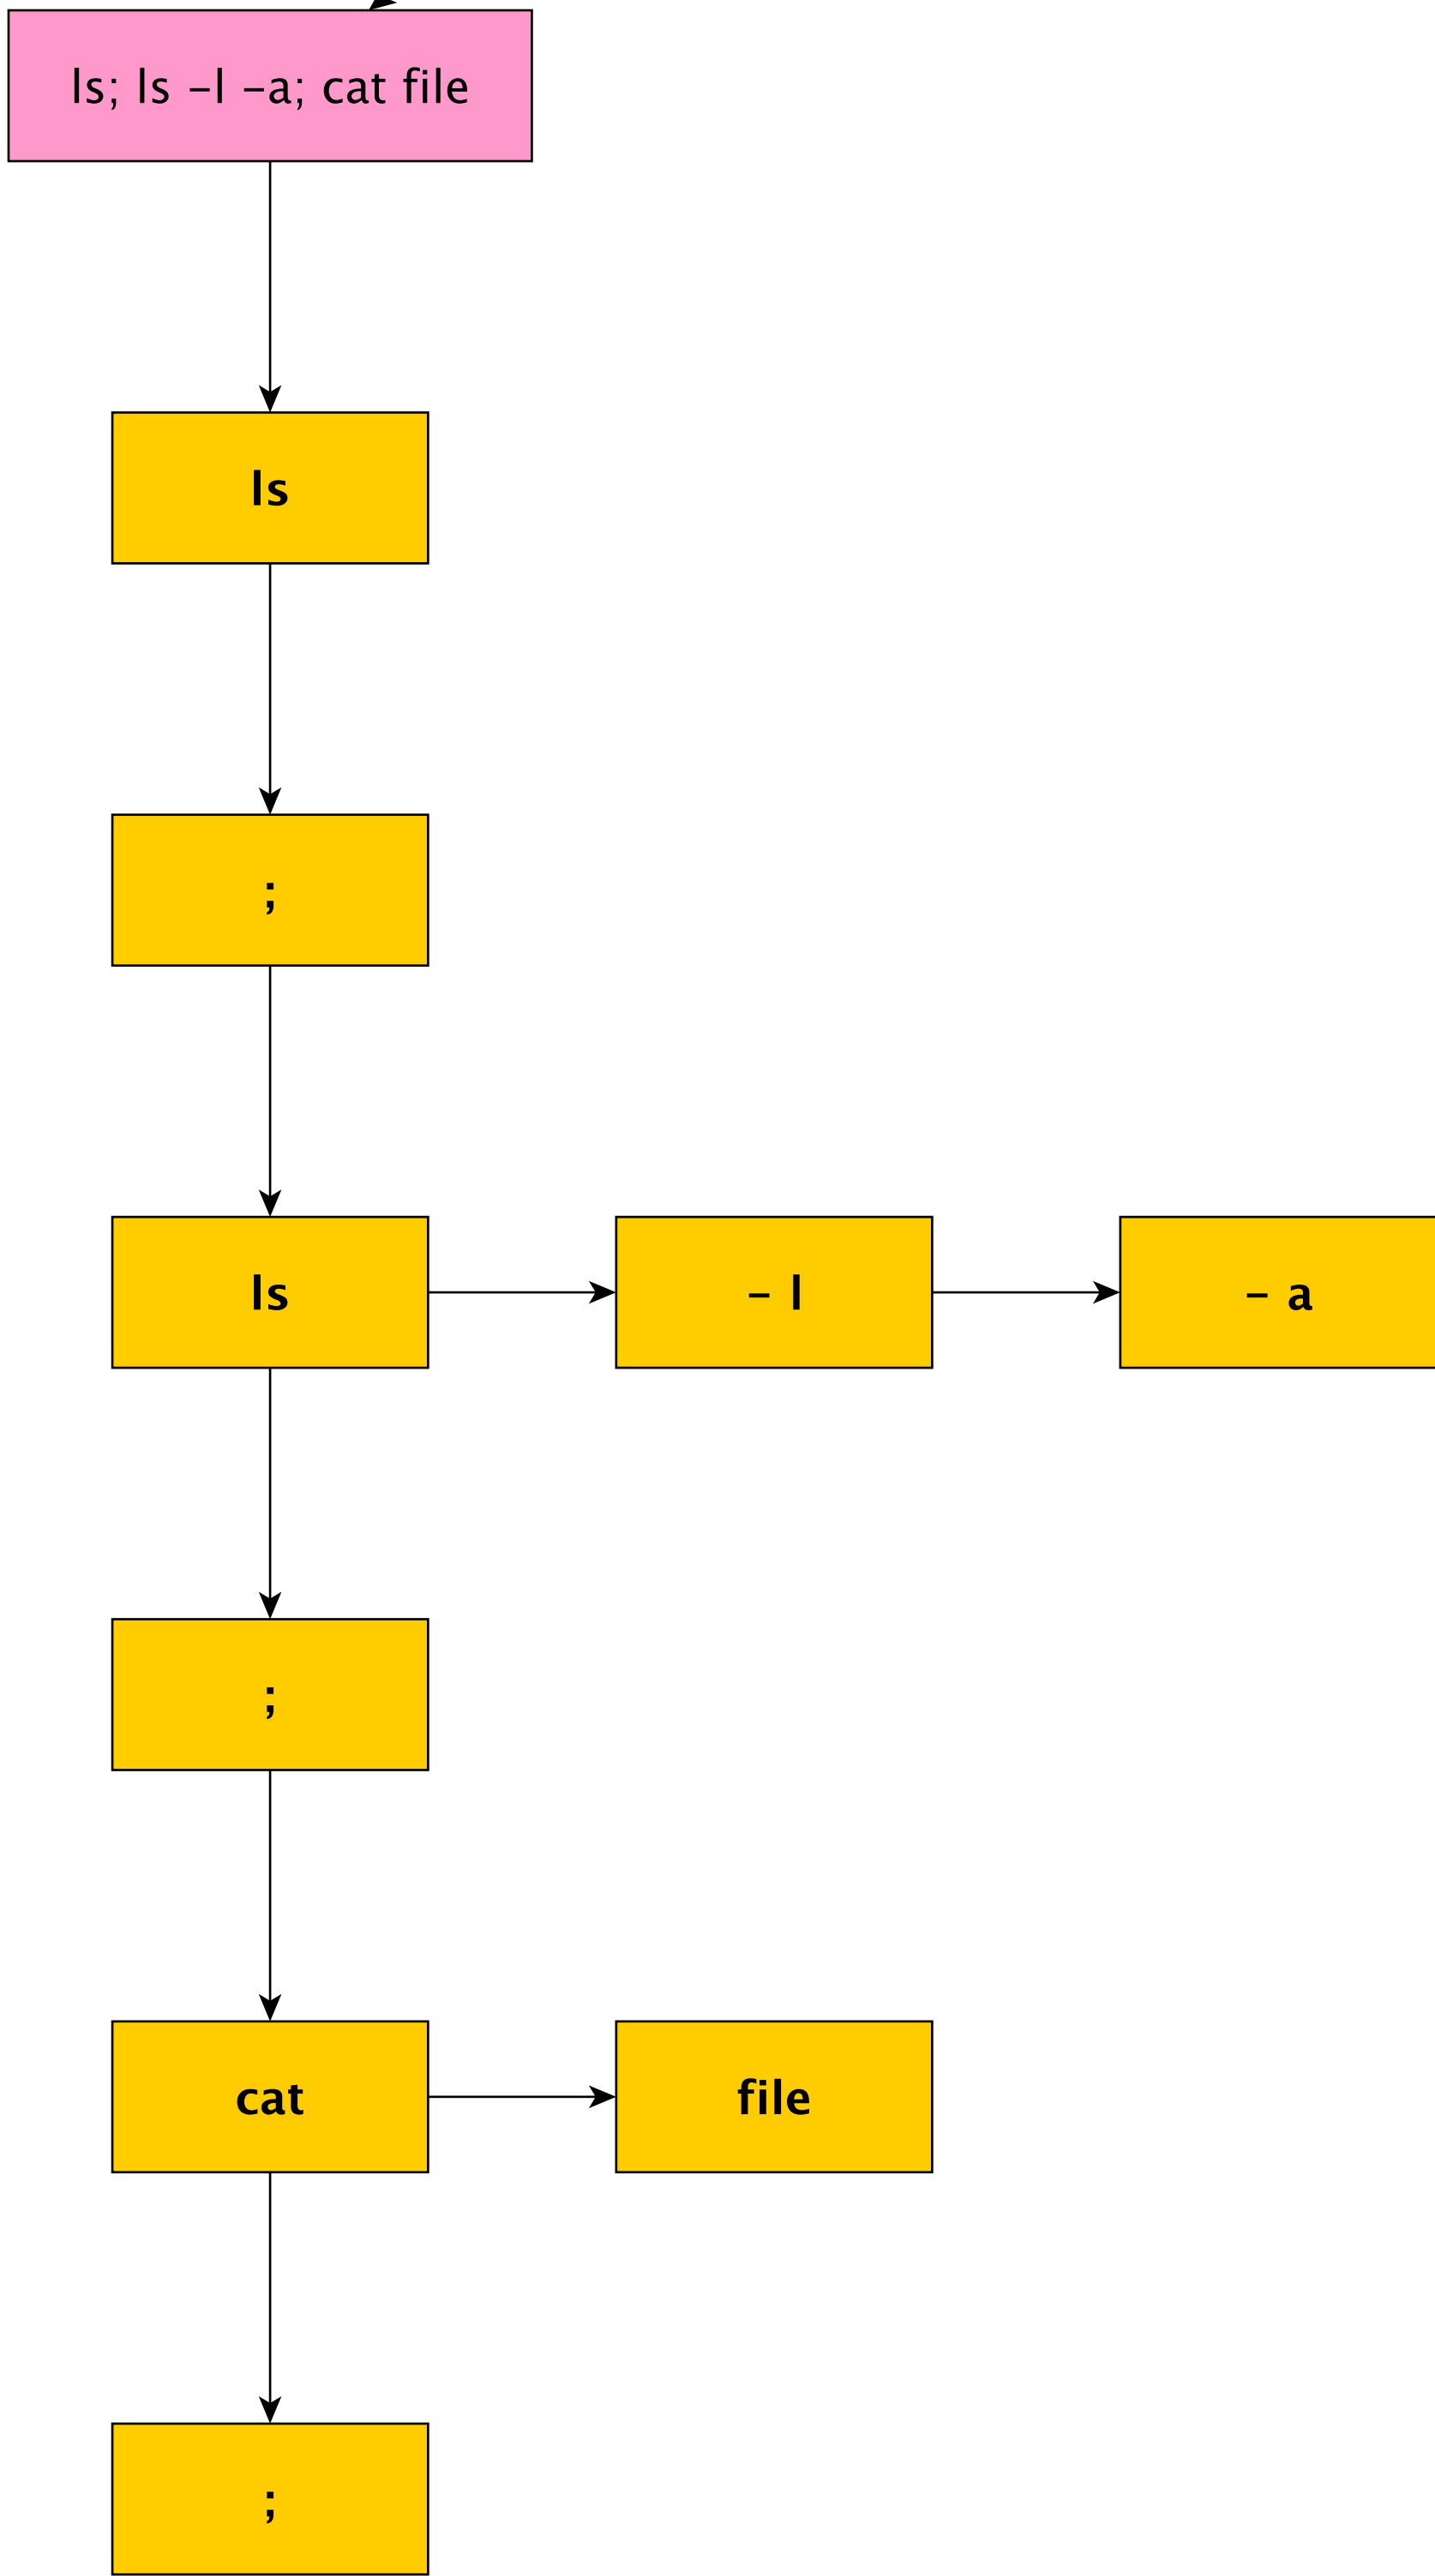

exemple pipe

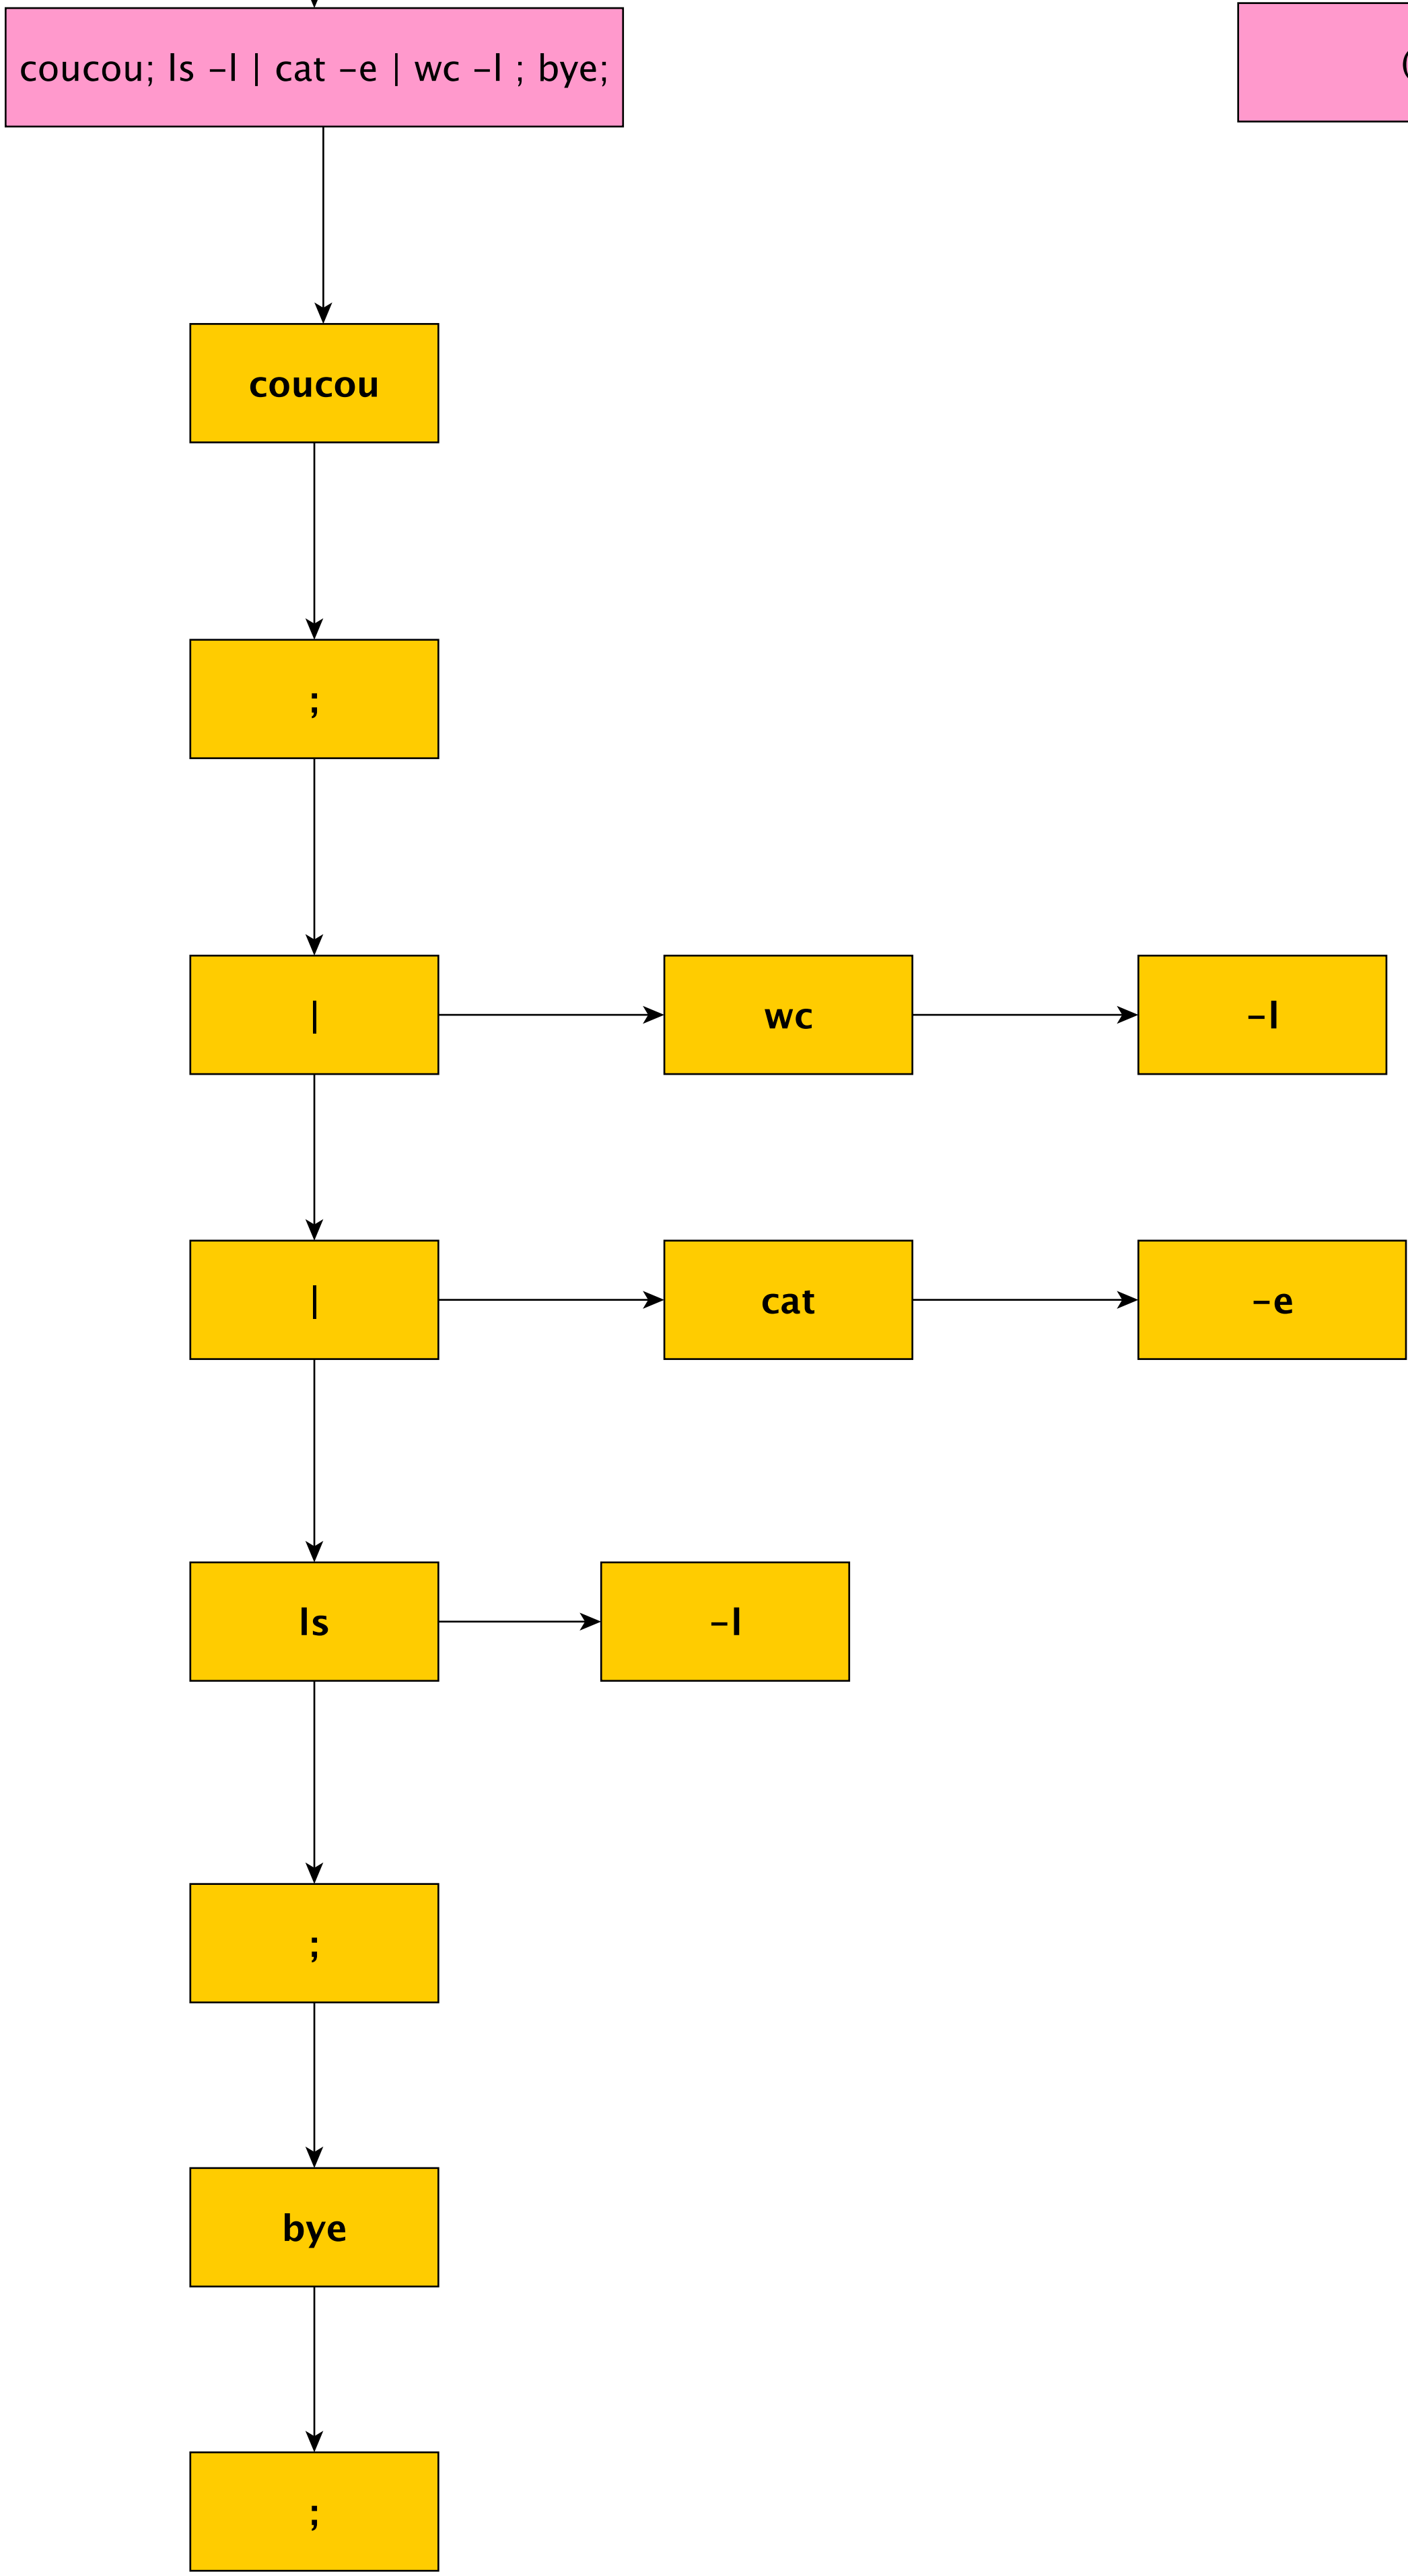

exemple, pipe, subsh, &&, ||, redirections

