



git installation

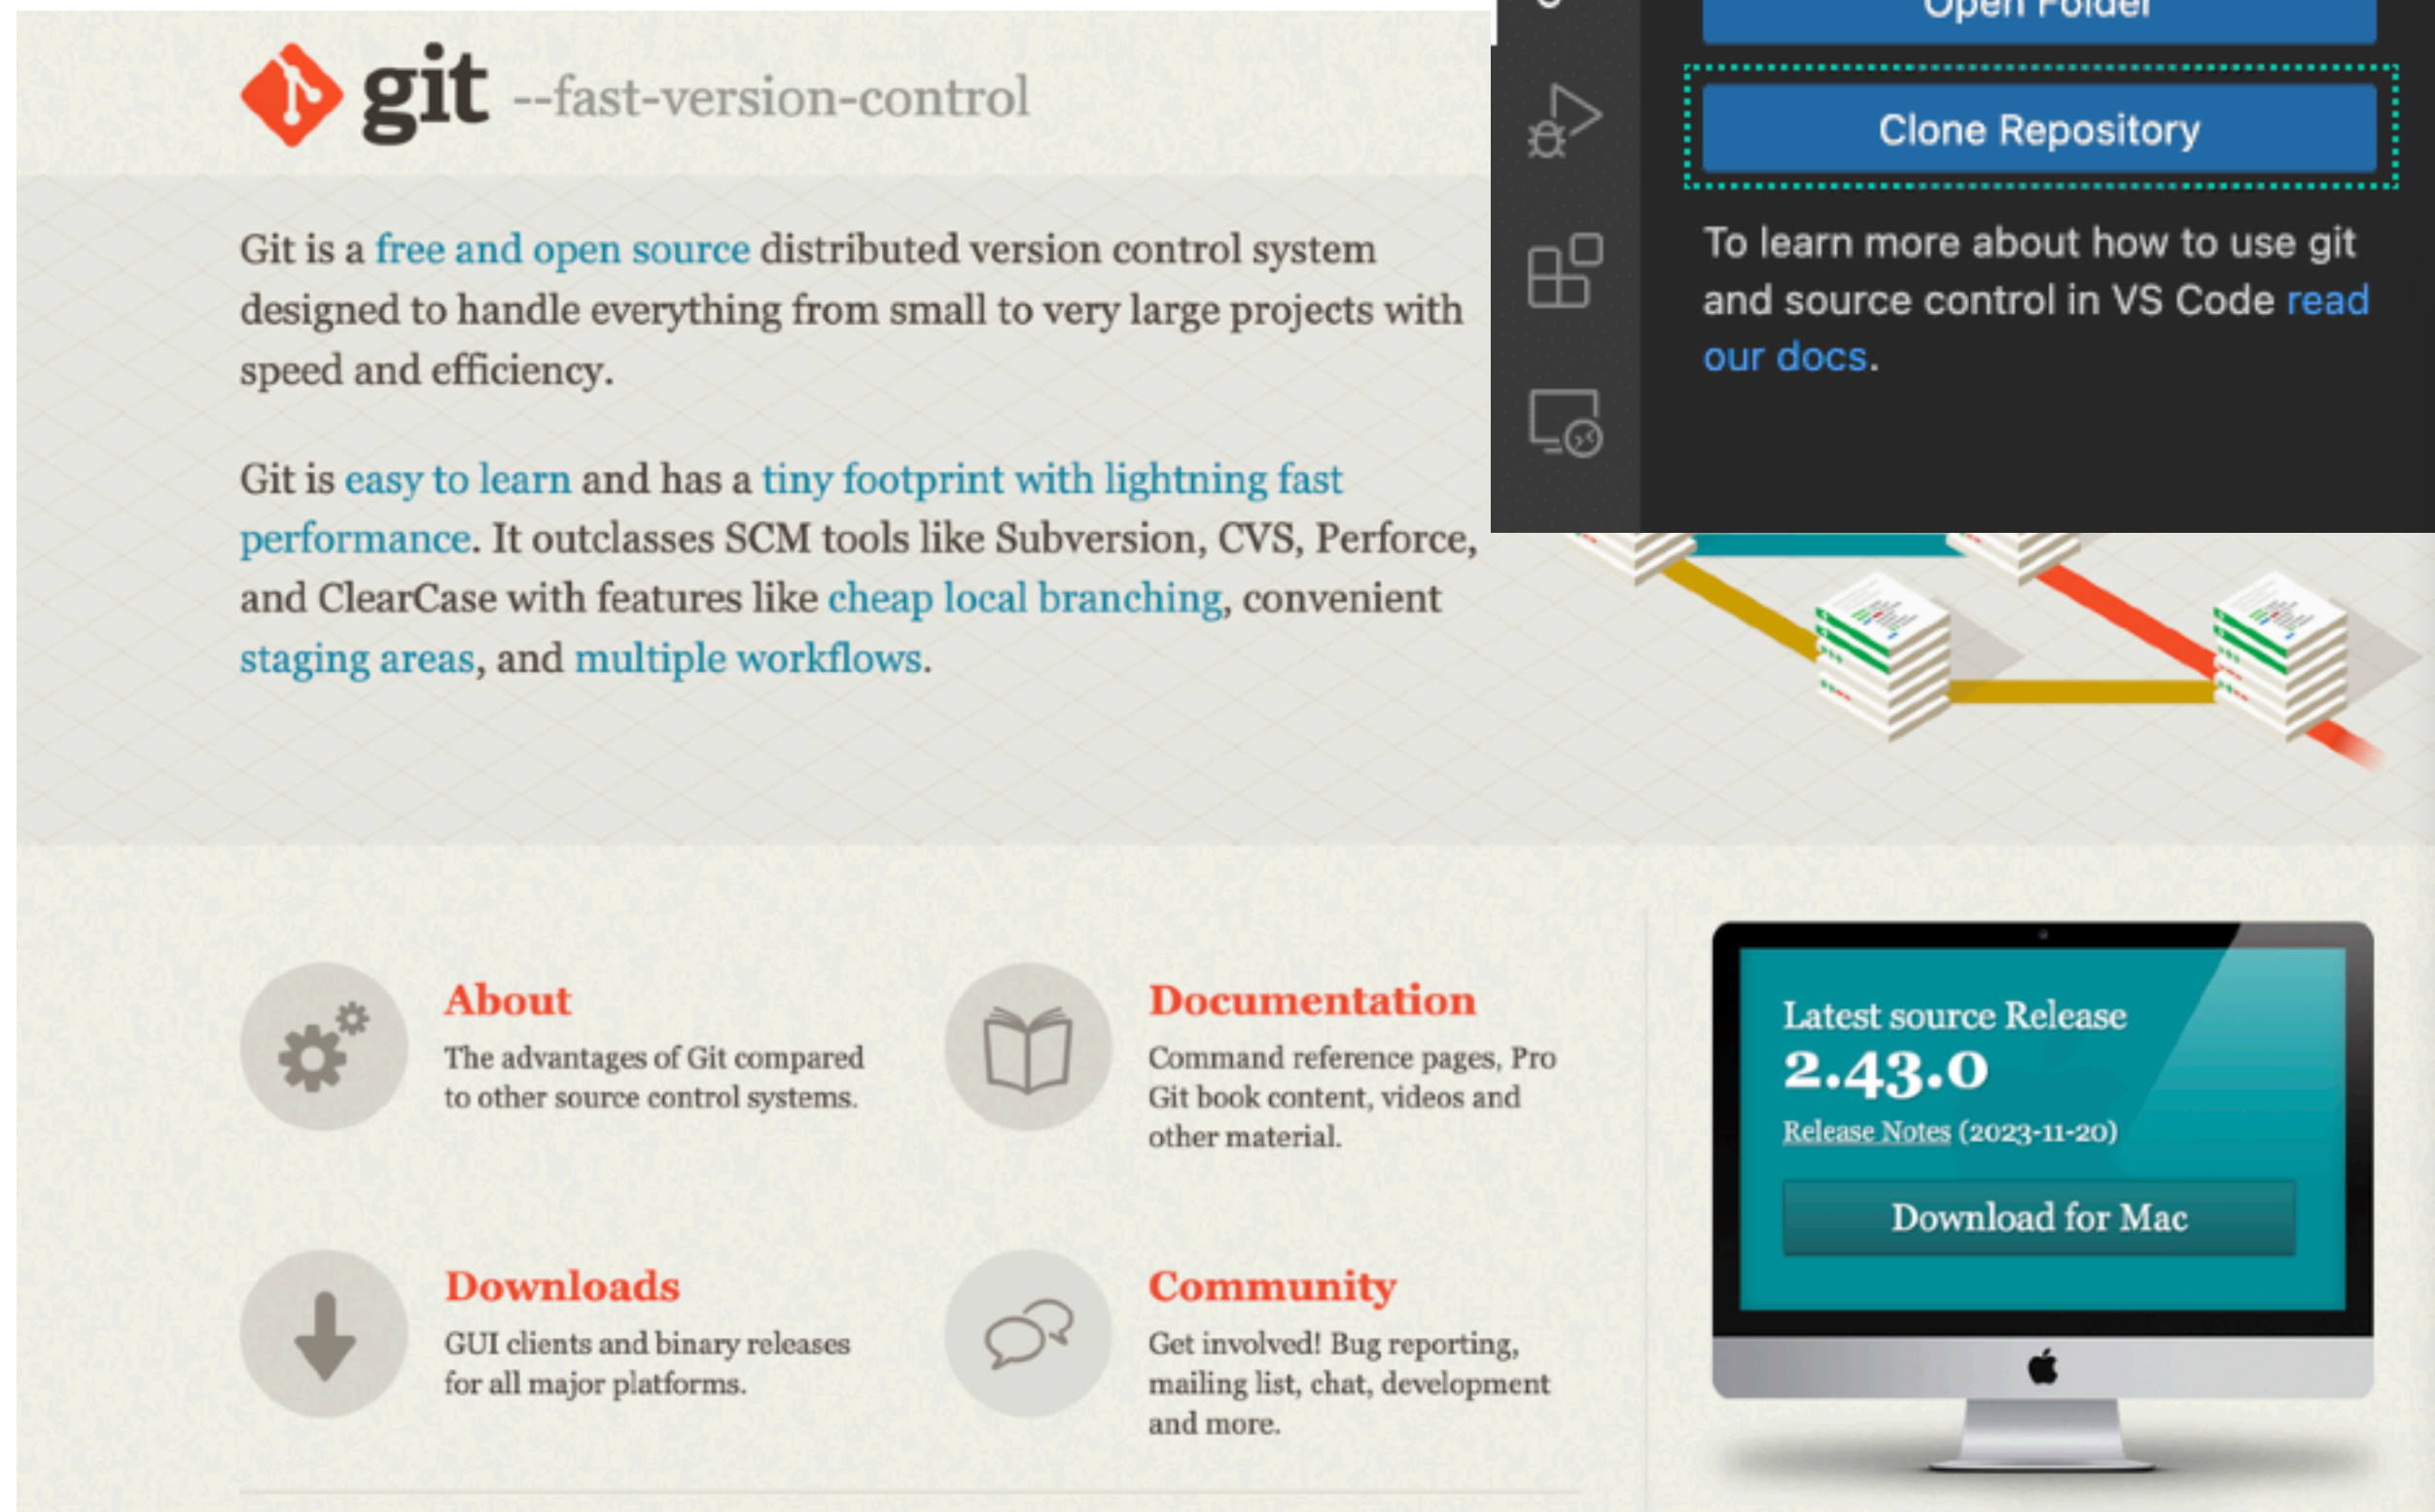

git --fast-version-control


Git is a **free and open source** distributed version control system designed to handle everything from small to very large projects with speed and efficiency.

Git is **easy to learn** and has a **tiny footprint with lightning fast performance**. It outclasses SCM tools like Subversion, CVS, Perforce, and ClearCase with features like **cheap local branching**, convenient **staging areas**, and **multiple workflows**.




About

The advantages of Git compared to other source control systems.




Documentation

Command reference pages, Pro Git book content, videos and other material.



Downloads

GUI clients and binary releases for all major platforms.



Community


Get involved! Bug reporting, mailing list, chat, development and more.

Latest source Release

2.43.0

Release Notes (2023-11-20)

Download for Mac

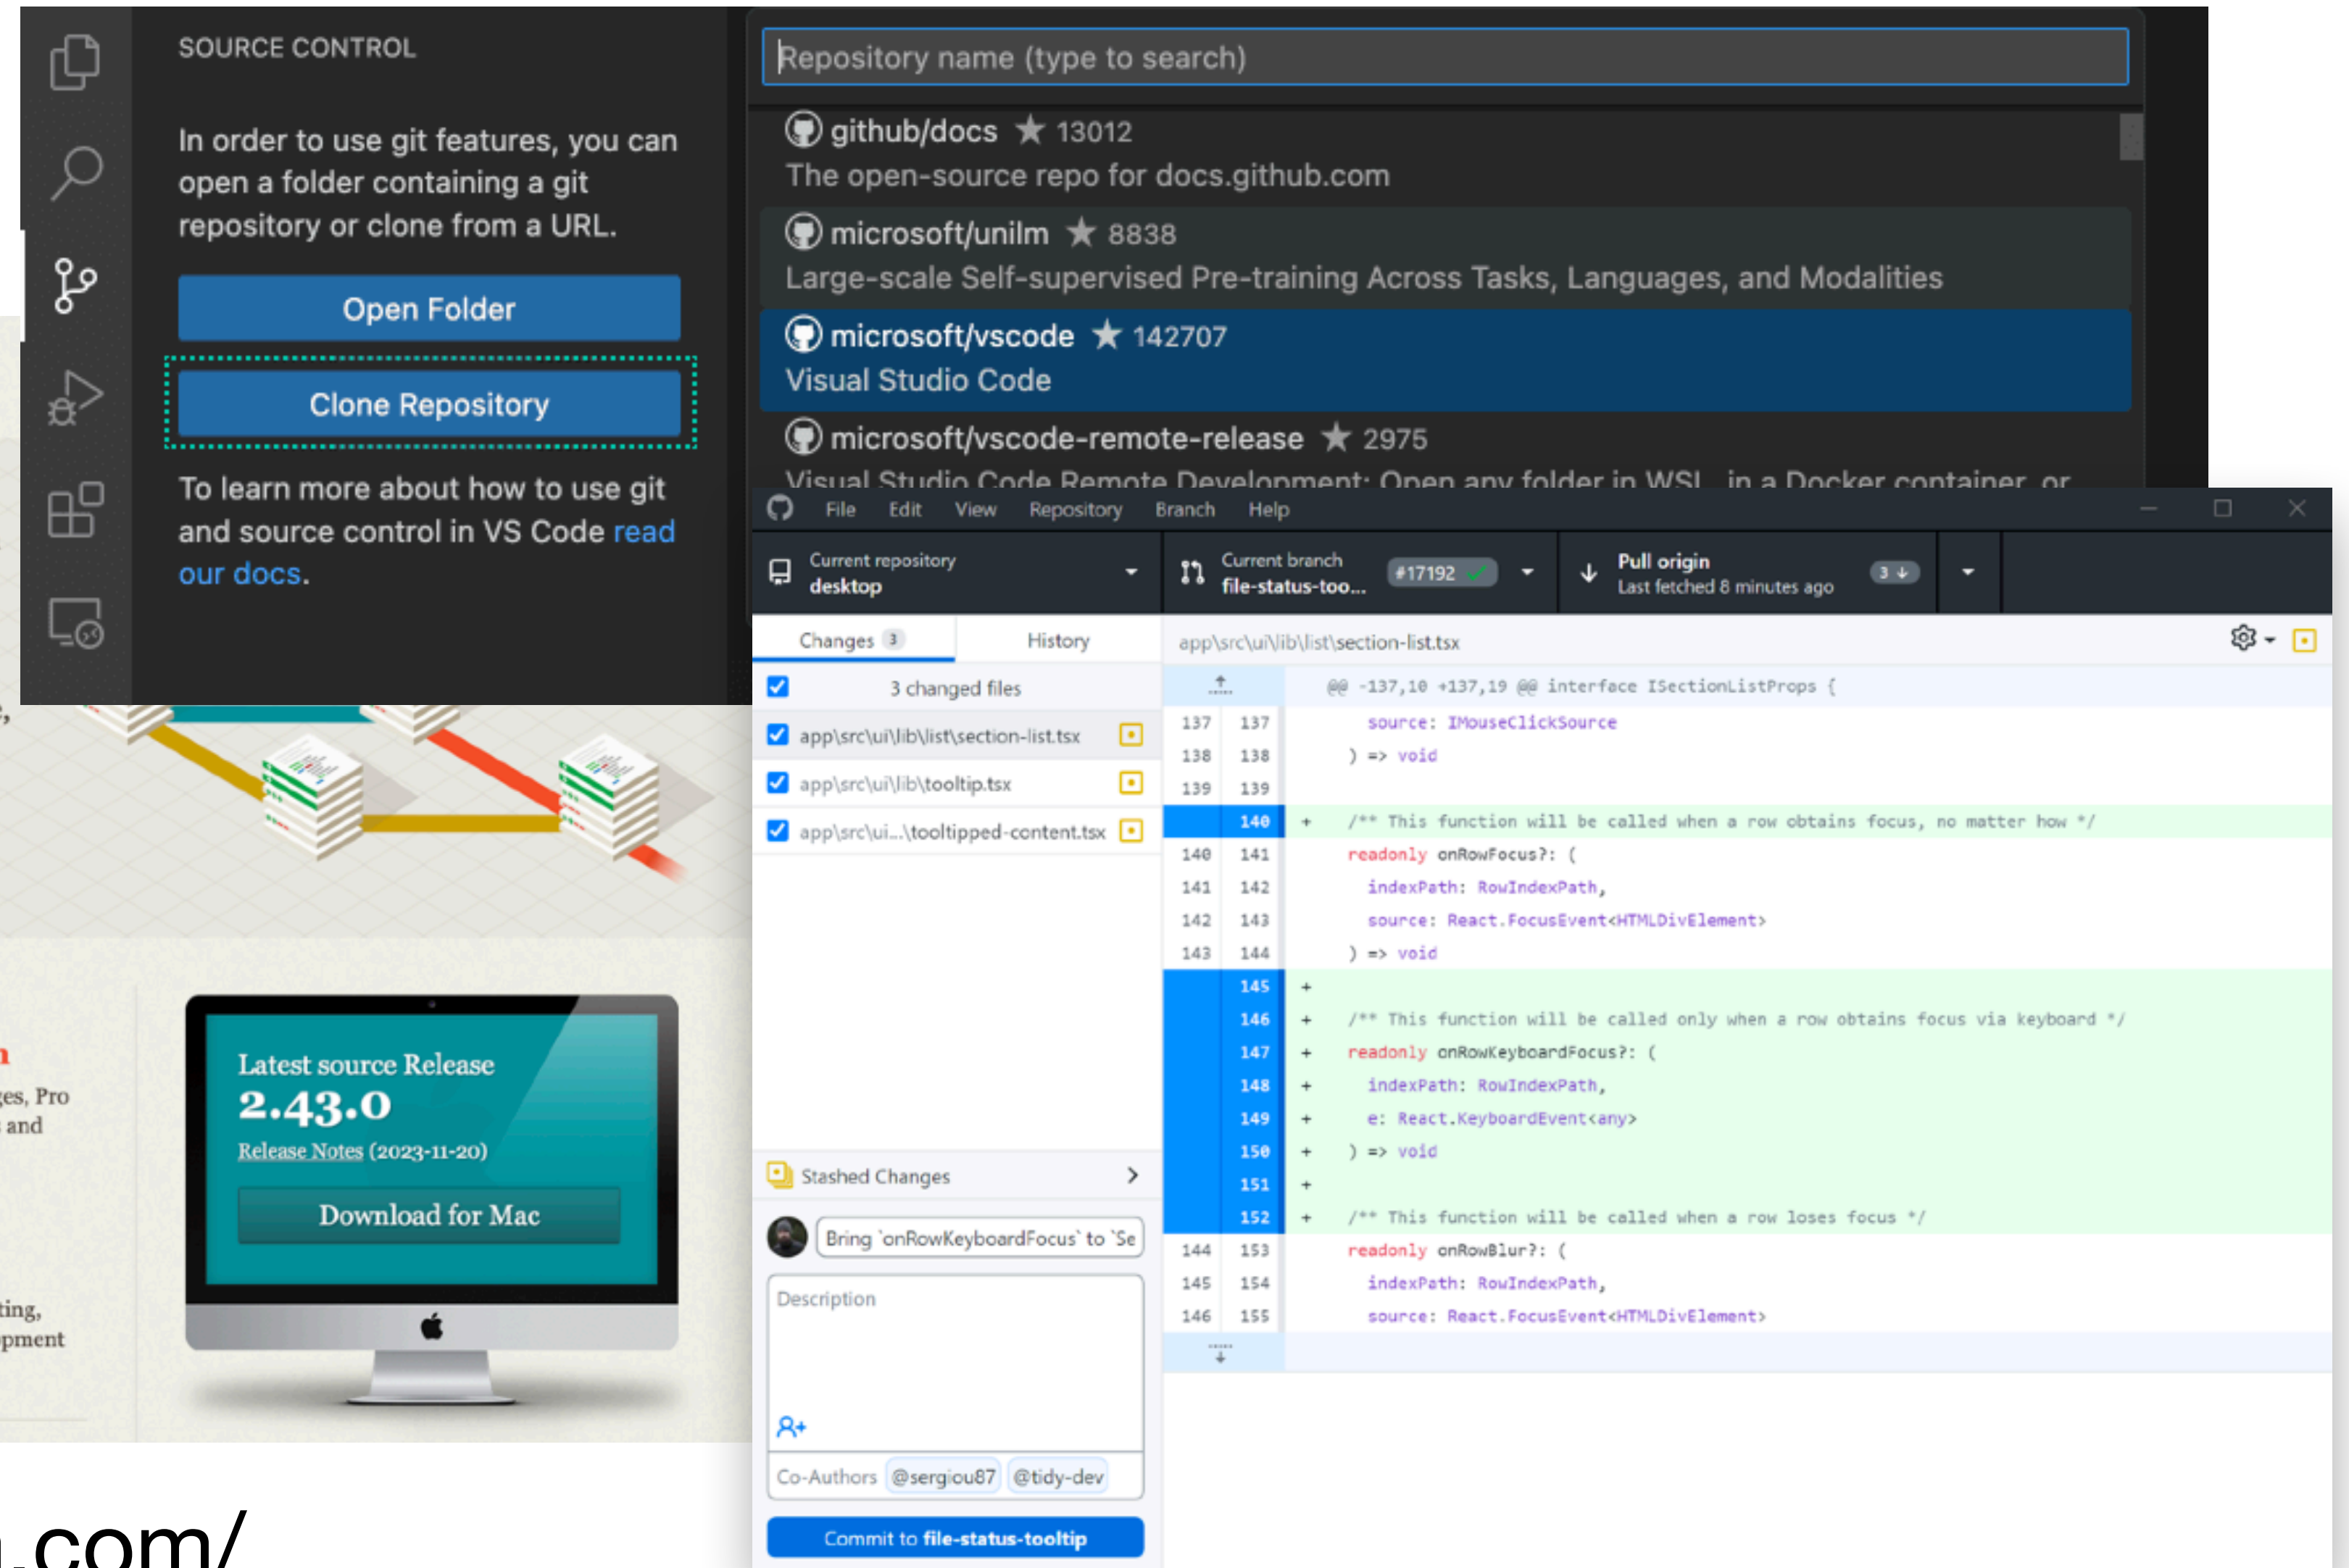

SOURCE CONTROL

In order to use git features, you can open a folder containing a git repository or clone from a URL.

Open Folder

Clone Repository

To learn more about how to use git and source control in VS Code [read our docs](#).

Repository name (type to search)

- github/docs ★ 13012
The open-source repo for docs.github.com
- microsoft/unilm ★ 8838
Large-scale Self-supervised Pre-training Across Tasks, Languages, and Modalities
- microsoft/vscode ★ 142707
Visual Studio Code
- microsoft/vscode-remote-release ★ 2975
Visual Studio Code Remote Development: Open any folder in WSL, in a Docker container, or

Current repository: desktop | Current branch: file-status-too... #17192 | Pull origin: Last fetched 8 minutes ago

Changes: 3 | History

app\src\ui\lib\list\section-list.tsx

```
@@ -137,10 +137,19 @@ interface ISectionListProps {
    source: IMouseClickSource
  ) => void

+ /** This function will be called when a row obtains focus, no matter how */
+ readonly onRowFocus?: (
+   indexPath: RowIndexPath,
+   source: React.FocusEvent<HTMLDivElement>
+ ) => void
+
+ /** This function will be called only when a row obtains focus via keyboard */
+ readonly onRowKeyboardFocus?: (
+   indexPath: RowIndexPath,
+   e: React.KeyboardEvent<any>
+ ) => void
+
+ /** This function will be called when a row loses focus */
+ readonly onRowBlur?: (
+   indexPath: RowIndexPath,
+   source: React.FocusEvent<HTMLDivElement>
```

Stashed Changes

Bring 'onRowKeyboardFocus' to 'Se

Description

Co-Authors: @sergiou87 @tidy-dev

Commit to file-status-tooltip

<https://git-scm.com/>

git

le stockage en ligne (remote)

