



{VA:MP}

versatile application meta-programming



VAMP

Versatile Application Meta-Programming

Synopsis

Introduction

Vamp runs as a daemon (background service API) on the host it is installed -which by default is configured to stay up and running even if the host is rebooted. This daemon manages & monitors other Vamp instances. These instances are managed (configured, started & stopped) either via the command-line or the Vamp daemon API. Vamp instances depend on the Vamp daemon, so if the daemon dies, the instances will (gracefully) commit suicide.

A "Vamp Project" is simply a folder with some Vamp file(s) inside it. Vamp file-extensions can be any of these: `.v` `.va` `.vam` `.vamp`.

When you create a new Vamp project, or simply want to test some Vamp code, make sure you do this in a new (empty) folder, or a folder that contains items related to your project, because Vamp expects these as part of your project's live runtime structure; however, only the items referred to in your Vamp code will be loaded accordingly.

Any "item" -like a file or folder (simply: "node") in your project structure have "aspects" (attributes), some of which are automatic -which (also) deals with relationships between items in your project. These "automatic-attributes" (meta-aspects) also deal with how an item reacts when "called" -as anything in Vamp can be called (like a function). "Calling" operates in different ways, depending on how you define and call an item.

Any "node" can have "contents" (even functions have contents -which is a list of instructions). The contents (and aspects) of any "node" is directly related to that "node", and its context remains within this "node". This means that your "runtime scope" is well preserved everywhere, which is also your runtime structure. Remember this, it is very important.

Vamp code closely correlates to "folders & files" as a structure; meaning that any (live) Vamp code can be "saved to disk" as a "tree structure" -consisting of folders & files that represent the functional structure and data of your live project. This makes any live Vamp project dynamically portable, -or can be used for recovery purposes.

Vamp has an intrinsic (built in) transmission control system, called "bios" (basic input output system) -which is extensible. It's IO functions have short-cut names like: `Sock` (socket), `Proc` (process), etc, -each of which have protocols -according to which default "flow" mechanisms control its input and output accordingly. The Vamp "bios" and all its control systems and their protocols are by default configured and optimized for rapid development; however, they can be configured and overridden per instance during runtime.

Some of these "bios" controls automatically "transpile" Vamp code into the appropriate language(s) (code) for each "tick" (request/event) respectively; however, this automation can be configured, and, any structure (like a document) can be "baked" (transpiled) to be "served" directly; which is resource conservative. It is important to structure your Vamp projects and name your Vamp files appropriately -with compound file expansions, like: `home.html.v` -which makes it easy to find and identify -for yourself and Vamp.

For security reasons, Vamp files cannot be "served" directly via any Vamp "bios". If you want to do so, it has to be explicitly transpiled to "plain text" first.

A "bios" can also be used to just transpile Vamp code into other server-side (-or client side) languages, like: Python, Ruby, PHP, JavaScript, etc.

Your Vamp project operates as a "programmable live database" -which follows your project structure, making it simple to write versatile applications that are well structured, dynamic, stable and portable. It is up to the developer to structure and scale large projects appropriately; either on the same host, or accross several servers and networks with the proper security measures in place, which Vamp also supports.

All of the above (and more) is done in a simple & elegant syntax (grammar) that looks like a combination of: JavaScript, C, CSS, PHP, & Lisp.

Examples

Many people don't like "reading" too much; however, if you skipped the "Introduction" above, read that first, else none of the following will make any sense.

These examples below are not "tutorials", but, fear not, a detailed guide for installation and a "Hello World!" tutorial is in the "orientation"; these are just so you can get a feel of what to expect and a firm grasp of what Vamp is about.

Web Server

Remember: in Vamp you can override & configure anything; either during runtime, or in your installed Vamp setup, so from here on just accept the fact that a lot of hard work has been done for you so you can just "tune" & control things as you wish.

With the above in mind: Vamp's "http sock bios" by default produces appropriate "HTTP message codes" and some required headers, like "Content-Type" (mime-type) and "Content-Length" (byte-size).

The context (or folder path) where any BIOS is instantiated becomes the "root path" of any "path request" on that BIOS instance.

This is for logical structure and security reasons. Everything in Vamp works this way.

If you don't like this, then just put it somewhere else -lower down the "tree", like in your "project root", this way it will have "read" access to everything in that context by relation to the other items in there "akin" to itself. "Write access" to the items "akin" to itself can be achieved by defining it as such in the meta-aspects of the other items.

See this security measure as "parents" who can "teach" their own children, but others need permission for this priviledge.

By now you can see how Vamp is geared towards structure, simplicity and security.

In the examples that follow, for clarity and brevity, I'll assume you created a file inside your "project root" named: `$.v`, and this is the file in which we will place the code in the examples below. An explanation of "\$" files is in the "orientation", but for now: "\$" simply means: "self", and when a file-name starts with "\$" -it is loaded first, and any text inbetween the "\$" and the ".v" will be an aspect-name of the context in which it resides.

Automatic Web Server

```
Sock(#HTTP:127.0.0.1:9000)
```

I can only imagine the expression on your face... read on, you'll see :)

In the example above, we created an "event listener" that handles "http" requests made to the IP address: "127.0.0.1" on port: "80". It will perform "expressions" on any path requested, based on the "method" of the request and the "arguments" (http request variables) passed along with the request.

If there is a problem with the request, like if the path does not exist, or this bios instance does not have permission to read (or write, based on the request path & method) it will produce an appropriate http response code (like 404, 403, etc) along with a good-looking error message.

This explanation may get a little long and technical, but for now, just know that: by default it handles requests & responses automatically and appropriately as it is geared towards simplicity and resource conservation. More on this is available in the "bios" section of this documentation.

Picture Web Server

```
Sock(#HTTP:127.0.0.1:9000)
{
  Mime: ['jpg', 'png']
}
```

The example above will only handle requests made to files with "jpg" & "png" extensions.

Note that if you used both the "Automatoc Web Server" example together with this one, then this one will override these 2 mime-types and this example will handle it, instead of the other.

Path Web Server

```
Sock(#HTTP:127.0.0.1:9000)
{
  Path: ['/docs/']
  Bias:
  {
    Deny:
    {
      Addr:
      [
        '192.*'
        '47.*':
        {
          Path: '/docs/gossip/'
          Mime: ['pdf']
        }
      ]
      Path: ['/docs/staff/']
    }
  }
}
```


The example above will only handle requests made to the folder "docs" inside the context where this bios instance resides. This will override any other "general" http handlers related to "Path" on the same socket.

This example (above) also implements specific security overrides on the "127.0.0.1:9000" socket over "http" protocol: It denies all access from any ip address starting with '192.'

It denies everything in the "/docs/gossip/" folder -and "PDF" files from any ip address starting with "47."

It denies any access to "/docs/staff/" for everyone.

Of coarse you can make a separate file, like: `rules.cfg.v` and just assign: `Bias: rules.cfg.v`, or however you want; it would be preferable, especially with a long list of such rules that may be needed for other BIOS instances as well.

Automatic Web-socket Server

```
Sock(#WS:127.0.0.1:9100)
```

In the example above, the same rules apply, with similar configuration.

Raw socket handler

```
Sock(#TCP:127.0.0.1:9200)
[
  $Push($Pull + ` -back to you!`)
]
```

The example above shows how to override the "event" (Tick) handler on any socket. Note that it does not specify a sub-protocol, so this means you will have to handle the raw input and output data yourself.

Child process :: Mule

Child processes in VAMP are called "mules" (workers); however, they are NOT "forks" of the parent process and each mule occupies 1 processing thread. As their title imply, they are not "fertile" -so they can't (-or rather shouldn't) have "children".

Mules are typically used to either share work-load, or to do specific tasks (once-off -or persistant), -away from the main process. The main (project root) process cannot execute system commands; however, mules can, because their priviledges can be limited to only certain resources, or certain commands.

Mules can only be "spawned" locally; they can only be commanded by the parent; they only report to their parent, and their parent manages communication between them in order to minimize any confusion -or disputes (-race conditions). Mules also report progress of tasks managed by them.

Mules can be used to setup servers -remotely via SSH -or which ever command interface you prefer --from operating system installation & configuration -to Vamp setup. The resources of these remote servers can become part of your main project root structure -as most of Vamp's processes are asynchronous anyway. Remote resources are managed via encrypted communication channels.

When a mule is done with its work -or if it fails, it dies. When a mule dies, its parent is notified via its messaging channel, which will either be a detailed "Done" -or "Fail" message.

Mules can "fail" under various conditions: if it's commands encounter a fatal error, or when its "time-limit" is exceeded, or if it "fatigues" the host system by occupying too much CPU for too long, or too much RAM (for too long), or too much disk space, too much band-width, etc. Each of these limits are already set in the main Vamp installation setup config, which can be overridden upon initialization of any mule -or can be set in the project root config of each project; however, the maximum limits set in the Vamp installation setup config cannot be overridden at all, they will just default to the limits if exceeded.

```
Mule(exec:`echo "blah"`)
[
  $Done(0)
]
```

Conclusion

This "synopsis" was both too long and way too short. There is so much more to Vamp, but this you will have to discover in the rest of this documentation; however, I hope it helped with understanding more about Vamp, even though it was a lot of text to read; thanks for not giving up.

There is no doubt that Vamp is versatile and powerful. A little code goes a long way. Your structure is your empire that could span securely across multiple networks accross different continents. Whith this kind of flexibility, scalability, stability, speed of development and mass deployment; the things you can do with Vamp is nothing short of astounding.

Next up is the "orientation", so grab a drink & some crisps; you're about to unveil a geek-adventure filled with might & magic!

VAMP - Orientation

Versatile Application Meta-Programming

Introduction

As its acronym suggests, VAMP is indeed versatile.

This document is to familiarize yourself with the basics, installing VAMP, and make a "Hello World!" app. However tedious it may seem reading through some of the text below, take your time, it won't hurt :)

The default VAMP setup may seem larger in file-size than some "normal" programming languages; however, in comparison with software stacks such as the infamous "LAMP", -VAMP's default "package" size is close in comparison.

What you get with the VAMP package -and what you can do with it, well...



About VAMP

Here's a few things you should know:

- it has an interpreter, a compiler, and a transpiler -which are all configurable & extensible
- it can transpile any mime-type it has a mime-library extension for
- it is securely scalable across several projects, servers -or domains, for n-tier software architecture
- it can be used for both server-side & client side and its syntax is clean & easy to learn
- it can create, read & listen on any permissible resource, path, socket, & child-process
- it can be used as an active database, or used for programming, configuration and content authoring
- it has a configurable "view" mechanism, both for CLI & GUI - which have similar instructions
- it is built to be stable, so it will not crash (under normal conditions)
- it runs in its own directory which is your runtime "project root" & every project has its own daemon
- its directory and file structure is part of the live runtime structure where folders are "nodes" (objects)
- structures (like "nodes") can be defined inside VAMP files, not only folders
- its structure is loaded at "boot time" and lives in memory; more on this in a bit, keep reading
- the live structure entities (and attributes) are referenced as "pointers", so it runs fast
- anything in the runtime has "meta-attributes", called "aspects" some of which are "intrinsic"
- the intrinsic concepts & aspects are designed for rapid prototyping and development
- the mathematical expressions are designed to be "safe", so it handles things like "devision by zero" well
- the arithmetic operators handle any data-type, -not only numbers

The power of VAMP is in its structure, expressive language, simplicity, useful concepts, extensibility, portability, and runtime stability; alas -it is up to the systems engineer to lay out the proper architecture.

VAMP is not a "framework". It sticks with the structure you define, so it is only as complex as your own structure. The structure you define is your folders & files, together with their relationships with one-another.

.. but hang on a second.. - no frameworks?

YES! - Why let your creative thinking be handicapped by limited ideologies?



You create your structure; VAMP lets you stick to it; -unless you explicitly need your structure mutable during runtime; which is also supported.

Of coarse you can make a "framework" -or "boiler-plate" with VAMP, all this means is that with VAMP you don't really need a bulky framework to get things done as it has a lot of useful tools and methods built into the language and its libraries, which are extensible. The point here is: "freedom with rules", and you are the author of these "rules" - or rather: "structure".

Extensibility

VAMP's default mime-type library comes with transpilers for:

- HTML
- CSS
- JavaScript
- PlainText

The mime library can be extended either by installing it from the repository, or building your own. The punch-line here is that you can code in one language and have your instructions translated (or compiled) to any other mime-type, depending on what you're authoring and what the target platform is of course.

So what's the big deal?

Well, as we all know, some languages are great for some things and others are better at other things, depending on what you need to do, or on which platform it should be done on; however, these languages have different syntax, and some languages have the power with which you can blow your foot off, or do something really interesting - if done right.

Now, using the "best practices" & the right tools for whatever language you're authoring may become tricky and most of the time -developers make "boiler-plates" in which ever language they use so they can have handy tools at their disposal during new project development, or maintenance work.

Wouldn't it be great if we could have a language that bring these tools together, for which ever language, and you use one language to program a dozen other languages - at once? A language that does not get in your way, but is expressive and extensible, so you do not need to repeat yourself all the time.



You can also compile your VAMP project into a stand-alone executable; which could be anything, from a systems API or service, a plug-in or module for another service -to native desktop GUI applications. Depending on your development setup, the VAMP compiler can compile executable that runs natively on Linux, OSX & Windows.



above :: illustration of VAMP's native binary compatible platforms

So based on the fact that we can extend any VAMP feature, and also create & edit its mime-libraries; it means that you can make a "boiler-plate" once, tell VAMP how to use it and which words relate to what and use it anywhere in your future VAMP projects.


By "anywhere" I really mean it: server back-end, data-base, web interface, native desktop GUI apps; -even interactive 3D web applications -or installable 3D games; videos with synchronized audio & sub-titles; still images with super-imposed overlays, etc, etc..

It is important to know that this is in deed possible, but VAMP does not come with these compilers & transpilers by default, so, if it exists in the VAMP repo, by all means, help yourself, otherwise, buy it, -or get someone to develop it, or build it yourself - then sell it - or donate it to the VAMP repository for free, if you want :)

However you decide how to use VAMP is up to you. The point is that it's an incredibly powerful system, that is easy to learn, simple to use, easy to extend, and applicable anywhere.

Structure

VAMP is all about structure. From your project's folders & files to the code in those files - it is all used as a whole. Its content operators shows very close correlation between folder-tree and VAMP code. Here's an example:

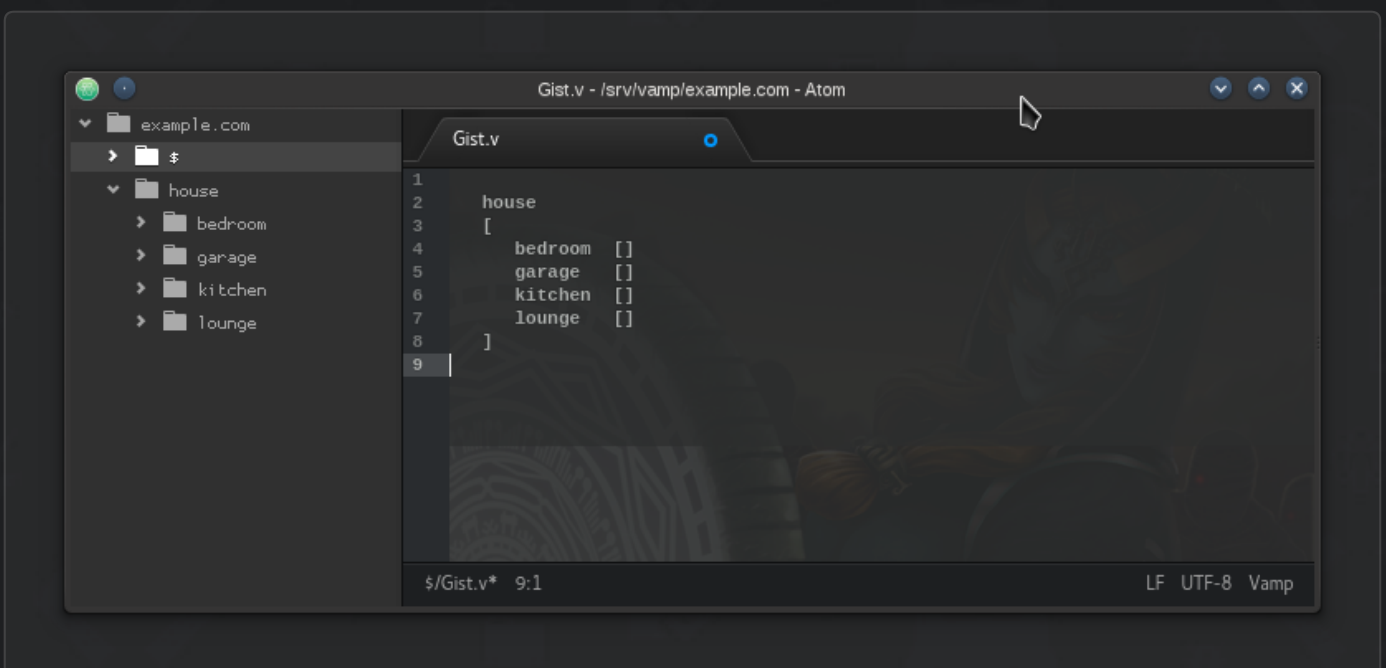

above :: illustration of folder-tree structure in correlation with VAMP code

View - GUI & CLI

VAMP comes default with configurable & programmable "view" mechanisms that use the same methods to "show" things to the user. This is directly related to VAMP's "Bios" (basic input-output system).

The GUI part is available for both web browsers and native desktop applications, depending if you compile your project to native binary -or run it as a server/service on the internet.



above :: VAMP's default GUI web browser compatibility list

The CLI part is for system administrators and hardcore devls (developers). It can be used to create -or manage projects on the fly. The VAMP runtime supports "hot-loading", so you do not need to restart your project daemon when minor changes are made to the structure; remember, it works like a data-base; you don't need to restart a database if you insert or delete information, that would be quite pointless :)

When working with the CLI you have a lot of power though. You can "save" the new structures you create in code -to disk, -where you also have the option to save it as a "vamp file" or tree structure. This is covered later.




The VAMP Bios (basic input - output system) adapts its input and output according to the transmission used; however, the developer does not need to apply a different way of sending messages, or reading input to and from any of these. This can be configured -per Bios; you have the freedom to customize pretty much anything.

This needs elaboration, but I hope this introduction shared enough info to inspire your into reading the rest -and start using VAMP!

Installation

VAMP can be installed from its repository here: <https://github.com/xacra/vamp>

Navigate to the `dist/bin` folder, in which you will find a list of folders named according to the supported operating systems.

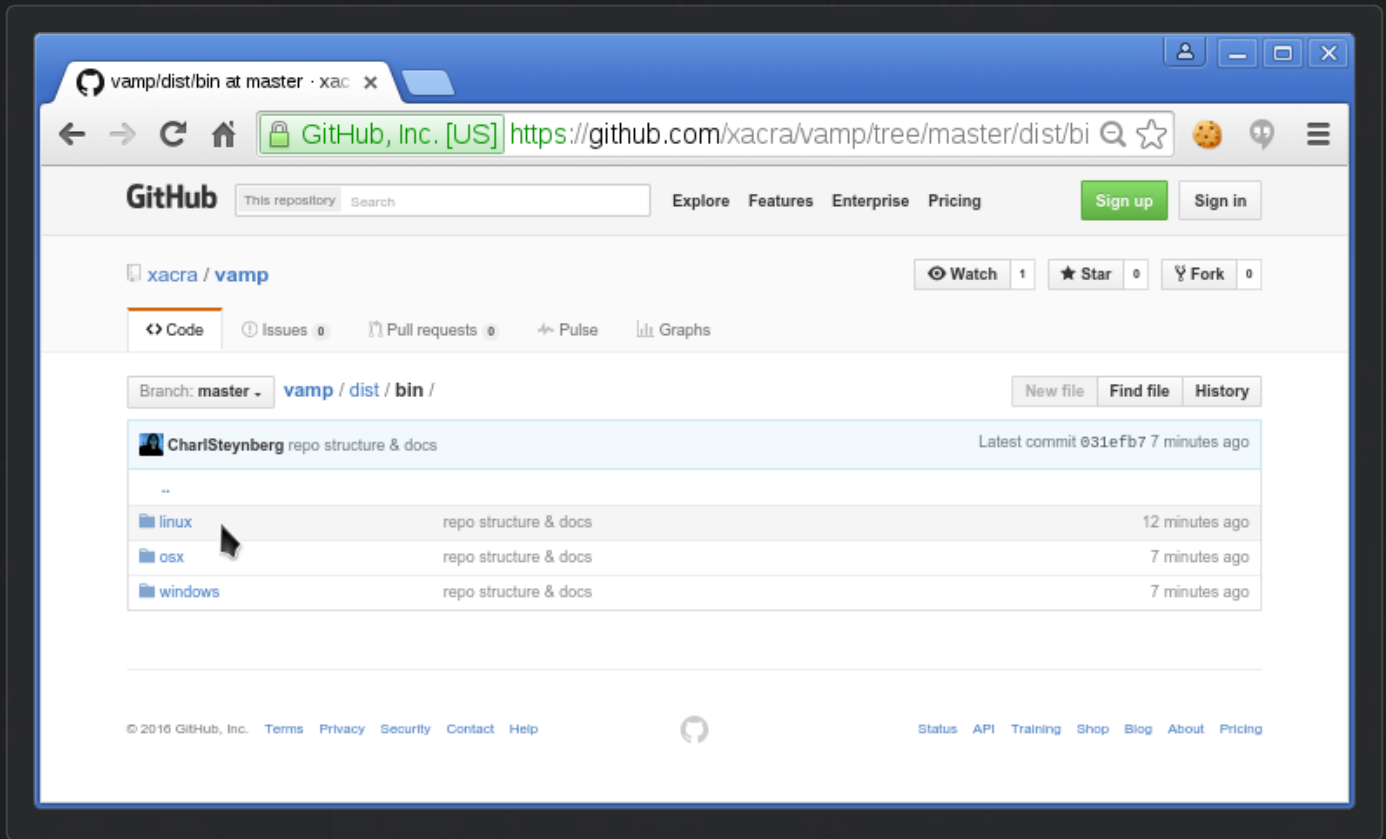

above :: the VAMP repository on GitHub

Linux

- Download the `vampSetup.sh` file from the `linux` folder.
- From the terminal, navigate to where it downloaded and make sure it is executable.
- Type: `./vampSetup.sh` and follow the prompts.
- To test if VAMP was successfully installed, type: `vamp -v` and you should see something like: `0.1.0`

OSX & Windows

- Coming soon!

Development Environment

VAMP does not require a specific development environment at all. You can simply install VAMP on which ever host-machine you want and use a plain text editor for coding, and a terminal to run or compile your projects; however if you're serious about your work you should at least run your test server on a separate host (or virtual machine) - and use some a proper text editor for programming.

Throughout this documentation, the file extension: `.v` is used for "vamp" files. Your local machine's operating system may already have the ".v" file extension associated with some other application; however, you do not need to use the `.v` file extension exclusively; - see the "Hello World" section below for more info on which alternative file extensions to use.

File extensions in VAMP are important. Not only is it easy to spot for a human, but also, the VAMP interpreter can recognize combination file extensions, like: `style.css.v` and process it "explicitly"; -where if the `.css.` part is missing, then it is processed "implicitly" - which could be slower.

If you have the VAMP SDK package installed, the icons in your local file browser will show recognizable icons for VAMP files, and combinations also.




Virtual machine

There are many VM solutions out there, the solution I recommend is using `VirtualBox` with `Arch Linux` running on a machine you configured; but you can use anything you like.

To take advantage of "compiling" it is recommended that you assign at least 2 virtual CPU's to your VM -with at least 2Gb of RAM. The machine does not need a GUI, so you can just use a minimal installation and set it up the way you want. You can also launch your VBox "headless" (without a "window") from the terminal and have it run in the background.

You can also "mount" a folder (path) which is on your virtual machine into a folder of your local machine. This is very useful for quick navigation, screen-shots, etc - using your local machine's file-manager to manage files & folders on your Vbox.

Consult the internet for more info on this as there are plenty tutorials on how to do these things - which is not in the scope of this document, but I thought it's worth mentioning to have something that "just works" without much hassle. It is very useful; not only for VAMP, but for your other projects as well.

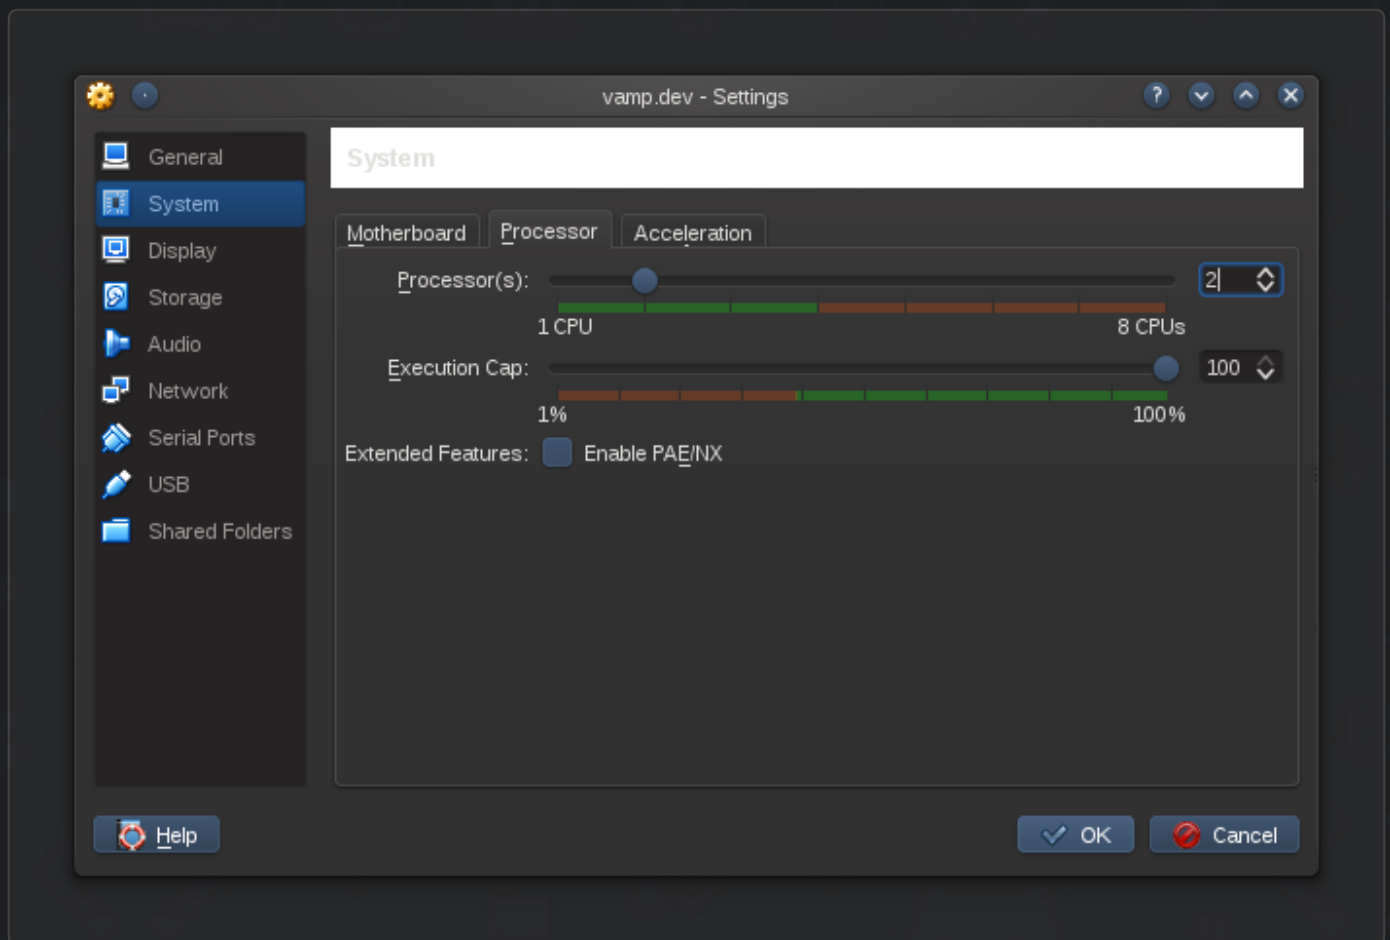

above :: VirtualBox


Syntax highlighting

It is important that your text editor supports syntax highlighting of some kind as it makes it easier to identify what you're typing.

If your text editor does not support VAMP syntax by default, there may be a syntax highlighting package for your editor in the VAMP repository.

Have a look here: <https://github.com/xacra/vamp/tree/master/dev/ext/editor>

At the time of this writing there is a syntax highlighting package available for **Atom**, so you can just install it.

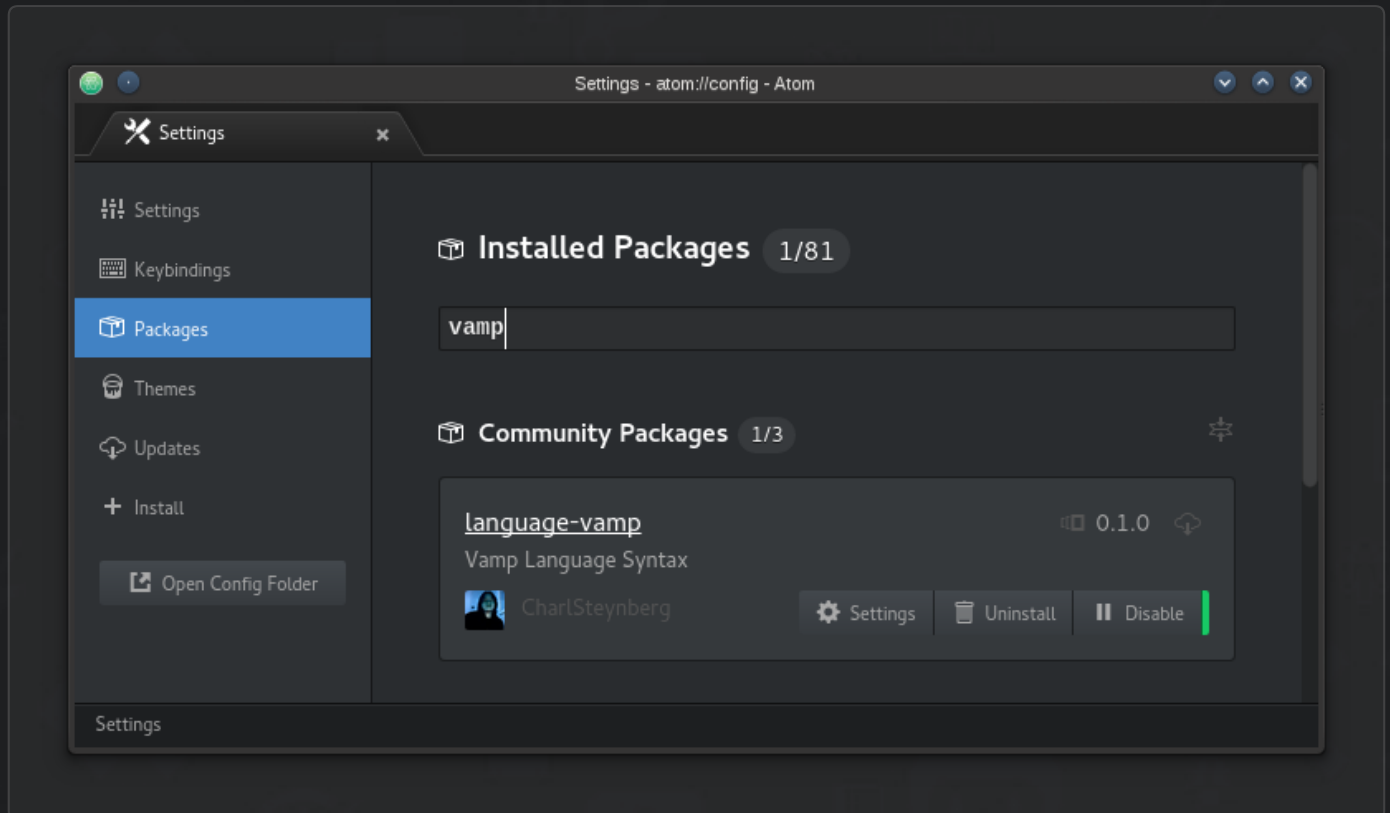

above :: VAMP syntax highlighting in Atom

Hello World

This exercise is actually very quick, but for the sake of getting a firm grasp of VAMP, we'll take it step by step. Note that you do not need to do the "mounting" thing, and you also do not need the VAMP SDK; these are just to make things more "user friendly" for yourself while you develop VAMP projects.

Before you dive in, read the following first - so you know exactly what to expect:

1. Any VAMP project needs its own folder (which defines the runtime scope)
2. VAMP files can have any of the following file extensions: `.v` `.va` `.vam` `.vamp`
3. `$` (meta) files are optional, but mandatory in `project root` and refer to the folder they are in
4. items in folders are loaded sequentially in ascending order by name, so `$` files are loaded first
5. the contents of VAMP files are statements in the context of the file-name and folder hierarchy
6. statements are evaluated by context, parsed from left-to-right and top-to-bottom
7. the return value of any context is determined implicitly or explicitly

For clarity & brevity, I'll assume the following:

- you have installed VAMP on your development server and have installed the VAMP SDK on your local machine;
- you're using a `Linux` machine as project server (where VAMP is installed);
- you have mounted the folder path of this server in which your VAMP projects will reside --into your local file-system;
- you either have a terminal window open that is connected to this dev server via SSH, or you're using a rich IDE with SSH support -OR -simply just the open VBOX window that runs your dev server.
- your text editor (or IDE) supports navigating file systems.

With all the above in mind, it's time to kick some booty!




SH!T JUST GOT REAL

Let's get started:


- Within the target file-system, navigate to your main projects (plural) container (folder).
- Create a new folder in there, so the path to it will be something like: `/srv/vamp/example.com`
- Inside this `example.com` folder, create a text file named: `$.v` (take note of the file extension)

Your project `root` structure of "example.com" should look something like this:

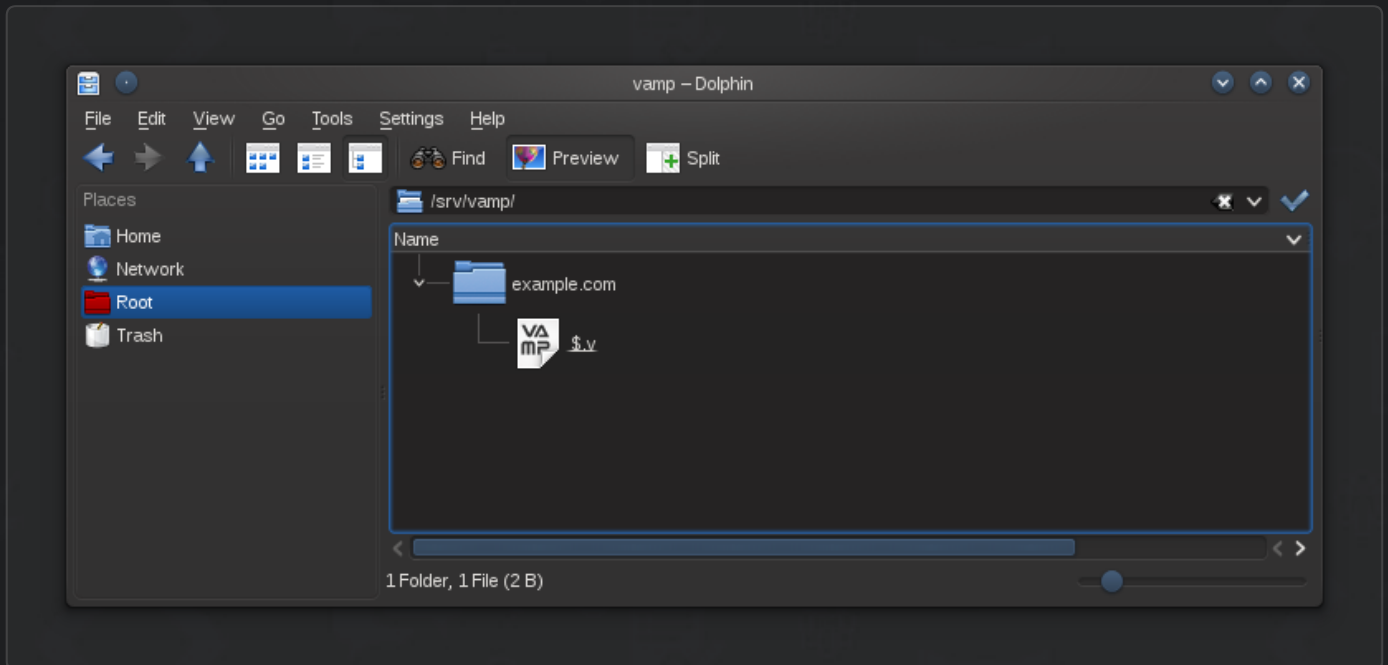

above :: project root of "example.com"

Using your editor, open the `$.v` file and type `Hello World!` inside it, and **save**.
Your project should look something like this:

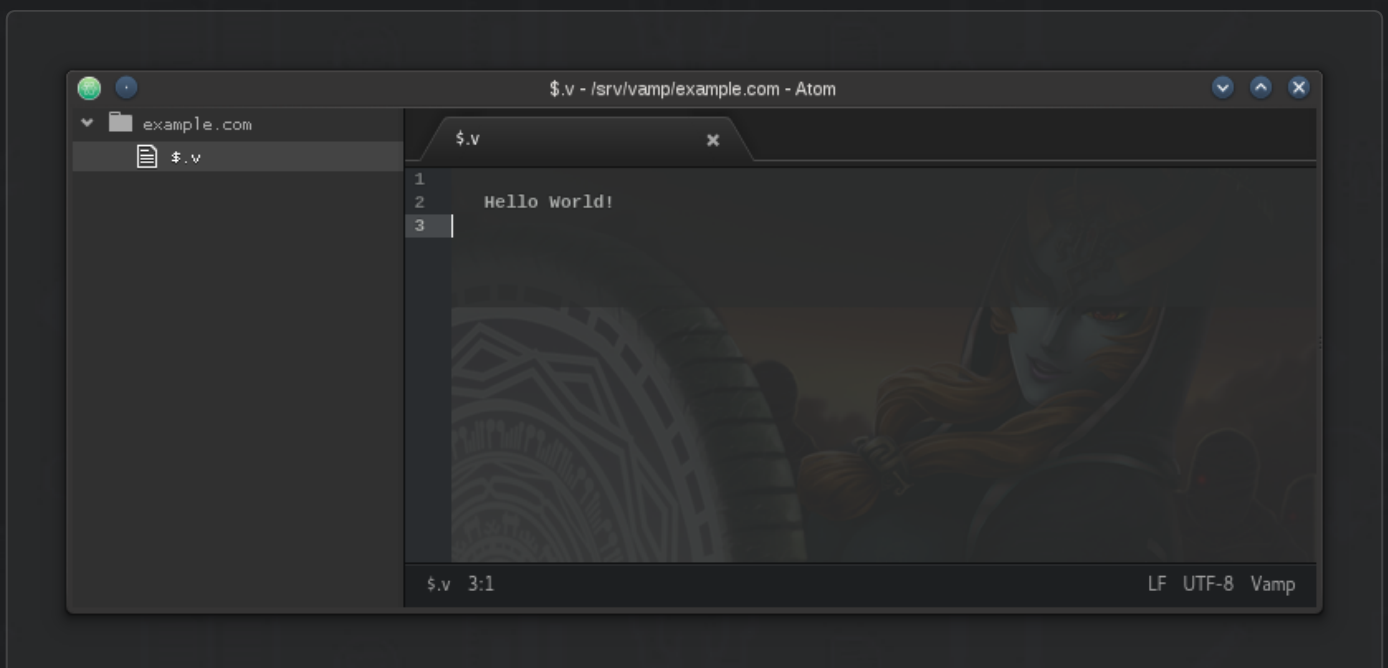


above :: project: "example.com"

Testing

To run your project, use your connected SSH interface (terminal) -or VBox window, and inside it type something like: `vamp init /srv/vamp/example.com` and hit "enter" (or return) on your keyboard.

If all went well, you should see something like this:

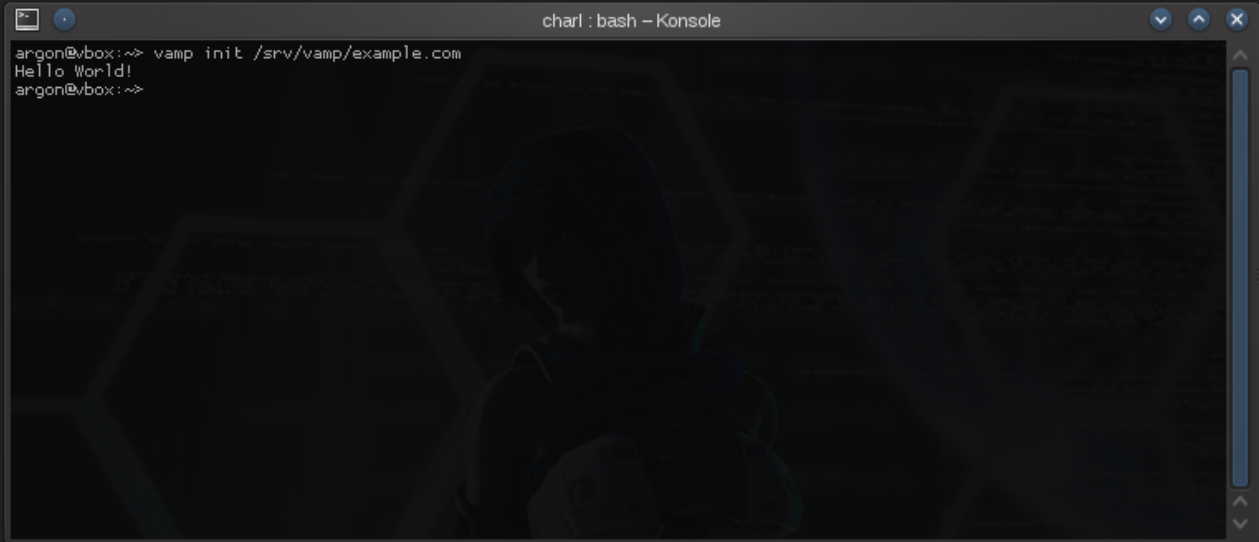A screenshot of a terminal window titled "charl : bash - Konsole". The terminal shows the command "vamp init /srv/vamp/example.com" being executed, followed by the output "Hello World!". The prompt "argon@vbox:~>" is visible before and after the command.

```
charl : bash - Konsole
argon@vbox:~> vamp init /srv/vamp/example.com
Hello World!
argon@vbox:~>
```

above :: project: "example.com" output

If your results are not as above, then consult the "troubleShoot" doc, but if all is good, then: Congrats!



Operators

Operator categories

The operators in VAMP are categorized in terms of usage. These are:

- comment
- context
- delimit
- reference
- logical
- arithmetic

This document is for reference purposes and will be covered in more detail later.

Comment Operators

Comment in VAMP is used both for documentation and developer reference. The purpose of all these comments is to have code look well explained, and has the ability to make Markdown -or HTML documentation from VAMP files. It is recommended to "minify" your code when publishing to a live environment as this speeds up loading & parsing, not only for VAMP, but with any other language or library commonly used.

These are the comment operators:

--	double-dash(+space)	block-comment, at line start, ends with `--` or `::(+newline)`
#	hashtag(+space)	line-comment, used anywhere
##	double-tag	line-comment, used anywhere
#!	shebang	line-comment, used at doc start
!#	bangshe	line-comment, used anywhere, or in docs as highlighted tags
.:	secon-begin	line-comment, used for: `section start`, or: `thus`
::	double-colon	line-comment, used anywhere, or section end
//	double-FWD-slash	line comment, used anywhere, or section start
\\	double-BCK-slash	line comment, used anywhere, or section end
---	triple-dash	line-comment, used for code -or comment-block separation
/* */	slash-star pair	block-comment, used anywhere

"Line-comment" is typically ended with a `newline` character, but "block-comment" is typically ended with a pairing sequence, as shown above.

The `bangshe` (or "banshee") line-comment can be used in both coding & documentation as it has the same effect, which is to highlight certain key-words and let the accompanying text stand out from the rest. The "accompanying text" can be whatever the developer types in there; the "quoted text" below is only an indication of what the key-word could mean; however, if no text is typed next to these key-words, then the quoted text below will be used instead.

The words & colours of the "banshee comment" can be configured, but the defaults are:

- **TODO** - dark grey - "to be done in the future"
- **TEST** - green - "not thoroughly tested yet"
- **HELP** - pink - "i need help with this"
- **NEED** - purple - "the specification -or technology needs to be updated"
- **DONE** - blue - "completed and tested"
- **BUSY** - orange - "work in progress"
- **WARN** - orange - "it could work but may fail under specific circumstances"
- **HACK** - orange - "working but not properly done and may have side effects"
- **FAIL** - red - "broken, fix this -or remove it to prevent issues"
- **VOID** - black - "deprecated - do not use in the future"

Below is an example of how to use these comments resulting in well documented code.

```
#!/usr/bin/vamp

-----
::      v0.1.0      ::
-----

## Heading
--
  Documentation paragraph with some bold text
--
!# TODO : not implemented yet


.: bgn section :.
--
  documentaion stuff
--
  "Hello world!"
--
.: end section :.


// begin section -- quick, but not so pretty as above
-----
"Hello world!"
-----
\\ end section
```


Context Operators

The importance of "context" in VAMP is paramount as it defines what any statement -or expression means or implies and to what it applies - and in which scope it can be valid. Comment operators also define a "context" but the contents inside the "comment context" is ignored during runtime.

Your project structure in folders and files define context (scope), as well as the following operators:

```
( )    ::    wrap, express, calculate, call
[ ]    ::    wrap, list, contain
{ }    ::    wrap, describe
" "    ::    text, quoted - unformatted plain text - single-line
' '    ::    text, quoted - unformatted plain text - single-line
` `    ::    text, quoted - formatted text, multi-line, embedded values & expressions
```

Delimit Operators

As with any (normal) language, "spaces" divide "randomtext" into "some words". The same applies here, but just with different punctuation. As with some languages, like "Python", VAMP does not completely ignore "white-space". White-space delimit text into lists & statements where appropriate.

List and statement delimitation does not apply to "quoted text", except when this text is to be parsed.

From the VAMP interpreter's perspective: any comment is ignored and the white-space at the beginning and ending of any context (except quoted text) is removed. Any white-space remaining is reduced to a single white-space character. This is important because in VAMP a white-space character is a delimiter.

VAMP does not require commas -or semi-colons between list items and statements - ONLY if these are separated by white-space. Examples will follow later, but for now, remember that VAMP compiles (or transpiles) into other forms where the "implied" items & statements are realized and treated accordingly. When the compiler minifies VAMP code it fixes the delimiters accordingly.

Speaking of lists; "text" is a list of characters (a character "string"), hence list operations are natural to text. This brings us to: indexing.

Indexing in VAMP starts with 1 (NOT 0) and applies to reverse lookup also. This solves a lot of common problems - especially in boolean truth comparisson where "something found" appears first in the list, -or the first item from the end of a list (or text).

Having to do extra calculations when coding just to compensate for that zero'th key, or to calculate the length of a list just to get to the last item - is insane, and, negative zero is a bit crazy, so, it's important to remember as it will save you a lot of headache.

The following delimiters are valid:

```
,      ::    comma
;      ::    semi-colon
      ::    white-space
```

Reference Operators

VAMP's reference operators together with the context-operators and inheritable meta-attributes are very powerful; you can do a lot more with less code. This does not necessarily mean it is slow, because VAMP does not (normally) pass whole data structures around, but rather creates pointers to these structures in memory and passes the pointers around instead.

The following operators are used as reference operators:

```
:      ::  is    - name is value, where "value" is in the context of "name"
$      ::  self - aspects of an entity
@      ::  at   - point "at", or "in", to find or retrieve
.      ::  's   - as in: "Dog's balls" in code: Dog.balls
```

Here are a few examples of how to use the operators above:

```
foo:bar      ::  {foo:'bar'}
bar:foo      ::  {bar:'foo'}

bar:$foo     ::  {bar:'bar'}
bar:$.foo    ::  {bar:'bar'}

('foo'):( 'bar' )      ::  {foo:'bar'}

(foo.Name + 'Var'):bar ::  {fooVar:'bar'}
```

Logical Operators

In VAMP, "logical operators" & "arithmetic operators" must be delimited from text by white-space; else they are just plain text.

Remember that VAMP expressions are always evaluated from left to right, no exceptions (not even multiply). If you need part of an expression to take precedence you need to enclose it inside (any) context operators.

Truth in VAMP is calculated logically. Since we need not worry about "zero'th" keys it is safe to assume that the following is logically false: `undefined,null,0,empty,error,false` - anything else is logically true.

We will get to the "data types" in a bit; the "logically false" references above are not part of the data-types, so you don't need to remember them, just that those kinds of things are "logically false" and anything else is "logically true".

Here are the logical operators:

```
?      ::  IF    - boolean truth confirm
|      ::  OR    - choose the first boolean true comparable value, "this OR that OR bark"
&      ::  AND   - boolean comparisson used to affirm & compound expressions

!      ::  NOT   - boolean negation
=      ::  same  - strict boolean comparisson
~      ::  like  - loose boolean comparisson
<      ::  less  - is true if "left of" is logically less than "right of", else false
>      ::  more  - is true if "left of" is logically more than "right of", else false
```

Some logical operators can be used together as compound operators.
The logical compound operators are:

- `!=` not same
- `!~` not like
- `>=` more same
- `<=` less same

Arithmetic Operators

In addition to "normal" arithmetic operation, VAMP also uses arithmetic to do data manipulation on various data-types. This saves a lot of time & duplication of function names. More on this later.

These are the arithmetic operators:

<code>+</code>	<code>::</code>	add
<code>-</code>	<code>::</code>	subtract
<code>*</code>	<code>::</code>	multiply
<code>/</code>	<code>::</code>	divide
<code>%</code>	<code>::</code>	modulus
<code>^</code>	<code>::</code>	exponent

VAMP is extremely versatile as a language, hence it has some rules of what belongs where.

The logical and arithmetic operators do not have any calculation value outside of "expression context", so, they MUST be inside expression context in order to be "calculated" (evaluated) accordingly.

When logical -or- arithmetic operators are used outside of expression context, then it is plain text.

Take note that VAMP requires white-space between operators in "expression context" -with only 4 exceptions to this rule, the following can be used directly in front of anything, -except logical, reference & arithmetic operators:

- `!` boolean negative-truth test
 - `?` negative number
 - `-` negative number
 - `+` positive umber
-

Data Types

The "data types" in VAMP are divided into 2 categories:

- `Type` primary data-type
- `Kind` secondary data-type

These are global meta-attributes and is automatically defined & updated as entities are created & modified. The data-types also have complimentary globals which are used for comparison. We say "data-types" here because, that is what it is known as; however, "data" is a very broad term. All information imaginable that can be stored on a disk -or transmitted via any medium is simply called: "data" and so is the code you type in programming as well.

Eventually the data changes as it is interpreted, but we need a way to distinguish what belongs where. VAMP has a `Data` "data-type" which simply means anything that can be stored as a bunch of characters, from text through to binary data: anything not parsed (yet) is simply just plain: `Data`. Before you start sweating - have a look below - after the examples that follow; you will see that the `Data` primary type has many secondary types.

From here on out we will simply refer to primary "data-type" as: `Type` and secondary "data-type" as `Kind`. So, we can say: "the Type of this", or "the Kind of that". Remember that VAMP is extensible, so you can extend the types & kinds to suit your specific needs, either in your project or in your VAMP base code; -the latter will be available for all your projects.

The concepts (global nodes, functions & constants) you see below are covered in the "concepts" doc, so keep reading ;)

Type

The types are the corner stones in VAMP. Some of these type names are not only static constants, but also functional nodes. However strange and wonderful they are, they do a lot of work for you so you can focus on the project and not spend so much time in persuading the computer to do what you want. This is especially true with the "kinds" as you will see in a bit.

These are the types:

<code>Void</code>	::	<code>()</code>	::	<code>undefined</code>
<code>Spin</code>	::	<code>+, ?, -</code>	::	<code>polarity</code>
<code>Nume</code>	::	<code>1, 0.9, #123.kg</code>	::	<code>numbers</code>
<code>Data</code>	::	<code>'abc', "123", `*. *`</code>	::	<code>text or binary</code>
<code>List</code>	::	<code>[]</code>	::	<code>list of contents</code>
<code>Node</code>	::	<code>{}</code>	::	<code>functional object</code>
<code>Time</code>	::	<code>Time(`2016-03-03`)</code>	::	<code>date, time</code>
<code>Fail</code>	::	<code>(!/?/*)</code>	::	<code>holds an error</code>

Spin

The word "spin" was decided on this data-type because of its possible use-cases and what it could mean during conversation -either with colleagues -or in your own contemplation of how to do things logically.

This type can be used as "boolean", -or "polarity", -or a "state mechanism", -or "flavor", -or "spin-off type" of anything, -depending on how it is used in your logic.

It is based on the theory and application of "Qubits" (quantum bits).

As you may know, traditional bits have only 2 possible states: 1 or 0 (true or false). Qubit values are calculated from "probability" in the form of "spin up" & "spin down" as the polarity of an atom rapidly changes.

This means it could be in 1 of 3 states: "positive", "negative", or "both". The latter (both) could be explained as "undecided", -or "not enough pull on either side to make any conclusion".

This concept is adopted in VAMP as "polarity" and it is part of the meta-aspects, named: "Spin".

The meta-aspect: "Spin" has 1 of 3 possible states and its initial value is determined by the type of the entity it belongs to and the entity's value:

- **+** : True, numbers more than 0
- **?** : Bare, numbers equal to 0, anything else
- **-** : False, numbers less than 0

However you decide to use it, being able to set -or change -or view the polarity of something in 3 states is very useful, especially in data-type declarations, and expressions as you will see later on.

Fail

The Fail type is a meta-object reference that is only created and returned upon error. VAMP does its best to prevent errors; even so, sometimes you may code something horrendous in the early hours of the morning. In such cases VAMP fails "gracefully". Instead of having the entire process break; the Fail type flows along as far as possible until it reaches the output eventually through your own process flow.

A Fail value is logically "boolean false" and you can easily check if a value type is "Fail" like this:

(!foo) -OR- IsFail(foo) -OR- foo.IsType(Fail).

Kind

The "kinds" are dependent on the "types" and they extend & compliment the types in extraordinary ways. These easily cut a lot of hours - when you take debugging in consideration of how many times you have to create & modify functions & expressions to identify some piece of data for you.

```
NoneVoid      ::      undefined

TrueSpin      ::      +          (boolean true)
BareSpin      ::      ?          (logically null)
FalsSpin      ::      -          (boolean false)

BareNume      ::      0          (zero)
IntgNume      ::      1          (integers)
FracNume      ::      0.1        (has a fraction)
UnitNume      ::      #FFF       (measured)

BareData      ::      ""
SpinData      ::      "True"     "None"     "Fals"
NumeData      ::      "123"      "0.4"       "#2.5.hz"
TextData      ::      "abc"      "foo bar"   some text
ListData      ::      "a,b,c"    "[1,2,3]"
NodeData      ::      "foo:1"    "{a:b}"   "(){}"     "foo(){}"
HardData      ::      (binary)
BiosData      ::      "/pth/dir"  "http://example.com"

BareList      ::      []          (empty array)
FlatList      ::      [a,b,c]     (no items are lists or nodes)
TreeList      ::      [a,[bleh]]  (some items are lists or nodes)

BareNode      ::      {}          (empty node)
FlatNode      ::      {a:1,b:2}   (no items are lists or nodes)
TreeNode      ::      {a:[c]}     (some items are lists or nodes)
FuncNode      ::      ()[]        {}()[]     foo{}()[]
BiosNode      ::      Sock(#WS:127.0.0.1:9000')[]

NumeTime      ::      Time()
DateTime      ::      Time(%YMD)
EmitTime      ::      Tick(every: #1:Sec)[]
```

Here are a couple of examples for clarity:

```
numb: 123
frag: 123.0
loaf: #0.7.kg
```

```
tnum: '123'
ptxt: 'abc'
path: '/some/place'
```

```
elst: []
nlst: [1,2,3]
tlst:
[
  ['a']
]
```

```
-----
numb.Type      ::      <Nume>
tnum.Type      ::      <Data>
elst.Type      ::      <List>
```

```
-----
numb.Kind      ::      <IntgNume>
frag.Kind      ::      <FracNume>
loaf.Kind      ::      <RateNume>

tnum.Kind      ::      <NumeData>
ptxt.Kind      ::      <TextData>
path.Kind      ::      <BiosData>

elst.Kind      ::      <BareList>
nlst.Kind      ::      <FlatList>
tlst.Kind      ::      <treeList>
```

```
-----
(numb.Type = Nume)      ::      True
(tnum.Type = Data)      ::      True
(elst.Type = List)      ::      True

(numb.Kind = IntgNume)  ::      True
(tnum.Kind = NumeData)  ::      True
(elst.Kind = BareList)  ::      True
```

```
-----
numb.IsType(Nume)      ::      True
tnum.IsType(Data)      ::      True
elst.IsType(List)      ::      True

numb.IsKind(IntgNume)   ::      True
tnum.IsKind(NumeData)   ::      True
elst.IsKind(BareList)   ::      True
-----
```

From the types, kinds & examples above, you can see that some entities can have more than one type -or kind at a time. The `.Type` and `.Kind` attributes will only be 1 though, and this would be the "most likely", or the one with the higher priority, simply meaning the one that comes first.

You can check for more than one -remember, the `isType()` & `isKind()` functions can also accept expressions, so instead of repeating things you can do this instead:

```
:: check ALL
-----
foo.IsType(Void & Data)      ::      same as   (foo.isType(Void) & foo.isType(Data))
-----

:: check ANY
-----
foo.IsType(Spin | Nume)      ::      same as   (foo.isType(Spin) | foo.isType(Nume))
-----
```
