

API DEVELOPMENT IN ASP.NET CORE WEB API



C#Corner

Sardar Mudassar Ali

API Development Using ASP.NET Core Web API

Practical approach for developing the API in asp.net core

By

Sardar Mudassar Ali Khan

Senior Software Engineer

Scientific Researcher

Blogger at C# Corner

AUTHOR NOTE

I welcome you all in **API Development using Asp.Net Core Web API** the topic discussed in this book based on practical knowledge of the industry. In this book we will study the complete projects and discuss the project from start to end we will apply all the software Development principles, Design Architecture and Design Patterns, and Generics that are very beneficial for the development of software products. We will architect a complete application from start to end using Different Software Architectures.

This book is the property of the Author and copying any kind of Content is a criminal offense so if you see any mistake in this book then contact us at the official email address paksoftvalley@gmail.com or the official email address of Author mudassarali.official@gmail.com.
Every step taken to word the completion of this book is based on an expert review of industry experts.

SARDAR MUDASSAR ALI KHAN
Blogger at C# Corner
Senior Software Engineer
Scientific Researcher

DEDICATION

Every single step that was taken towards the completion of the book was because of the strong background provided by my parents they supported me morally. Moreover, the community of **C# Corner** helped me a lot in getting knowledge and solution where I was stuck. They motivate me in every situation and always ask to us never give up everything possible in the world. They held our hands firmly never letting us get down and made it possible for us to get through. This book is also dedicated to my seniors who motivated us to guide us in this regard.

The pure dedication of my book is to my parents our soul parents- the teacher and friends. Teachers always motivated and boosted us with full support whenever required.

DECLARATION

I Sardar Mudassar Ali hereby declare that this book contains original work and that not any part of it has been copied from any other sources. It is further declaring that I have completed my book under the project of ***Free Education for Humanity*** and with the guidance of my teachers and my senior colleagues and this is entirely possible based on my efforts and, my ideas.

SARDAR MUDASSAR ALI KHAN



ACKNOWLEDGEMENT

It would be my pleasure and I am feeling ecstatically rapturous to pay the heartiest thanks. First, To Allah (SWT) who is most beneficent and most merciful that he enabled me and blessed me to take the pebble out of his multitude of bounties. To my dear parents, their prayers become true towards the completion of my book. I am greatly beholden to my esteemed honorable motivator and kind-hearted, teachers, friends, and colleagues who supported my idea all the way and never let me down and corporate with me in this way completely sincerely and heartedly.

Also, special thanks to those who helped me a lot in my way, but I have forgotten them to mention here.

PREFACE

API Development in asp.net core web API in this book we adopted a practical approach for the development of software products. This book is divided into four parts every part has its dimension. In this book, we will explain the fully featured projects and how we can architect the application using the following architectures.

- What is Restful Web Service
- Introduction to API Development
- API Development Using Asp.net Core
- API Development Using Onion Architecture.
- API Testing Using Swagger
- API Testing Using Postman
- API Deployment on Azure Cloud
- API Deployment on Hosting Server

PART 1: API Development Using Asp.net Core

1) Introduction
2) Why Restful Web Service
3) Implementation
4) Conclusion
5) Complete Project GitHub URL

PART 2: API Development Using Three-Tier Architecture.

1) Introduction
2) Complete Understanding of Three Tier Architecture
3) Practical Approach for Architecting the Application with Asp.net Core
4) Conclusion
5) Complete the Project GitHub URL

PART 3: API Development Using Onion Architecture.

1) Introduction
2) Complete Understanding of Onion Architecture
3) Practical Approach for Architecting the Application with Asp.net Core
4) Conclusion
5) Complete the Project GitHub URL

PART 4: API Testing Using Swagger.

1) Introduction
2) API Testing Using Swagger in Asp.net Core
3) Test POST, PUT, DELETE, GET, UPDATE Endpoints Using Swagger
4) Conclusion

PART 5: API Testing Using Postman.

1) Introduction
2) API Testing Using Postman in Asp.net Core
3) Test POST, PUT, DELETE, GET, UPDATE Endpoints Using Postman
4) Conclusion

PART 6: Application Deployment on Azure Cloud.

1) Introduction
2) Creation of App on Azure Cloud
3) Server Configuration in Visual Studio
4) Deployment Steps Using Visual Studio
5) Output on Azure Websites
6) Conclusion

PART 7: Application Deployment on Server.

1) Introduction
2) Deployment Procedure
3) Server Configuration
4) Deployment Steps
5) Conclusion

PUBLISHER



CSharp Corner

https://www.c-sharpcorner.com/

All rights reserved. No part of this publication may be reproduced, distributed or transmitted in any form or by any means, including photocopying, recording, or other electronic or mechanical methods, without the prior written permission of the publisher, except in the case of brief quotations embodied in critical reviews and certain other noncommercial uses permitted by copyright law. Although the author/co-author and publisher have made every effort to ensure that the information in this book was correct at press time, the author/co-author and publisher do not assume and hereby disclaim any liability to any party for any loss, damage, or disruption caused by errors or omissions, whether such errors or omissions result from negligence, accident, or any other cause. The resources in this book are provided for informational purposes only and should not be used to replace the specialized training and professional judgment of a health care or mental health care professional. Neither the author/co-author nor the publisher can be held responsible for the use of the information provided within this book. Please always consult a trained professional before making any decision regarding the treatment of yourself or others.

Author/Co-Author – Sardar Mudassar Ali Khan
Publisher – C# Corner
Editorial Team – Archie Vankar, Deepak Tewatia
Publishing Team – Praveen Kumar, Amit Kumar
Promotional & Media – Rohit Tomar, Rohit Sharma

Contents

What is REST ARCHITECTURE? **11**
API Development in Asp.Net Core Using Three Tier Architecture **39**
API Development in Asp.Net Core Using Onion Architecture **59**
API Testing Using Postman **93**
API Testing Using Swagger **105**
Application Deployment on Microsoft Azure Cloud **117**
Select the Net Working Options **123**
Application Deployment on Server **135**

1

What is REST ARCHITECTURE?

Overview

- What is RESTful Web Service?
- RESTful Web Service Features
- RESTful Web Service Methods
- Why RESTful Web Service
- RESTful Architecture
- RESTful Principals and Constraints
- RESTful Client-Server
- Layered System
- RESTful Web Services Interfaces
- Create your first RESTful Web service in Asp.net Core Web API
- Data Access Layer
- Business Access Layer
- Presentation Layer

What is RESTful Web Service?

Restful web services are a lightweight maintainable and scalable service that is built on the REST Architecture. Restful Web service exposes API from your application in a secure uniform stateless manner to the calling client can perform predefined operations using the restful service the protocols for the REST is HTTP and Rest is a Representational State Transfer. Representational state transfer (REST) is a de-facto standard for a software Architecture or Interactive applications that use Web Service a Web Service that follows this standard is called RESTful such web must provide its web resources in a textual representation and allow them to be read and modified with stateless protocol and predefined set of operations this standard allow interoperability between a Machine and the Internet that provide these services. REST Architecture is alternative to SOAP and SOAP Architecture is the way to access a Web Service.


RESTful Web Service Features

Rest Web services have come a long way since their inception. In 2002 the Web Consortium had released the definition of WSDL and SOAP Web services and this formed the standard of how web services are implemented in 2004 the web consortium also released the definition of an additional standard called RESTful in past four to five years this standard has become more popular and being used in many giants like Facebook and Twitter Microsoft. REST is a way to access resources that lie in an articular environment you could have a server that could be hosting important documents or pictures or videos. All these are an example of the resources if a client says a web browser needs any of these resources it must send a request to the server to access the resources.

The key features of the RESTful implementation are as follows:

Resources


The first key feature is the resource itself. Let us assume that a web application on the server has a record of Persons if we want to access the records of the Persons by Id the details are in the given below figure the coding part is also given.

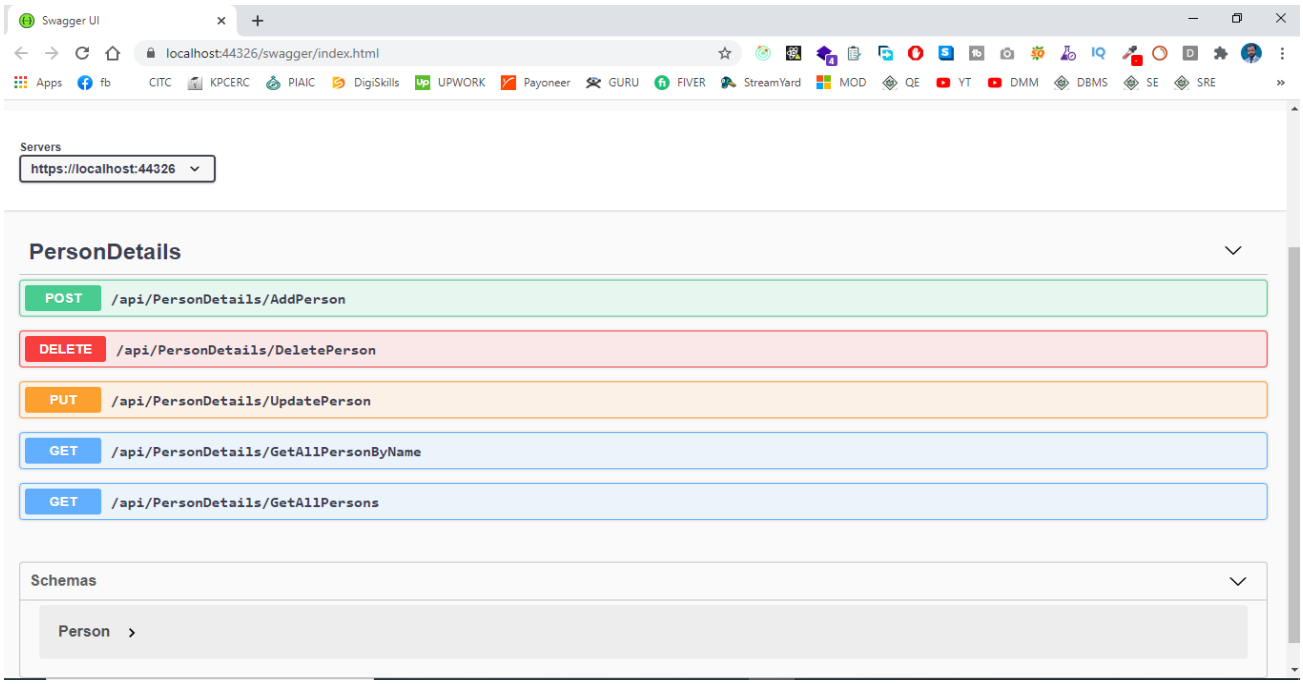

Request Verbs

This describes what you want to do with the resources a browser issues a **GET** verb to instruct the endpoints it wants to get the data like **POST** is used to send the data by hitting the endpoints in the postman or swagger and PUT is used to update the data and DELETE is used to either soft delete the record or on permanent bases.

As shown in the below figure.

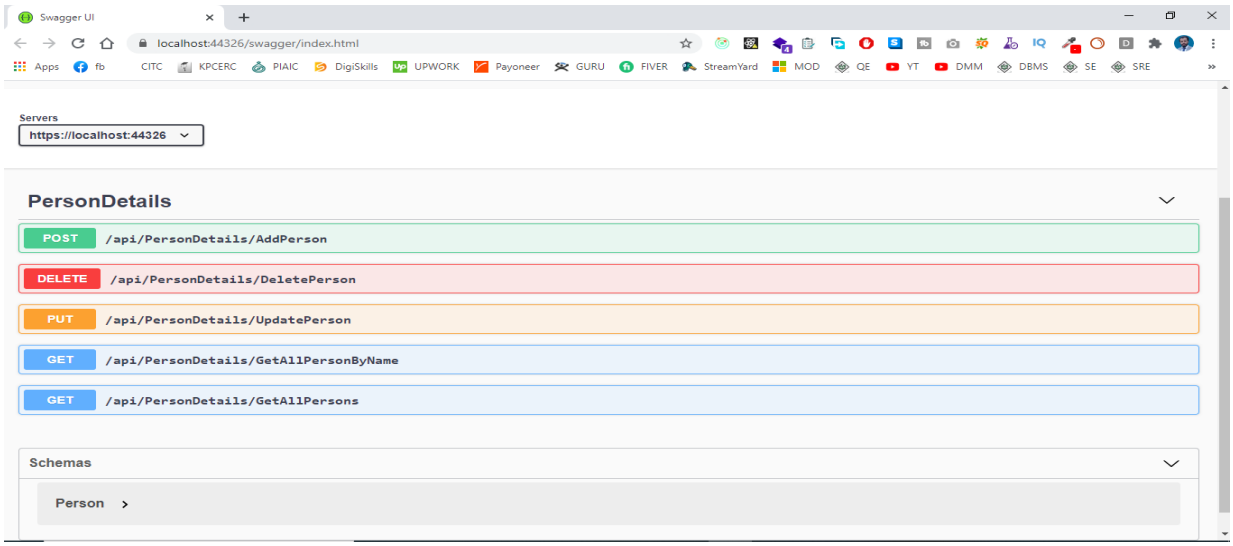


Request Header

These are the additional instructions sent with the request these might define the types of the response required or authorization details

Request Body


Data is sent with the requested data is normally sent in the request when a POST request is made to the REST web service in a POST call the client tells the rest web Service that it wants to add a resource to the server hence the request body would have the details of the resources which is required to be added to the server. As shown in the figure below.

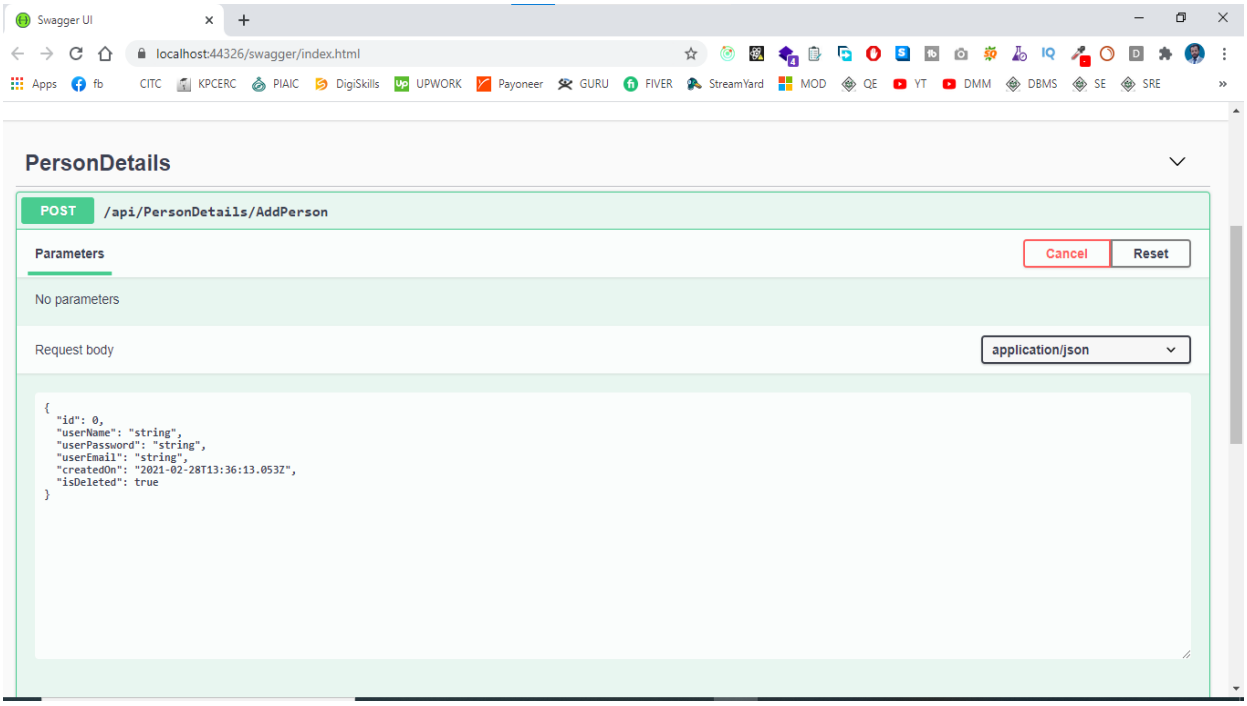

Response Body

This is the main body of the response so in our RESTful API Example if we were to query the web service via the GET Request, we server returns the response in the JSON format which gives us the details of Persons according to the Person ID.

For Posting the Data

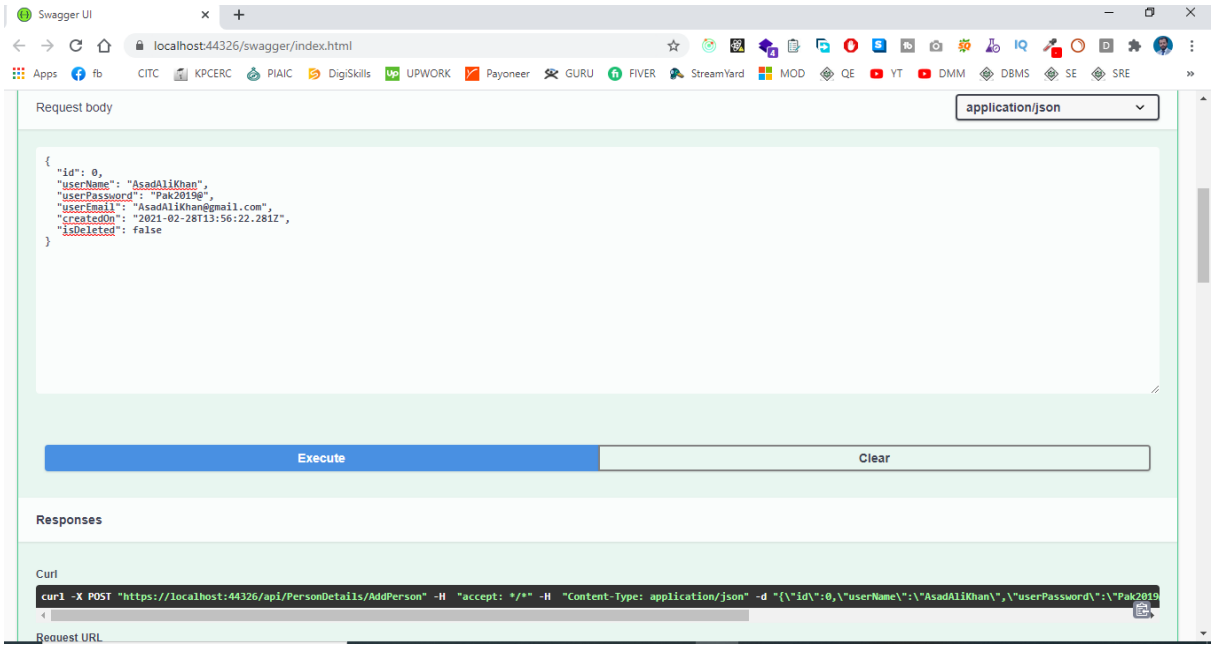

Response After Positing the Data into Database

Response Status Codes

These codes are the general codes that are returned along with the response from the webserver the status code details are the given below table.

	Code	Response
1	100 - 199	Informational Response
2	200 - 299	Successful Response
3	300 - 399	Redirects
4	400 - 499	Client Error
5	500 - 599	Server Error


RESTful Web Service Methods

Web Resources were first defined on the world wide web as documents of files identified by their URLs today the definition is much generic and abstract and includes everything entity or action that can be identified Named Addressed handled or performed in any way on the web in a RESTful web service requests made to a resources URI gives us the response with the payload formatted in HTML XML JSON or some other format, for example, the response can be related resources the most common protocol is HTTP provides us following **HTTP** Methods **GET**, **POST**, **PUT**, **PATCH**, **DELETE**, **CONNECT**, **OPTIONS** AND **TRACE.**

The HTTP methods details are given below.

- **POST** is used to post the data from the webserver to the database using the RESTful Web Service.

- **GET** is used to get the list of all records from the database either all records or based on specific I'd like Person ID or employed.
- **DELETE** is used to delete all the records from the database or based on a specific Id.
- **PUT** is used to Replace the record or update a record based on Specific Id.
- **PATCH** method provides an entity containing the list of changes to be applied to the resources requesting using the HTTP Request-URI.
- **OPTIONS** The options method represents a request for information about the communication options available on the request/response chain identified by Request-URI.
- **TRACE The** trace method performs a message look back test along the path to the target resources providing a useful debugging mechanism.

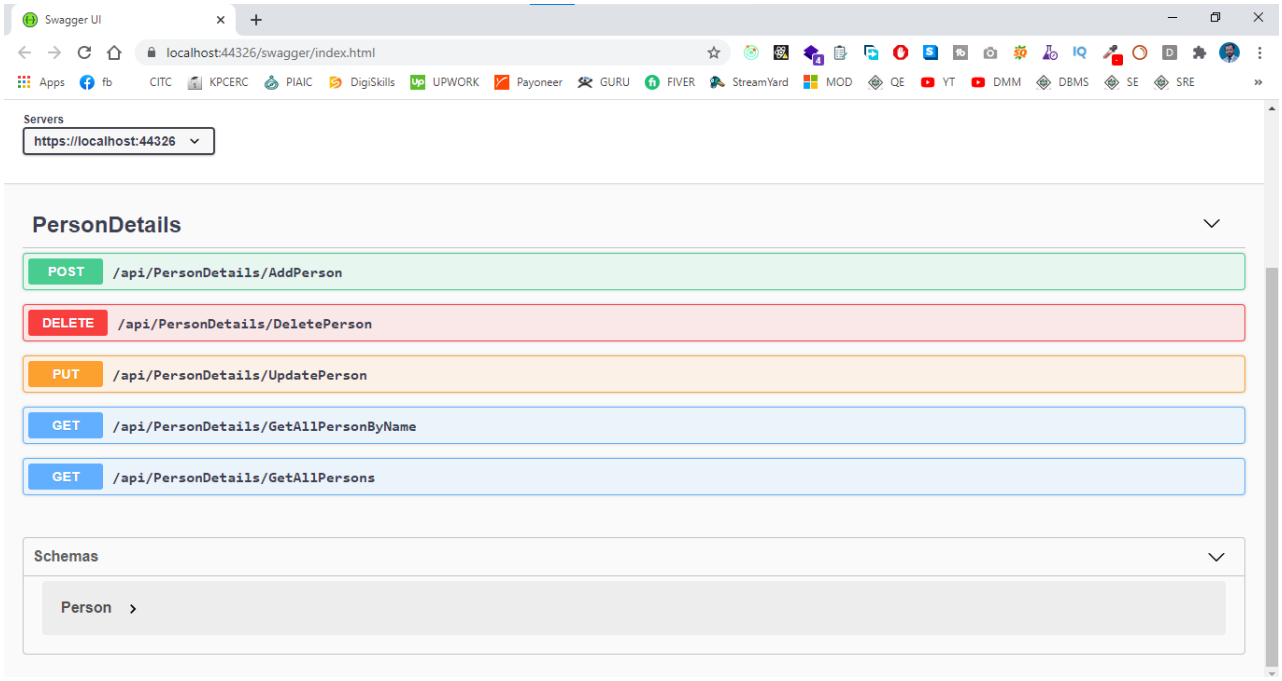

Why RESTful Web Service

Restful Mostly comes into popularity due to the following features.

- Heterogeneous language and environment this is one of the fundamental reasons which is same as we have seen for SOAP as well
- It enables web applications that are built on various programming languages to communicate with each other.
- RESTful web architecture helps the web applications to reside in different environments some could be on windows and others could be on Linux.
- RESTful web service offers this flexibility to applications built on various programming languages and platforms to talk to each other.

RESTful Architecture

An Application OR Architecture considered RESTful or Rest Style has the following Characteristics

- A-State and functionality are divided into distributed resources which means that every resource should be accessible via the normal HTTP Commands like getting, POST, PUT, DELETE, if someone wanted to get a file from a server, they should be able to issue the GET request and get the file. If we want to put the file on the server, we will use either POST or PUT request, and finally, if we want to delete the file from the storage, we must use a DELETE request.
- The architecture is client/server stateless layered and supports the caching.
- The client-server is the typical architecture where the server can be web server hosting the application and the client can be as simple as the web browsers.
- Stateless means that the state of the application is not maintained in REST

If we want to delete a resource from a server using the DELETE Command, you cannot pass the deleted information to the next request. To ensure that the resources are deleted you would need to issue the GET request first to get all the information from the server after which one would need to see if the resource were deleted.

RESTful Principals and Constraints

The REST architecture is based on few characteristics which are elaborated below any RESTful web service must comply with the below characteristics for it to be called RESTful these characteristics are known as design principle which need to be filled when working with RESTful based architecture.

RESTful Client-Server

This is the most fundamental requirement of the REST Based architecture it means that the server will have a RESTful web service that would provide the required functionality to the client. The client sends a request to the web service on the server would either reject the request on complying and provide ab adequate response on the client,



Stateless

The concept of stateless means that it is up to the client to ensure that all the required information is provided to the server. This is required so that server can process the response appropriately the server should not maintain any soft of the information between requests from the client requests the server and the server give the response to the client appropriately.

Cache

The Cache concept is to help with the problem of stateless which was described in the last point since each client request is independent sometimes the client might ask the server for the same request again even though it had already asked for it in the past. This is even though it had already asked for it in the past. This request will go to the server and the server will give a response. This increase the traffic across the network the cache is the concept implemented on the client to store requests which have already been sent to the server so if the same request is given by the client instead of going to the server this saves the amount of to and fro network traffic from the client to the server.



Layered System

The concept of a layered system is that any additional layer such as a middleware layer can be inserted between the client and the actual server hosting the RESTful web service the middleware layer is where all the business logic is created this can be an extra service created


with a client could interact with before it makes a call to the web service. the layered system needs to be transparent so that interaction between client and server should Not Be Affected in any way.

RESTful Web Services Interfaces

This is the underlying technology in the web service how RESTful should work. RESTful works on the HTTP web layer and uses the below key verb to work with resources on the server. Web Resources were first defined on the world wide web as documents of files identified by their URLs today the definition is much generic and abstract and includes everything entity or action that can be identified Named Addressed handled or performed in any way on the web in a RESTful web service requests made to a resources URI gives us the response with the payload formatted in HTML XML JSON or some other format, for example, the response can be related resources the most common protocol is HTTP provides us following **HTTP** Methods **GET**, **POST**, **PUT**, **PATCH**, **DELETE**, **CONNECT**, **OPTIONS** AND **TRACE.**


The HTTP methods details are given below.


- **POST** is used to post the data from a web server to the database using the RESTful Web Service.
- **GET** is used to get the list of all records from the database either all records or based on specific I would like Person ID or employed.
- **DELETE** is used to delete all the records from the database or based on a specific Id.
- **PUT** is used to Replace the record or update a record based on a Specific Id.
- **PATCH** method provides an entity containing the list of changes to be applied to the resources requesting using the HTTP Request-URI.
- **OPTIONS** The options method represents a request for information about the communication options available on the request/response chain identified by Request-URI.
- **TRACE The** trace method performs a message look back test along the path to the target resources providing a useful debugging mechanism.

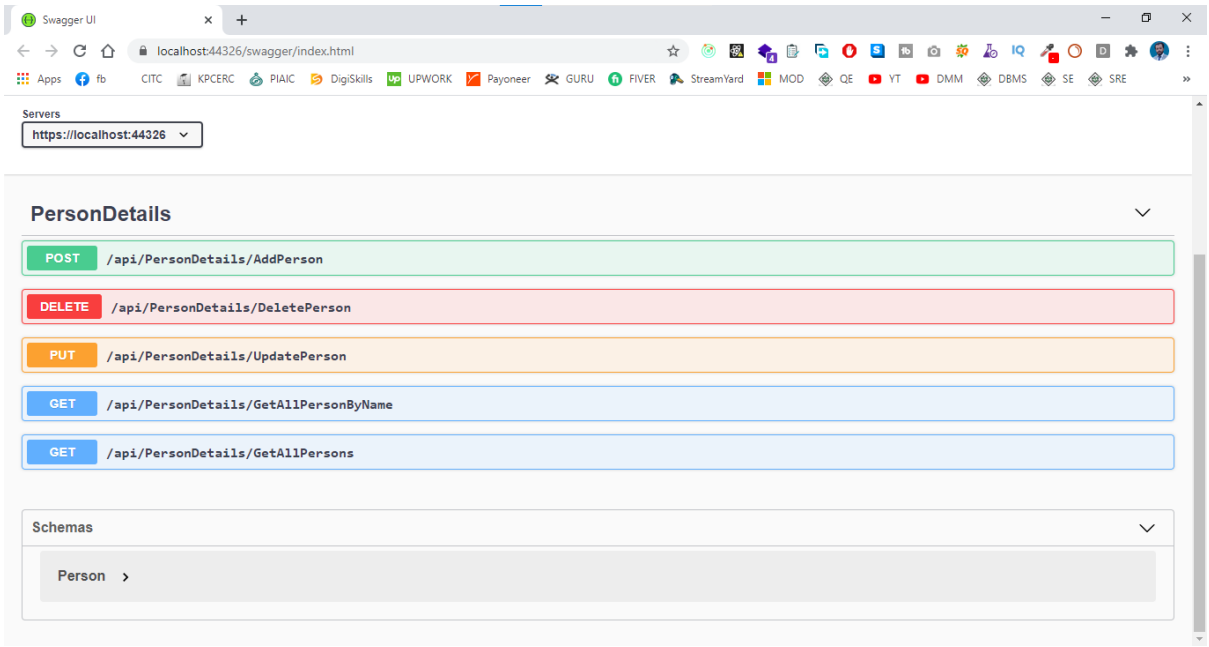


Create your first RESTful Web service in Asp.net Core Web API

Step 1 First, Create the Asp.net Core Web API in Visual Studio.

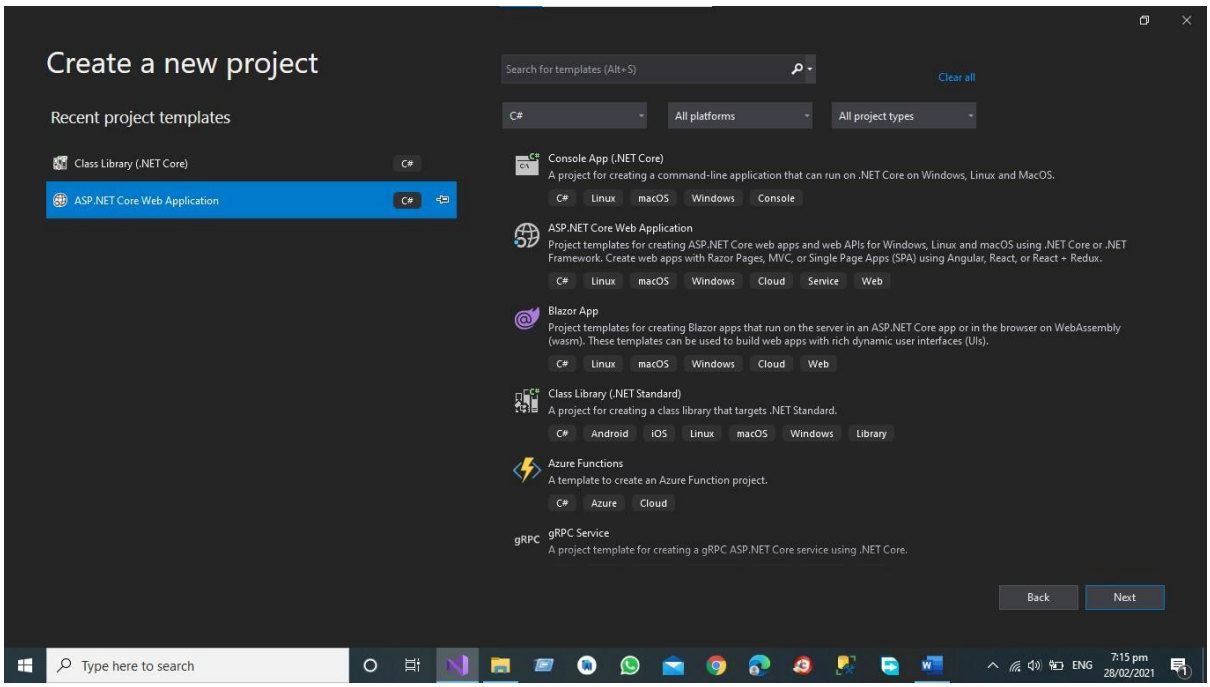

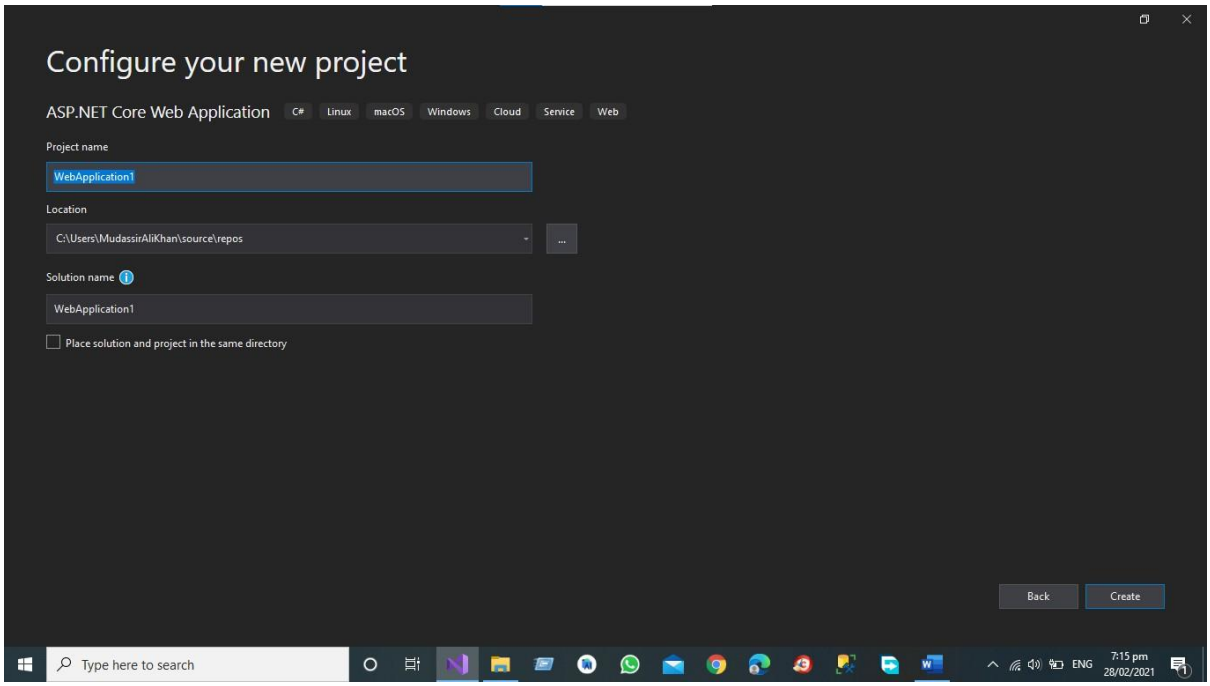

Step 2 Add the New Project in your Solution like Asp.net Core Class Library for Business Access Layer and Data Access Layer

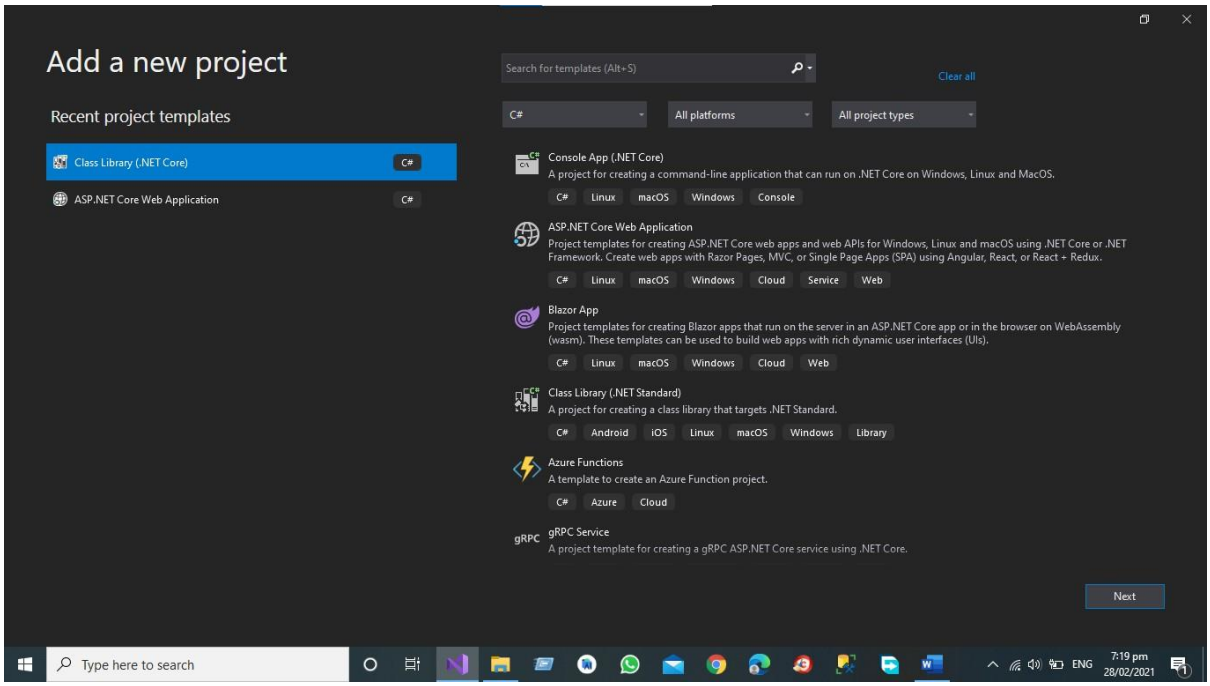


After Adding the BAL (Business Access Layer) And DAL (Data Access Layer)


All the Data in Data Access Layer and All the Crud Operations are in Data Access Layer for Business Logic we have Business Access layer in which we will do our All Operations Related to our Business.

Data Access Layer

The Given below picture is the structure of our project according to the Our Initial steps.

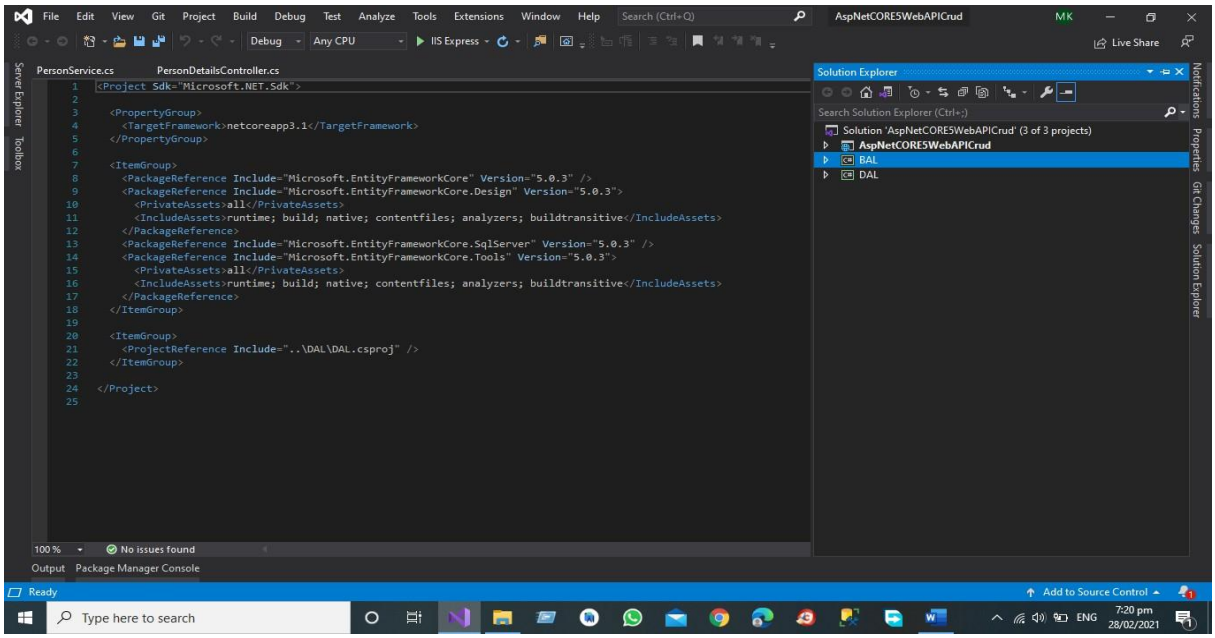

Step 3 First, Add the Model Person in the Data Access Layer

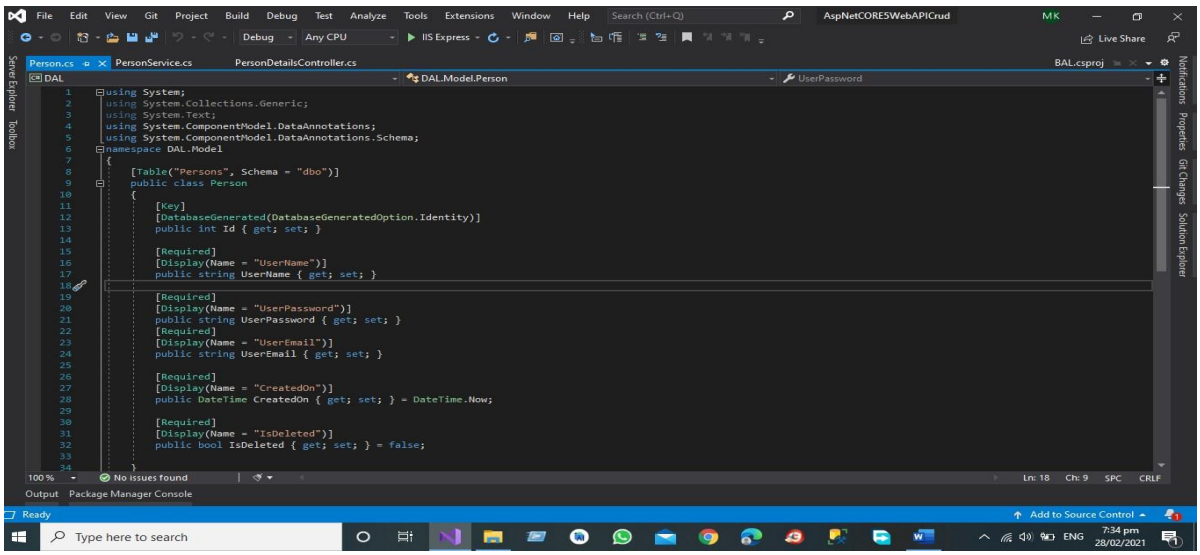

Code is Given Below

```
using System;

using
System.Collections.Generic;
using System.Text;

using System.ComponentModel.DataAnnotations;

using
System.ComponentModel.DataAnnotations.Sch
ema; namespace DAL.Model

{

    [Table("Persons",   Schema   =
    "dbo")] public class Person

    {

        [Key]
        [DatabaseGenerated(DatabaseGeneratedOption.Iden
        tity)] public int Id { get; set; }


        [Required]

        [Display(Name = "UserName")]

        public string UserName { get; set; }

        [Required]

        [Display(Name = "UserPassword")]

        public string UserPassword { get;
        set; } [Required]

        [Display(Name = "UserEmail")]

        public string UserEmail { get; set; }


        [Required]

        [Display(Name = "CreatedOn")]

        public DateTime CreatedOn { get; set; } = DateTime.Now;


        [Required]


        [Display(Name = "IsDeleted")]

        public bool IsDeleted { get; set; } = false;

    }

}
```

Step 4 Add the Enter face for all the operation you want to perform.

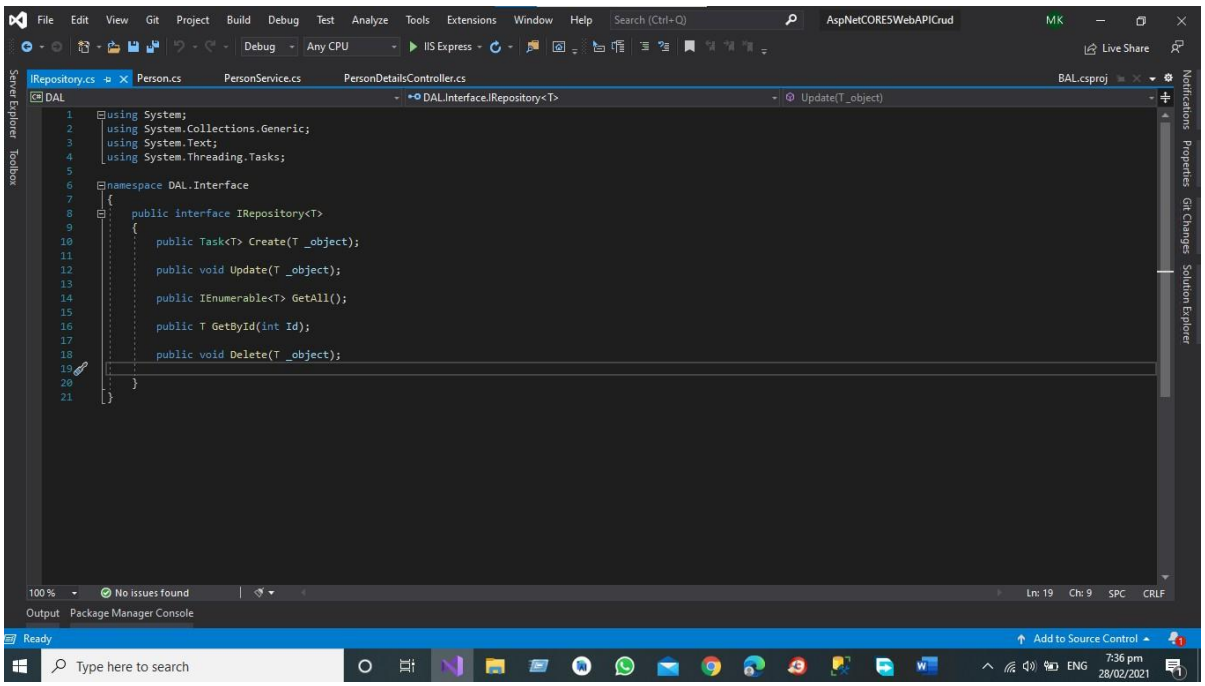

Code is Giver Below

```
using System;

using      System.Collections.Generic;
using System.Text;

using System.Threading.Tasks;


namespace DAL.Interface

{

    public interface IRepository<T>

    {


        public Task<T> Create(T _object);
        public  void  Update(T  _object);
        public   IEnumerable<T>  GetAll();
        public T GetById(int Id);

        public void Delete(T _object);


    }

}
```

Step 5 Apply the Repository Pattern in you project Add the Class Repository Person.

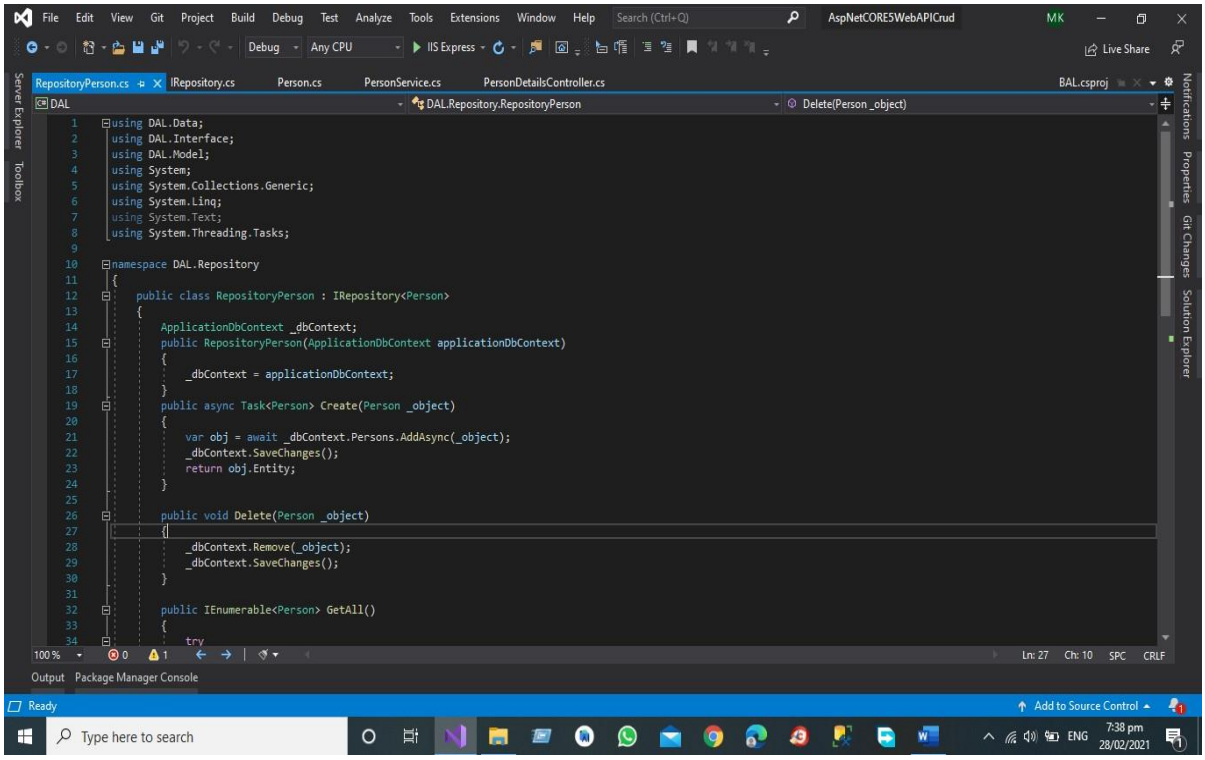

Code is Given Below

using DAL.Data; using DAL.Interface; using DAL.Model; using System;

using System.Collections.Generic; using System.Linq;

using System.Text;

using System.Threading.Tasks;

namespace DAL.Repository

{

public class RepositoryPerson : IRepository<Person>

{

ApplicationDbContext _dbContext;

public RepositoryPerson(ApplicationDbContext applicationDbContext)

{

_dbContext = applicationDbContext;

}

public async Task<Person> Create(Person _object)

```
{
var obj = await _dbContext.Persons.AddAsync(_object);
_dbContext.SaveChanges(); return obj.Entity;
}
public void Delete(Person _object)
{
_dbContext.Remove(_object);
_dbContext.SaveChanges();
}
public IEnumerable<Person> GetAll()
{

try
{

}
return _dbContext.Persons.Where(x => x.IsDeleted == false).ToList();
catch (Exception ee)
{
throw;
}
}
public Person GetById(int Id)
{
return _dbContext.Persons.Where(x => x.IsDeleted == false && x.Id == Id).FirstOrDefault();
}

public void Update(Person _object)
{
```

```
_dbContext.Persons.Update(_object);


_dbContext.SaveChanges();

}

}
```


Step 6


Add the Data Folder and then add the Db Context Class set the database connection using SQL Server before starting the migration check these four packages in All of Your Project

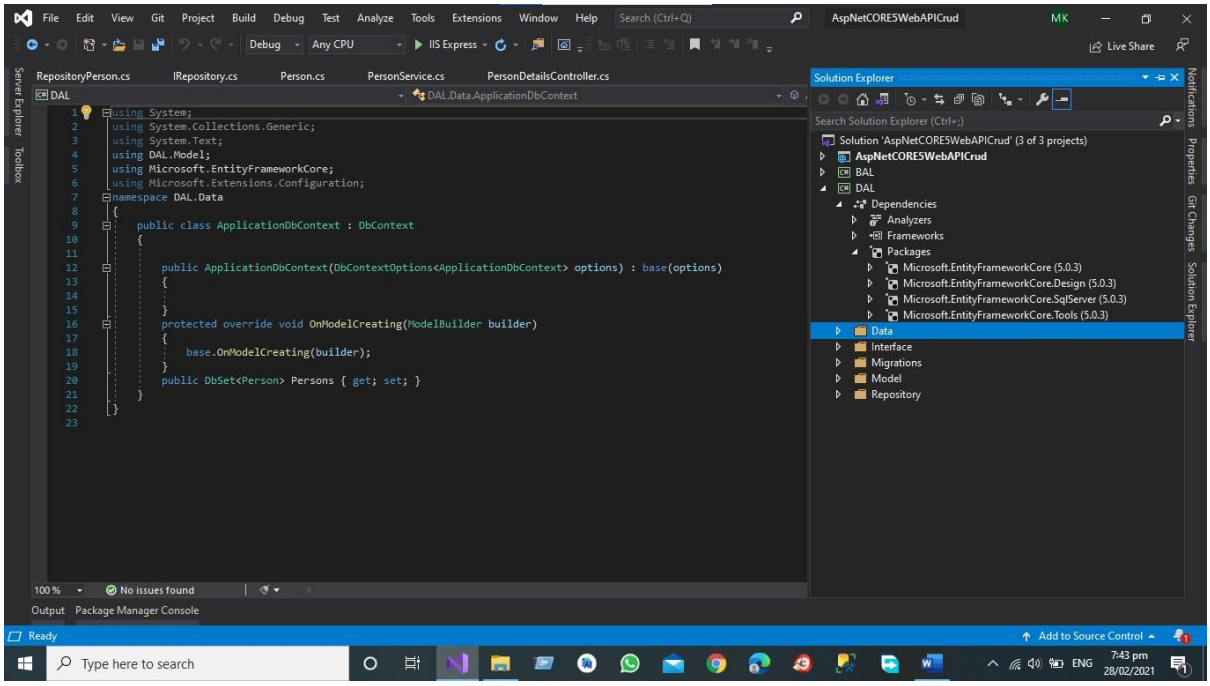

Then Add the project references in All of Project Directory Like in API Project and BAL Project

Like

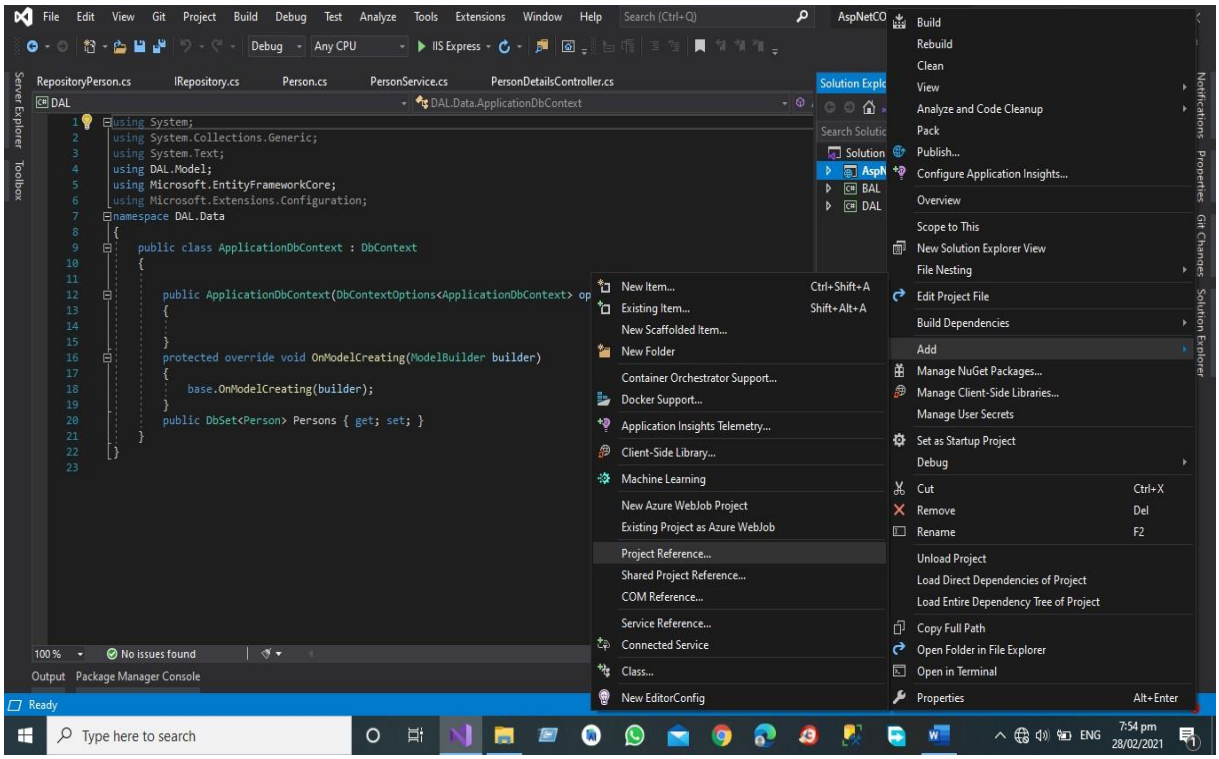

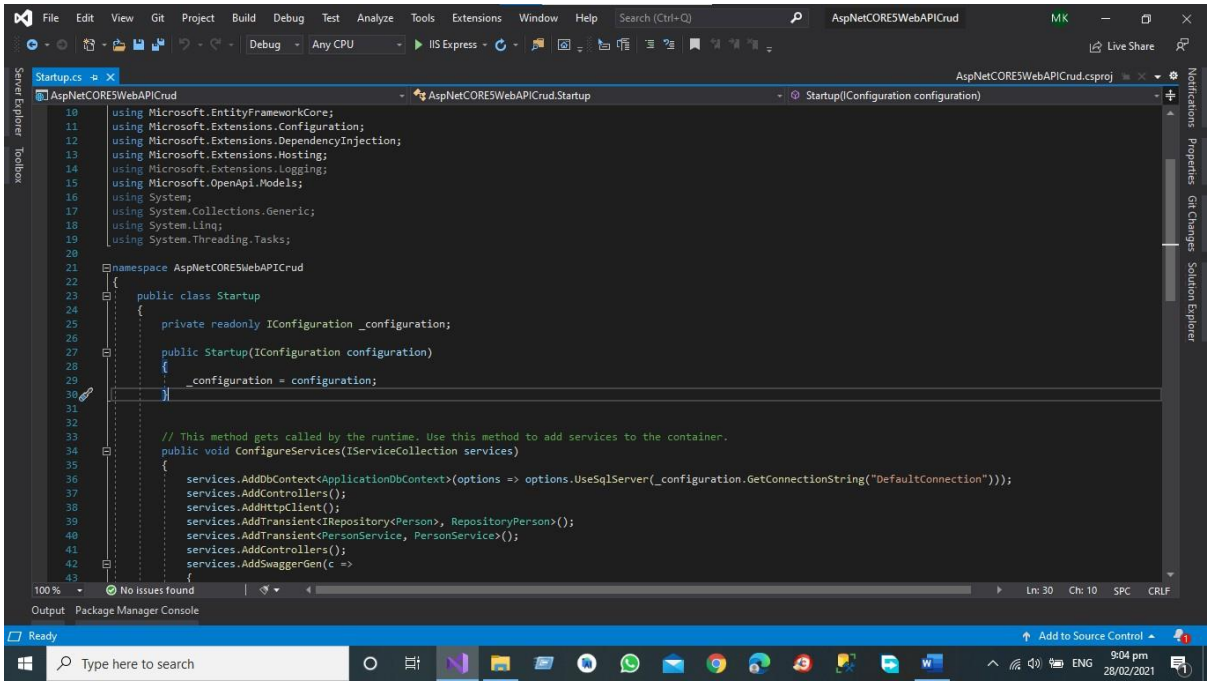

Now Modify the Start-up Class in Project Solution.

Code of the start-up file is given below

```
using
BAL.Service;

using DAL.Data;

using
DAL.Interface;
using DAL.Model;

using DAL.Repository;

using
Microsoft.AspNetCore.Builder;

using
Microsoft.AspNetCore.Hosting;

using
Microsoft.AspNetCore.HttpsPolicy;
using Microsoft.AspNetCore.Mvc;

using Microsoft.EntityFrameworkCore;

using
Microsoft.Extensions.Configuration;

using
Microsoft.Extensions.DependencyInjection;

using Microsoft.Extensions.Hosting;

using
Microsoft.Extensions.Logging;
using Microsoft.OpenApi.Models;

using System;

using
System.Collections.Generic;

using System.Linq;

using System.Threading.Tasks;

namespace AspNetCORE5WebAPICrud

{

    public class Startup

    {

        private readonly IConfiguration _configuration;


        public Startup(IConfiguration configuration)

        {
```

```
            _configuration = configuration;
        }


        // This method gets called by the runtime. Use this method to add
services to the container.
        public void ConfigureServices(IServiceCollection services)
        {
            services.AddDbContext<ApplicationDbContext>(options                =>
options.UseSqlServer(_configuration.GetConnectionString("DefaultConnection")
));
            services.AddController
            s();
            services.AddHttpClient
            ();
            services.AddTransient<IRepository<Person>,RepositoryPerson>();
            services.AddTransient<PersonService,PersonService>();
            services.AddControllers();
            services.AddSwaggerGen(c =>
            {
                c.SwaggerDoc("v1",     new     OpenApiInfo     {     Title     =
"AspNetCORE5WebAPICrud", Version = "v1" });
            });
        }


        // This method gets called by the runtime. Use this method to
configure the HTTP request pipeline.
        public  void  Configure(IApplicationBuilder  app,  IWebHostEnvironment
        env)
        {
            if (env.IsDevelopment())
            {
                app.UseDeveloperExceptionPage()
                ; app.UseSwagger();
```

```
            app.UseSwaggerUI(c                                          =>
c.SwaggerEndpoint("/swagger/v1/swagger.json", "AspNetCORE5WebAPICrud v1"));
            }


            app.UseHttpsRedirectio
            n();  app.UseRouting();
            app.UseAuthorization()
            ;

            app.UseEndpoints(endpoints =>


            {

                endpoints.MapControllers();

            });
        }
    }
}
```

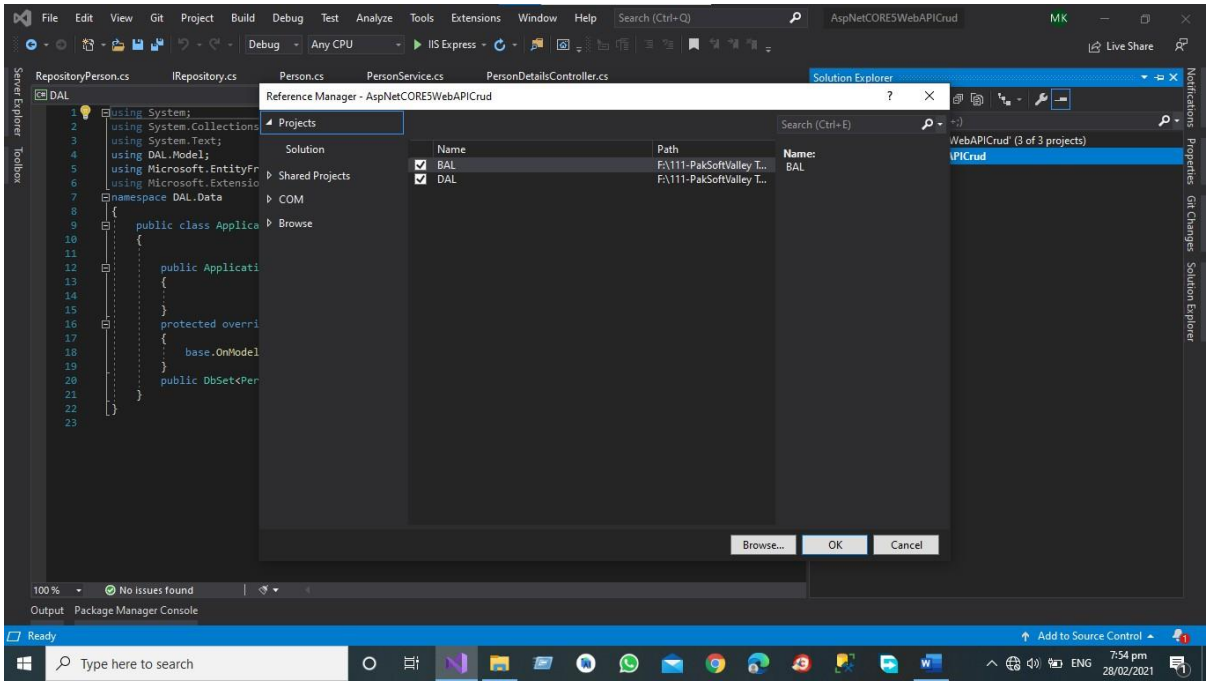

Then Add the DB Set Property in your Application Db Context Class.

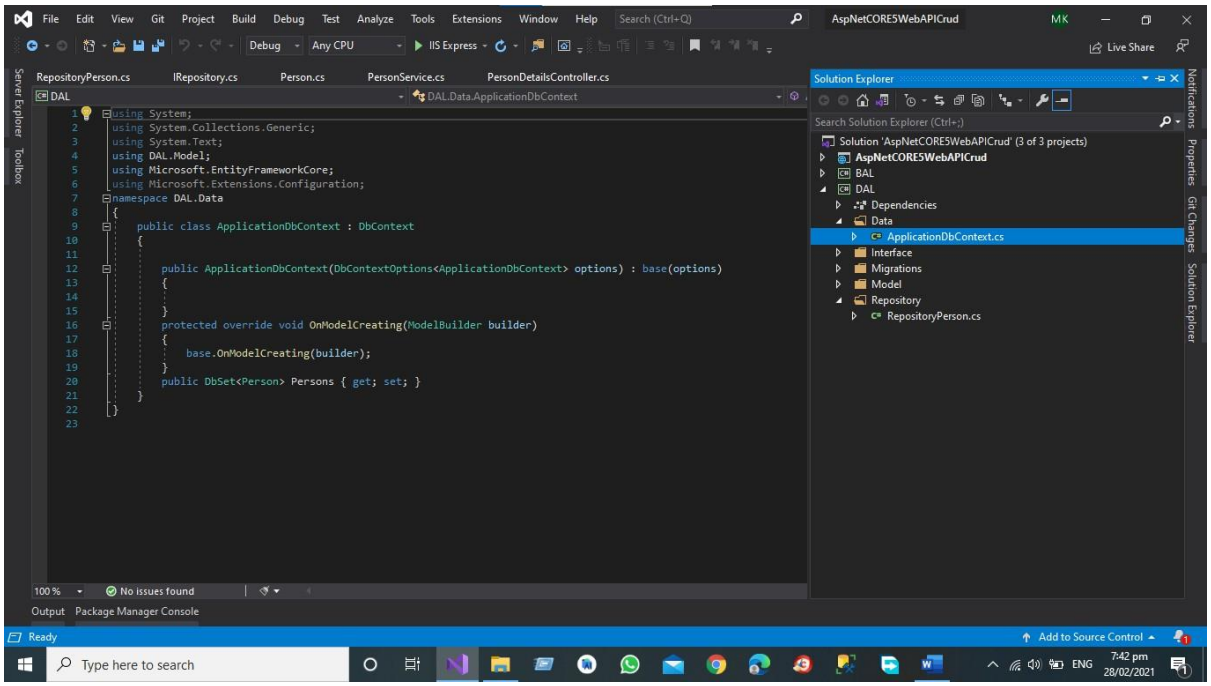

Code of Db Context Class is Given Below

```
using System;

using      System.Collections.Generic;
using System.Text;

using DAL.Model;

using Microsoft.EntityFrameworkCore; using
Microsoft.Extensions.Configuration;
namespace DAL.Data

{

    public class ApplicationDbContext : DbContext

    {


        public  ApplicationDbContext(DbContextOptions<ApplicationDbContext>  options)  :
base(options)

        {


        }

        protected override void OnModelCreating(ModelBuilder builder)

        {


            base.OnModelCreating(builder);

        }


        public DbSet<Person> Persons { get; set; }
```

```
    }
}
```


Step 7 Now start the migration Command for Creating the Table in Database.

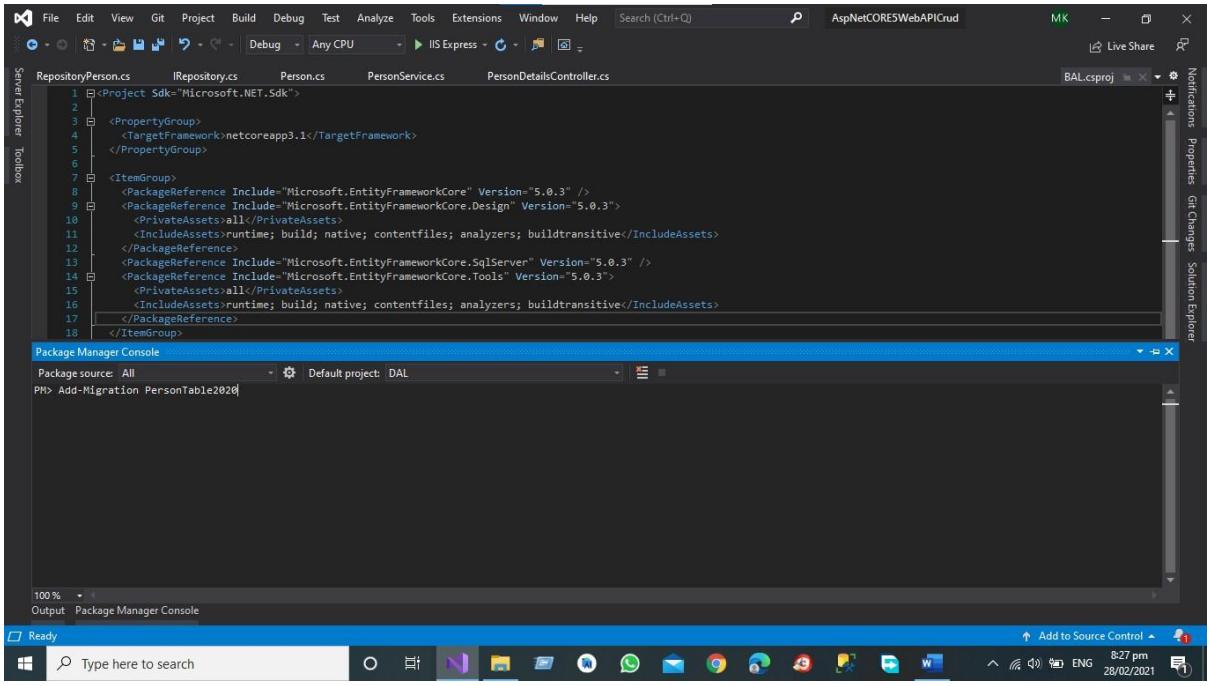

After Executing the command, we have the migration folder in our Data Access Layer that contain the Definition of Person Table

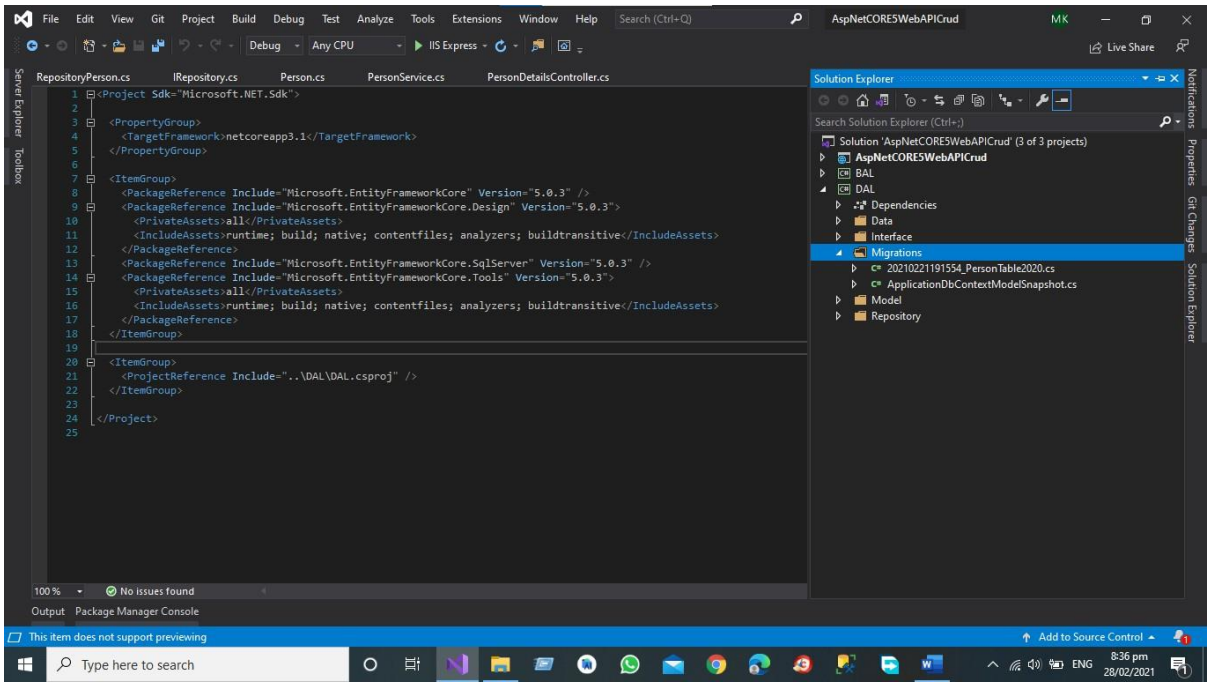

Step 8 Add the Repository Person class then Implement the Interface and Perform the suitable Action according to the action define in the Interface.

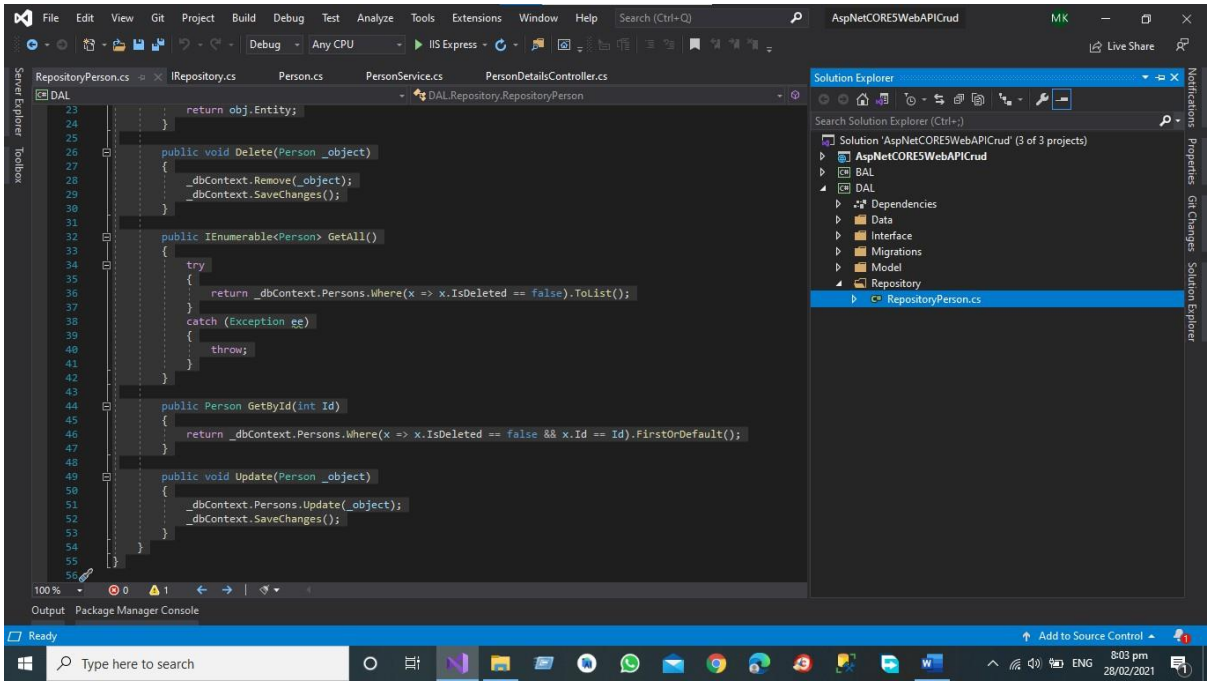

Code ID Given Below.

```
using DAL.Data;

using
DAL.Interface;
```

```
using    DAL.Model;
using System;

using System.Collections.Generic;

using System.Linq;

using System.Text;

using System.Threading.Tasks;

namespace DAL.Repository

{

    public class RepositoryPerson : IRepository<Person>

    {

        ApplicationDbContext _dbContext;

        public RepositoryPerson(ApplicationDbContext applicationDbContext)

        {

            _dbContext = applicationDbContext;

        }

        public async Task<Person> Create(Person _object)

        {

            var obj = await _dbContext.Persons.AddAsync(_object);

            _dbContext.SaveChanges()
            ; return obj.Entity;

        }


        public void Delete(Person _object)

        {

            _dbContext.Remove(_object);

            _dbContext.SaveChanges();

        }


        public IEnumerable<Person> GetAll()

        {

            try

            {

                return _dbContext.Persons.Where(x => x.IsDeleted == false).ToList();

            }

            catch (Exception ee)
```


```
            {
                throw;
            }
        }

        public Person GetById(int Id)
        {
            return _dbContext.Persons.Where(x => x.IsDeleted == false && x.Id == Id).FirstOrDefault();
        }

        public void Update(Person _object)
        {
            _dbContext.Persons.Update(_object);
            _dbContext.SaveChanges();
        }
    }
}
```

Step 10

Again, Modify the Start Up Class for Adding Transient to register the service business Layer and Data Access Layers Classes.

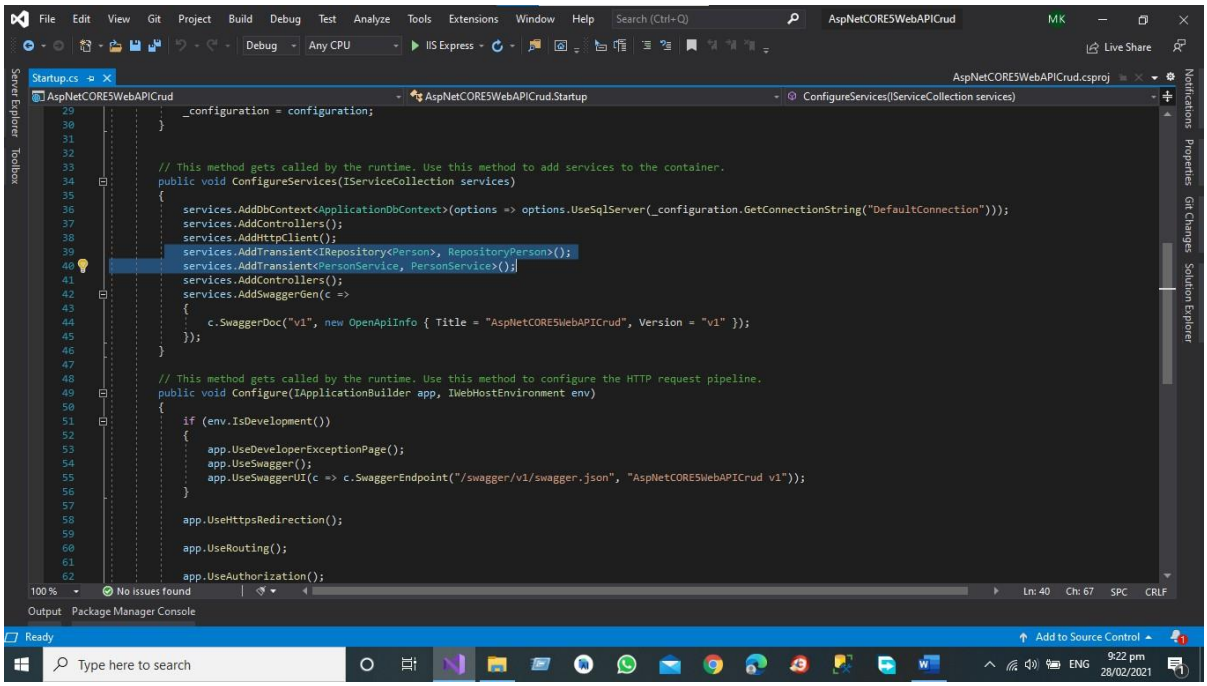

Code of the Start-up is given below.

```
using    BAL.Service;
using       DAL.Data;
using DAL.Interface;
using DAL.Model;

using DAL.Repository;

using Microsoft.AspNetCore.Builder;

using Microsoft.AspNetCore.Hosting;

using  Microsoft.AspNetCore.HttpsPolicy;
using Microsoft.AspNetCore.Mvc;
```

```
using Microsoft.EntityFrameworkCore;

using Microsoft.Extensions.Configuration;

using Microsoft.Extensions.DependencyInjection;

using Microsoft.Extensions.Hosting;

using  Microsoft.Extensions.Logging;
using Microsoft.OpenApi.Models;

using System;

using System.Collections.Generic;

using System.Linq;

using System.Threading.Tasks;


namespace AspNetCORE5WebAPICrud

{

    public class Startup

    {

        private readonly IConfiguration _configuration;


        public Startup(IConfiguration configuration)

        {

            _configuration = configuration;

        }


        // This method gets called by the runtime. Use this method to add services to
the container.

        public void ConfigureServices(IServiceCollection services)

        {

            services.AddDbContext<ApplicationDbContext>(options                          =>
options.UseSqlServer(_configuration.GetConnectionString("DefaultConnection")));

            services.AddControllers();
            services.AddHttpClient();

            services.AddTransient<IRepository<Person>,              RepositoryPerson>();
            services.AddTransient<PersonService,                       PersonService>();
            services.AddControllers();

            services.AddSwaggerGen(c =>

            {
```

```
                c.SwaggerDoc("v1", new OpenApiInfo { Title = "AspNetCORE5WebAPICrud",
Version = "v1" });
            });

        }


        // This method gets called by the runtime. Use this method to configure the
HTTP request pipeline.
        public void Configure(IApplicationBuilder app, IWebHostEnvironment env)

        {
            if (env.IsDevelopment())

            {

                app.UseDeveloperExceptionPage();
                app.UseSwagger();

                app.UseSwaggerUI(c    =>    c.SwaggerEndpoint("/swagger/v1/swagger.json",
"AspNetCORE5WebAPICrud v1"));

            }


            app.UseHttpsRedirection();

            app.UseRouting();

            app.UseAuthorization();


            app.UseEndpoints(endpoints =>

            {

                endpoints.MapControllers();

            });


        }


    }

}
```


Step 11

Add the Person Details API Controller for GET PUT POST AND DELETE end points

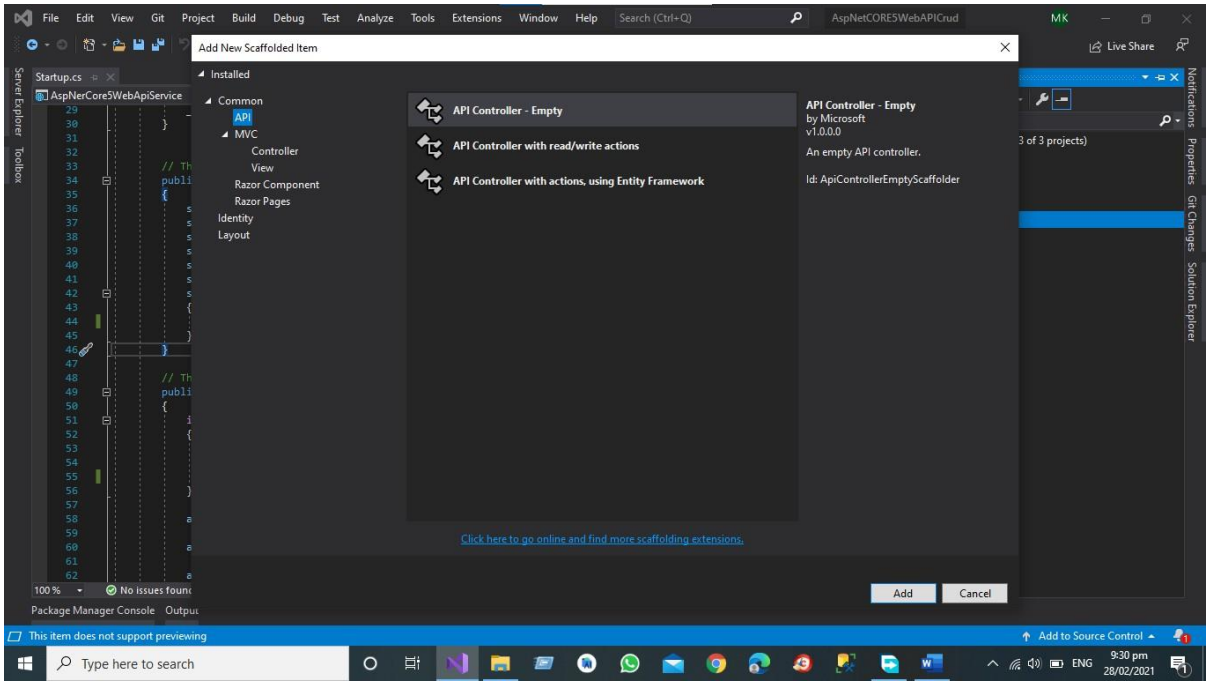

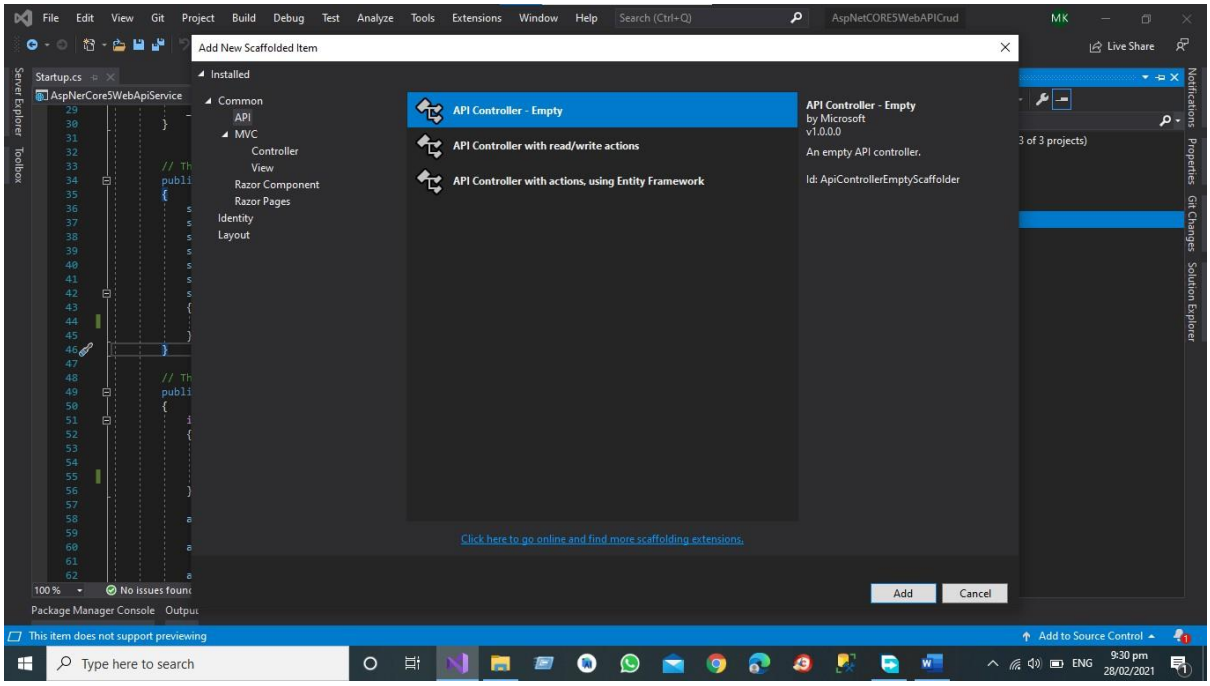

After Adding the Controller in the API project

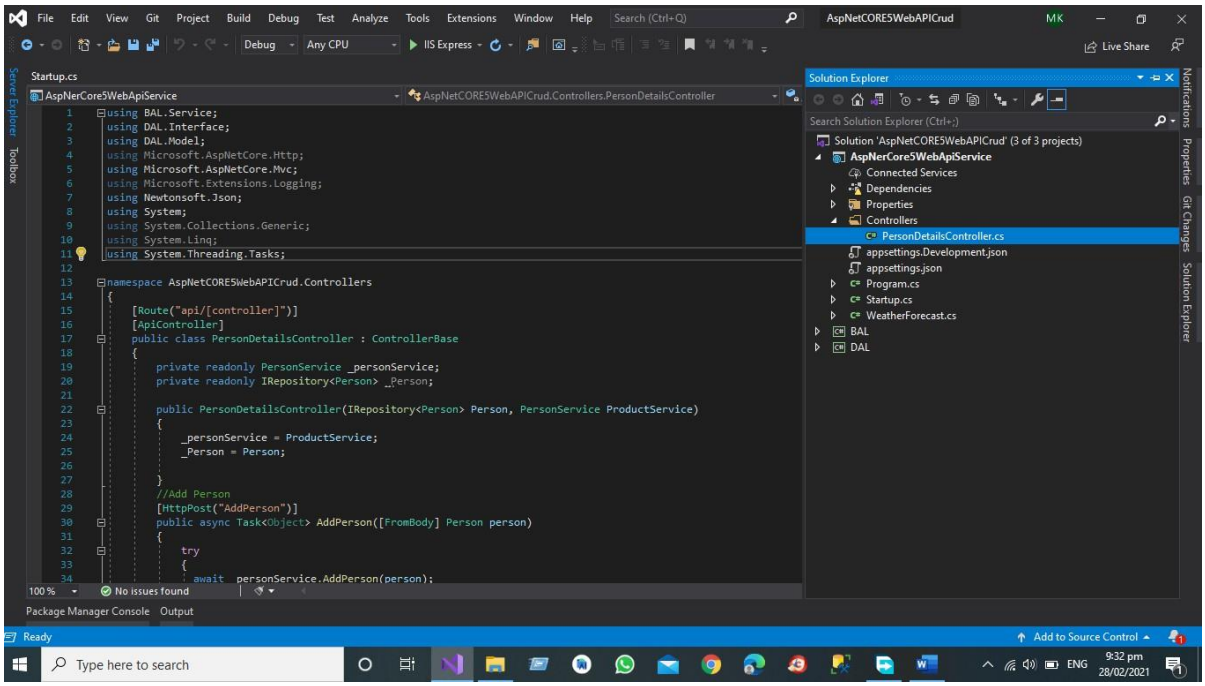

Code of the Controller for Person Details is Given Below

```
using BAL.Service; using DAL.Interface;
 using DAL.Model;
using Microsoft.AspNetCore.Http;
using Microsoft.AspNetCore.Mvc;
using Microsoft.Extensions.Logging;
using Newtonsoft.Json;
using System;
using System.Collections.Generic;
using System.Linq;
using System.Threading.Tasks;

namespace AspNetCORE5WebAPICrud.Controllers
{
[Route("api/[controller]")] [ApiController]
public class PersonDetailsController : ControllerBase
{
private readonly PersonService _personService; private readonly IRepository<Person>
_Person;

public PersonDetailsController(IRepository<Person> Person, PersonService ProductService)
{
_personService = ProductService;
_Person = Person;
```

```
}
//Add  Person [HttpPost("AddPerson")]
public  async  Task<Object>  AddPerson([FromBody]  Person  person)
{

try
{
await  _personService.AddPerson(person); return  true;
}
catch  (Exception)
{

return  false;
}
}
//Delete  Person [HttpDelete("DeletePerson")]
public  bool  DeletePerson([FromBody]  String  UserEmail)
{

try
{

}

_personService.DeletePerson(UserEmail); return  true;

catch  (Exception)
{

return  false;
}
}
//Delete  Person [HttpPut("UpdatePerson")]
public  bool  UpdatePerson([FromBody]  String  UserEmail)
{

try
{

}

_personService.UpdatePerson(UserEmail); return  true;

catch  (Exception)
{

return  false;
}
}
//GET  All  Person  by  Name [HttpGet("GetAllPersonByName")]
public  Object  GetAllPersonByName(string  UserEmail)
```

```
{
var data = _personService.GetPersonByUserName(UserEmail);
var json = JsonConvert.SerializeObject(data, Formatting.Indented, new JsonSerializerSettings()
{
ReferenceLoopHandling = Newtonsoft.Json.ReferenceLoopHandling.Ignore
}
);
return json;
}

//GET All Person [HttpGet("GetAllPersons")] public Object GetAllPersons()
{
var data = _personService.GetAllPersons();
var json = JsonConvert.SerializeObject(data, Formatting.Indented,


new JsonSerializerSettings()
{
ReferenceLoopHandling = Newtonsoft.Json.ReferenceLoopHandling.Ignore
}
);
return json;
}
}
}
```

RESTful Web Service Results

To get the results of APIS We need to start the visual studio debugging process and then using swagger API Testing we will test all end points of Project.


Debug the project using visual studio

Swagger is Already Implemented in Our Project for Documenting the web service in this Project We have Separate Endpoints for GET POST DELETE AND PUT

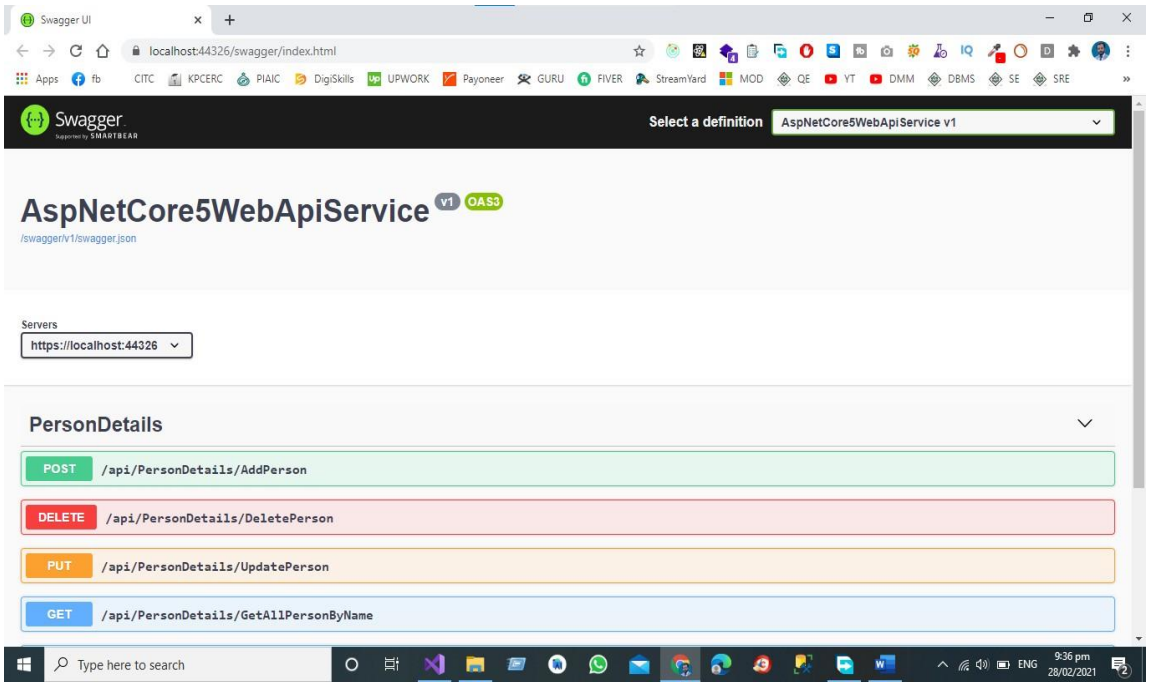


POST Endpoint in Web API Service

If we want to Create the New Person in the Database, we must send the JSON Object to the End Point then data is posted by Swagger UI to POST End Point in the Controller Then Create Person Object Creates the Complete Person Object in the Database.

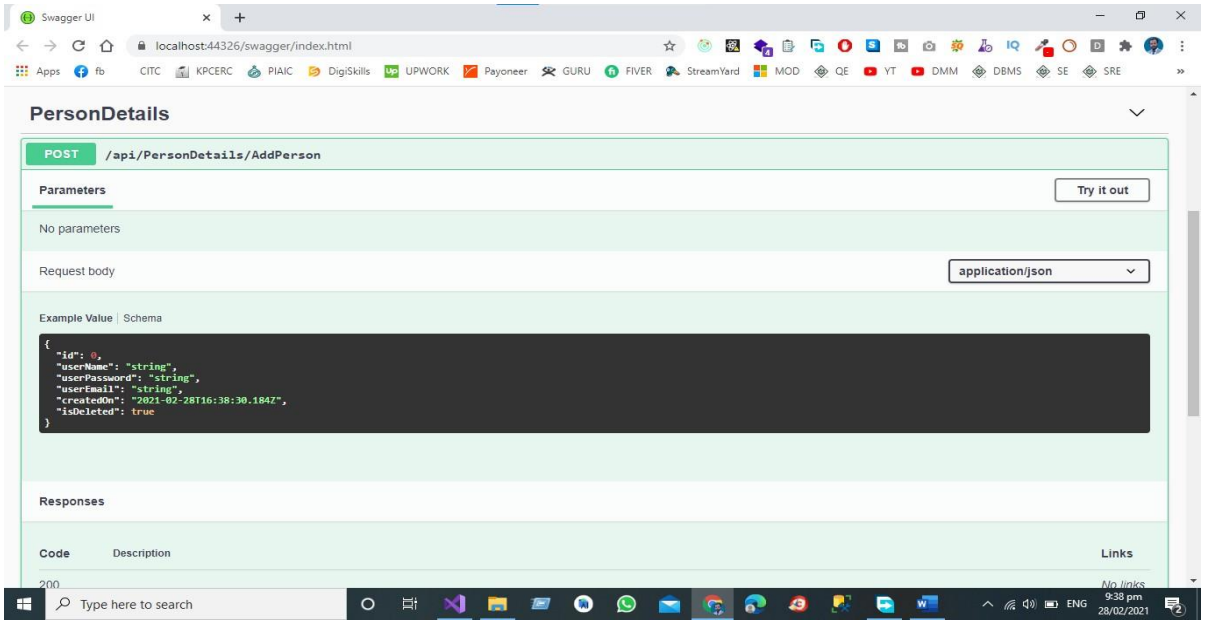


DELETE Endpoint in Web API Service

For deletion of person, we have a separate end point delete employee from the database, we must send the JSON object to the end point then data is posted by swagger UI to call the end point delete person in the controller then person object will be deleted from the database.

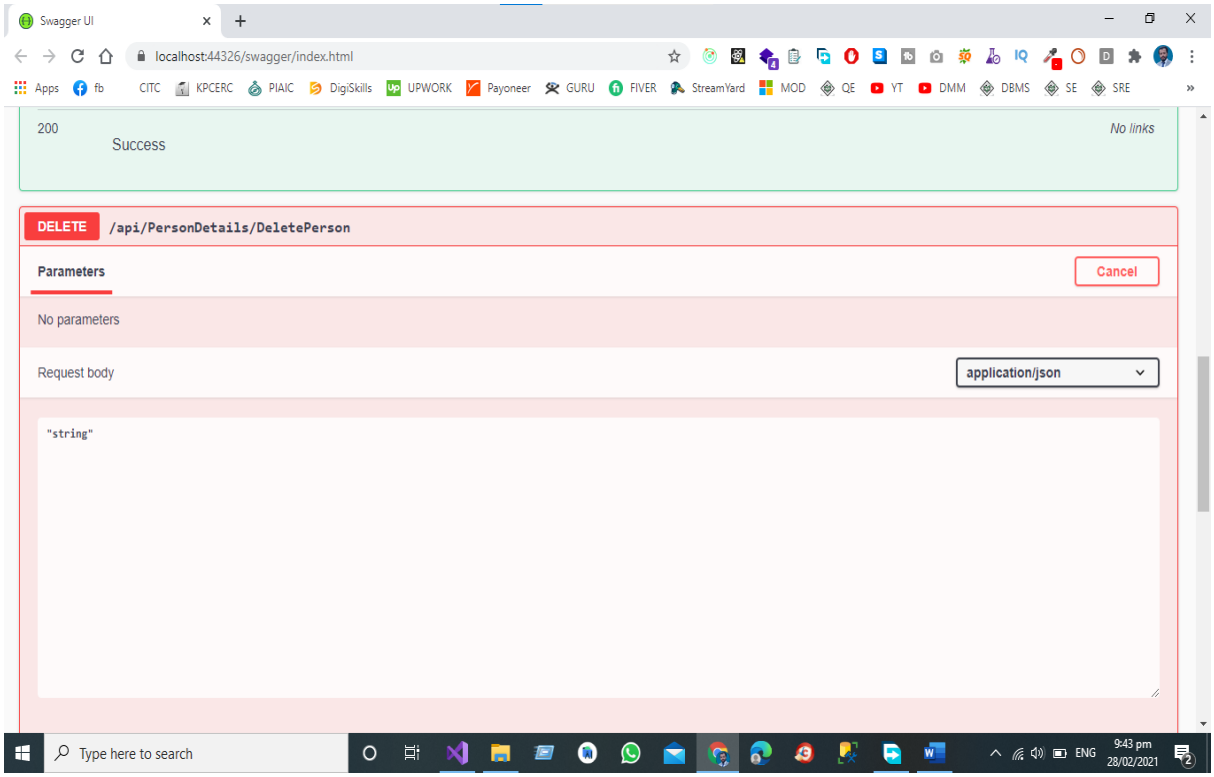


GET All Endpoint in Web API Service


We have Separate End Points for All the operations like Get All the Person Records from the Database by Hitting the GET End Point that send the request to controller and in controller we have the separate End Point for Fetching all the record from the database.

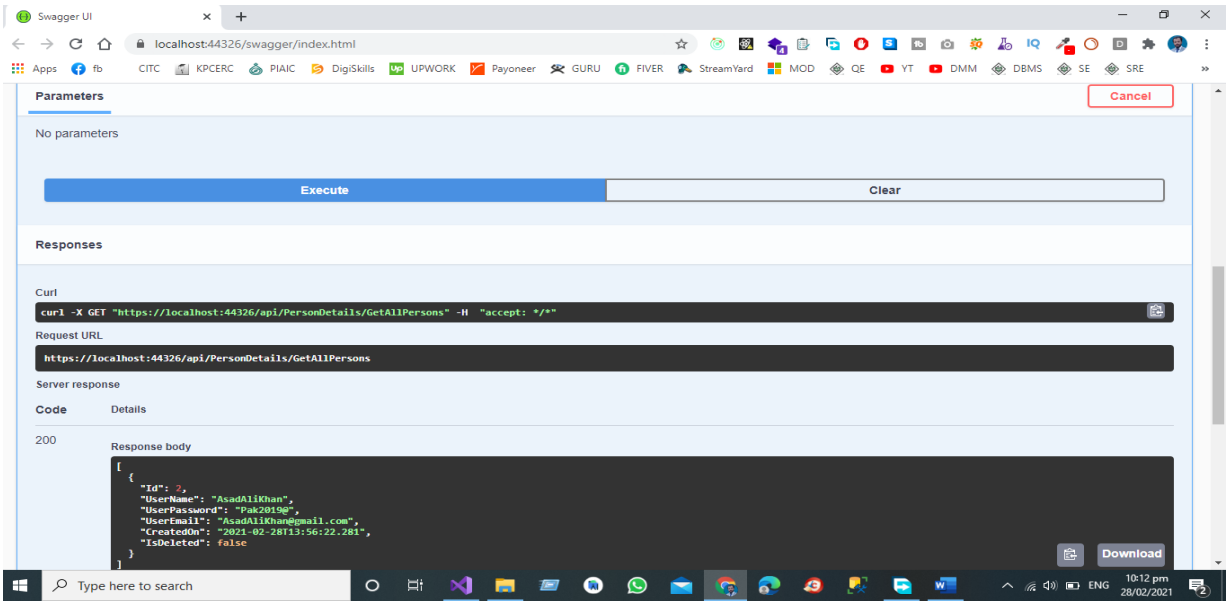

GET End Point for Getting the Record by User Email


We have Separate End Points for All the operations like Get the Record of the Person by User Email from the Database by Hitting the GET End Point that send the request to controller and in controller we have the separate End Point for Fetching the record based on User Email from the database.

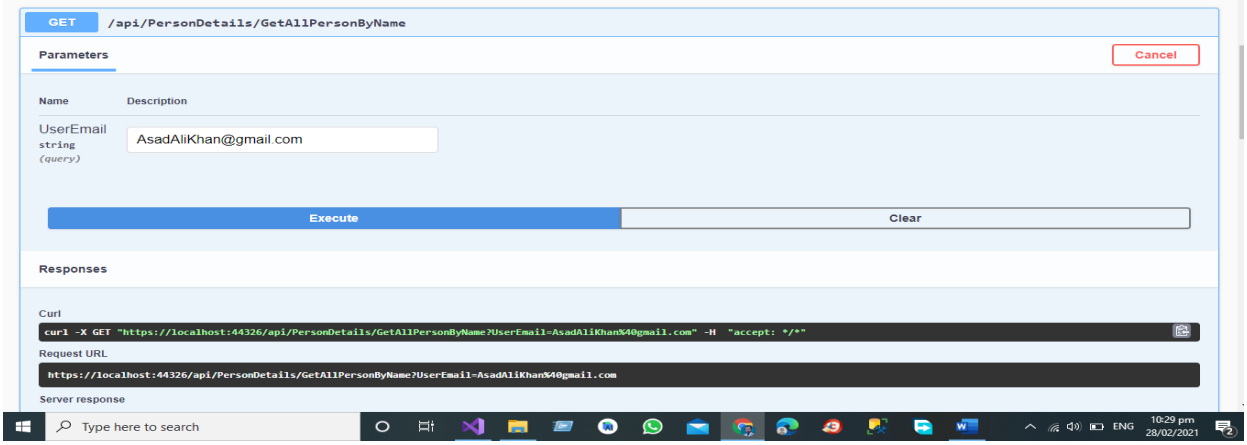

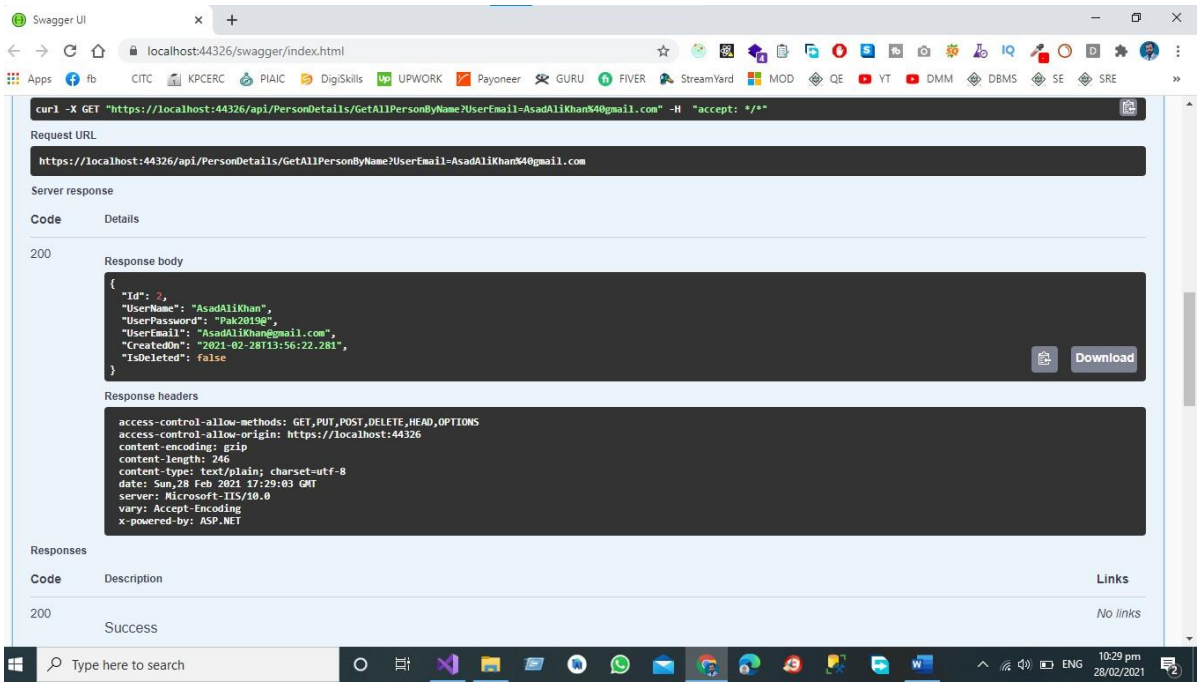


Delete End Point for Deleting the Record by User Email

We have Separate End Points for All the operations like Delete the Record of the Person by User Email from the Database by Hitting the DELETE End Point that send the request to controller and in controller we have the separate End Point for Deleting the record based on User Email from the database.

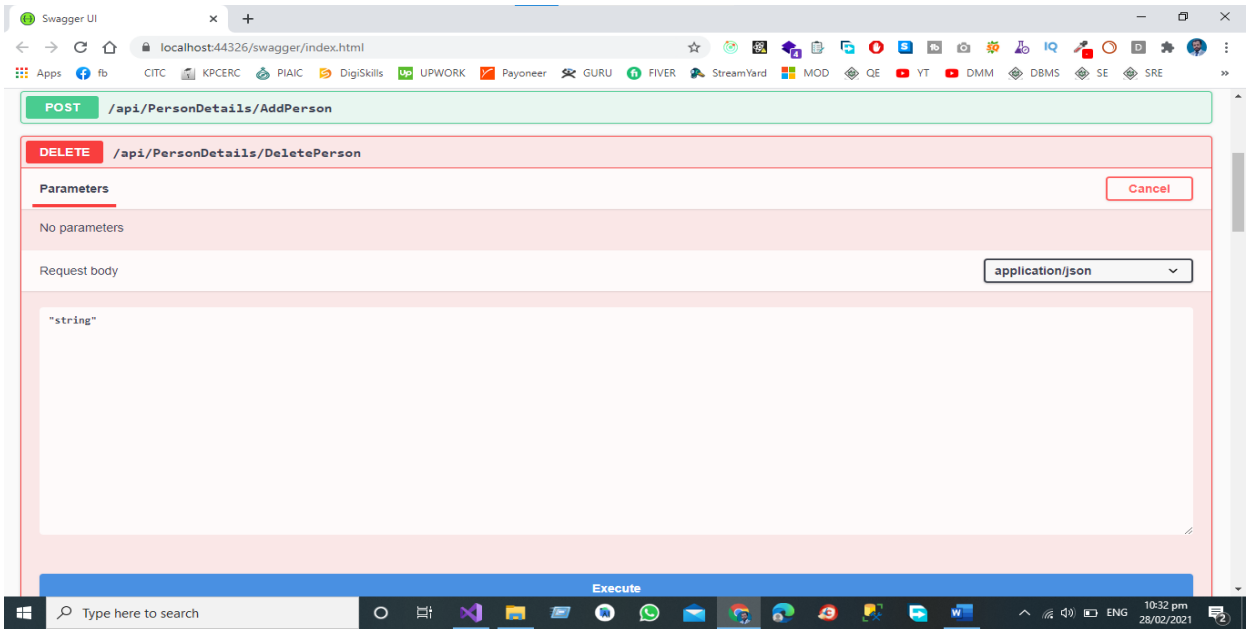

Update End Point for Updating the Record by User Email

We have Separate End Points for All the operations like Update the Record of the Person by User Email from the Database by Hitting the UPDTAE End Point that send the request to controller and in controller we have the separate End Point for Updating the record based on User Email from the database.

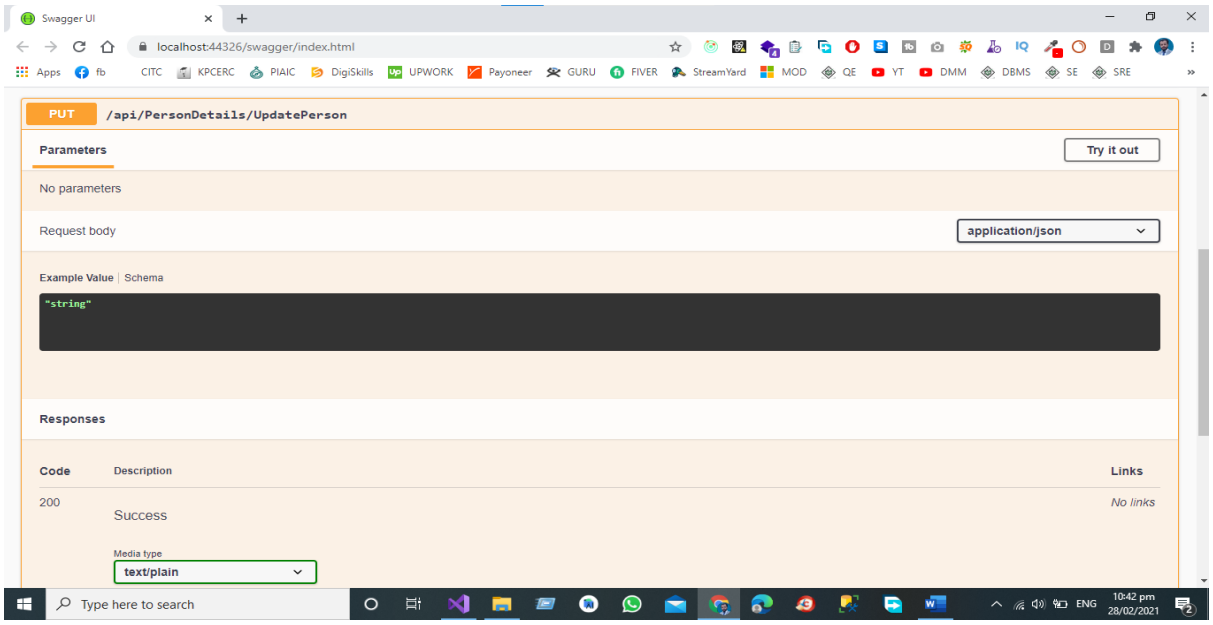


Testing the RESTful Web Service

Test the project using visual studio for that we need to follow given below steps

Step 1 Run the Project

Run the project then in the browser Swagger UI will be shown to the Tester

Step 2 Test POST End Point

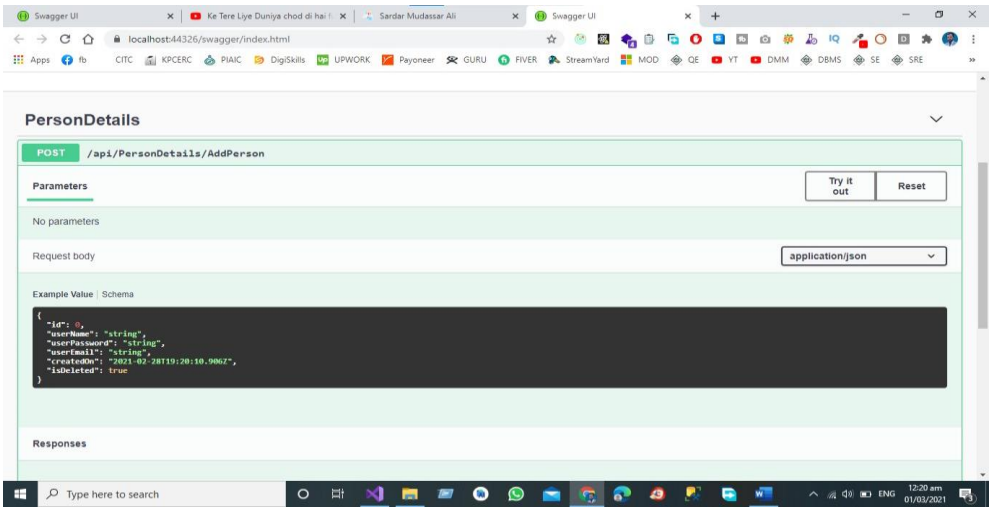

Conclusion

As a Software Engineer My Opinion about Restful web services are a lightweight maintainable and scalable service that is built on the REST Architecture. Restful Web service exposes API from your application in a secure uniform stateless manner to the calling client can perform predefined operations using the restful service the protocols for the REST is HTTP and Rest is a Representational State Transfer. Representational state transfer (REST) is a de-facto standard for a software Architecture or Interactive applications that use Web Service a Web Service that follows this standard is called RESTful such web must provide its web resources in a textual representation and allow them to be read and modified with stateless protocol and predefined set of operations this standard allow interoperability between a Machine and the Internet that provide these services. REST Architecture is alternative to SOAP and SOAP Architecture is the way to access a Web Service.

Complete Git Hub Project URL

Click here for complete project access

2

API Development in Asp.Net Core Using Three Tier Architecture

Overview

- Introduction
- Project Structure
- Presentation Layer (PL)
- Business Access Layer (BAL)
- Data Access Layer (DAL)
- Add the References to the Project
- Data Access Layer
- Contacts
- Data
- Migrations
- Models
- Repository
- Business Access Layer
- Services
- Presentation layer
- Advantages of 3-Tier Architecture
- Dis-Advantages of 3-Tier Architecture
- Conclusion
- Complete GitHub Project URL


Introduction

In this chapter, we'll look at three-tier architecture and how to incorporate the Data Access Layer and Business Access Layer into a project, as well as how these layers interact.


Add the References to the Project

Now, in the Presentation Layer, add the references to the Data Access Layer and the Business Access Layer.


Right Click on the Presentation layer and then click on add => project Reference

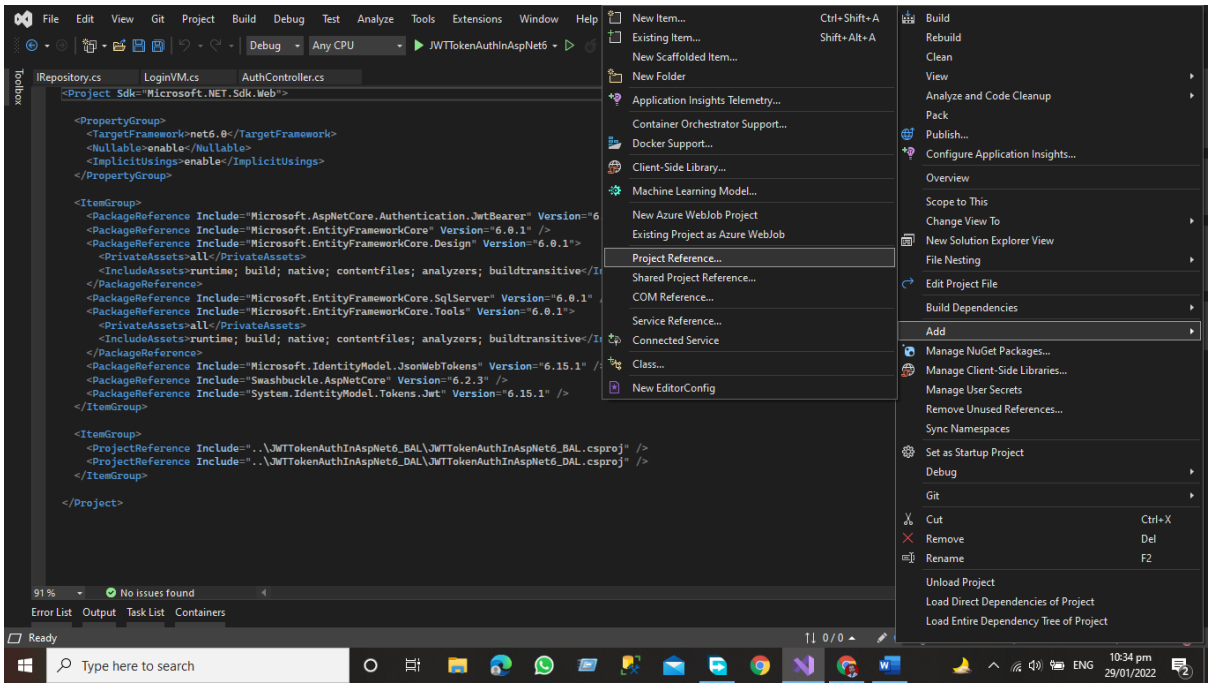

Add the References by Checking both the checkboxes

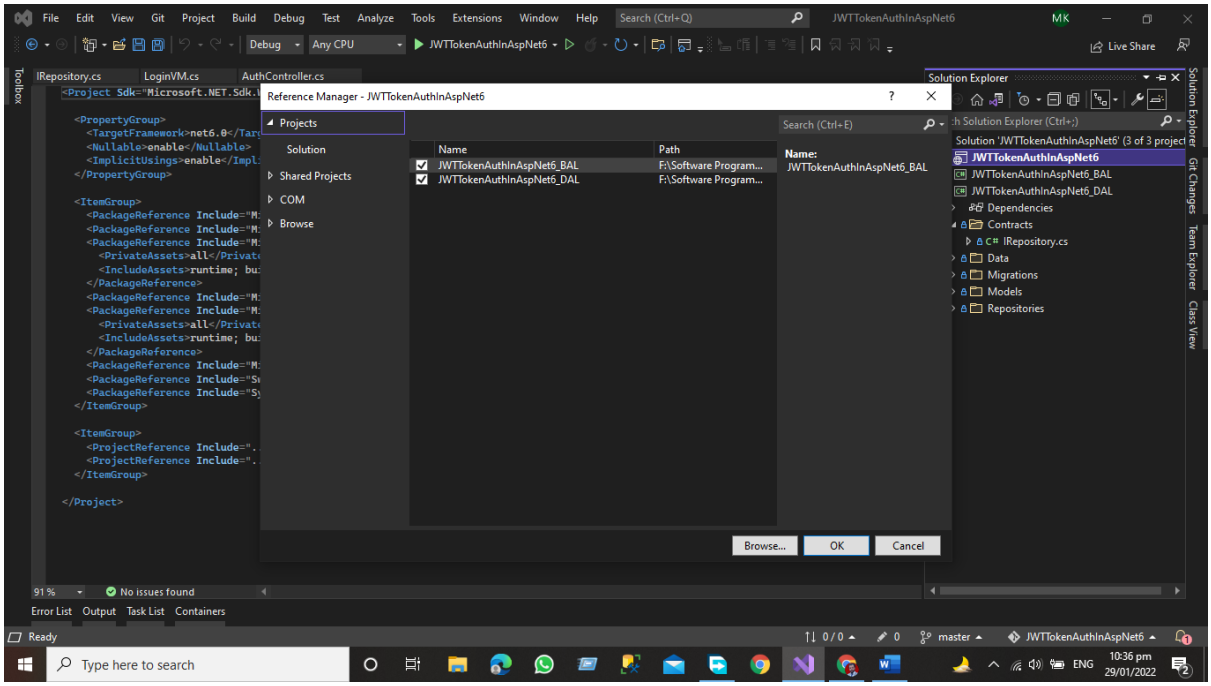


References have been added for both DAL and BAL

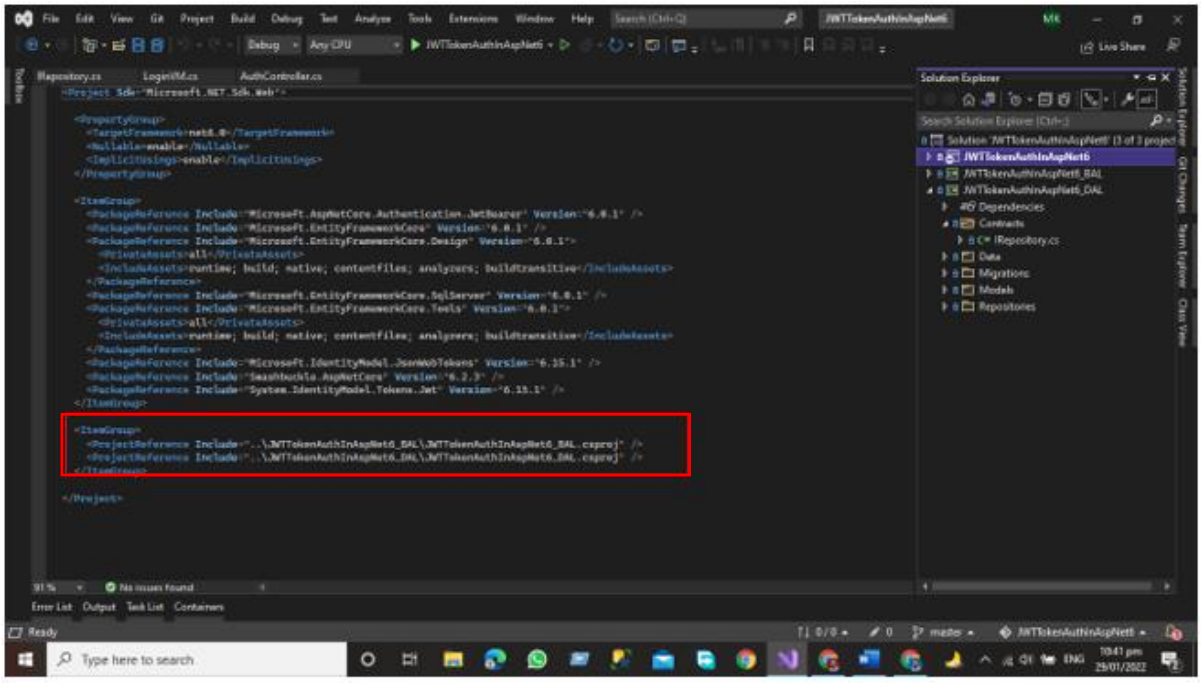


Now we'll add the Data Access layer project references to the Business layer.


- Right Click on the Business access layer and then Click Add Button => Project References

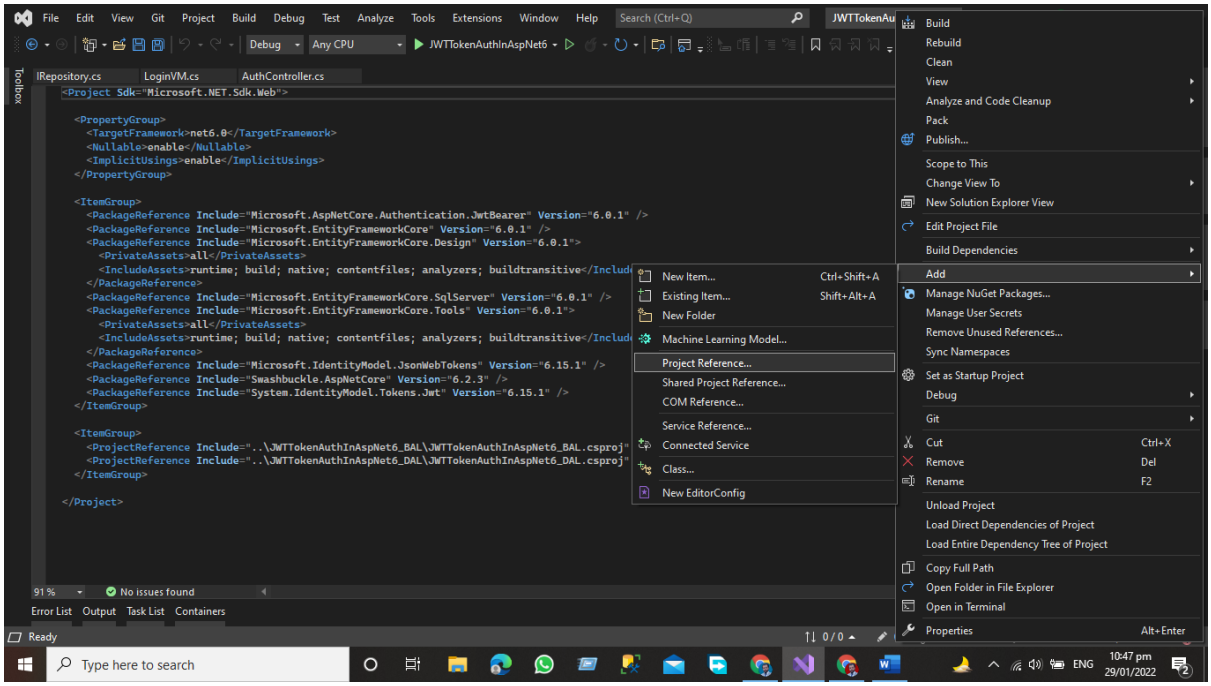

“Remember that we have included the DAL and BAL references in the project, so don't add the Presentation layer references again in the business layer. We only need the DAL Layer references in the business layer”

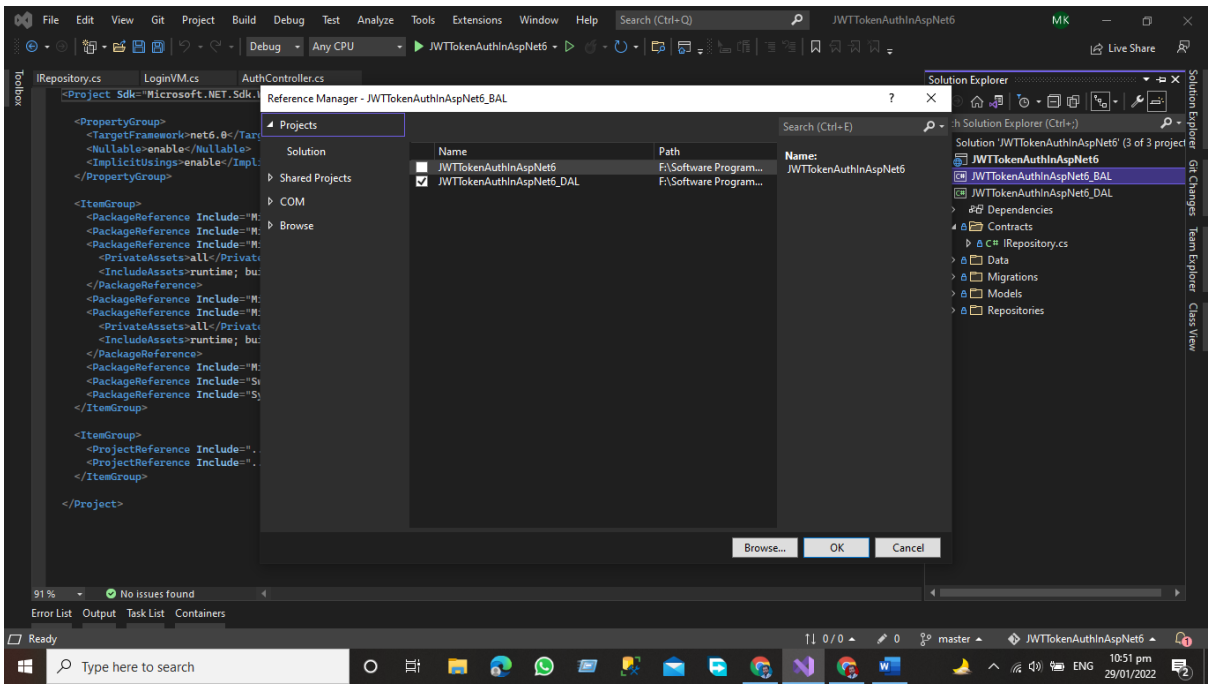


Project References of DAL Has Been Added to BAL Layer

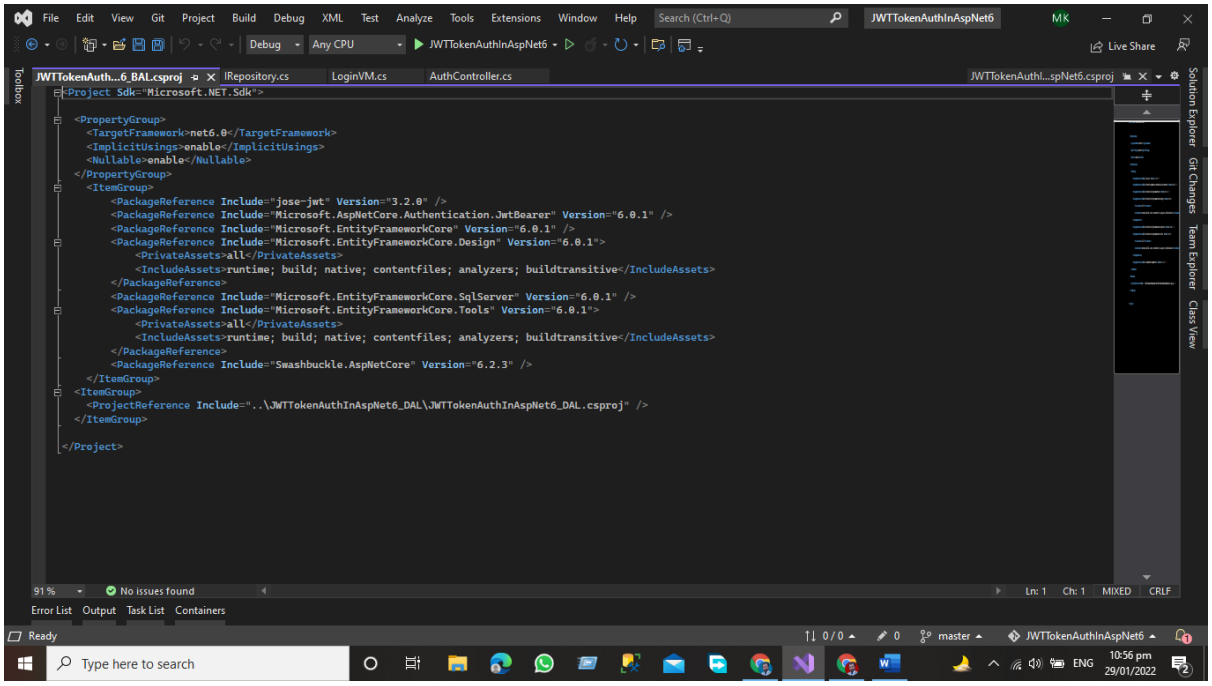

Project Structure

We use a three-tier architecture in this project, with a data access layer, a business access layer, and an application presentation layer.

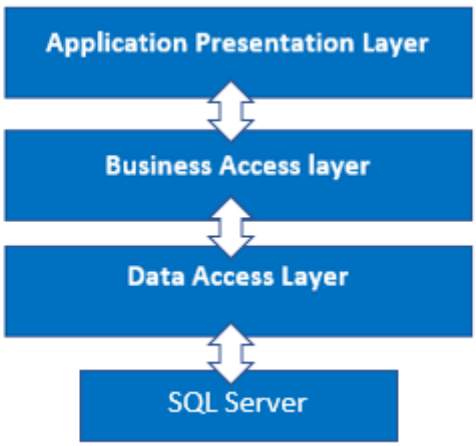

Presentation Layer (PL)


The Presentation layer is the top-most layer of the 3-tier architecture, and its major role is to display the results to the user, or to put it another way, to present the data that we acquire from the business access layer and offer the results to the front-end user.

Business Access Layer (BAL)

The logic layer interacts with the data access layer and the presentation layer to process the activities that lead to logical decisions and assessments. This layer's primary job is to process data between other layers.


Data Access Layer (DAL)

The main function of this layer is to access and store the data from the database and the process of the data to business access layer data goes to the presentation layer against user request.

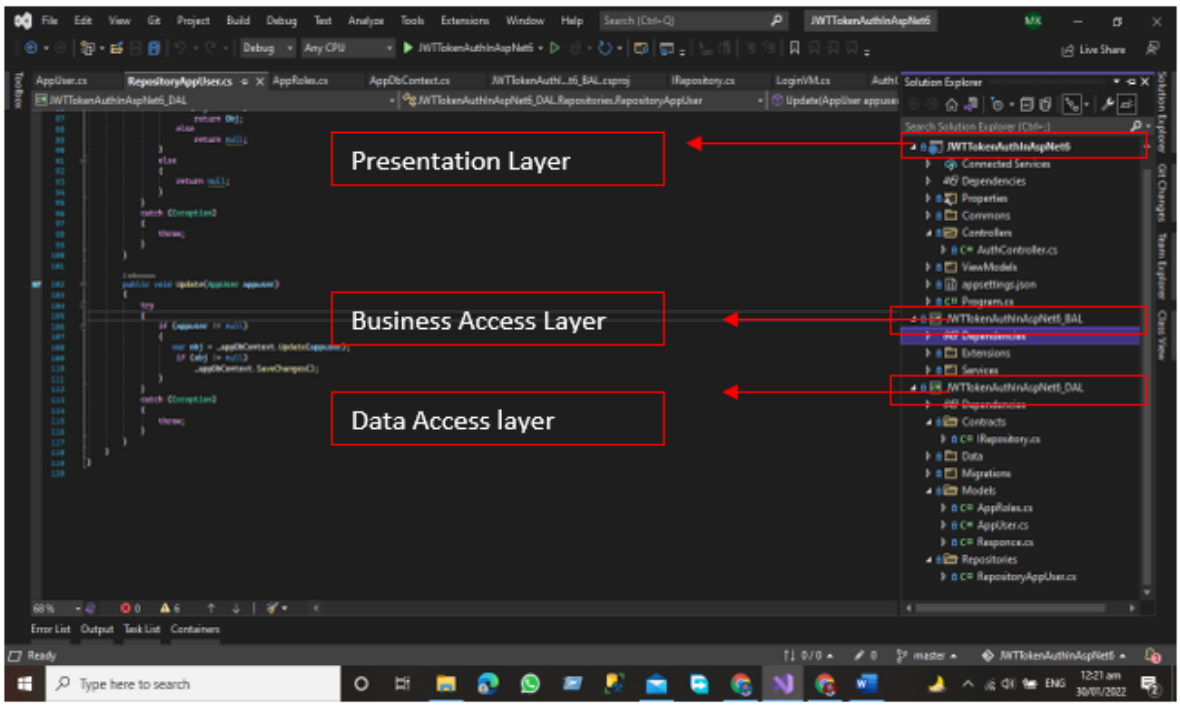


Steps to Follow for configuring these layer


- Add the Class Library project of Asp.net for Data Access Layer
- Right Click on the project and then go to the add the new project window and then add the Asp.net Core class library project.

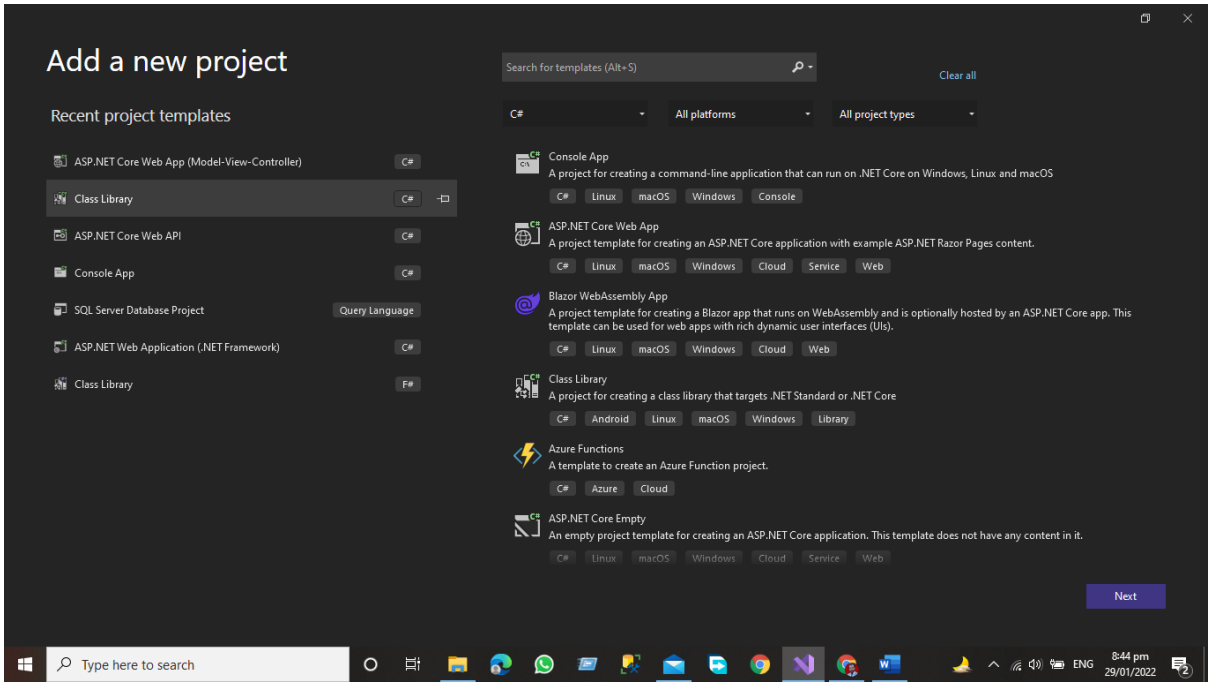

- After Adding the Data Access layer project now, we will add the Business access layer folder
- Add the Class library project of Asp.Net Core for Business Access
- Right Click on the project and then go to the add the new project window and then add the Asp.net Core class library project.

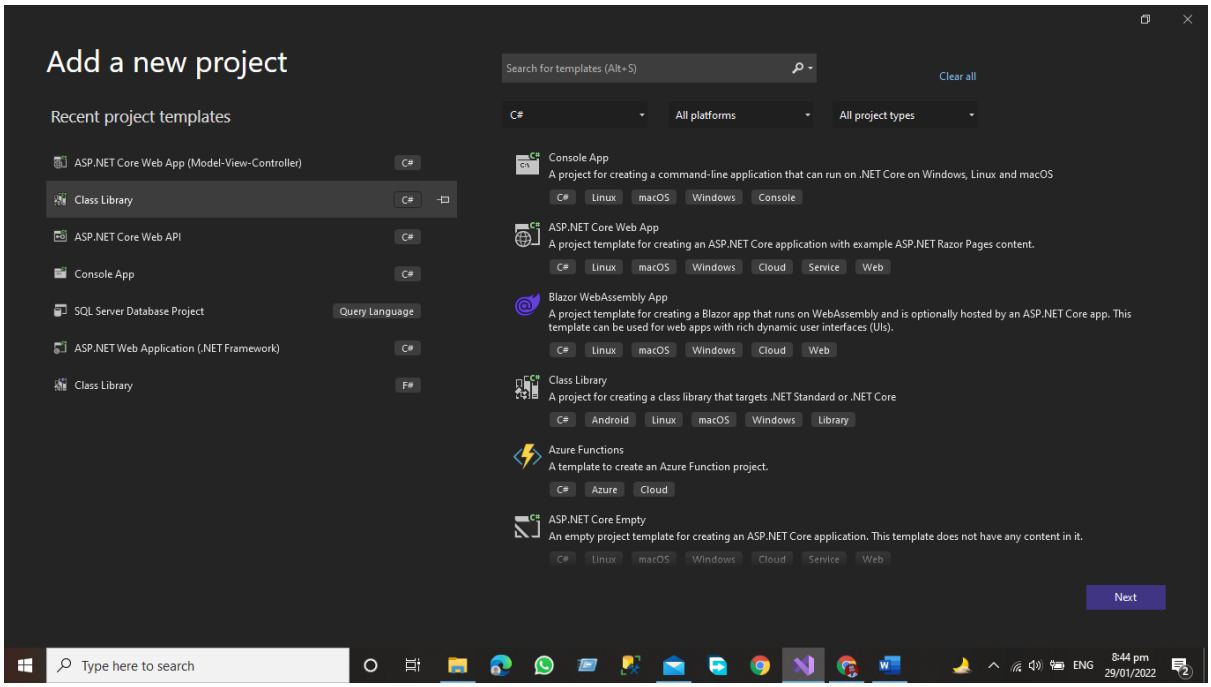

After adding the business access layer and data access layer, we must first add the references of the Data Access layer and Business Access layer, so that the project structure can be seen.

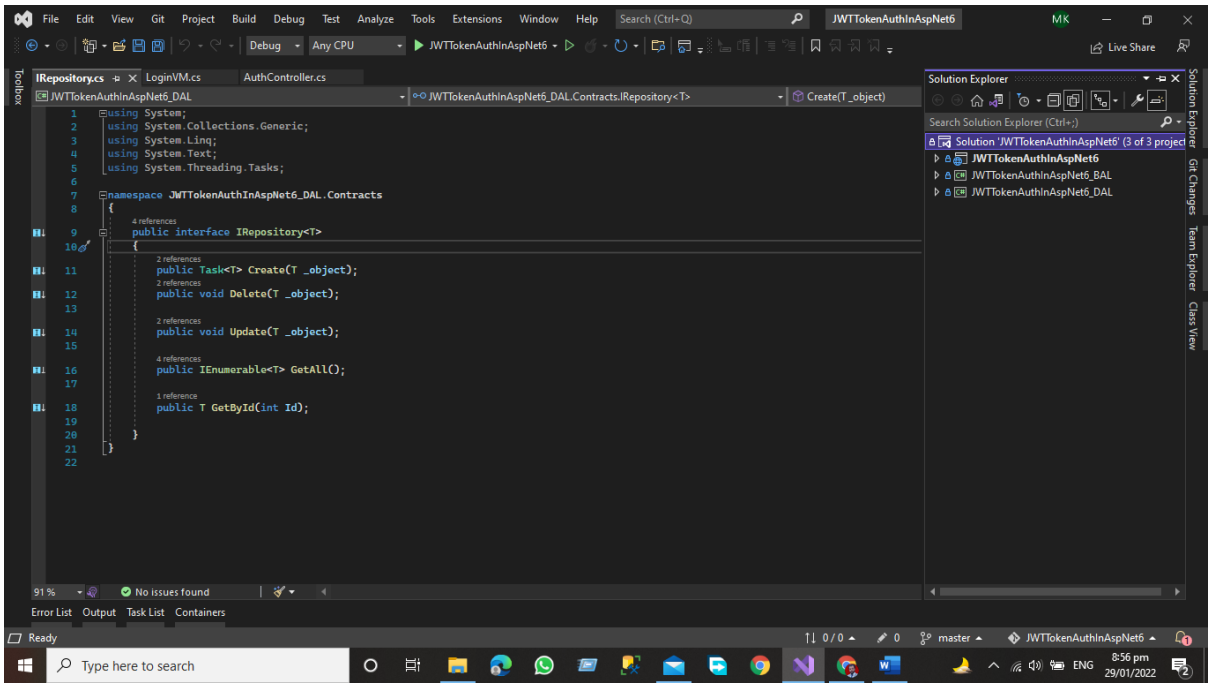

As you can see, our project now has a Presentation layer, Data Access Layer, and Business Access layer.

Data Access Layer

The Data Access Layer contains methods that assist the Business Access Layer in writing business logic, whether the functions are linked to accessing or manipulating data. The Data Access Layer's major goal is to interface with the database and the Business Access Layer in our project.

the structure will be like this.

In this Layer we have the Following Folders Add these folders to your Data access layer

- Contacts
- Data
- Migrations
- Models
- Repositories

Contacts

In the Contract Folder, we define the interface that has the following function that performs the desired functionalities with the database like

```
using System;
using System.Collections.Generic;
using System. Linq;
using System. Text;
using System.Threading.Tasks;


namespace JWTTokenAuthInAspNet6_DAL.Contracts
{
   public interface IRepository<T>
   {
      public Task<T> Create(T _object);
      public void Delete(T _object);

      public void Update(T _object);

      public IEnumerable<T> GetAll();


      public T GetById(int Id);

   }
}
```

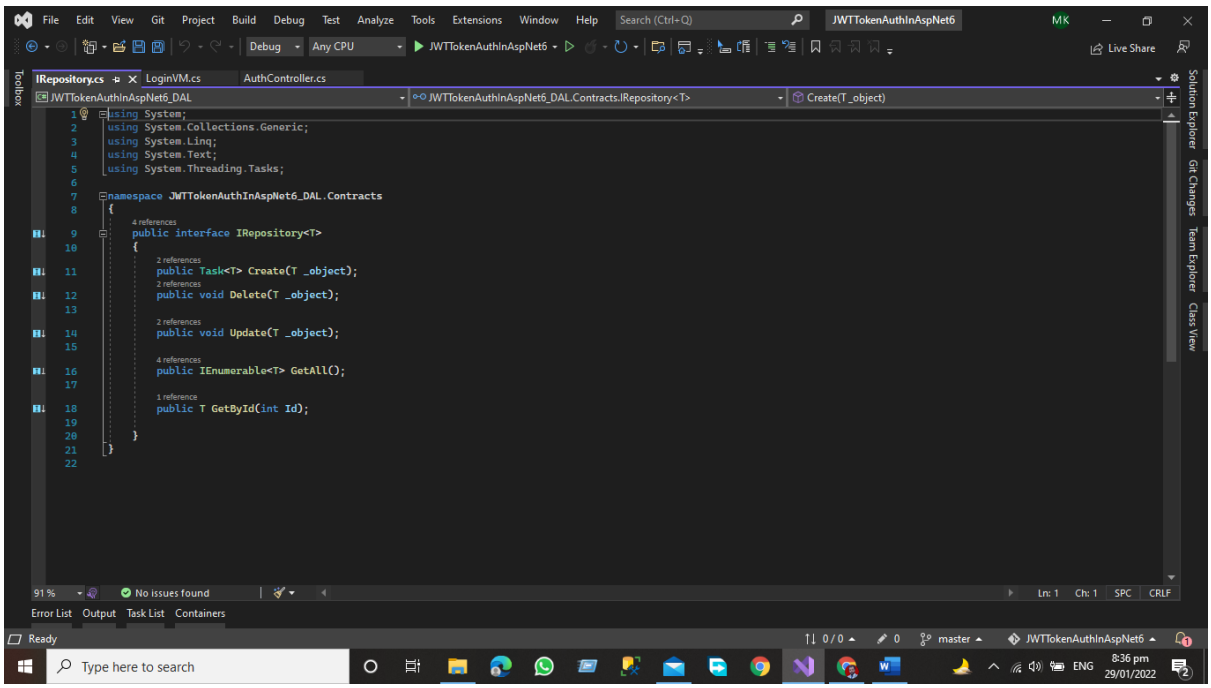

Data

In the Data folder, we have Db Context Class this class is very important for accessing the data from the database.

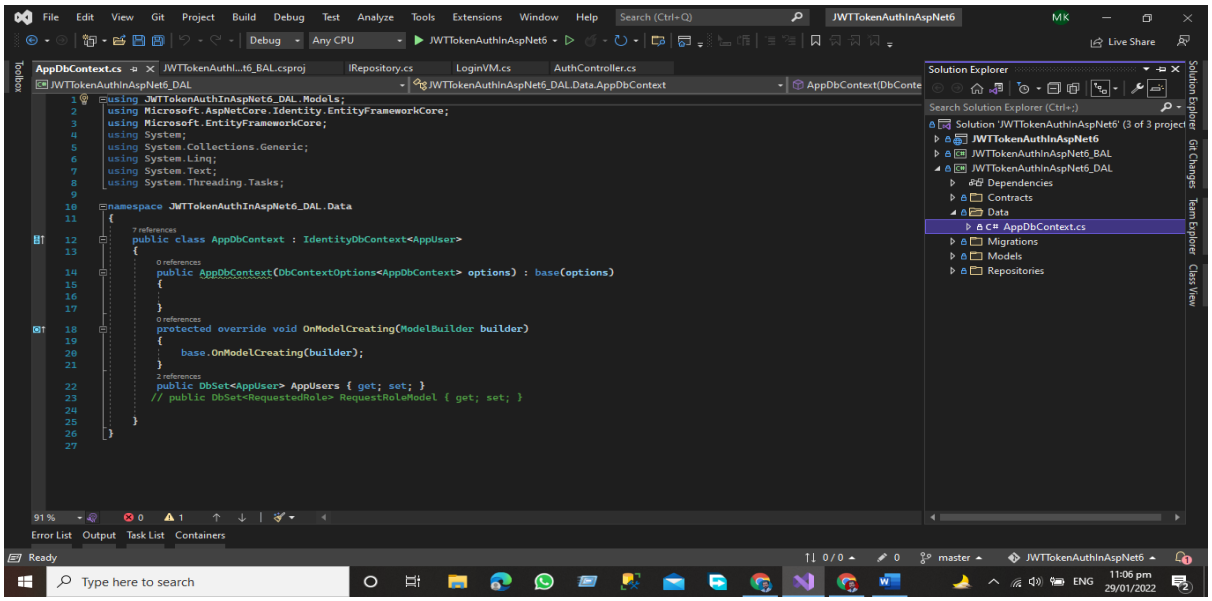


Migrations

The Migration Folder contains information on all the migrations we performed during the construction of this project. The Migration Folder contains information on all the migrations we performed during the construction of this project.

Models

Our application models, which contain domain-specific data, and business logic models, which represent the structure of the data as public attributes, business logic, and methods, are stored in the Model folder.

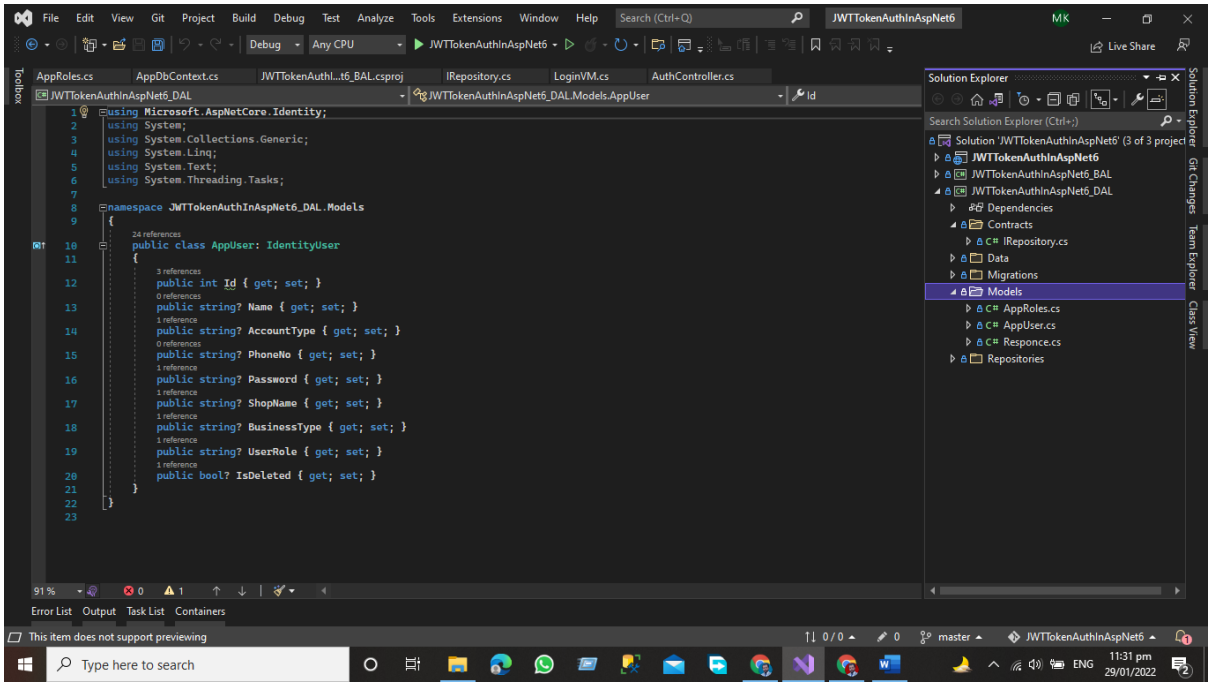


```
using Microsoft.AspNetCore.Identity;
using System;
using System.Collections.Generic;
using System. Linq;
using System. Text;
using System.Threading.Tasks;

namespace JWTTokenAuthInAspNet6_DAL.Models
{
    public class AppUser: IdentityUser
    {
        public int Id { get; set; }
        public string? Name { get; set; }
        public string? AccountType { get; set; }
        public string? PhoneNo { get; set; }
        public string? Password { get; set; }
        public string? ShopName { get; set; }
        public string? BusinessType { get; set; }
        public string? UserRole { get; set; }
        public bool? IsDeleted { get; set; }
    }
}
```

Repository

In the Repository folder, we add the repository classes against each model. We write the CRUD function that communicates with the database using the entity framework. We add the repository class that inherits our Interface that is present in our contract folder.

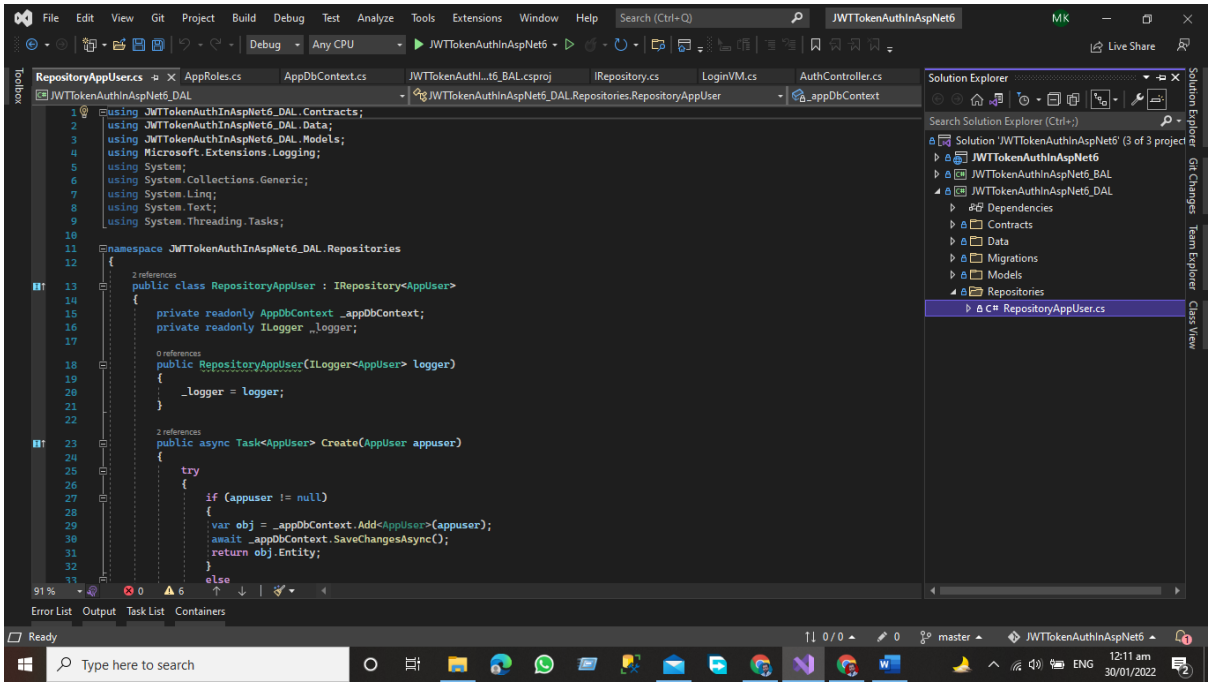

```
using JWTTokenAuthInAspNet6_DAL.Contracts;
using JWTTokenAuthInAspNet6_DAL.Data;
using JWTTokenAuthInAspNet6_DAL.Models;
using Microsoft.Extensions.Logging;
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.Threading.Tasks;

namespace JWTTokenAuthInAspNet6_DAL.Repositories
{
    public class RepositoryAppUser : IRepository<AppUser>
    {
        private readonly AppDbContext _appDbContext;
        private readonly ILogger _logger;

        public RepositoryAppUser(ILogger<AppUser> logger)
        {
            _logger = logger;
        }
```

```
public async Task<AppUser> Create(AppUser appuser)
{
    try
    {
        if (appuser != null)
        {
         var obj = _appDbContext.Add<AppUser>(appuser);
         await _appDbContext.SaveChangesAsync();
         return obj.Entity;
        }
        else
        {
            return null;
        }
    }
    catch (Exception)
    {
        throw;
    }
}

public void Delete(AppUser appuser)
{
    try
    {
        if(appuser!=null)
        {
            var obj = _appDbContext.Remove(appuser);
            if (obj!=null)
            {
                _appDbContext.SaveChangesAsync();
            }
        }
    }
    catch (Exception)
    {
        throw;
    }
}

public IEnumerable<AppUser> GetAll()
{
```

```
    try
    {
        var obj = _appDbContext.AppUsers.ToList();
        if (obj != null)
            return obj;
        else
            return null;
    }
    catch (Exception)
    {
        throw;
    }
}

public AppUser GetById(int Id)
{
    try
    {
        if(Id!=null)
        {
          var Obj = _appDbContext.AppUsers.FirstOrDefault(x => x.Id == Id);
            if (Obj != null)
                return Obj;
            else
                return null;
        }
        else
        {
            return null;
        }
    }
    catch (Exception)
    {
        throw;
    }
}


public void Update(AppUser appuser)
{
    try
    {
        if (appuser != null)
```

```
            {
                var obj = _appDbContext.Update(appuser);
                if (obj != null)
                    _appDbContext.SaveChanges();
            }
        }
        catch (Exception)
        {
            throw;
        }
    }
  }
}
```

Business Access Layer

The business layer communicates with the data access layer and the presentation layer logic layer process the actions that make the logical decision and evaluations the main function of this layer is to process the data between surrounding layers.

Our Structure of the project in the Business Access Layer will be like this.

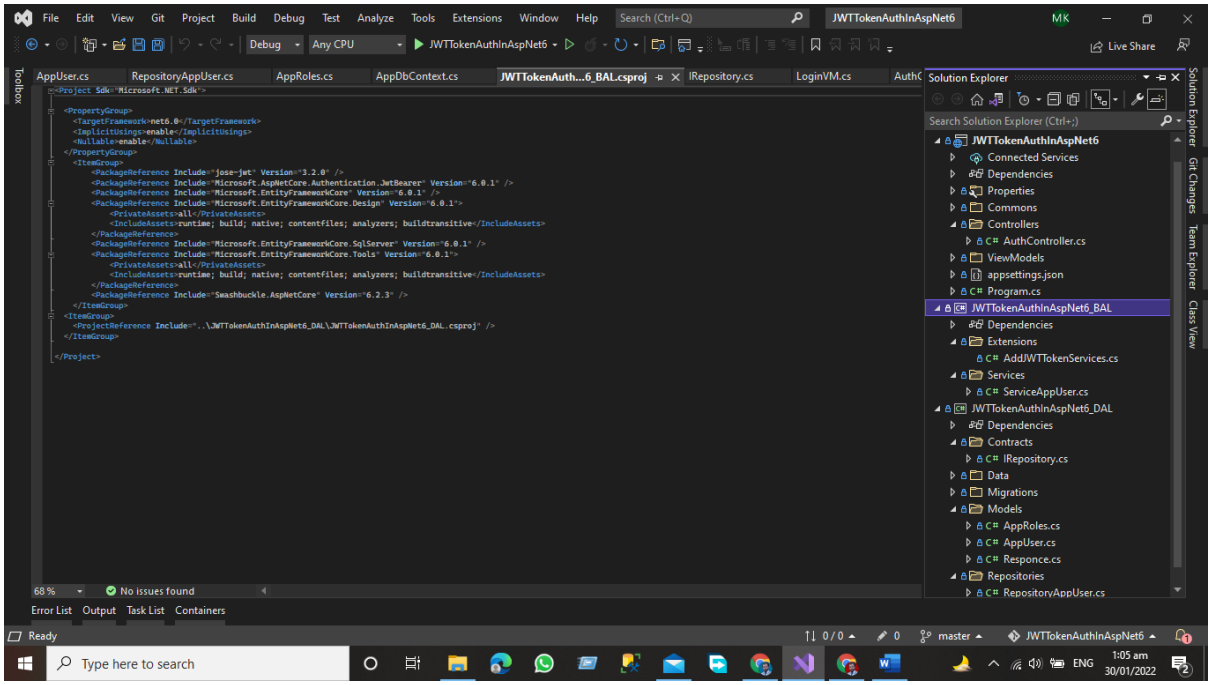

In this layer, we will have two folders

- Extensions Method Folder
- And Services Folder

In the business access layer, we have our services that communicate with the surrounding layers like the data layer and Presentation Layer.

Services

Services define the application's business logic. We develop services that interact with the data layer and move data from the data layer to the presentation layer and from the presentation layer to the data access layer.

Example

```
using JWTTokenAuthInAspNet6_DAL.Contracts;
using JWTTokenAuthInAspNet6_DAL.Models;
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.Threading.Tasks;

namespace JWTTokenAuthInAspNet6_BAL.Services
{
    public class ServiceAppUser
    {
        public readonly IRepository<AppUser> _repository;
        public ServiceAppUser(IRepository<AppUser> repository)
        {
            _repository = repository;
        }
        //Create Method
        public async Task<AppUser> AddUser(AppUser appUser)
        {
            try
            {
                if (appUser == null)
                {
                    throw new ArgumentNullException(nameof(appUser));
                }
                else
                {
                    return await _repository.Create(appUser);
                }
            }
            catch (Exception)
```

```
    {

        throw;
    }
}

public void DeleteUser(int Id)

{
    try
    {
        if (Id != 0)
        {
            var obj = _repository.GetAll().Where(x => x.Id == Id).FirstOrDefault();
            _repository.Delete(obj);
        }
    }
    catch (Exception)
    {
        throw;
    }
}

public void UpdateUser(int Id)

{
    try
    {
        if (Id != 0)
        {
            var obj = _repository.GetAll().Where(x => x.Id == Id).FirstOrDefault();
            if (obj != null)
                _repository.Update(obj);
        }
    }
    catch (Exception)
    {

        throw;
    }

}
```

```
        public IEnumerable<AppUser> GetAllUser()
        {
            try
            {
                return _repository.GetAll().ToList();
            }
            catch (Exception)
            {


                throw;
            }
        }


    }
}
```

Presentation layer

The top-most layer of the 3-Tier architecture is the Presentation layer the main function of this layer is to give the results to the user or in simple words to present the data that we get from the business access layer and give the results to the front-end user.

In the presentation layer, we have the default template of the asp.net core application here OUR structure of the application will be like this.

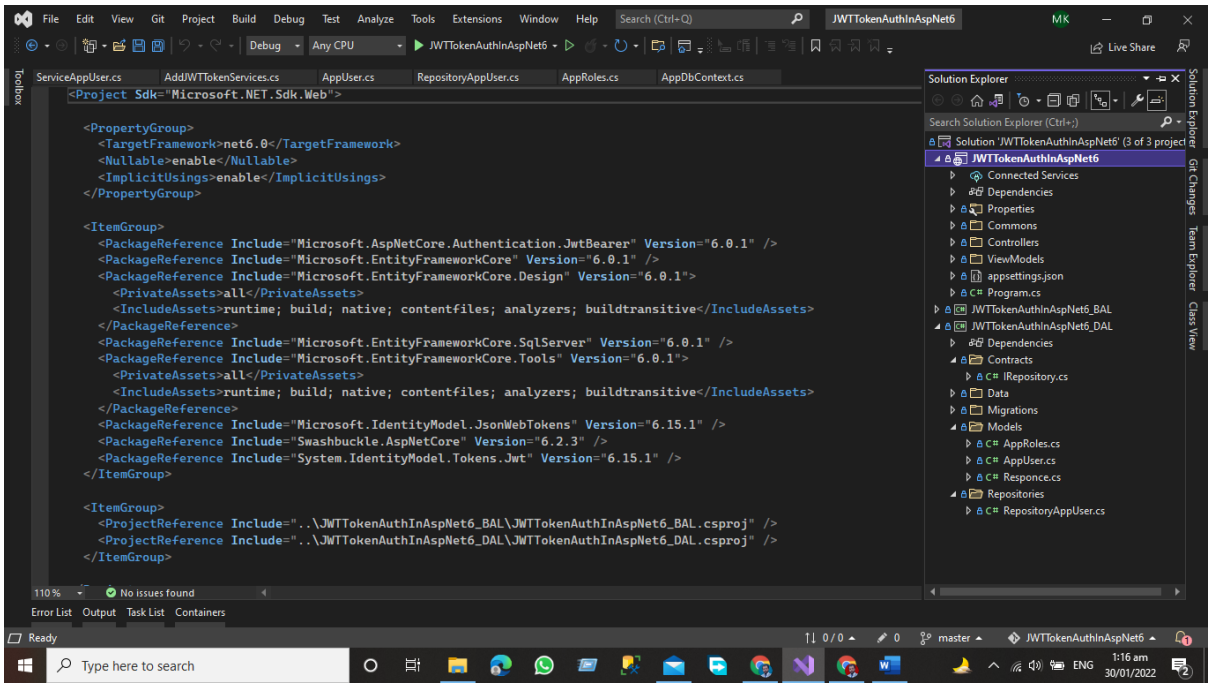

The presentation layer is responsible to give the results to the user against every HTTP request. Here we have a controller that is responsible for handling the HTTP request and communicates with the business layer against each HTTP request get the get data from the associated layer and then present it to the User.

Advantages of 3-Tier Architecture

- It makes the logical separation between the presentation layer, business layer, and data layer.
- Migration to a new environment is fast.
- In This Model, each tier is independent so we can set the different developers on each tier for the fast development of applications
- Easy to maintain and understand the large-scale applications
- The business layer is in between the presentation layer and data layer the application is more secured because the client will not have direct access to the database.
- The process data that is sent from the business layer is validated at this level.
- The Posted data from the presentation layer will be validated at the business layer before Inserting or Updating the Database
- Database security can be provided at BAL Layer
- Define the business logic one in the BAL Layer and then share it among the other components at the presentation layer
- Easy to Apply for Object-oriented Concepts
- Easy to update the data provided quires at DAL Layer

Dis-Advantages of 3-Tier Architecture

- It takes a lot of time to build the small part of the application
- Need Good understanding of Object-Oriented programming

Conclusion

In this chapter, we have learned about 3-tier Architecture and how the three-layer exchange data between them how we can add the Data Access Layer and Business access layer in the project and studied how these layers communicate with each other.

Presentation Layer (PL)

The top-most layer of the 3-Tier architecture is the Presentation layer the main function of this layer is to give the results to the user or in simple words to present the data that we get from the business access layer and give the results to the front-end user.

Business Access Layer (BAL)

The logic layer communicates with the data access layer and the presentation layer logic layer process the actions that make the logical decision and evaluations the main function of this layer is to process the data between surrounding layers.

Data Access Layer (DAL)

The main function of this application is to access and store the data from the database and the process of the data to business access layer data goes to the presentation layer against user request.

Complete Git Hub Project URL

Click here for complete project access

3

API Development in Asp.Net Core Using Onion Architecture

Overview

- Introduction
- Introduction
- What is Onion architecture
- Layers in Onion Architecture
- Domain Layer
- Repository Layer
- Service Layer
- Presentation Layer
- Advantages of Onion Architecture
- Implementation of Onion Architectu


- Project Structure.
- Domain Layer
- Models Folder
- Data Folder
- Repository Layer
- Service Layer
- I Custom Service
- Custom Service
- Department Service
- Student Service
- Result Service
- Subject GPA Service
- Presentation Layer
- Dependency Injection
- Modify Program.cs File
- Controllers
- Output
- Conclusion

Introduction

In this chapter, we will cover the onion architecture using the Asp.Net 6 Web API. Onion architecture term introduces by Jeffrey Palermo in 2008 this architecture provides us a better way to build applications using this architecture our applications are better testable maintainable and dependable on infrastructures like databases and services. Onion architecture solves common problems like coupling and separation of concerns.

What is Onion architecture

In onion architecture, we have the domain layer, repository layer, service layer, and presentation layer. Onion architecture solves the problem that we face during the enterprise applications like coupling and separations of concerns. Onion architecture also solves the problem that we confronted in three-tier architecture and N-Layer architecture. In Onion architecture, our layer communicates with each other using interfaces.

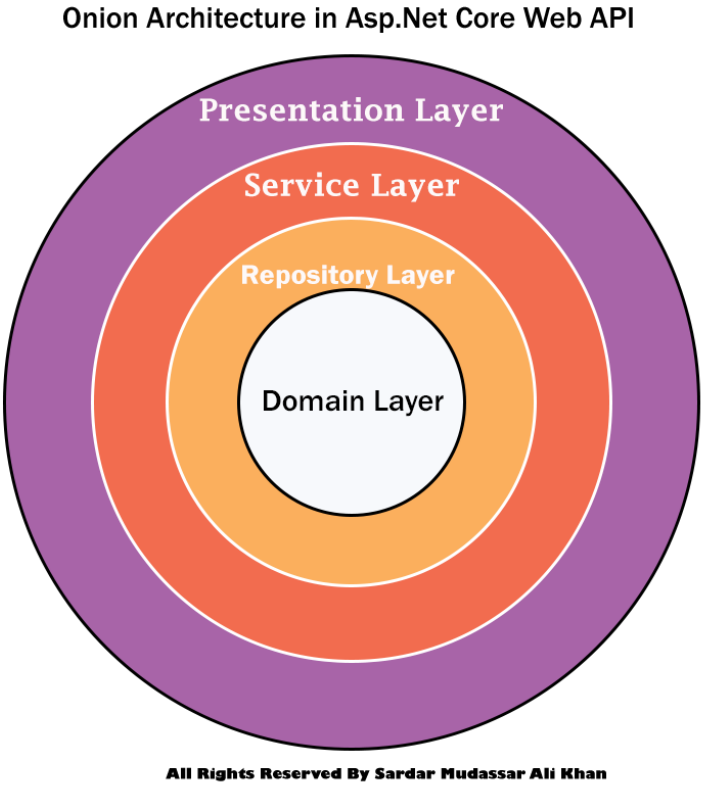

Layers in Onion Architecture

Onion architecture uses the concept of the layer, but it is different from N-layer architecture and 3-Tier architecture.

Domain Layer

This layer lies in the center of the architecture where we have application entities which are the application model classes or database model classes using the code first approach in the application development using Asp.net core these entities are used to create the tables in the database.

Repository Layer

The repository layer act as a middle layer between the service layer and model objects we will maintain all the database migrations and database context Object in this layer. We will add the interfaces that consist the of data access pattern for reading and writing operations with the database.

Service Layer

This layer is used to communicate with the presentation and repository layer. The service layer holds all the business logic of the entity. In this layer services interfaces are kept separate from their implementation for loose coupling and separation of concerns.

Presentation Layer

In the case of the API Presentation layer that presents us the object data from the database using the HTTP request in the form of JSON Object. But in the case of front-end applications, we present the data using the UI by consuming the APIS.

Advantages of Onion Architecture


- Onion architecture provides us with the batter maintainability of code because code depends on layers.
- It provides us batter testability for unit tests we can write the separate test cases in layers without affecting the other module in the application.
- Using the onion architecture our application is loosely coupled because our layers communicate with each other using the interface.
- Domain entities are the core and center of the architecture and have access to databases and UI Layer.
- A Complete implementation would be provided to the application at run time.
- The external layer never depends on the external layer.

Implementation of Onion Architecture

Now we are going to develop the project using the Onion Architecture

First, you need to create the Asp.net Core web API project using visual studio. After creating the project, we will add our layer to the project after adding all the layers our project structure will look like this.

Project Structure.

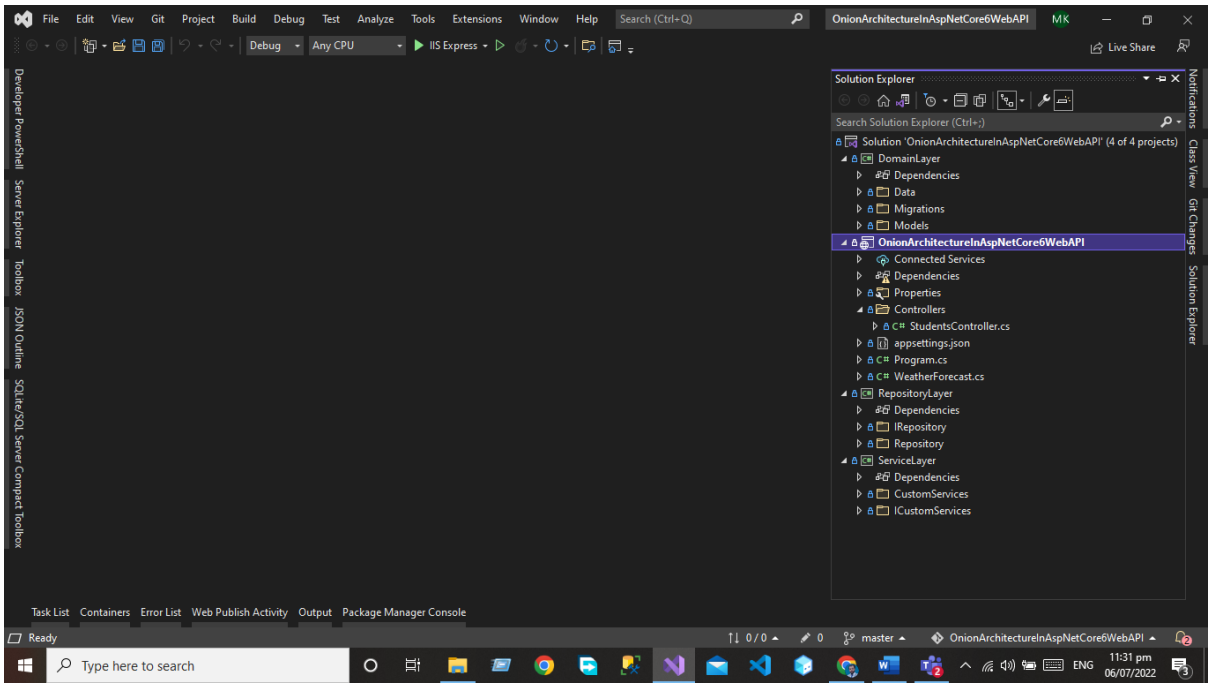


Domain Layer


This layer lies in the center of the architecture where we have application entities which are the application model classes or database model classes using the code first approach in the application development using Asp.net core these entities are used to create the tables in the database.

For the Domain layer, we need to add the library project to our application.

Write click on the Solution and then click on add option.

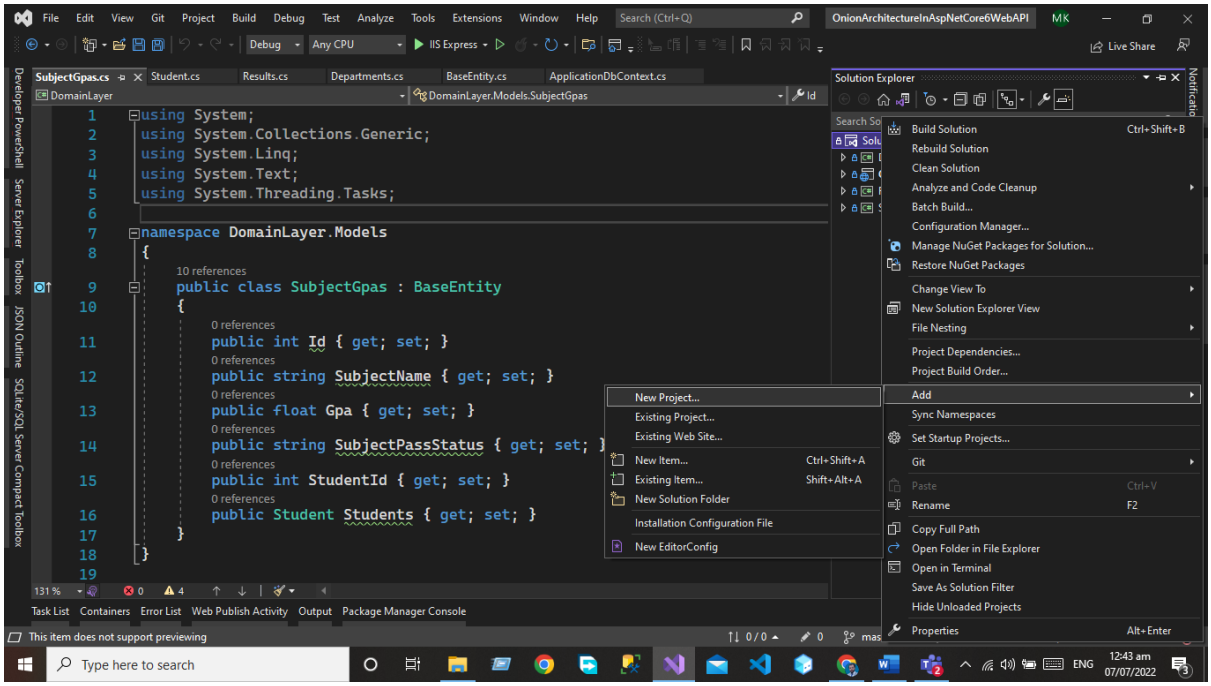


Add the library project to your solution

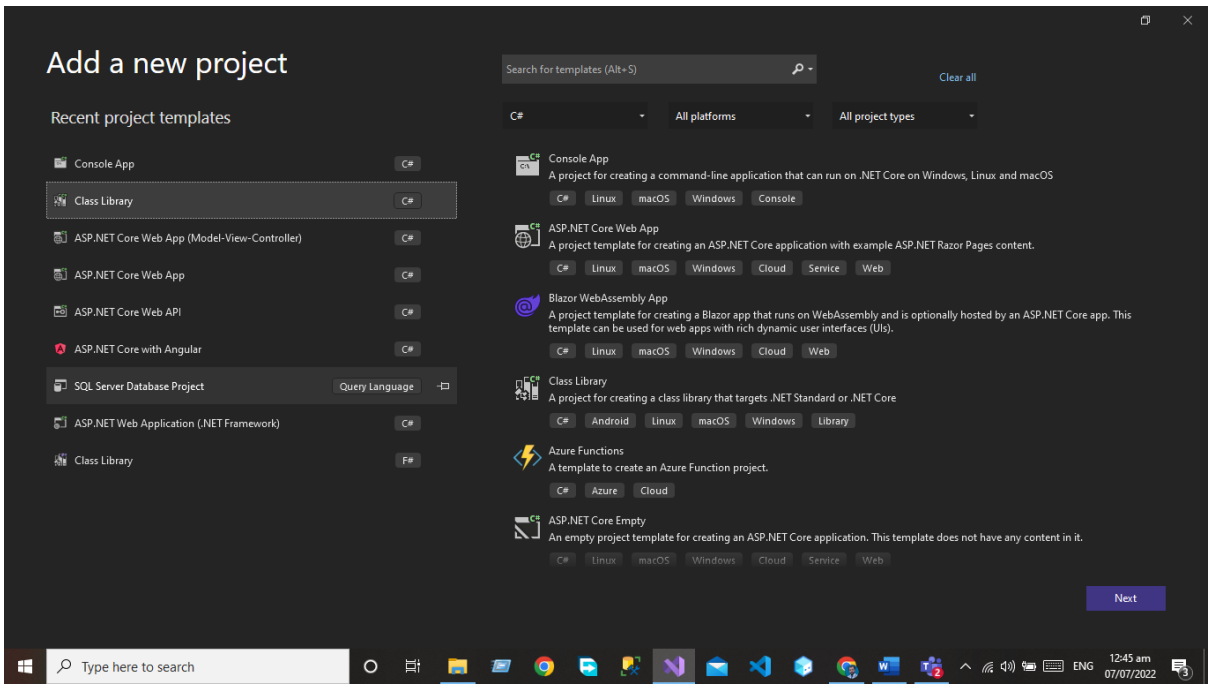

Name this project as Domain Layer

Models Folder

First, you need to add the Models folder that will be used to create the database entities. In the Models folder, we will create the following database entities.

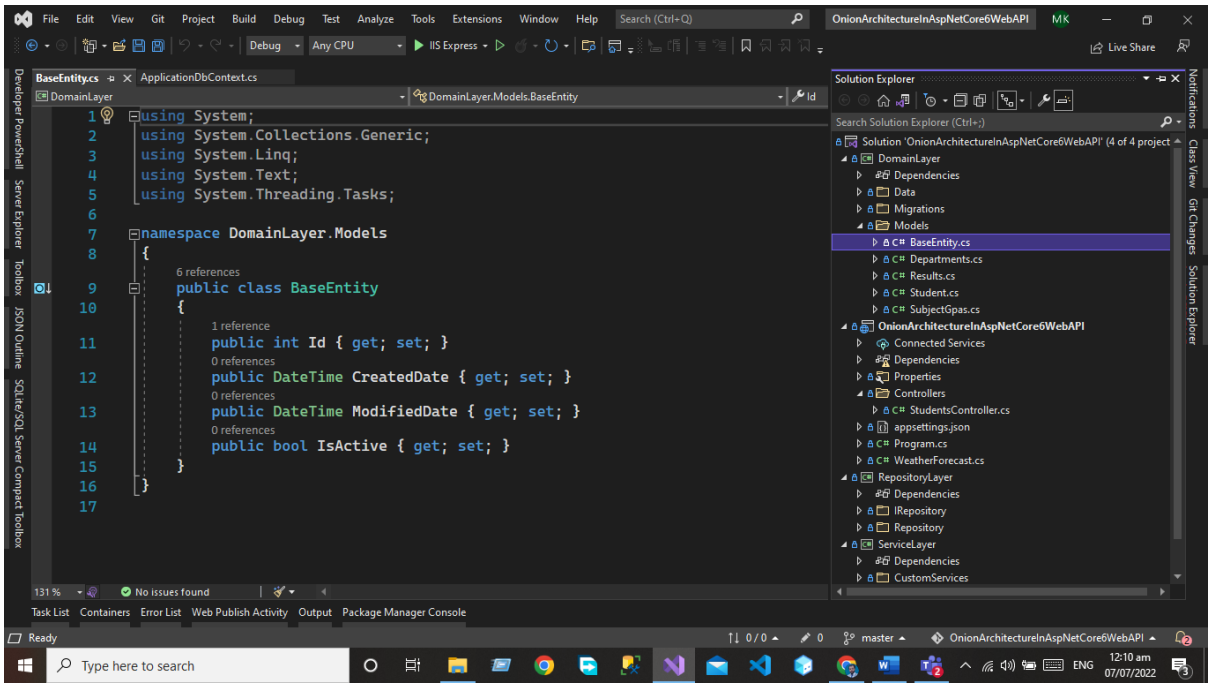

Base Entity

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.Threading.Tasks;

namespace DomainLayer.Models
{
   public class BaseEntity
   {
      public int Id { get; set; }
      public DateTime CreatedDate { get; set; }
      public DateTime ModifiedDate { get; set; }
      public bool IsActive { get; set; }
   }
}
```

Department

Department entity will extend the base entity

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.Threading.Tasks;

namespace DomainLayer.Models
{
    public class Departments :BaseEntity
    {
        public int Id { get; set; }
        public string DepartmentName { get; set; }
        public int StudentId { get; set; }
        public Student Students { get; set; }
    }
}
```

Result

Result Entity will extend the base entity

```
using System;
using System.Collections.Generic;
using System.ComponentModel.DataAnnotations;
using System.Linq;
using System.Text;
using System.Threading.Tasks;

namespace DomainLayer.Models
{
    public class Resultss : BaseEntity
    {
        [Key]
        public int Id { get; set; }
        public string? ResultStatus { get; set; }
        public int StudentId { get; set; }
        public Student Students { get; set; }
    }
}
```

Students

Student Entity will extend the base entity

```
using System;
using System.Collections.Generic;
using System.ComponentModel.DataAnnotations;
using System.Linq;
using System.Text;
using System.Threading.Tasks;

namespace DomainLayer.Models
{
    public class Student : BaseEntity
    {
        [Key]
        public int Id { get; set; }
        public string? Name { get; set; }
        public string? Address { get; set; }
        public string? Emial { get; set; }
        public string? City { get; set; }
        public string? State { get; set; }
        public string? Country { get; set; }
        public int? Age { get; set; }
        public DateTime? BirthDate { get; set;}


    }
}
```

SubjectGpa

Subject GPA Entity will extend the Base Entity

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.Threading.Tasks;

namespace DomainLayer.Models
{
    public class SubjectGpas : BaseEntity
    {
        public int Id { get; set; }
        public string SubjectName { get; set; }
```

```
        public float Gpa { get; set; }
        public string SubjectPassStatus { get; set; }
        public int StudentId { get; set; }
        public Student Students { get; set; }
    }
}
```

Data Folder

Add the Data in the domain that is used to add the database context class. The database context class is used to maintain the session with the underlying database using which you can perform the CRUD operation.

Write click on the application and create the class ApplicationDbContext.cs


```
using DomainLayer.Models;
using Microsoft.EntityFrameworkCore;
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.Threading.Tasks;

namespace DomainLayer.Data
{
    public class ApplicationDbContext : DbContext
    {
        public ApplicationDbContext(DbContextOptions<ApplicationDbContext> options) : base(options)
        {


        }
        protected override void OnModelCreating(ModelBuilder builder)
        {
            base.OnModelCreating(builder);
        }
        public DbSet<Student> Students { get; set; }
        public DbSet<Departments> Departments { get; set; }
        public DbSet<SubjectGpas> SubjectGpas { get; set; }
        public DbSet<Resultss> Results { get; set; }
    }
}
```

After Adding the DB Set properties we need to add the migration using the package manager console and run the command Add-Migration.

add-migration OnionArchitectureV1

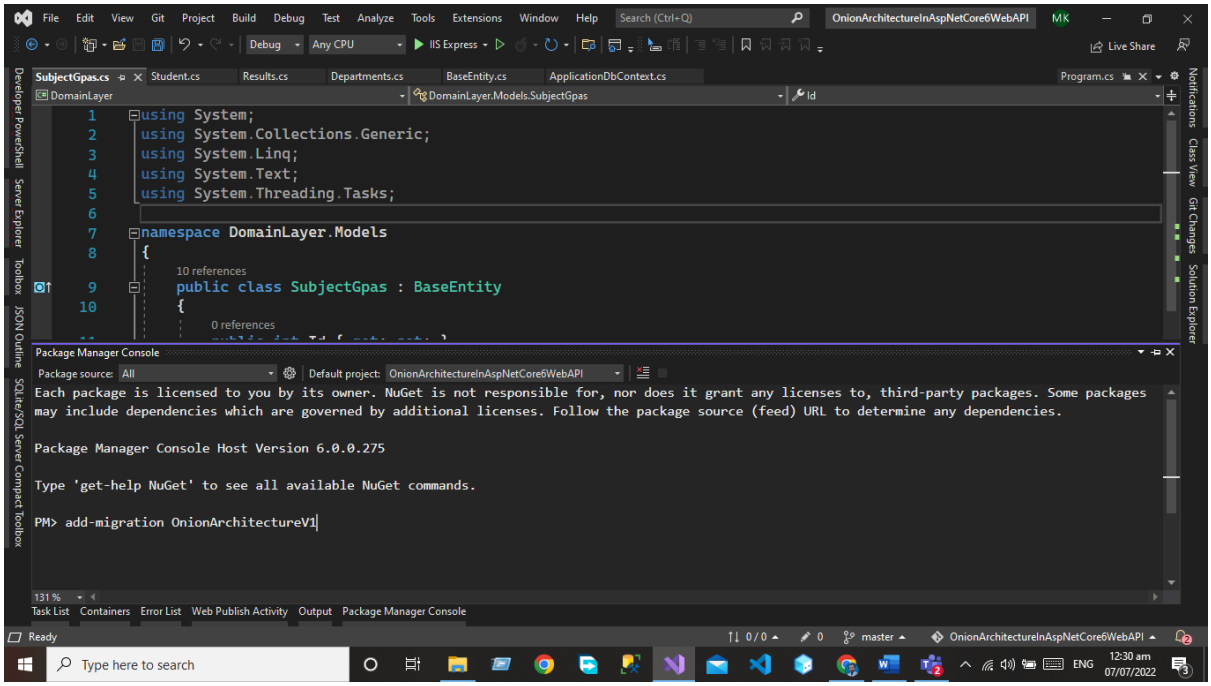


After executing the commands now, you need to update the database by executing the **update-database** Command

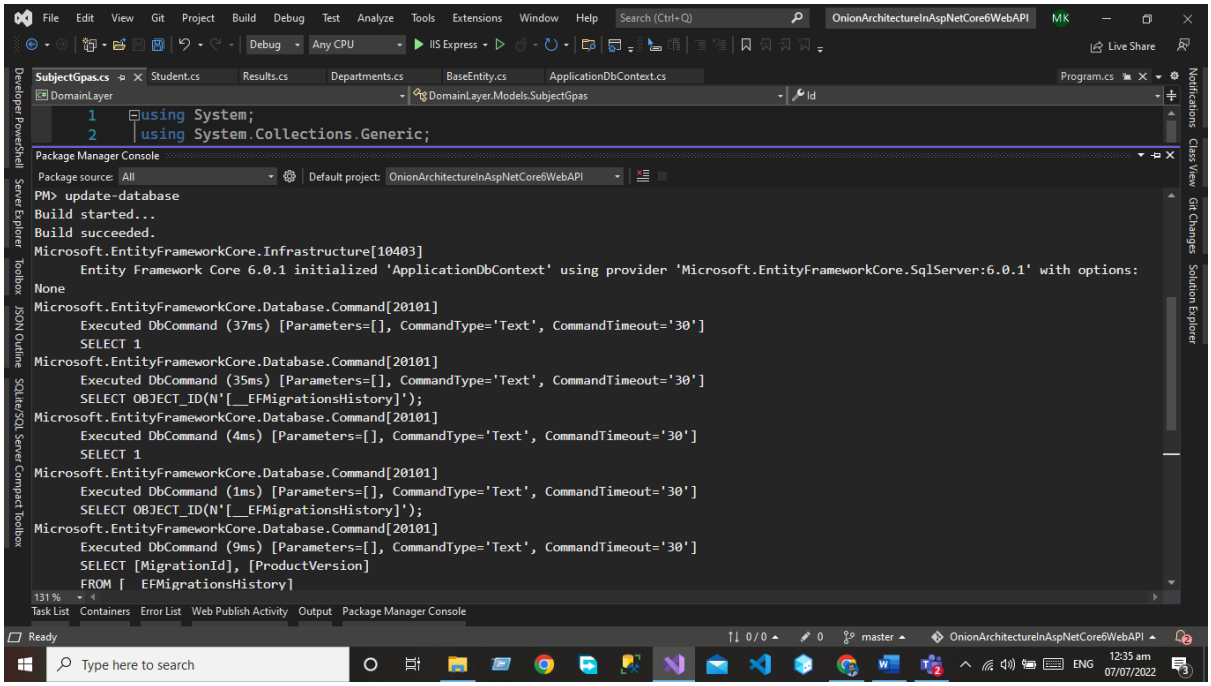

Migration Folder

After executing both commands now you can see the migration folder in the domain layer.

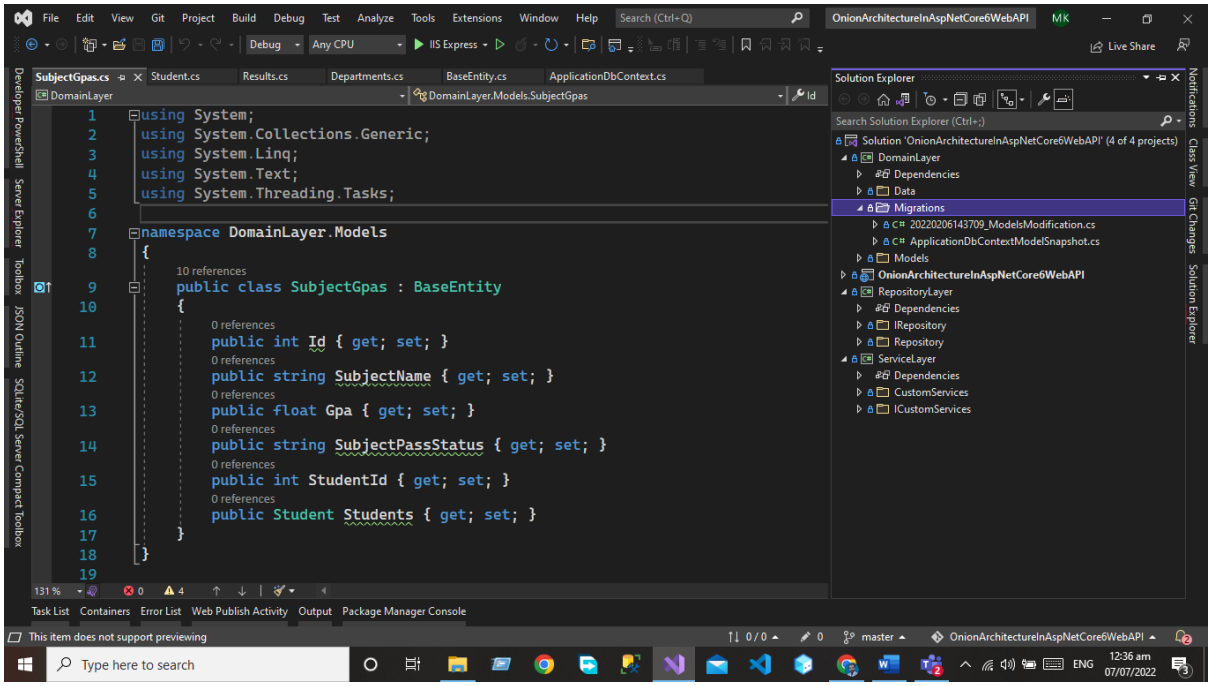


Repository Layer


The repository layer act as a middle layer between the service layer and model objects we will maintain all the database migrations and database context Object in this layer. We will add the interfaces that consist the of data access pattern for reading and writing operations with the database.

Now we will work on Repository Layer we will follow the same project as we did for the Domain layer add the library project in your applicant and give a name to that project Repository layer.

But here we need to add the project reference of the Domain layer in the repository layer. Write click on the project and then click the Add button after that we will add the project references in the Repository layer.

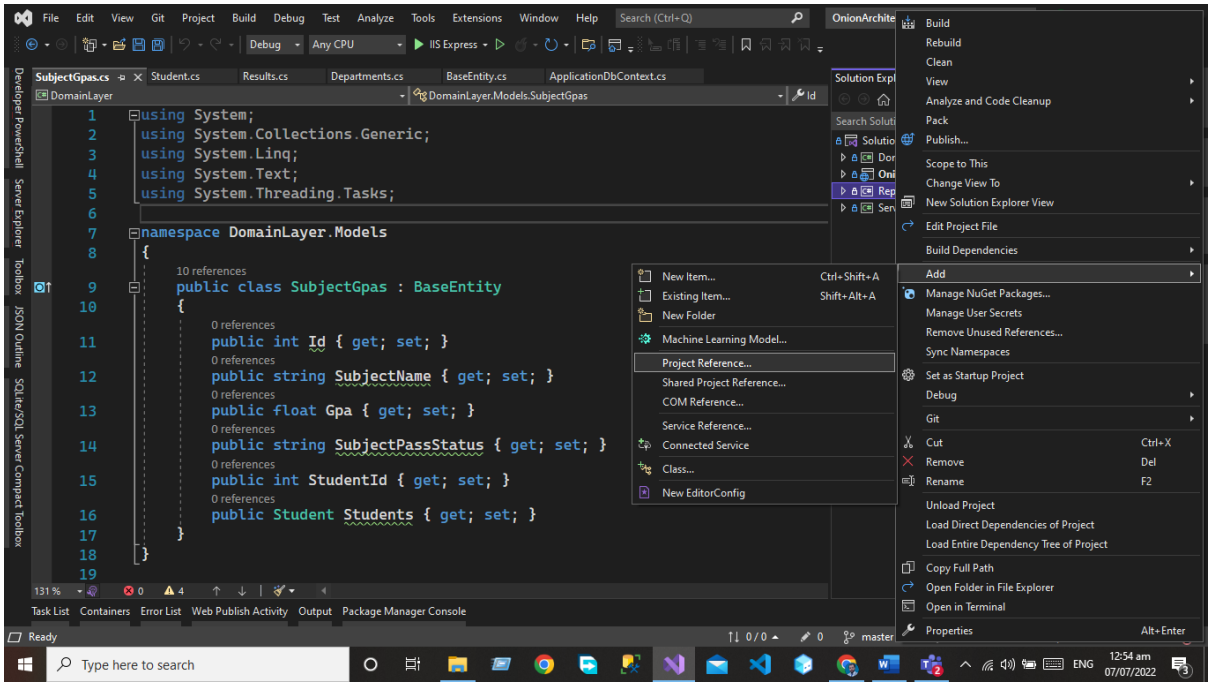

Click on project reference now and select the Domain layer.

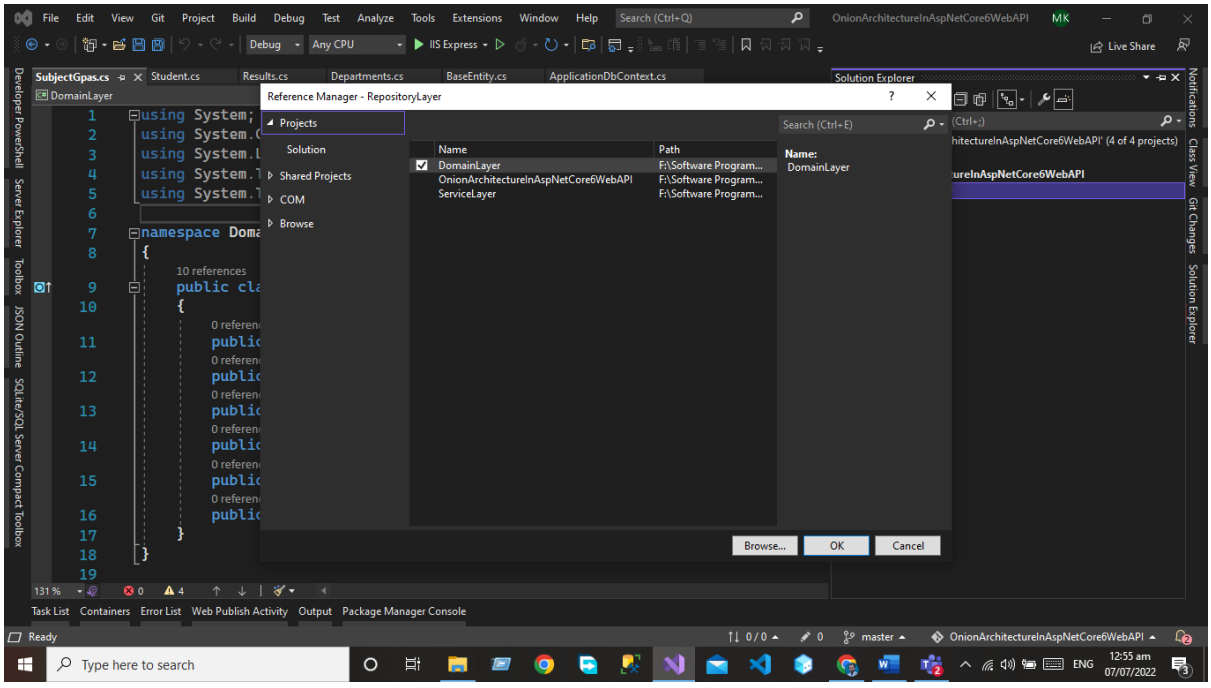

Now we need to add the two folders.

- I Repository
- Repository

IRepository

IRepsitory folder contains the generic interface using this interface we will create the CRUD operation for our all entities.

Generic Interface will extend the Base-Entity for using some properties. The Code of the generic interface is given below.

```
using DomainLayer.Models;

namespace RepositoryLayer.IRepository
{
    public interface IRepository<T> where T: BaseEntity
    {
        IEnumerable<T> GetAll();
        T Get(int Id);
        void Insert(T entity);
        void Update(T entity);
        void Delete(T entity);
        void Remove(T entity);
        void SaveChanges();
    }
}
```

Repository

Now we create the Generic repository that extends the Generic IRepository Interface. The Code of the generic repository is given below.

```
using DomainLayer.Data;
using DomainLayer.Models;
using Microsoft.EntityFrameworkCore;
using RepositoryLayer.IRepository;
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.Threading.Tasks;

namespace RepositoryLayer.Repository
{
    public class Repository<T> : IRepository<T> where T : BaseEntity
    {
        #region property
        private readonly ApplicationDbContext _applicationDbContext;
```

```
private DbSet<T> entities;
#endregion

#region Constructor
public Repository(ApplicationDbContext applicationDbContext)
{
    _applicationDbContext = applicationDbContext;
    entities = _applicationDbContext.Set<T>();
}
#endregion

public void Delete(T entity)
{
    if (entity == null)
    {
        throw new ArgumentNullException("entity");
    }
    entities.Remove(entity);
    _applicationDbContext.SaveChanges();
}

public T Get(int Id)
{
    return entities.SingleOrDefault(c => c.Id == Id);
}

public IEnumerable<T> GetAll()
{
    return entities.AsEnumerable();
}

public void Insert(T entity)
{
    if (entity == null)
    {
        throw new ArgumentNullException("entity");
    }
     entities.Add(entity);
    _applicationDbContext.SaveChanges();
}

public void Remove(T entity)
```

```
        {
            if (entity == null)
            {
                throw new ArgumentNullException("entity");
            }
            entities.Remove(entity);
        }

        public void SaveChanges()
        {
            _applicationDbContext.SaveChanges();
        }

        public void Update(T entity)
        {
            if (entity == null)
            {
                throw new ArgumentNullException("entity");
            }
            entities.Update(entity);
            _applicationDbContext.SaveChanges();
        }


    }
}
```

We will use this repository in our service layer.


Service Layer

This layer is used to communicate with the presentation and repository layer. The service layer holds all the business logic of the entity. In this layer services interfaces are kept separate from their implementation for loose coupling and separation of concerns.

Now we need to add a new project to our solution that will be the service layer we will follow the same process for adding the library project in our application but here we need some extra work after adding the project we need to add the reference of the **Repository Layer.**

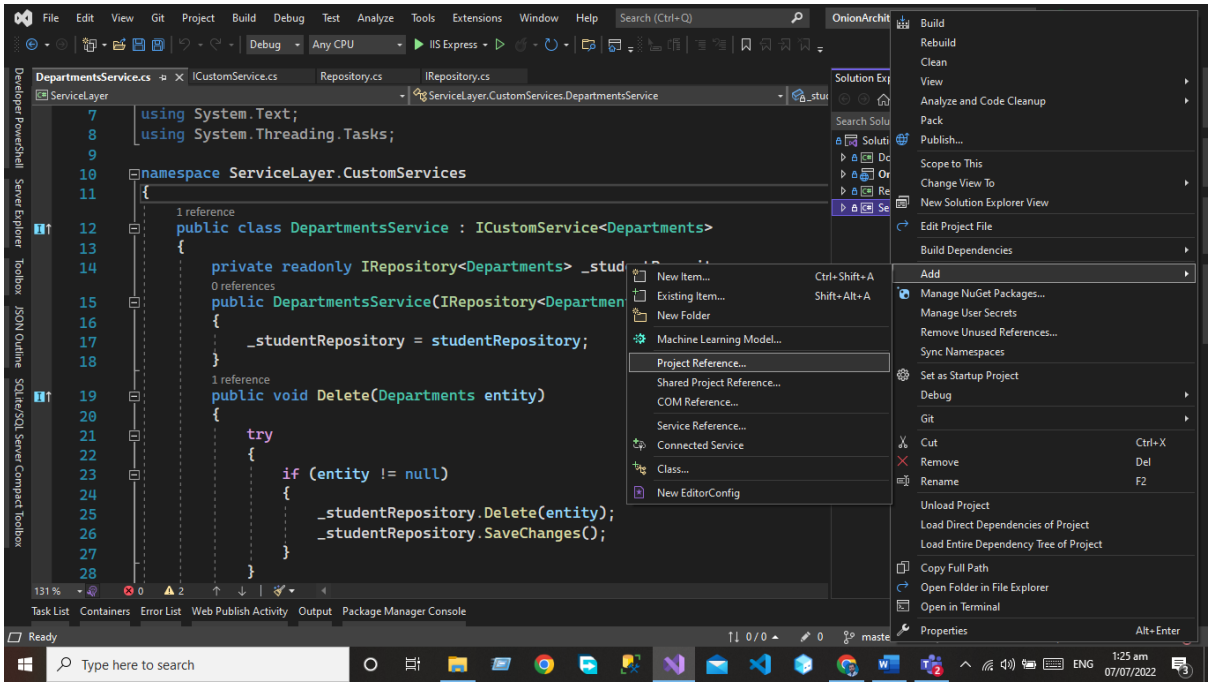

Now our service layer contains the reference of the repository layer.

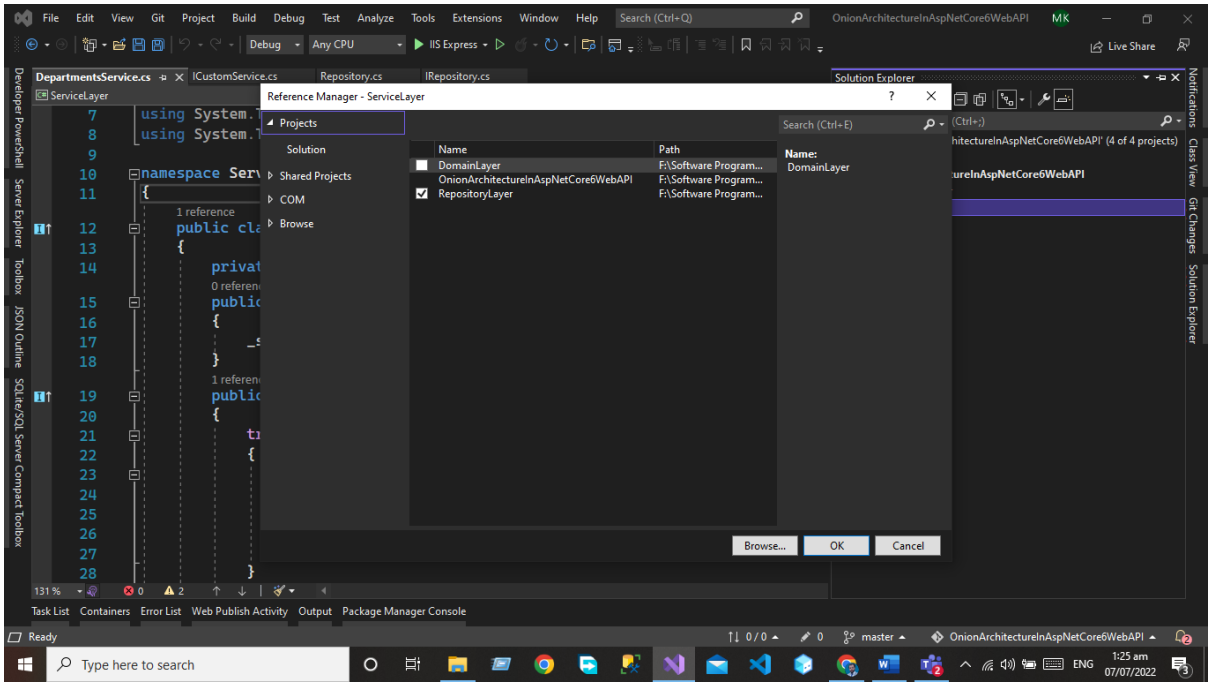

In the Service layer, we will create the two folders.

- ICustomServices
- CustomServices

ICustom Service

Now in the ICustomServices folder, we will create the ICustomServices Interface this interface holds the signature of the method we will implement these methods in the customs service code of the ICustomServices Interface given below.

```
using DomainLayer.Models;
using System;
using System.Collections.Generic;
using System. Linq;
using System. Text;
using System.Threading.Tasks;

namespace ServiceLayer.ICustomServices
{
   public interface ICustomService<T> where T : class
   {
      IEnumerable<T> GetAll();
      T Get(int Id);
      void Insert(T entity);
      void Update(T entity);
      void Delete(T entity);
      void Remove(T entity);

   }
}
```

Custom Service

In the custom service folder, we will create the custom service class that inherits the ICustomService interface code of the custom service class given below. We will write the crud for our all entities.

For every service, we will write the CRUD operation using our generic repository.

Department Service

Student Service

```
using DomainLayer.Models;
using RepositoryLayer.IRepository;
using ServiceLayer.ICustomServices;
using System;
using System.Collections.Generic;
using System.Linq;
```

```
using System.Text;
using System.Threading.Tasks;

namespace ServiceLayer.CustomServices
{
    public class StudentService : ICustomService<Student>
    {
        private readonly IRepository<Student> _studentRepository;
        public StudentService(IRepository<Student> studentRepository)
        {
            _studentRepository = studentRepository;
        }
        public void Delete(Student entity)
        {
            try
            {
                if(entity!=null)
                {
                    _studentRepository.Delete(entity);
                    _studentRepository.SaveChanges();
                }
            }
            catch (Exception)
            {

                throw;
            }
        }

        public  Student Get(int Id)
        {
            try
            {
                var obj = _studentRepository.Get(Id);
                if(obj!=null)
                {
                    return obj;
                }
                else
                {
                    return null;
                }
```

```
    }
    catch (Exception)
    {

        throw;
    }
}

public IEnumerable<Student> GetAll()
{
    try
    {
        var obj = _studentRepository.GetAll();
        if (obj != null)
        {
            return obj;
        }
        else
        {
            return null;
        }
    }
    catch (Exception)
    {

        throw;
    }
}

public void Insert(Student entity)
{
    try
    {
        if (entity != null)
        {
            _studentRepository.Insert(entity);
            _studentRepository.SaveChanges();
        }
    }
    catch (Exception)
    {
```

```
                throw;
            }
        }

        public void Remove(Student entity)
        {
            try
            {
                if(entity!=null)
                {
                  _studentRepository.Remove(entity);
                  _studentRepository.SaveChanges();
                }
            }
            catch (Exception)
            {

                throw;
            }
        }
        public void Update(Student entity)
        {
            try
            {
                if(entity!=null)
                {
                    _studentRepository.Update(entity);
                    _studentRepository.SaveChanges();
                }
            }
            catch (Exception)
            {

                throw;
            }
        }
    }
}
```

Result Service

```
using DomainLayer.Models;
using RepositoryLayer.IRepository;
using ServiceLayer.ICustomServices;
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.Threading.Tasks;

namespace ServiceLayer.CustomServices
{
    public class ResultService : ICustomService<Resultss>
    {
        private readonly IRepository<Resultss> _studentRepository;
        public ResultService(IRepository<Resultss> studentRepository)
        {
            _studentRepository = studentRepository;
        }
        public void Delete(Resultss entity)
        {
            try
            {
                if (entity != null)
                {
                    _studentRepository.Delete(entity);
                    _studentRepository.SaveChanges();
                }
            }
            catch (Exception)
            {

                throw;
            }
        }

        public Resultss Get(int Id)
        {
            try
            {
                var obj = _studentRepository.Get(Id);
                if (obj != null)
                {
```

```
            return obj;
        }
        else
        {
            return null;
        }

    }
    catch (Exception)
    {

        throw;
    }
}

public IEnumerable<Resultss> GetAll()
{
    try
    {
        var obj = _studentRepository.GetAll();
        if (obj != null)
        {
            return obj;
        }
        else
        {
            return null;
        }
    }
    catch (Exception)
    {

        throw;
    }
}

public void Insert(Resultss entity)
{
    try
    {
        if (entity != null)
        {
```

```
            _studentRepository.Insert(entity);
            _studentRepository.SaveChanges();
        }
    }
    catch (Exception)
    {

        throw;
    }
}

public void Remove(Resultss entity)
{
    try
    {
        if (entity != null)
        {
            _studentRepository.Remove(entity);
            _studentRepository.SaveChanges();
        }
    }
    catch (Exception)
    {

        throw;
    }
}
public void Update(Resultss entity)
{
    try
    {
        if (entity != null)
        {
            _studentRepository.Update(entity);
            _studentRepository.SaveChanges();
        }
    }
    catch (Exception)
    {

        throw;
    }
```

```
        }
    }
}
```

Subject GPA Service

```
using DomainLayer.Models;
using RepositoryLayer.IRepository;
using ServiceLayer.ICustomServices;
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.Threading.Tasks;

namespace ServiceLayer.CustomServices
{
    public class SubjectGpasService : ICustomService<SubjectGpas>
    {
        private readonly IRepository<SubjectGpas> _studentRepository;
        public SubjectGpasService(IRepository<SubjectGpas> studentRepository)
        {
            _studentRepository = studentRepository;
        }
        public void Delete(SubjectGpas entity)
        {
            try
            {
                if (entity != null)
                {
                    _studentRepository.Delete(entity);
                    _studentRepository.SaveChanges();
                }
            }
            catch (Exception)
            {

                throw;
            }
        }

        public SubjectGpas Get(int Id)
```

```
{
    try
    {
        var obj = _studentRepository.Get(Id);
        if (obj != null)
        {
            return obj;
        }
        else
        {
            return null;
        }

    }
    catch (Exception)
    {

        throw;
    }
}

public IEnumerable<SubjectGpas> GetAll()
{
    try
    {
        var obj = _studentRepository.GetAll();
        if (obj != null)
        {
            return obj;
        }
        else
        {
            return null;
        }
    }
    catch (Exception)
    {

        throw;
    }
}
```

```
public void Insert(SubjectGpas entity)
{
    try
    {
        if (entity != null)
        {
            _studentRepository.Insert(entity);
            _studentRepository.SaveChanges();
        }
    }
    catch (Exception)
    {

        throw;
    }
}

public void Remove(SubjectGpas entity)
{
    try
    {
        if (entity != null)
        {
            _studentRepository.Remove(entity);
            _studentRepository.SaveChanges();
        }
    }
    catch (Exception)
    {

        throw;
    }
}
public void Update(SubjectGpas entity)
{
    try
    {
        if (entity != null)
        {
            _studentRepository.Update(entity);
            _studentRepository.SaveChanges();
        }
```

```
        }
        catch (Exception)
        {


            throw;
        }
    }
  }
}
```

Presentation Layer

The presentation layer is our final layer that presents the data to the front-end user on every HTTP request.


In the case of the API presentation layer that presents us the object data from the database using the HTTP request in the form of JSON Object. But in the case of front-end applications, we present the data using the UI by consuming the APIS.

The presentation layer is the default Asp.net core web API project Now we need to add the project references of all the layers as we did before

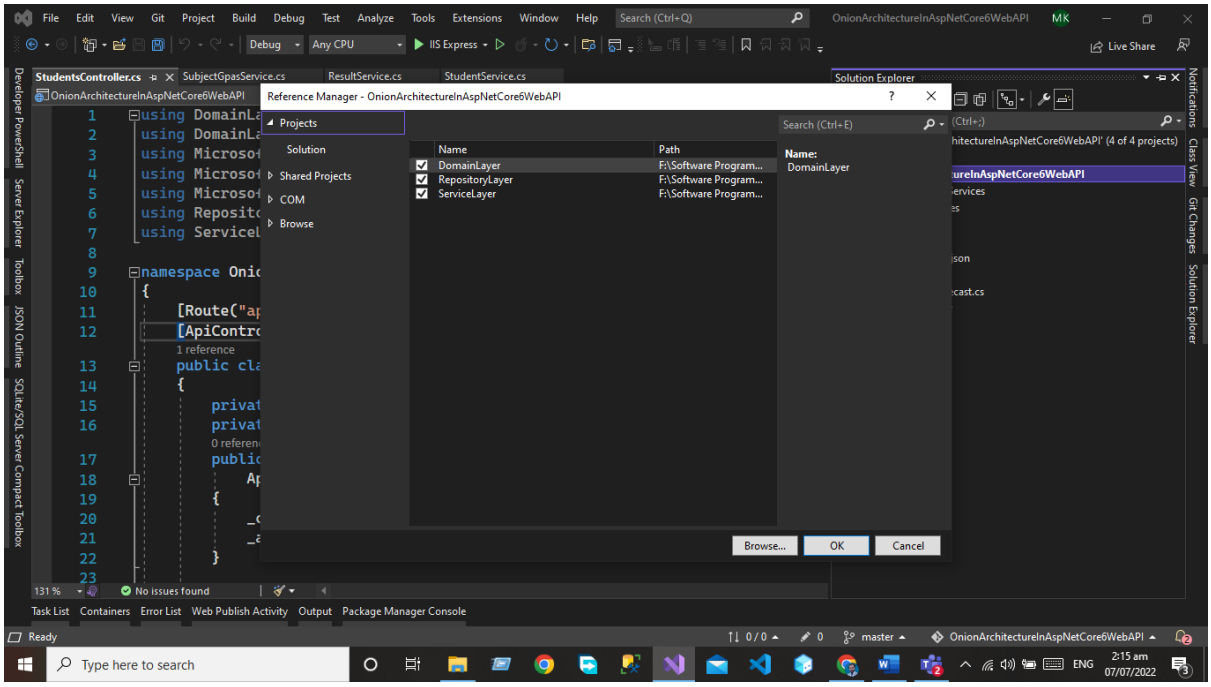

Dependency Injection

Now we need to add the dependency Injection of our all services in the program.cs class

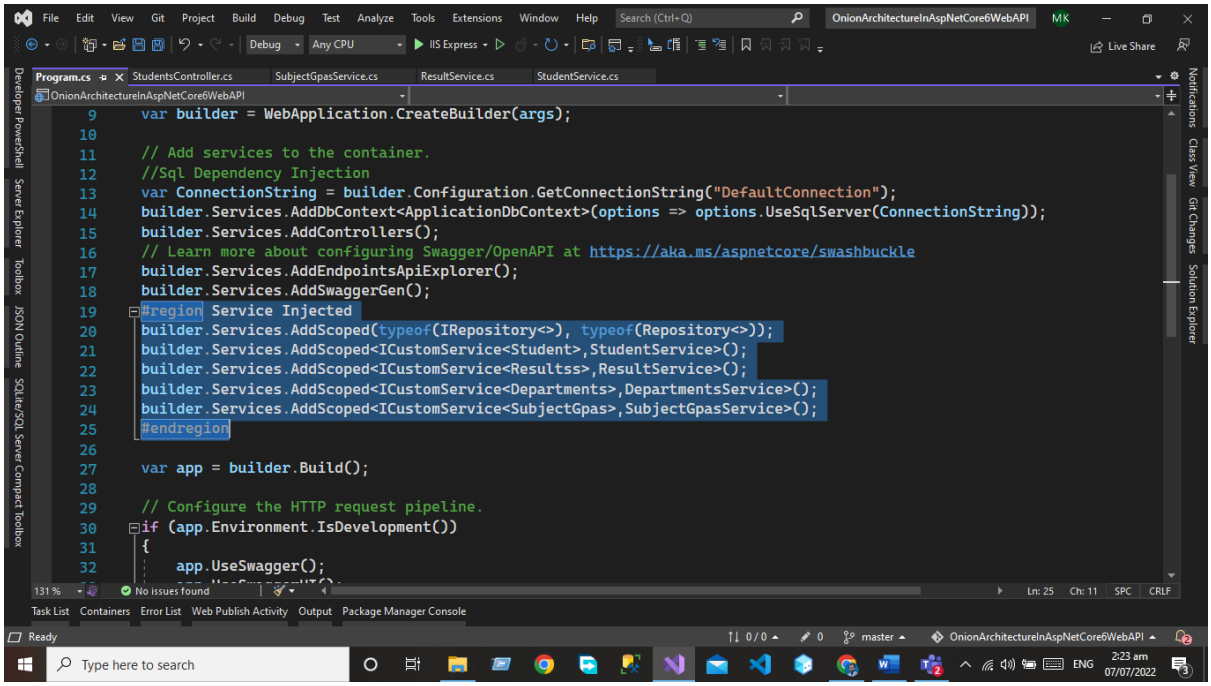

Modify Program.cs File

The Code of the Startup Class is Given below

```
using DomainLayer.Data;
using DomainLayer.Models;
using Microsoft.EntityFrameworkCore;
using RepositoryLayer.IRepository;
using RepositoryLayer.Repository;
using ServiceLayer.CustomServices;
using ServiceLayer.ICustomServices;

var builder = WebApplication.CreateBuilder(args);

// Add services to the container.
//Sql Dependency Injection
var ConnectionString = builder.Configuration.GetConnectionString("DefaultConnection");
builder.Services.AddDbContext<ApplicationDbContext>(options                                    =>
options.UseSqlServer(ConnectionString));
builder.Services.AddControllers();
// Learn more about configuring Swagger/OpenAPI at https://aka.ms/aspnetcore/swashbuckle
builder.Services.AddEndpointsApiExplorer();
builder.Services.AddSwaggerGen();
#region Service Injected
builder.Services.AddScoped(typeof(IRepository<>), typeof(Repository<>));
```

```
builder.Services.AddScoped<ICustomService<Student>,StudentService>();
builder.Services.AddScoped<ICustomService<Resultss>,ResultService>();
builder.Services.AddScoped<ICustomService<Departments>,DepartmentsService>();
builder.Services.AddScoped<ICustomService<SubjectGpas>,SubjectGpasService>();
#endregion

var app = builder.Build();

// Configure the HTTP request pipeline.
if (app.Environment.IsDevelopment())
{
    app.UseSwagger();
    app.UseSwaggerUI();
}

app.UseHttpsRedirection();


app.UseAuthorization();

app.MapControllers();

app.Run();
```

Controllers

Controllers are used to handle the HTTP request. Now we need to add the student controller that will interact will our service layer and display the data to the users.

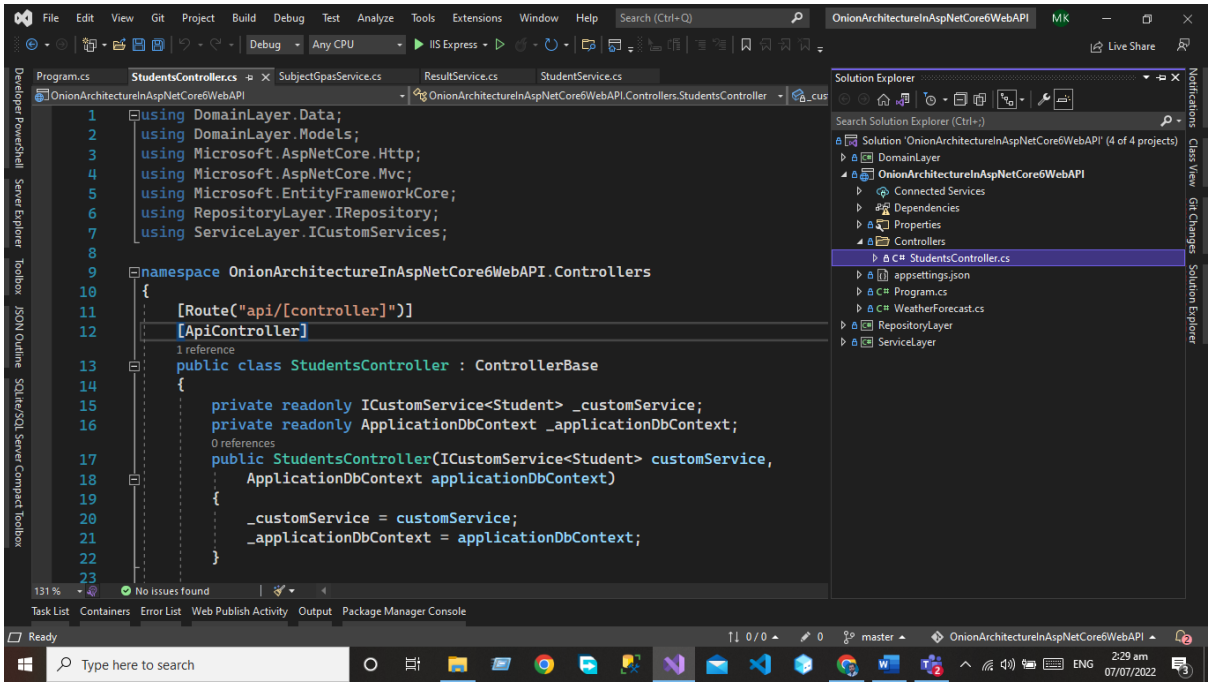

The Code of the Controller is given below.

```
using DomainLayer.Data;
using DomainLayer.Models;
using Microsoft.AspNetCore.Http;
using Microsoft.AspNetCore.Mvc;
using Microsoft.EntityFrameworkCore;
using RepositoryLayer.IRepository;
using ServiceLayer.ICustomServices;

namespace OnionArchitectureInAspNetCore6WebAPI.Controllers
{
   [Route("api/[controller]")]
   [ApiController]
   public class StudentsController : ControllerBase
   {
      private readonly ICustomService<Student> _customService;
      private readonly ApplicationDbContext _applicationDbContext;
      public StudentsController(ICustomService<Student> customService,
         ApplicationDbContext applicationDbContext)
      {
         _customService = customService;
         _applicationDbContext = applicationDbContext;
      }

      [HttpGet(nameof(GetStudentById))]
```


```
public IActionResult GetStudentById(int Id)
{
    var obj = _customService.Get(Id);
    if (obj == null)
    {
        return NotFound();
    }
    else
    {
        return Ok(obj);
    }
}
[HttpGet(nameof(GetAllStudent))]
public IActionResult GetAllStudent()
{
    var obj = _customService.GetAll();
    if(obj == null)
    {
        return NotFound();
    }
    else
    {
        return Ok(obj);
    }
}
[HttpPost(nameof(CreateStudent))]
public IActionResult CreateStudent(Student student)
{
    if (student!=null)
    {
      _customService.Insert(student);
       return Ok("Created Successfully");
    }
    else
    {
        return BadRequest("Somethingwent wrong");
    }
}
[HttpPost(nameof(UpdateStudent))]
public IActionResult UpdateStudent(Student student)
{
    if(student!=null)
```

```
            {
                _customService.Update(student);
                return Ok("Updated SuccessFully");
            }
            else
            {
                return BadRequest();
            }


        }
        [HttpDelete(nameof(DeleteStudent))]
        public IActionResult DeleteStudent(Student student)
        {
            if(student!=null)
            {
                _customService.Delete(student);
                return Ok("Deleted Successfully");
            }
            else
            {
                return BadRequest("Something went wrong");
            }
        }
    }
}
```


Output

Now we will run the project and will see the output using the swagger.

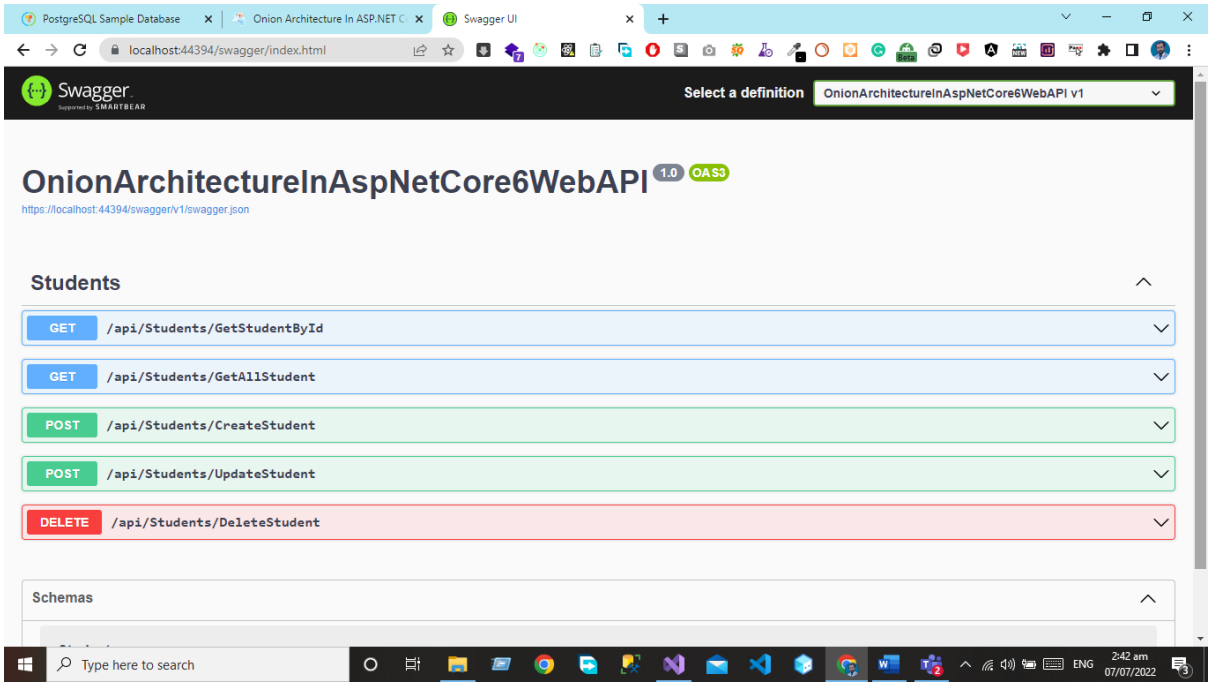

Now we can see when we hit the GetAllStudent Endpoint we can see the data of students from the database in the form of JSON projects.

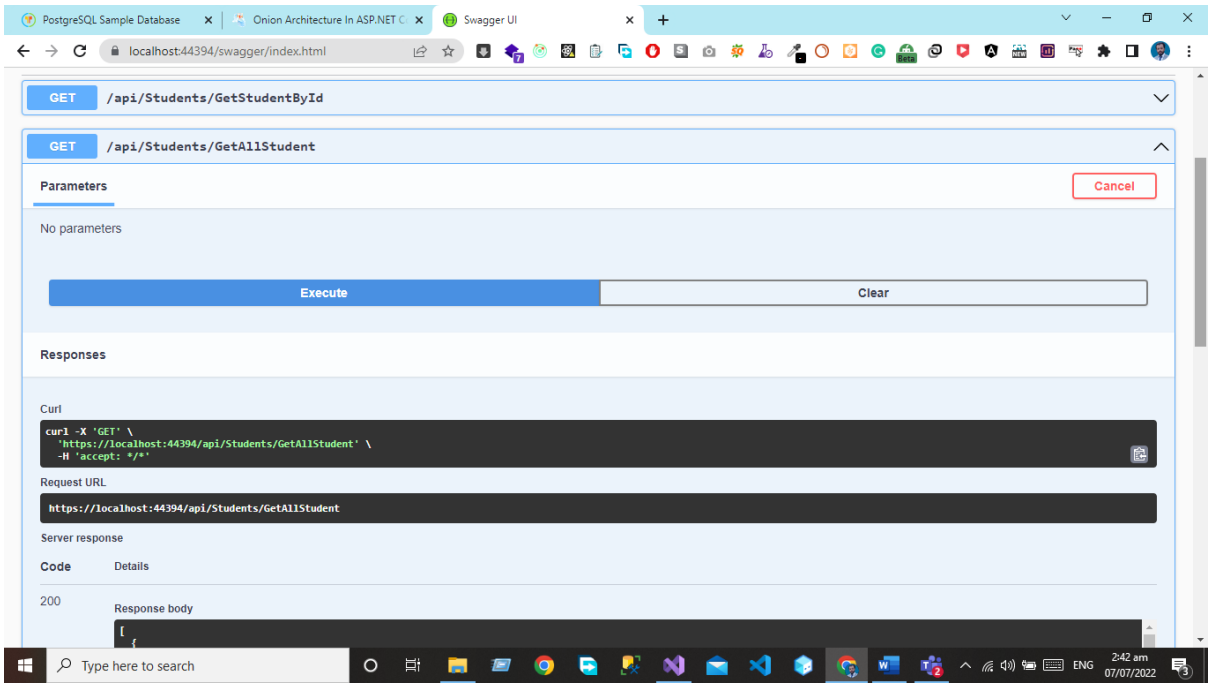

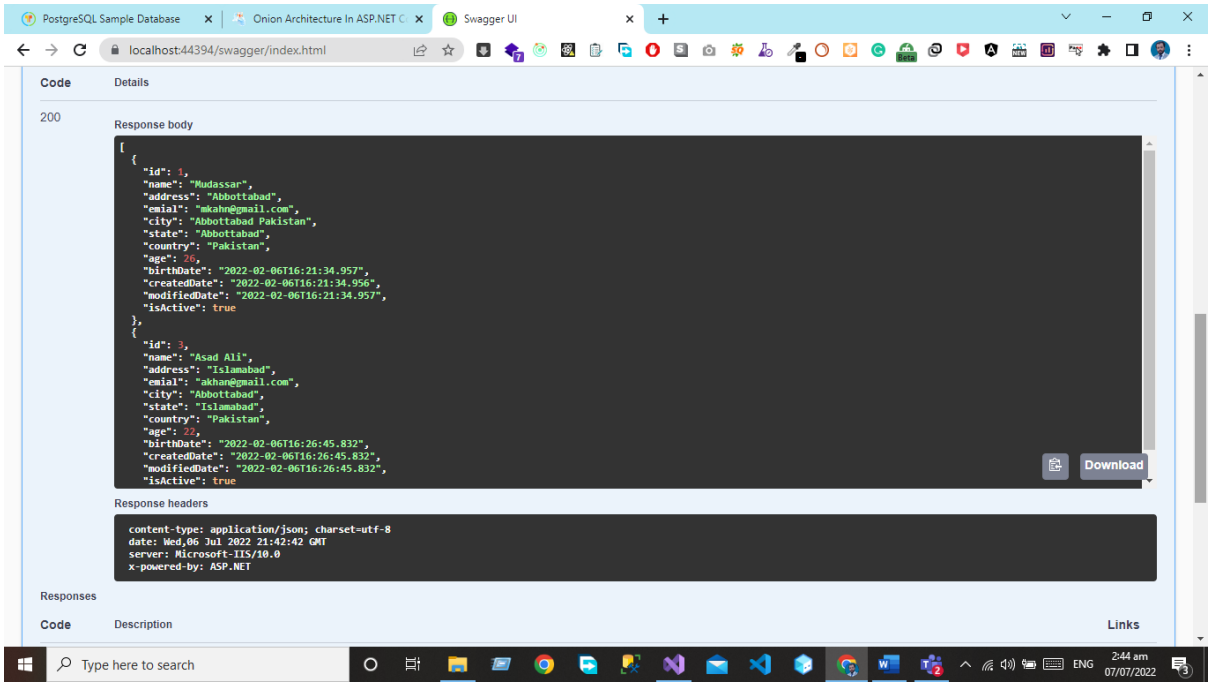

Conclusion

In this chapter, we have implemented the Onion architecture using the Entity Framework and Code First approach. We have now the knowledge of how the layer communicates with each other's in onion architecture and how we can write the Generic code for the Interface repository and services. Now we can develop our project using onion architecture for API Development OR MVC Core Based projects.

Complete GitHub project URL

Click here for complete project

4

API Testing Using Postman

Overview

- Introduction
- How to Test API Web Service in Asp Net Core 5 Using Postman
- Test Post Call in Postman
- Test Get Call in Postman
- Test Put Call in Postman
- Test Delete Call in Postman
- Conclusion


Introduction

In this article I will cover the complete procedure of How to test web API Service using Postman It is a simplest and very beautiful way to test and document your web service. Postman is a collaboration platform for API development. Postman's functions simplify every step of building an API and streamline collaboration so you can create better APIs—quicker.




How to Test API Web Service in Asp Net Core 5 Using Postman


In Postman for API Testing the professional approach is make the collection for API Requests for collecting the responses like GET PUT POST AND DELETE Request Response. Open the post man Click on Create Collection.

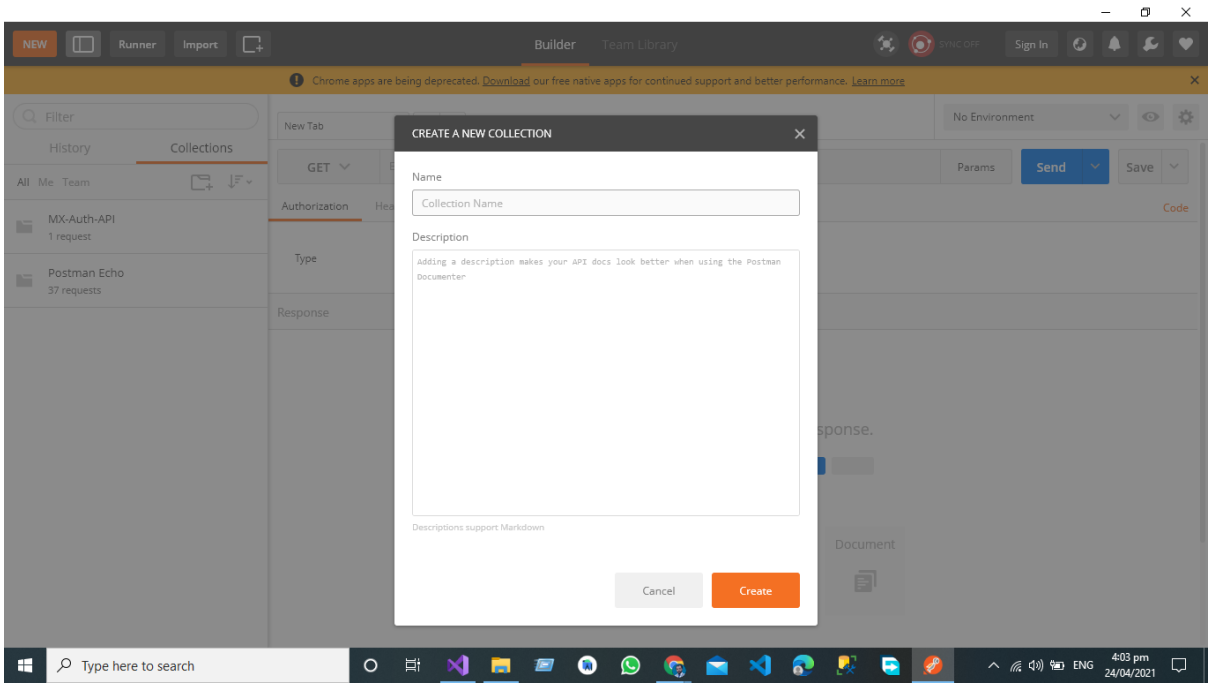


Name the Collection in Postman.

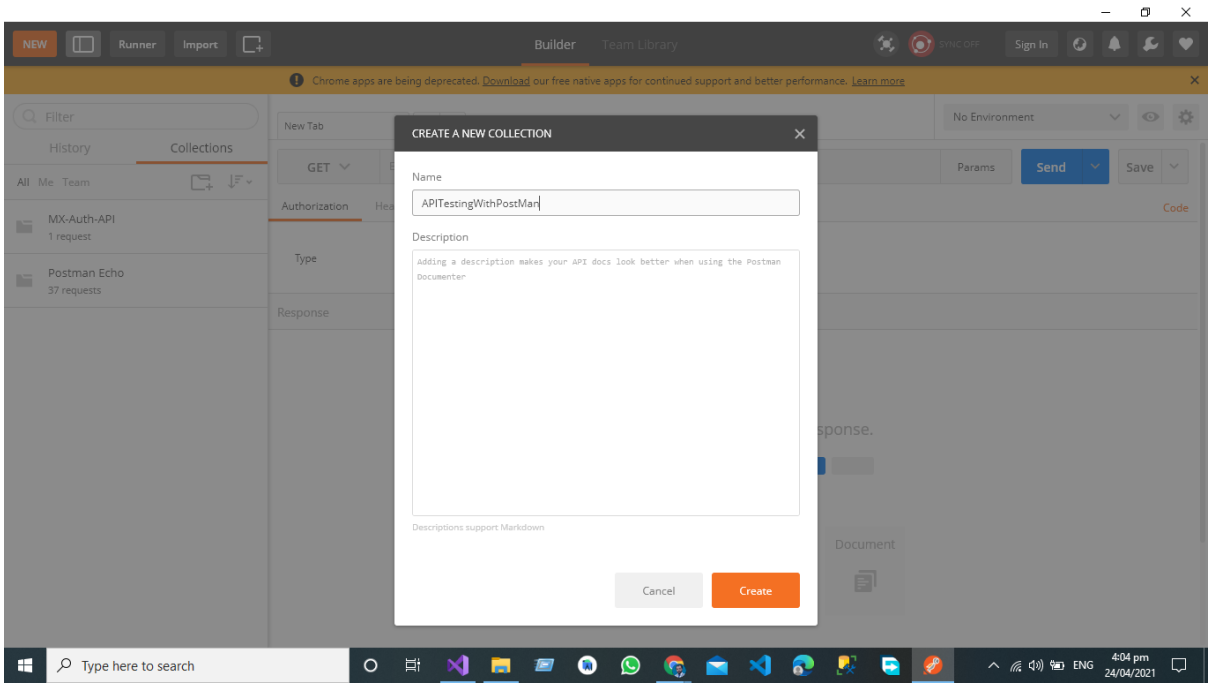


Now the collection is ready for collecting the API Request Response.

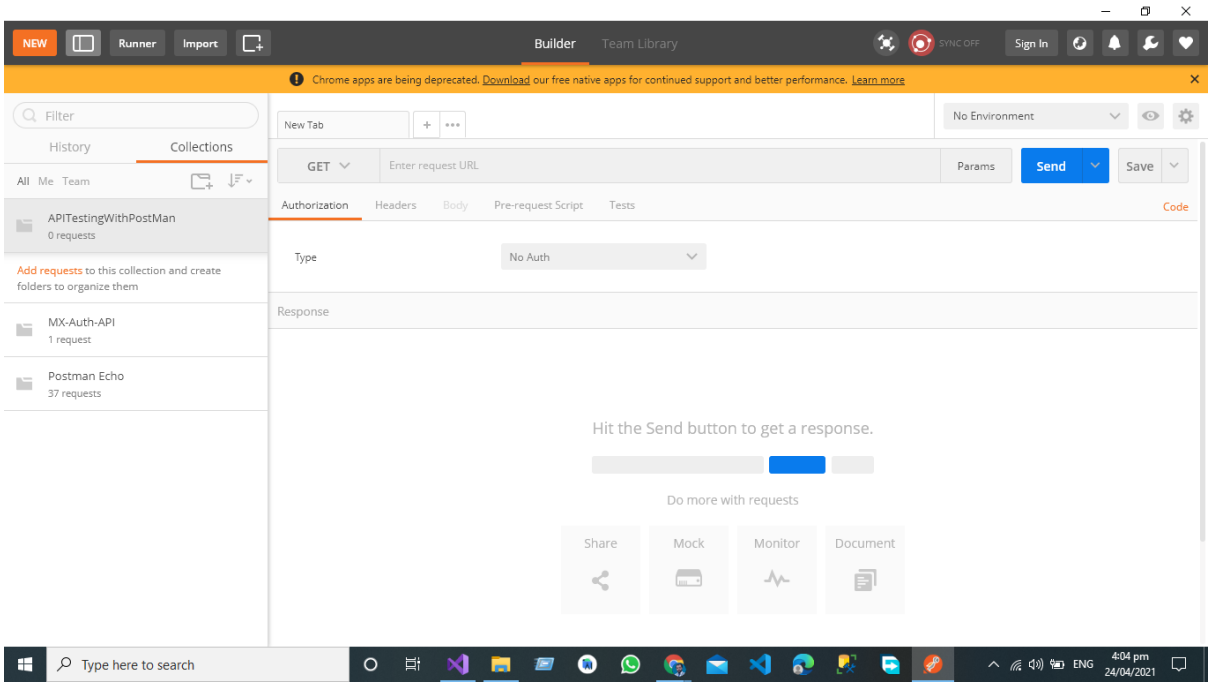


Add the API Request Responses Like PUT,POST,DELETE AND GET,

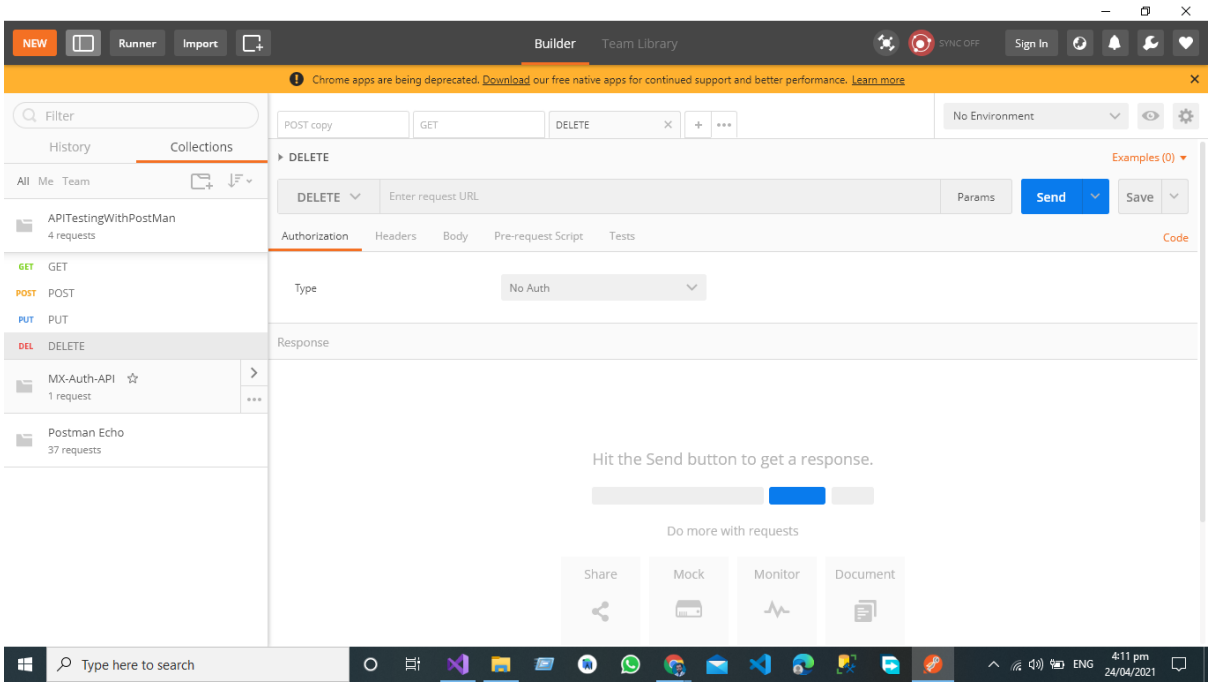

We are going to test the following use case for this article. In this article I am going to test the **POST, GET, PUT, DELETE, AND UPDATE,** Endpoints of Web Service.

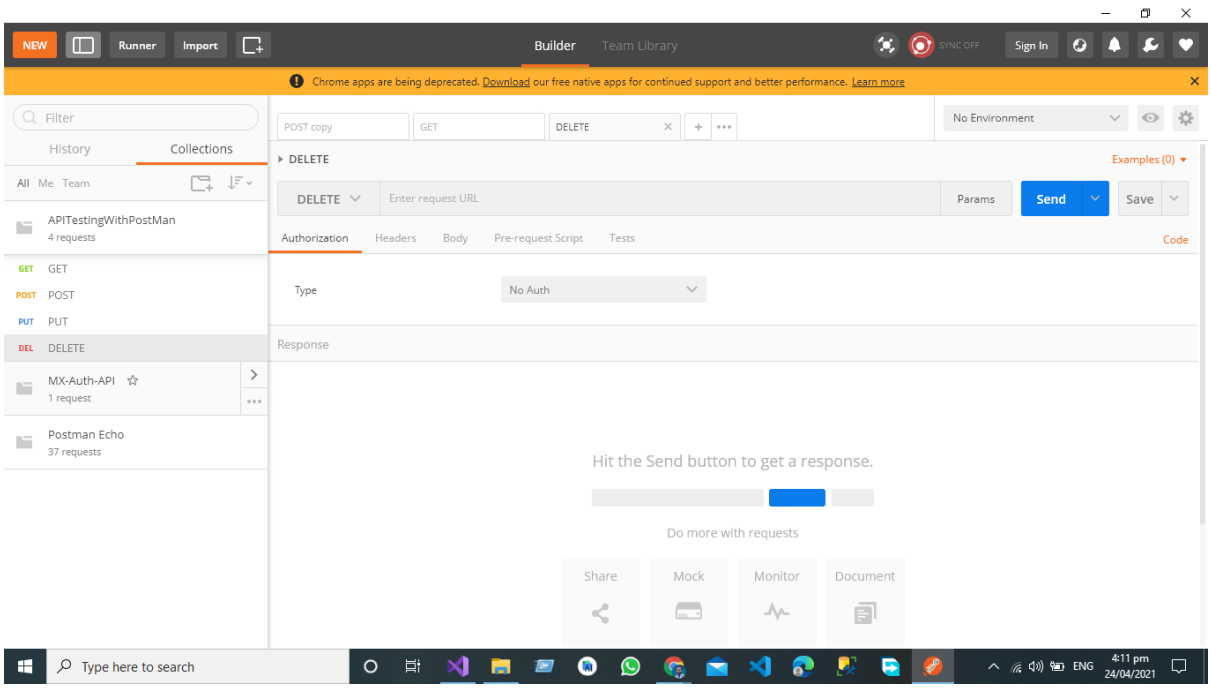


Here in this example we are going to test the Web Servive using Postman Developed using the Asp.Net Core 5 Web API

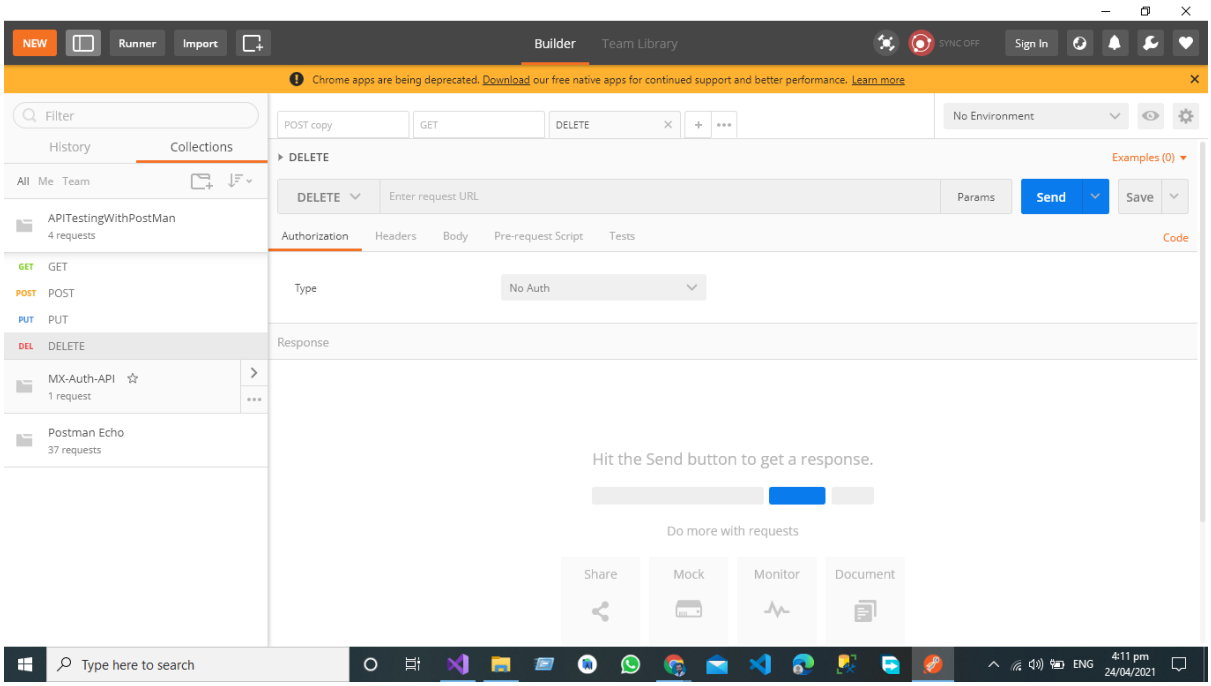


Test Post Call in Postman

Here we are going to send the JSON object with Following Properties


```
{
  "id": 0,
  "userName": "string",
  "userPassword": "string",
  "userEmail": "string",
  "createdOn": "2021-04-16T20:38:41.062Z",
  "isDeleted": true
}
```

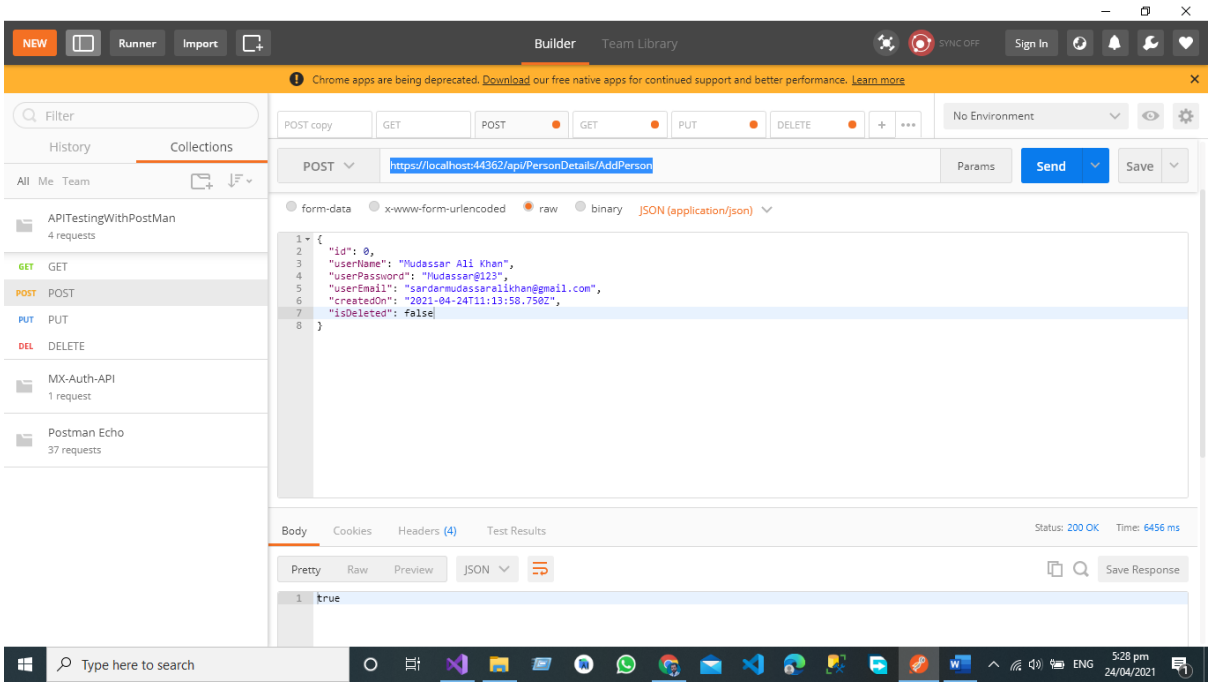

Now Click on Raw and then Select the JSON

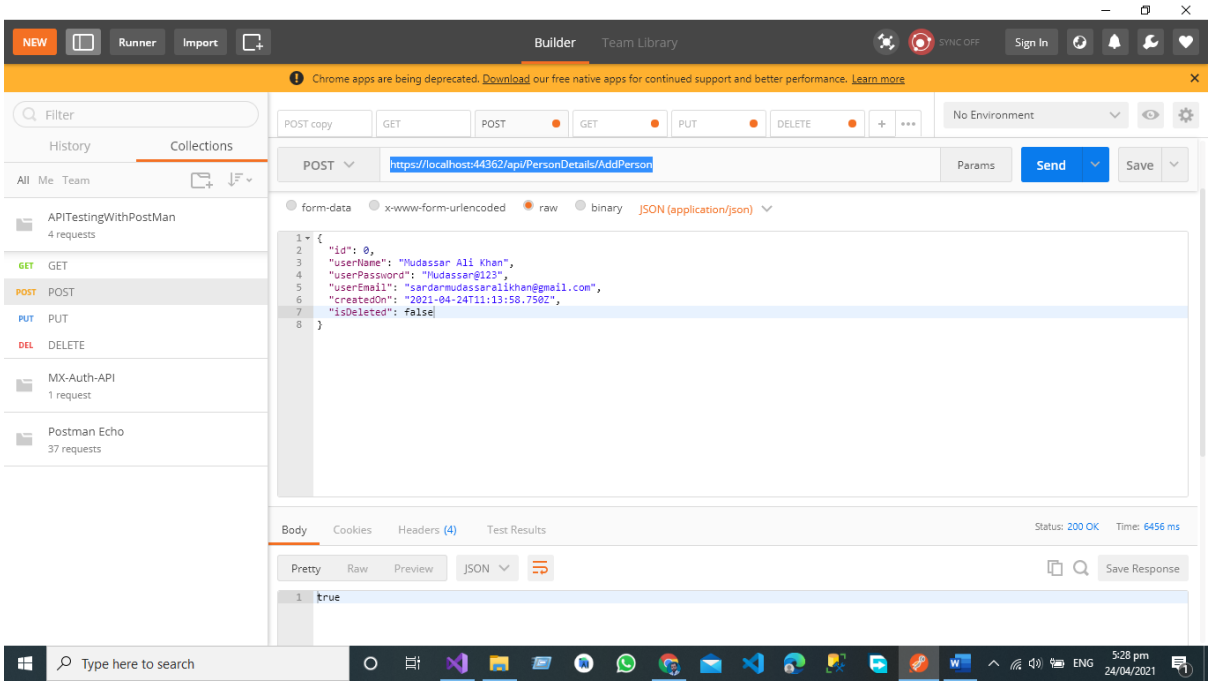

If we want to Create the New Person in the Database, we must send the JSON Object to the End Point then data is posted by Postman UI to POST End Point in the Controller Then Create Person Object Creates the Complete Person Object in the Database.

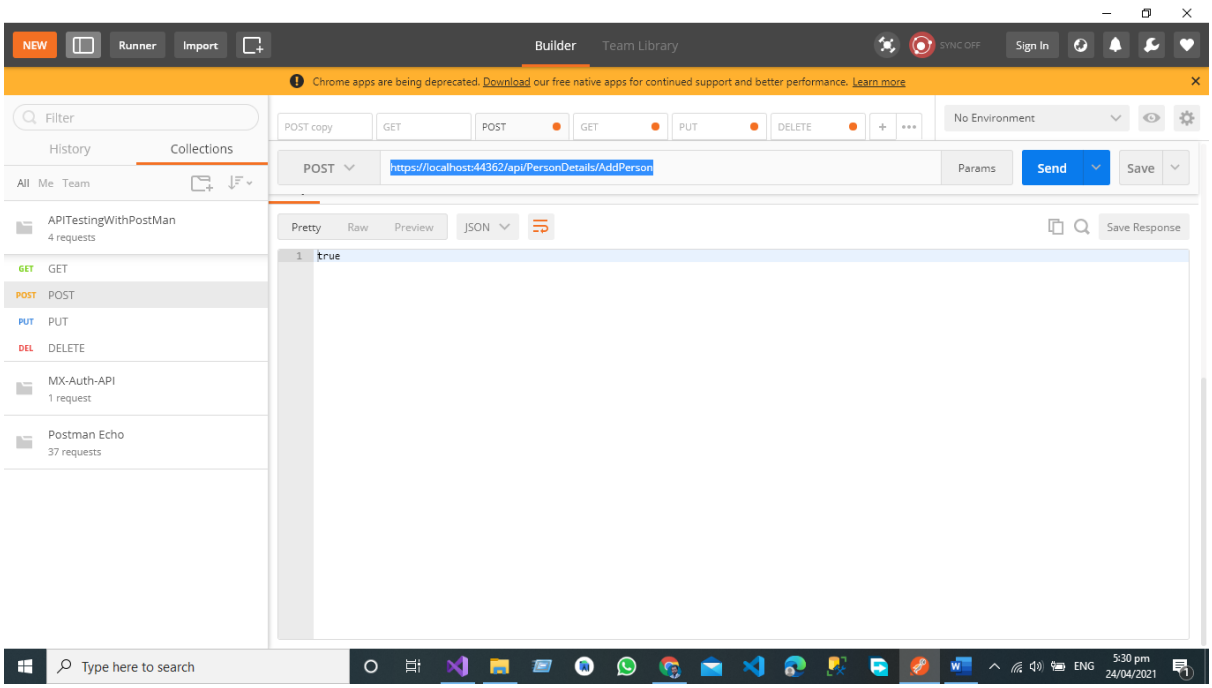


Now you can see that our API give us the server response == true so it indicates that a new record has been created in the data base against our JSON Object that we have sent using Postman.


Test Delete Call in Postman

For Deletion of Person, we have a separate End Point Delete Employee from the Database, we must send the JSON Object to the End Point then data is posted by Postman UI to call the End Point DELETE Person in the Controller Then Person Object will be Deleted from the Database.

In Deletion of the record just select body and the select the form data pass the id value the for the record you want to delete from the database.

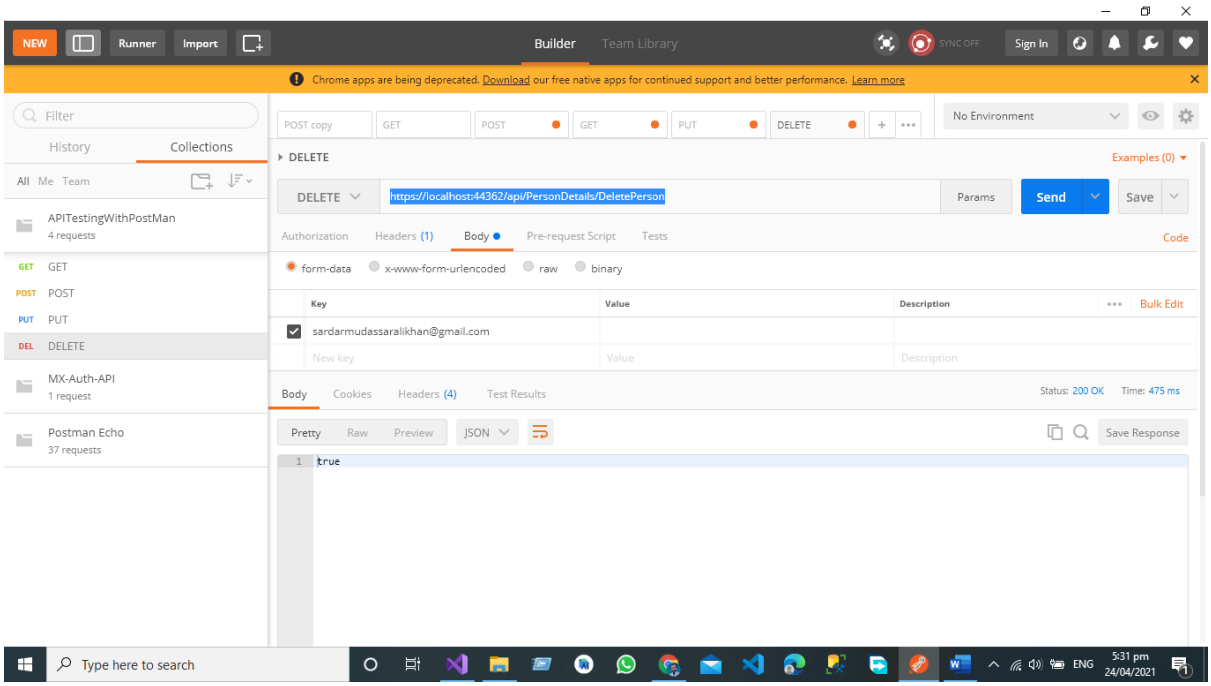


We are going to delete the record against the given email if the API server response equal to true then our record deleted from the database successfully.

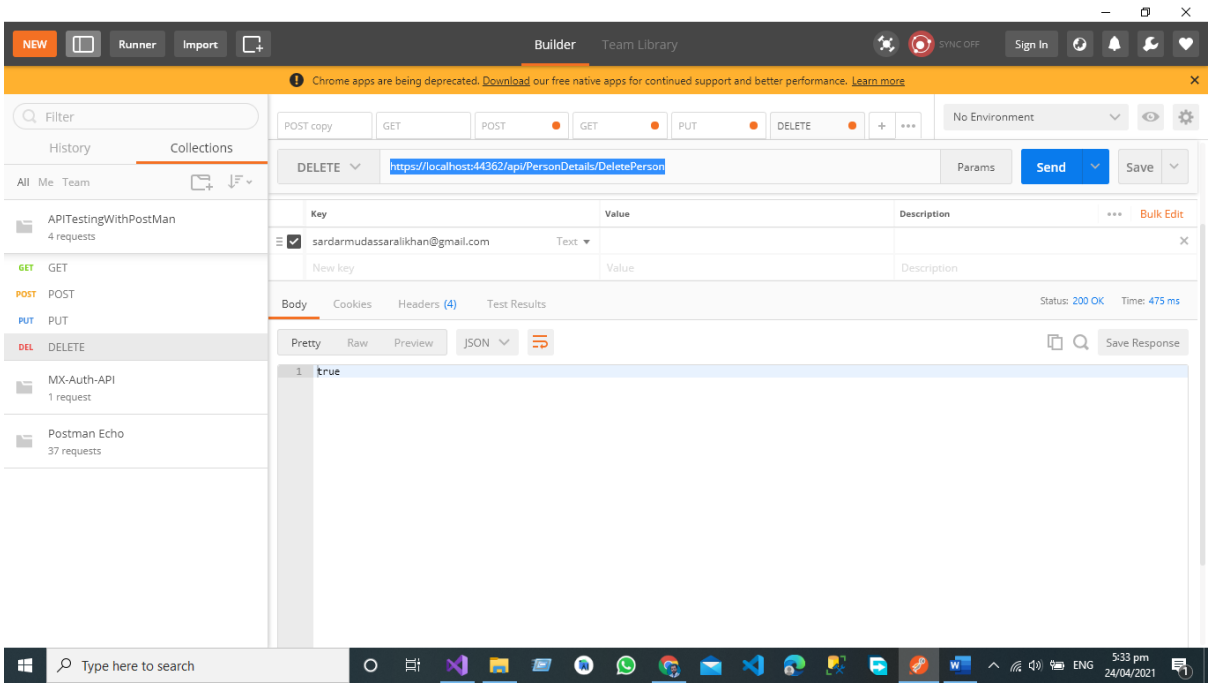


In Above two pictures you can see that after hitting the Delete End point our server response is true it indicates that our record has been delete from the database against our desired Email.

Test Get Call in Postman

If we want to get the record of all the person's data from the database, we will hit the GET end point in our Web Service using Postman after the completion of server request all the data will be given to us by our GETAllPerson End point.

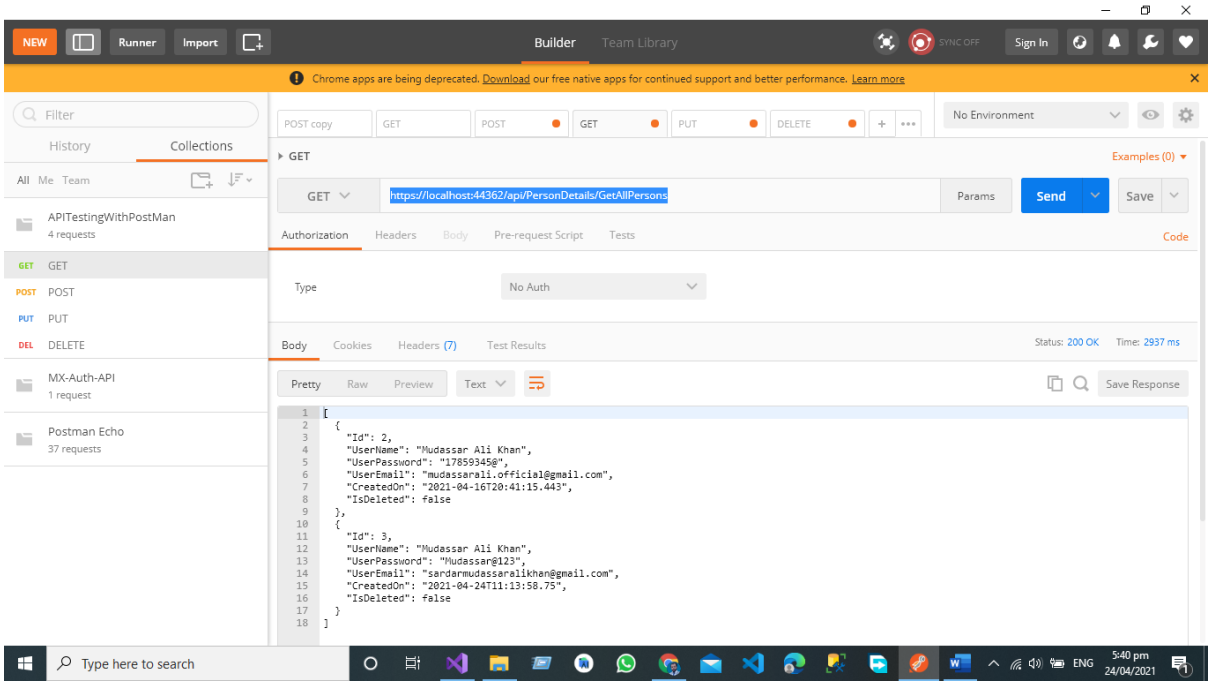

Hit the GET Endpoint for getting all record from the database.

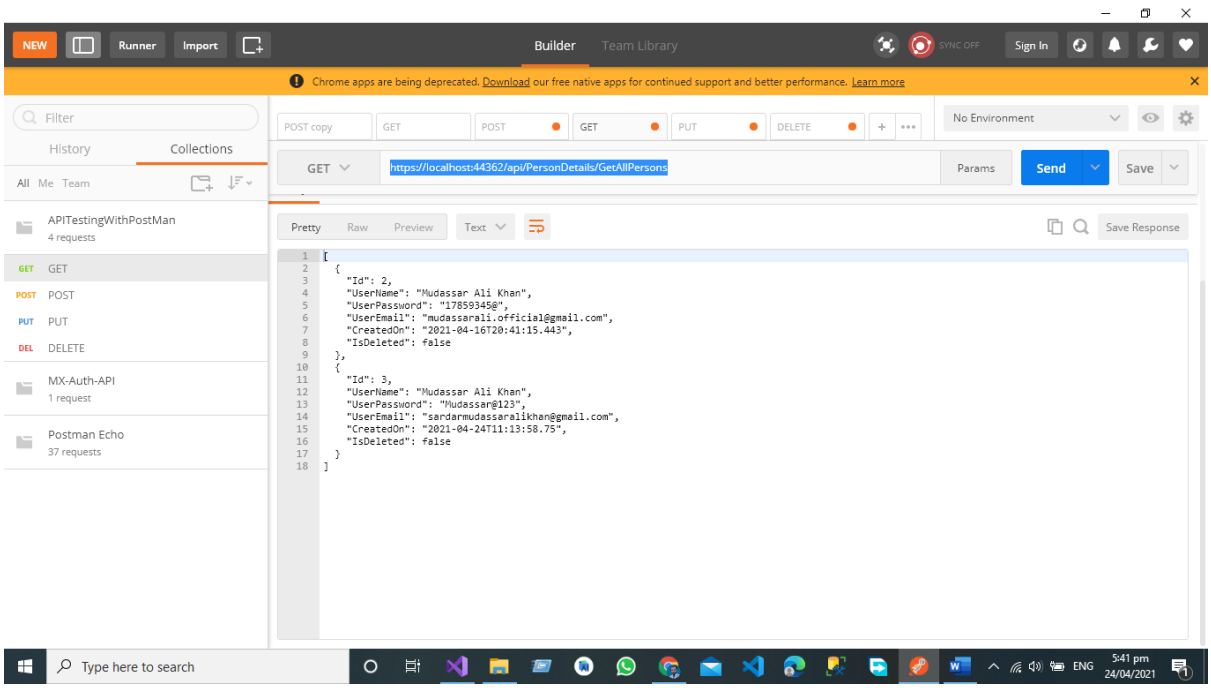

After the successful execution of Web service all the record is visible to us in the form of JSON object in database we have Only One Record so that

Test Put Call in Postman


In put call we are going to update the record in database. We have Separate End Points for All the operations like Update the Record of the Person by User Email from the Database by Hitting the UPDTAE End Point that send the request to controller and in controller we have the separate End Point for Updating the record based on User Email from the database.

We are going to update the given below JSON Object in the database


```
{
  "id": 0,
  "userName": "Mudassar Ali Khan",
  "userPassword": "17859345@",
  "userEmail": "mudassarali.official@gmail.com",
  "createdOn": "2021-04-16T20:41:15.443Z",
  "isDeleted": false
}
```

To given below JSON object


```
{
  "id": 0,
  "userName": "Sardar Mudassar Ali Khan",
  "userPassword": "17859345@",
  "userEmail": "mudassarali.official@gmail.com",
  "createdOn": "2021-04-16T20:41:15.443Z",
  "isDeleted": false
}
```

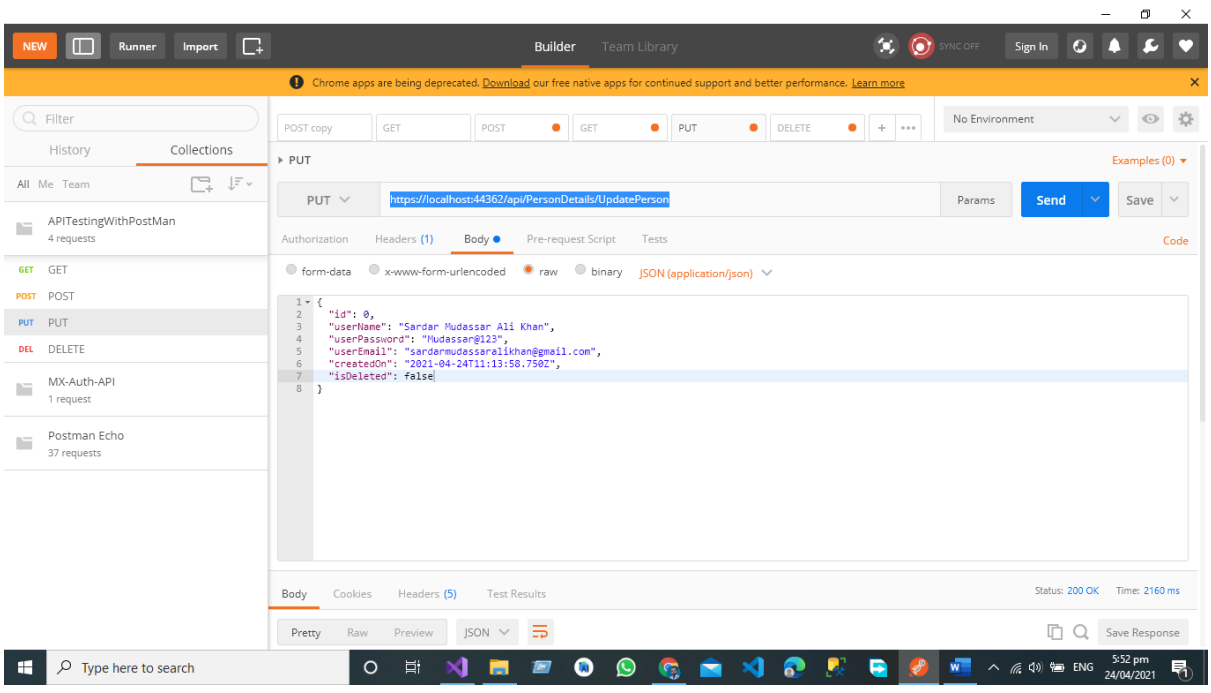

We have sent the API JSON Response to the PUT Endpoint for Updating the Record in the database

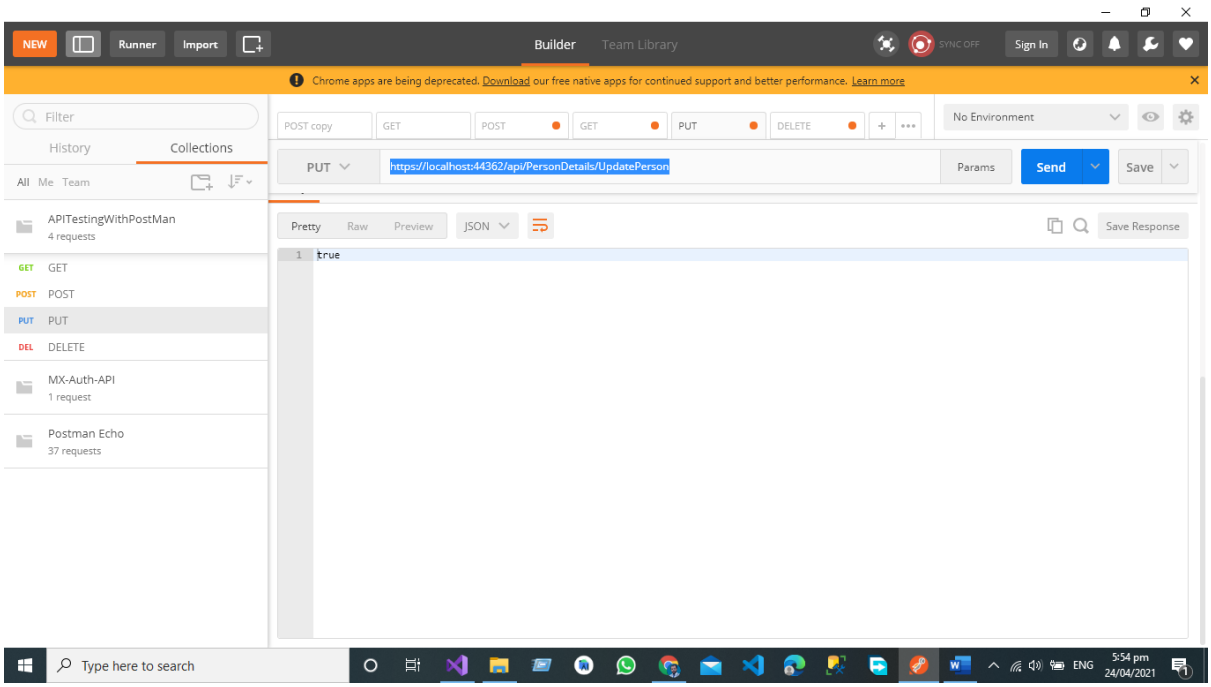

After the successful submission of data, you can see that our server response is true it indicates that our data has been successfully submitted in the database

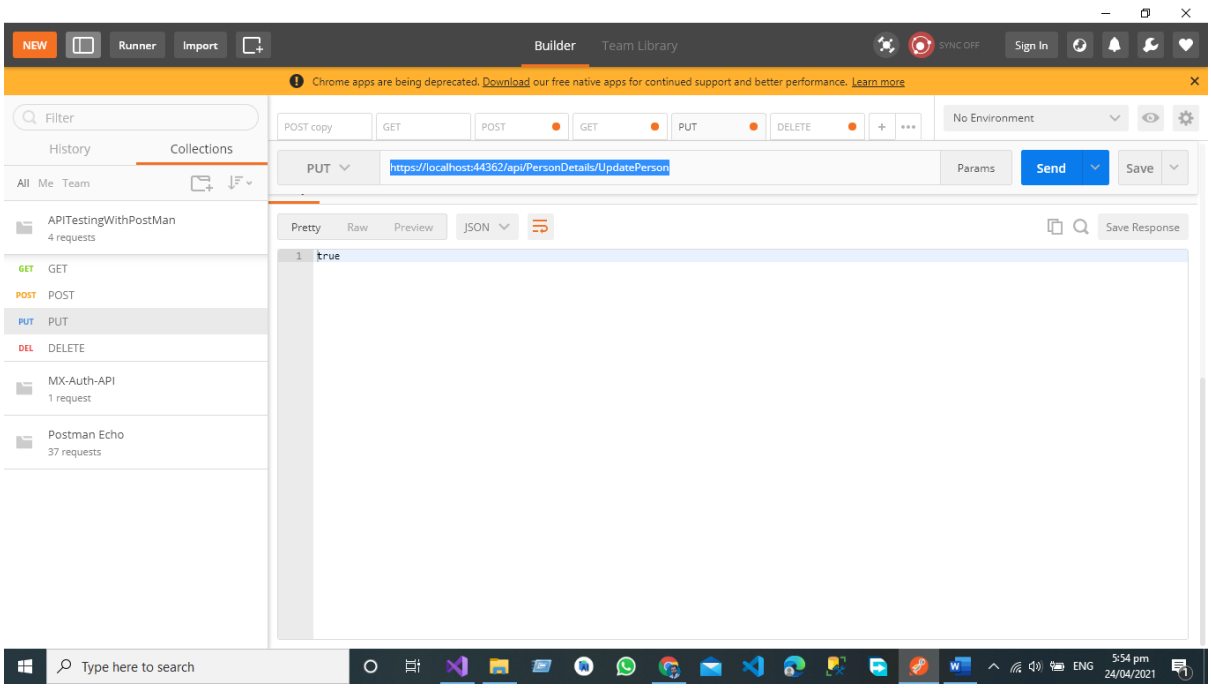

Conclusion

As a Software Engineer My Conclusion about the Postman is the best Open API for Testing the RESTful API as a Developer I have a great experienced with Postman for testing the restful API sending the Complete JSON Object and then getting the response in a professional way. It is easy to implement in Asp.net core Web API Project and after the configuration Developers can enjoy the beauty of Postman Open API.

5

API Testing Using Swagger

Overview

- Introduction
- How to Test API Web Service in Asp Net Core 5 Using Swagger
- Test Post Call in Swagger
- Test Get Call in Swagger
- Test Put Call in Swagger
- Test Delete Call in Swagger
- Conclusion

Introduction

In this article I will cover the complete procedure of How to test web API Service using Swagger Open API It is the simplest and very beautiful way to test and document your web service.


Swagger (Open API) is a language-agnostic specification for describing and documenting the REST API. Swagger Allows both the Machine and Developer to understand the working and capabilities of the Machine without direct access to the source code of the project the main objectives of swagger (Open API) are to:

Minimize the workload to connect with Micro services.


Reduce the Time Needed to accurately document the Micro services.

How to Test API Web Service in Asp Net Core 5 Using Swagger

We are going to test the following use case for this article. In this article I am going to test the **POST, GET, PUT, DELETE, AND UPDATE,** Endpoints of Web Service.

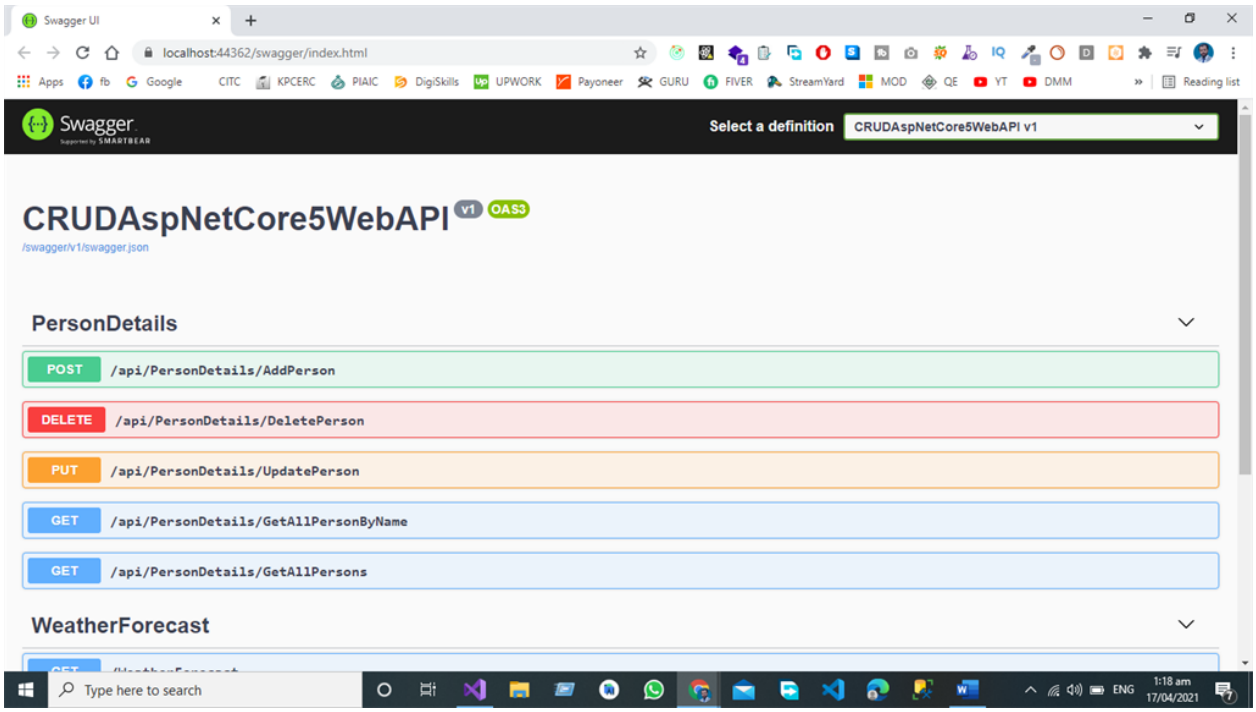


Here in this example, we are going to test the Web Service using Swagger Developed using the Asp.Net Core 5 Web API.

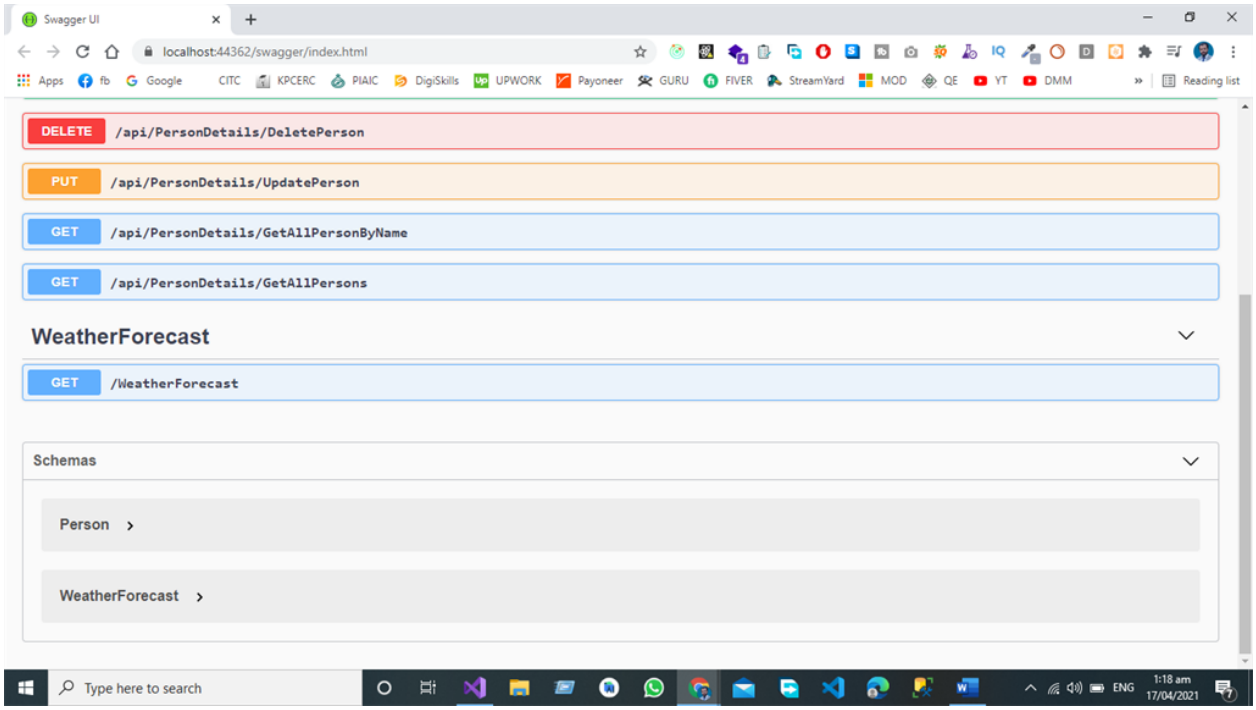


Test POST Call in Swagger

Here we are going to send the JSON object with the Following Properties


```
{
  "id": 0,
  "userName": "string",
  "userPassword": "string",
  "userEmail": "string",
  "createdOn": "2021-04-16T20:38:41.062Z",
  "isDeleted": true
}
```

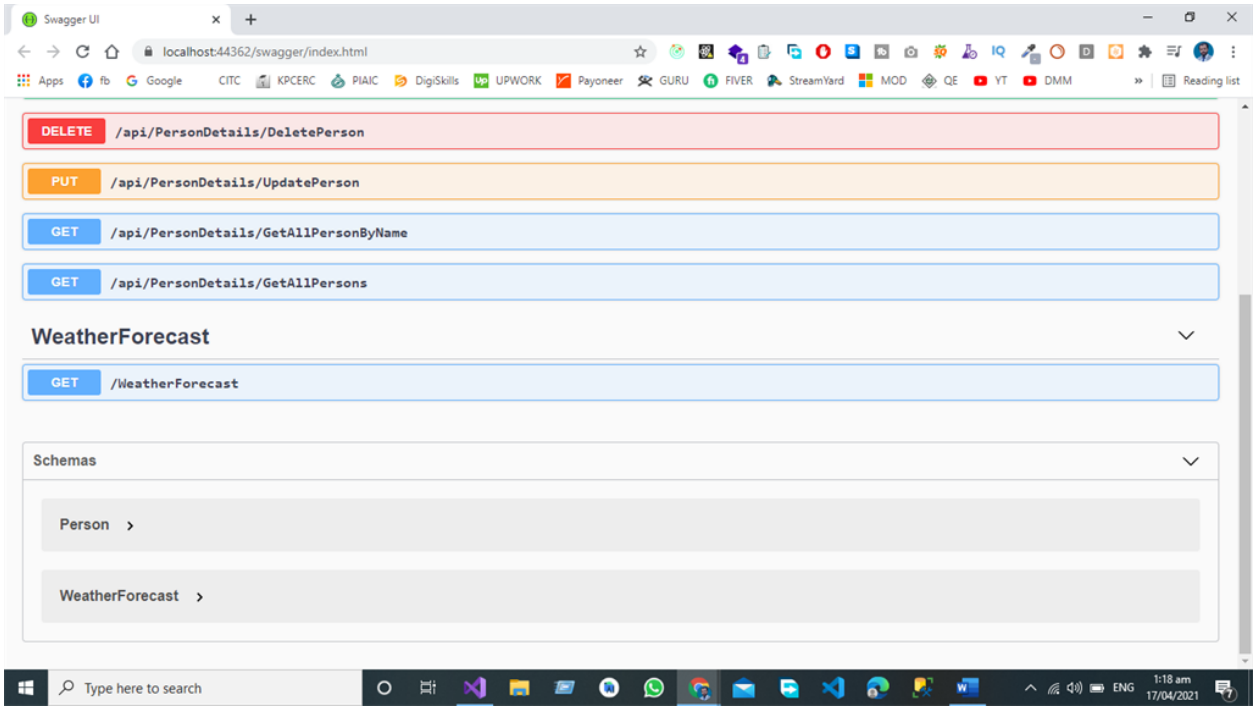

Now click the try-out button.

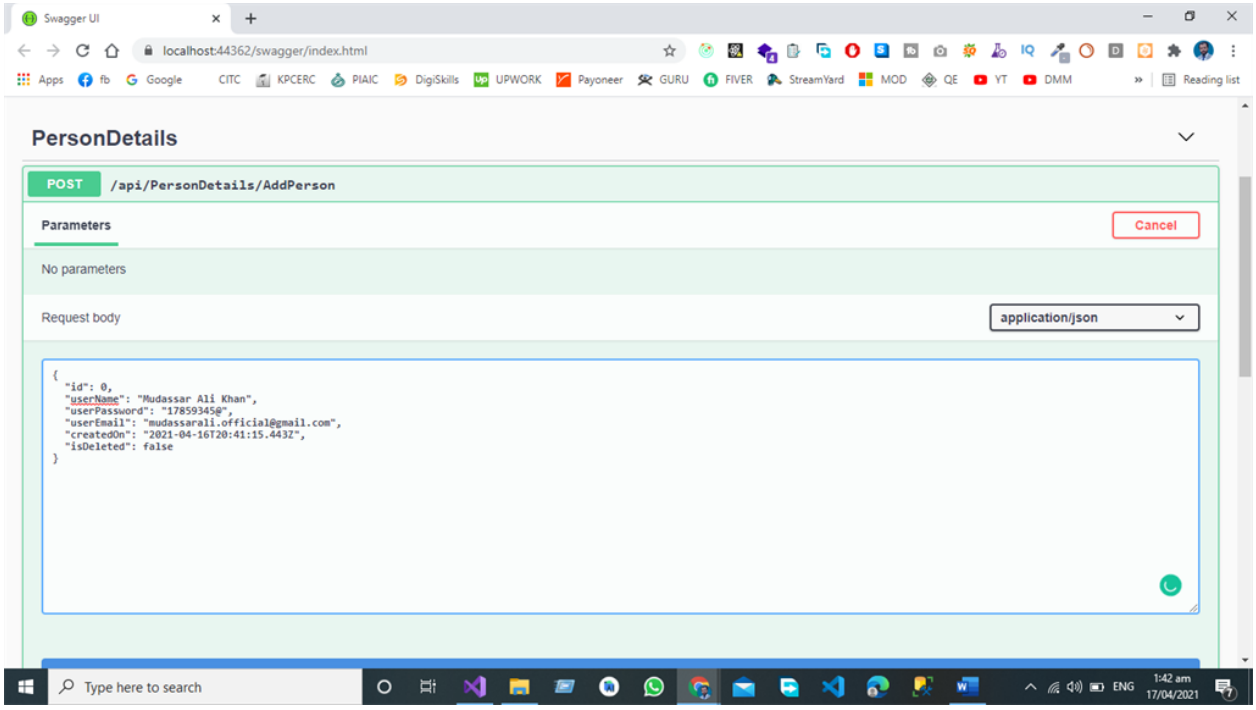


If we want to Create the New Person in the Database, we must send the JSON Object to the End Point then data is posted by Swagger UI to POST End Point in the Controller then Create Person Object Creates the Complete Person Object in the Database.

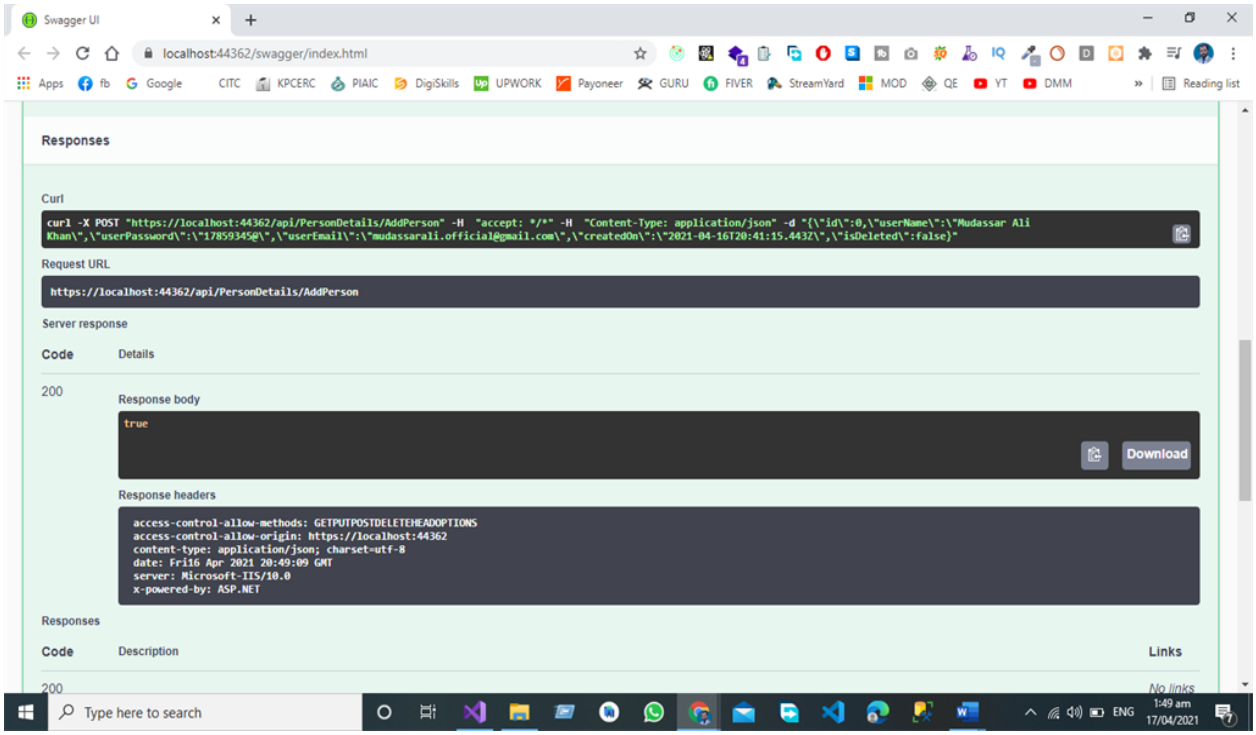


Now you can see that our API gives us the server response == true so it indicates that a new record has been created in the database against our JSON Object that we have sent using Swagger.

Test DELETE Call in Swagger


For Deletion of Person, we have a separate End Point Delete Employee from the Database, we must send the JSON Object to the End Point then data is posted by Swagger UI to call the End Point DELETE Person in the Controller Then Person Object will be deleted from the Database.

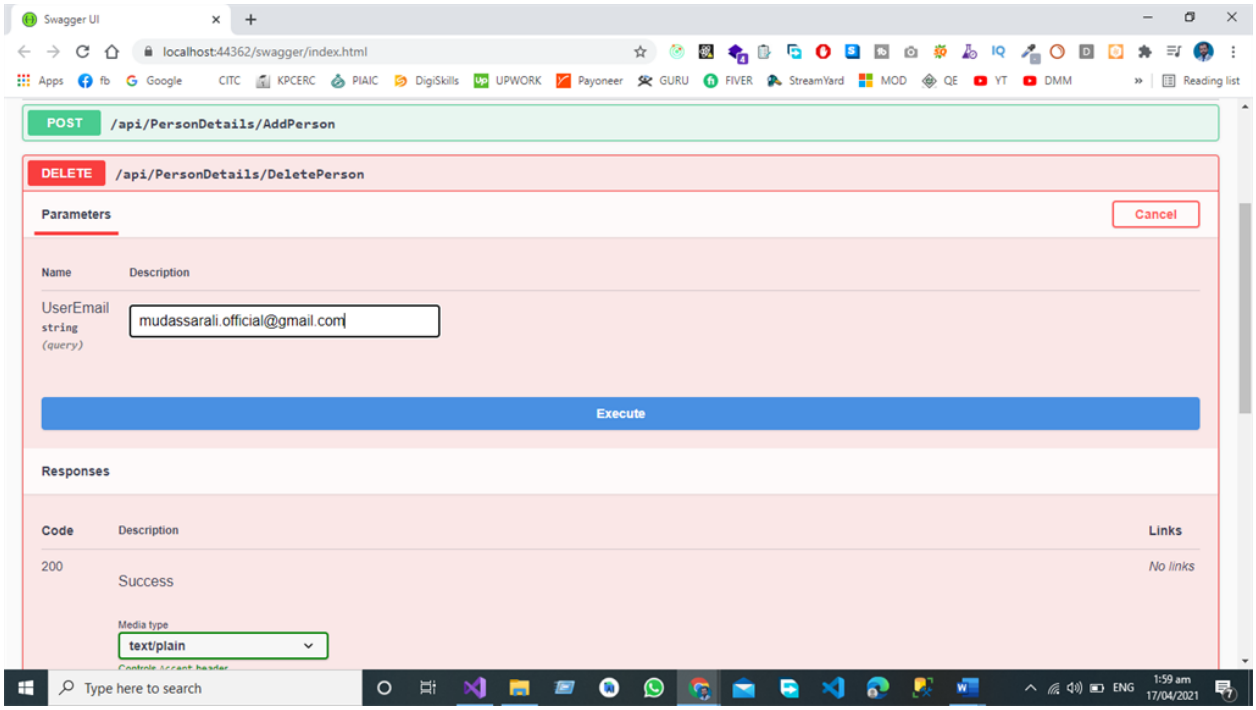

Now we are going to delete the record against a certain Id

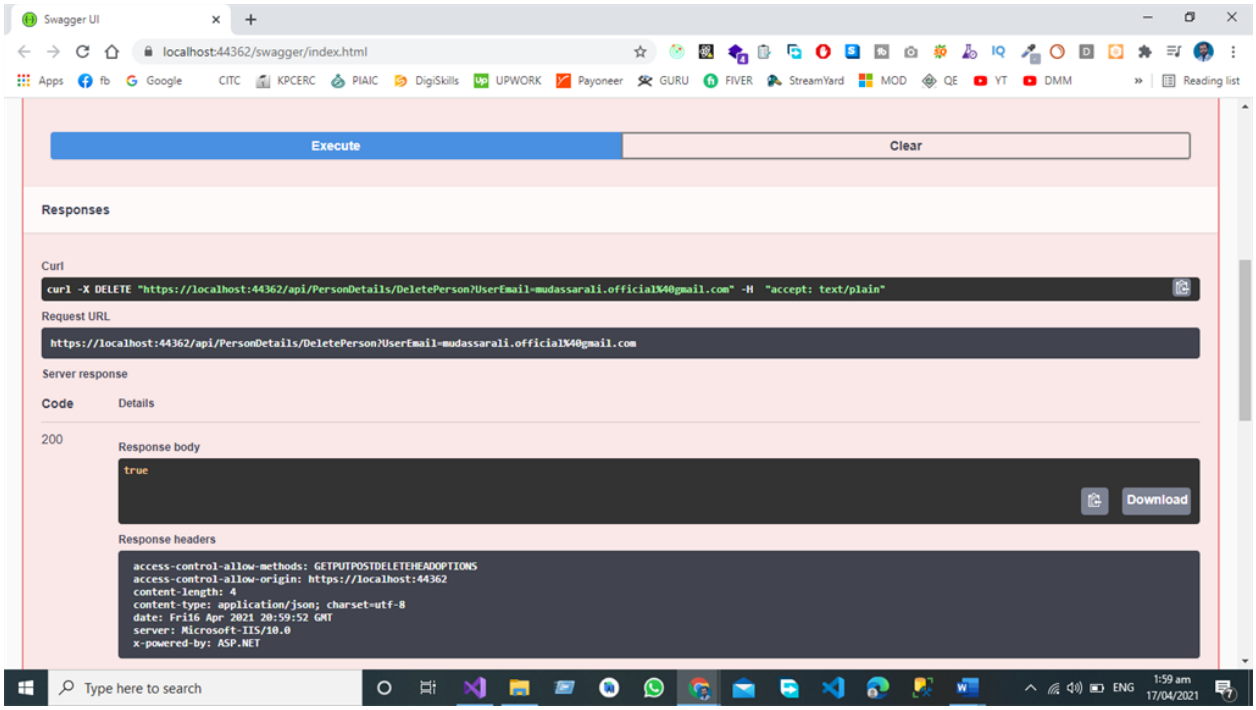


We are going to delete the record against the given email if the API service equal to true then our record deleted from the database successfully.

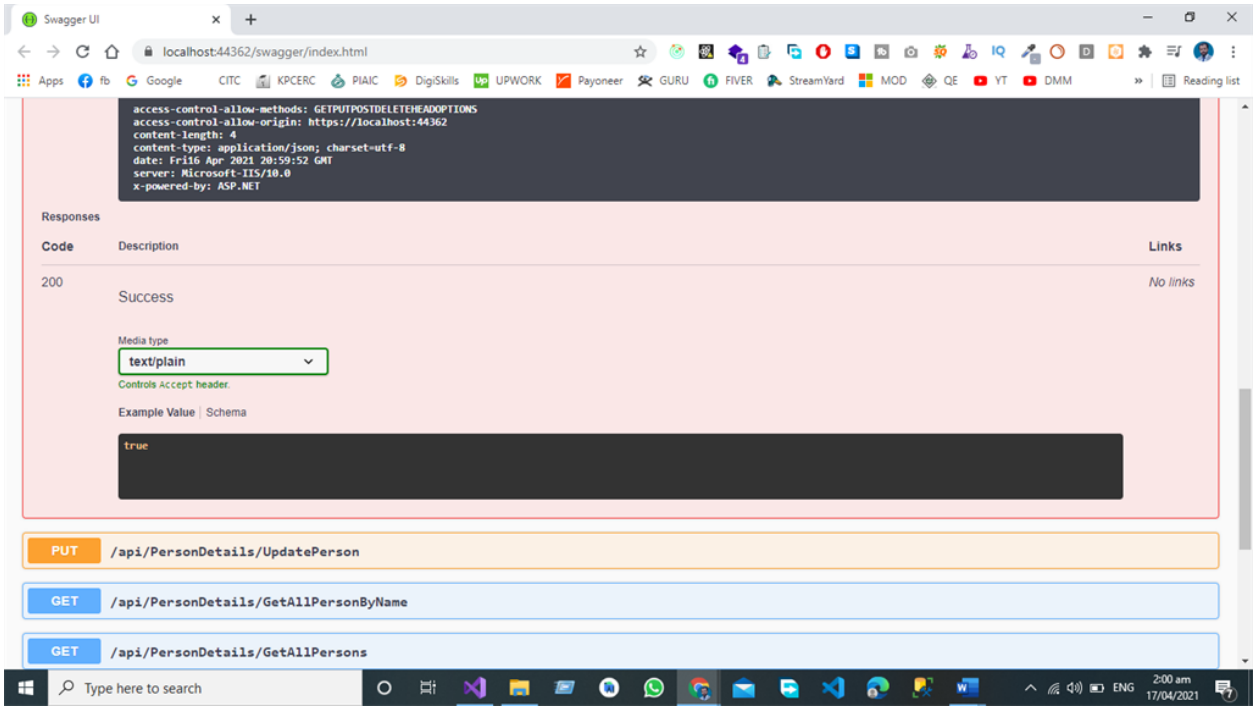


In the above two pictures, you can see that after hitting the Delete Endpoint our server response is true it indicates that our record has been deleted from the database against our desired Email.

Test GET Call in Swagger

If we want to get the record of all the personal data from the database, we will hit the GET endpoint in our Web Service using swagger after the completion of the server request all the data will be given to us by our GETAllPerson Endpoint.

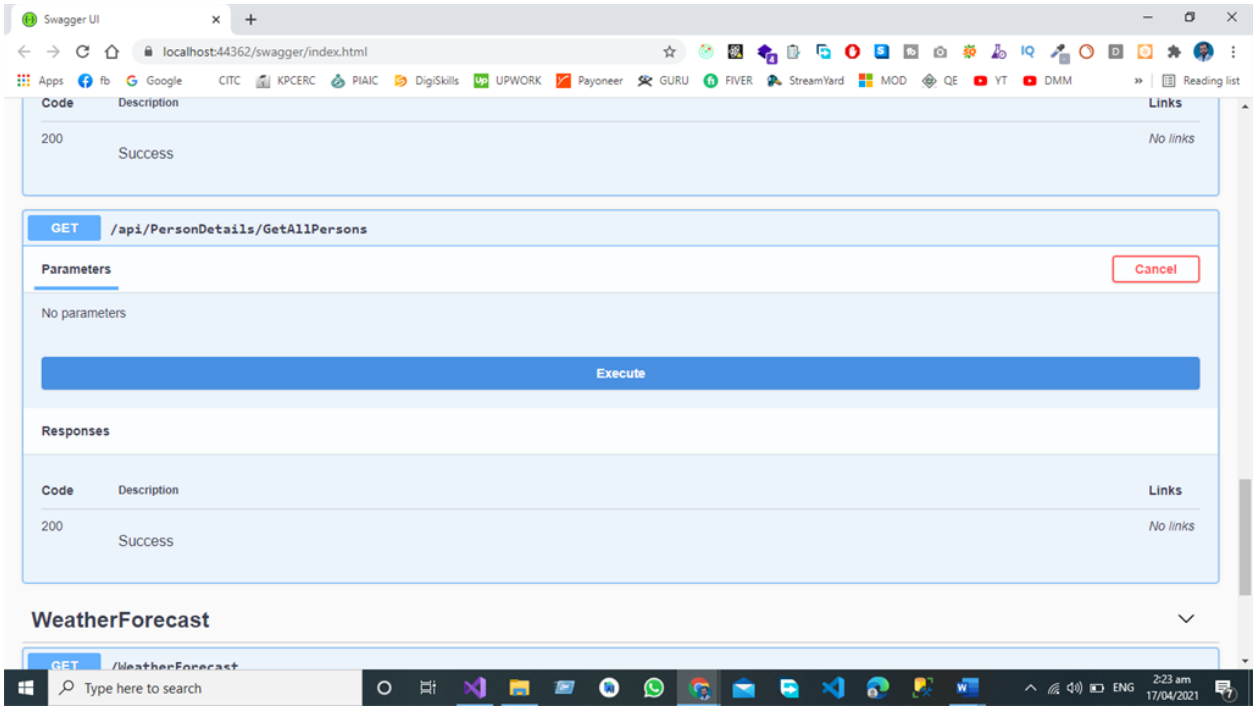

Now we are going to fetch all the record from the database.

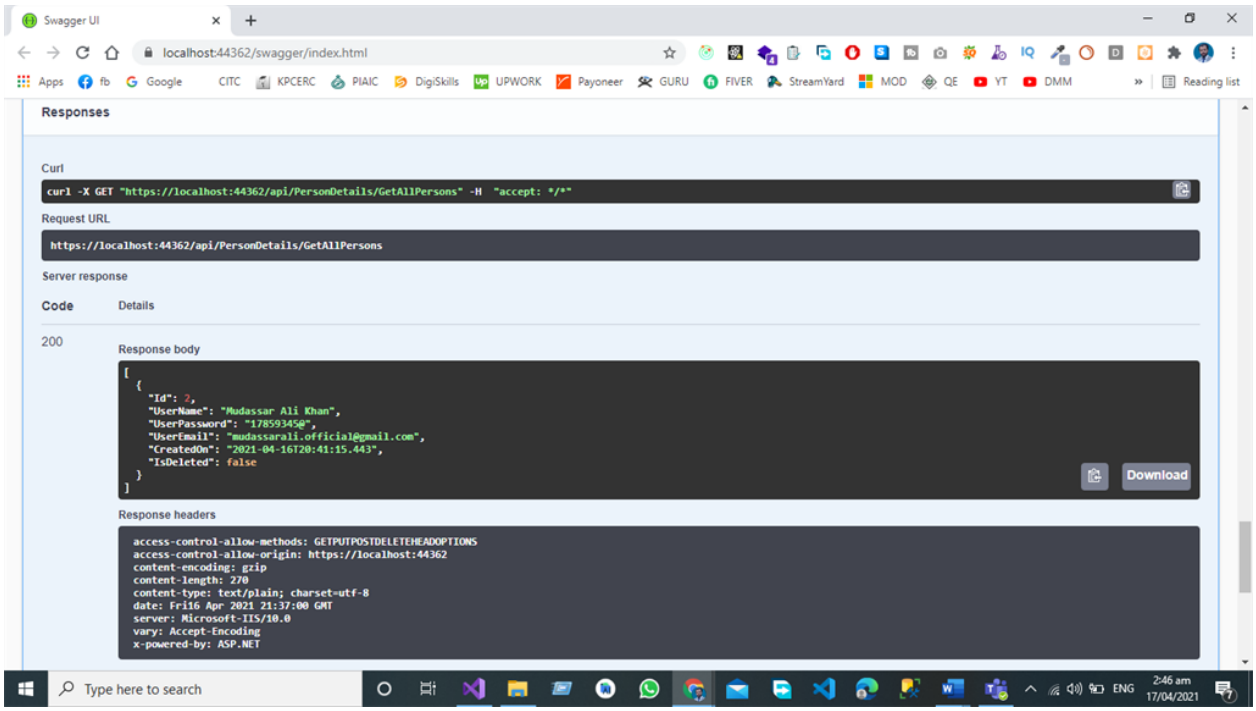


After the successful execution of Web service, all the record is visible to us in the form of a JSON object in database we have Only One Record so that

Test PUT Call in Swagger

In put-call, we are going to update the record in the database. We have Separate End Points for All the operations like Update the Record of the Person by User Email from the Database by Hitting the UPDATE End Point that sends the request to the controller and in the controller we have a separate End Point for Updating the record based on User Email from the database.


We are going to update the given below JSON Object in the database.

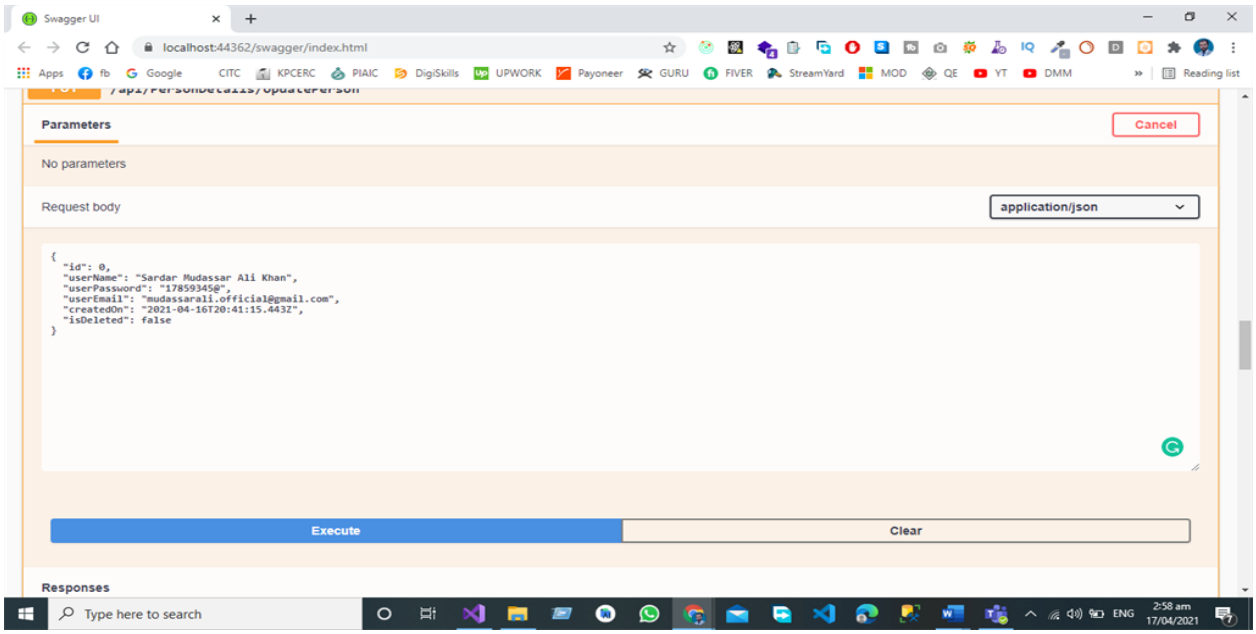



```
{
  "id": 0,
  "userName": "Mudassar Ali Khan",
  "userPassword": "17859345@",
  "userEmail": "mudassarali.official@gmail.com",
  "createdOn": "2021-04-16T20:41:15.443Z",
  "isDeleted": false
}
```


To given below JSON Object

```
{
  "id": 0,
  "userName": "Sardar Mudassar Ali Khan",
  "userPassword": "17859345@",
  "userEmail": "mudassarali.official@gmail.com",
  "createdOn": "2021-04-16T20:41:15.443Z",
  "isDeleted": false
}
```

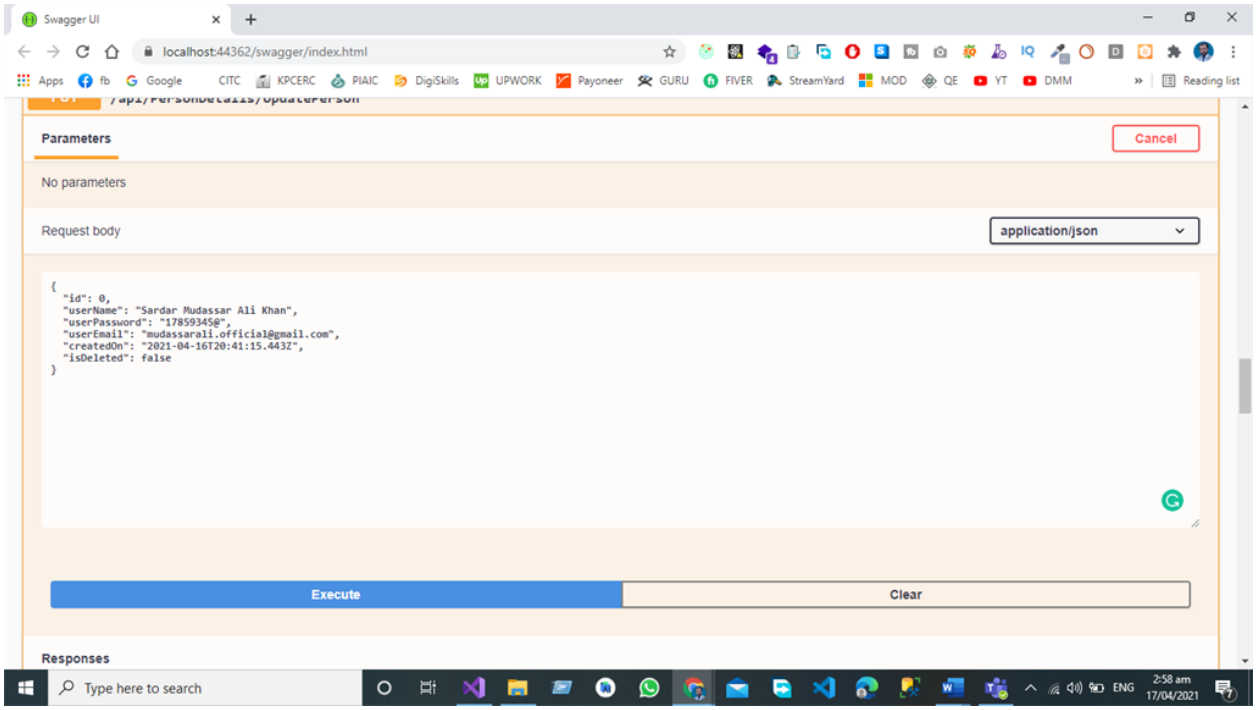

After the successful submission of data, you can see that our server response is true it indicates that our data has been successfully submitted to the database

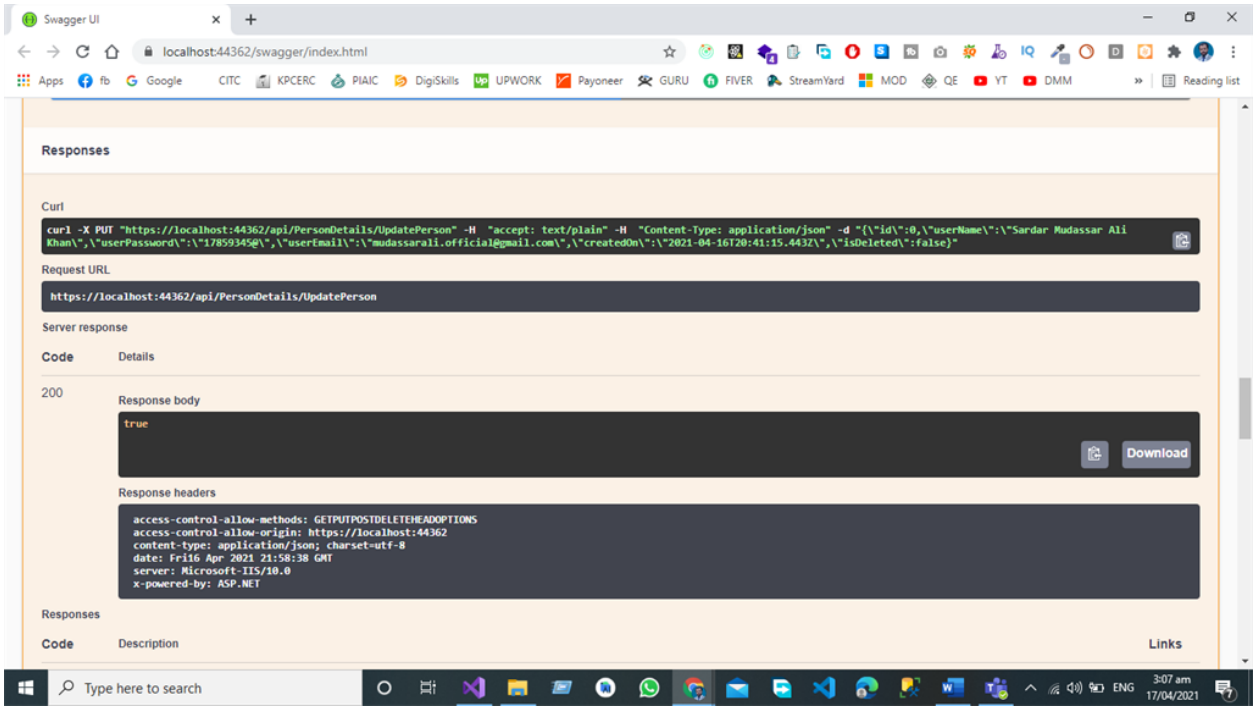

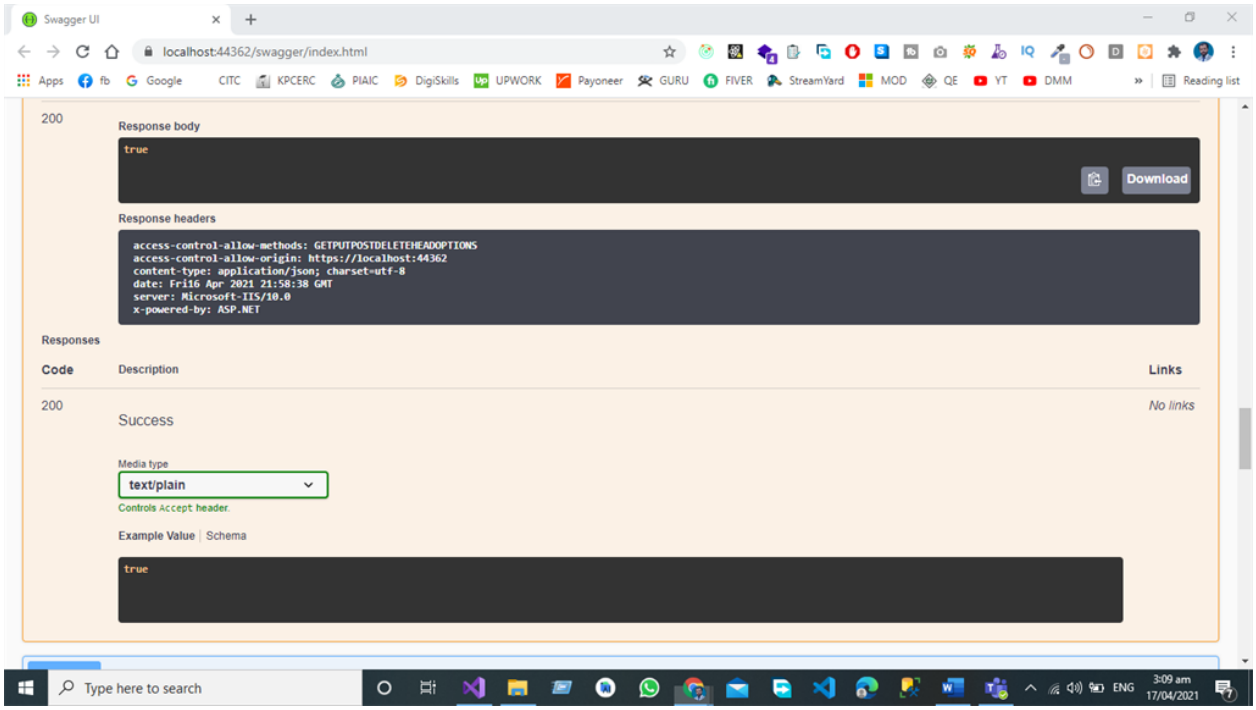

Summary

Swagger (Open API) is a language-agnostic specification for describing and documenting the REST API. Swagger Allows both the Machine and Developer to understand the working and capabilities of Machine without direct access to the source code of the project the main objectives of swagger (Open API) are too,

Minimize the workload to connect with Micro services.

Reduce the Time Needed to accurately document the Micro services.

Swagger is the Interface Description Language for Describing the RESTful APIS Expressed using JSON. Swagger is used to gathering with a set of open-source software tools to Design build documents and use Restful Web Services Swagger includes automated documentation code generation and test the generation. Three main components of Swashbuckle Swashbuckle.AspNetCore.Swagger is the Object Model and Middleware to expose swagger Document as JSON End Points.

Swashbuckle.AspNetCore.SwaggerGen.Swagger Generator that builds Swagger Document Objects Directly from your routes controllers and models this package is combined with swagger endpoints middleware to automatically expose the Swagger JSON. Swashbuckle.AspNetCore.SwaggerUI is an Embedded version of the Swagger UI Tool it explains swagger JSON to build a rich customizable practical for explaining the Web API Functionality it includes a built-in test harnessed for the public Methods.

Conclusion

Now My Conclusion about the Swagger Open API Swagger is the best Open API for Documenting the Restful API as a Developer I have great experience with Swagger for testing the restful API sending the Complete JSON Object and then getting the response in an efficient way. It is easy to implement in Asp.net core Web API Project and after the configuration, Developers can enjoy the beauty of Swagger Open API.

6

Application Deployment on Microsoft Azure Cloud

Overview

- Introduction
- Deployment Procedure
- Server Configuration
- Deployment Steps
- Conclusion

Introduction


App Service Web Apps lets you quickly build, deploy, and scale enterprise-grade web, mobile, and API apps running on any platform. Meet rigorous performance, scalability, security and compliance requirements while using a fully managed platform to perform infrastructure maintenance.

Open Your Azure portal

First you need to open your Microsoft azure account after that go to home and then select the subscription where you want to create azure web app.


Create Azure Web App

Select the azure app from resources then follow the steps that are necessary for the azure application Select a subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

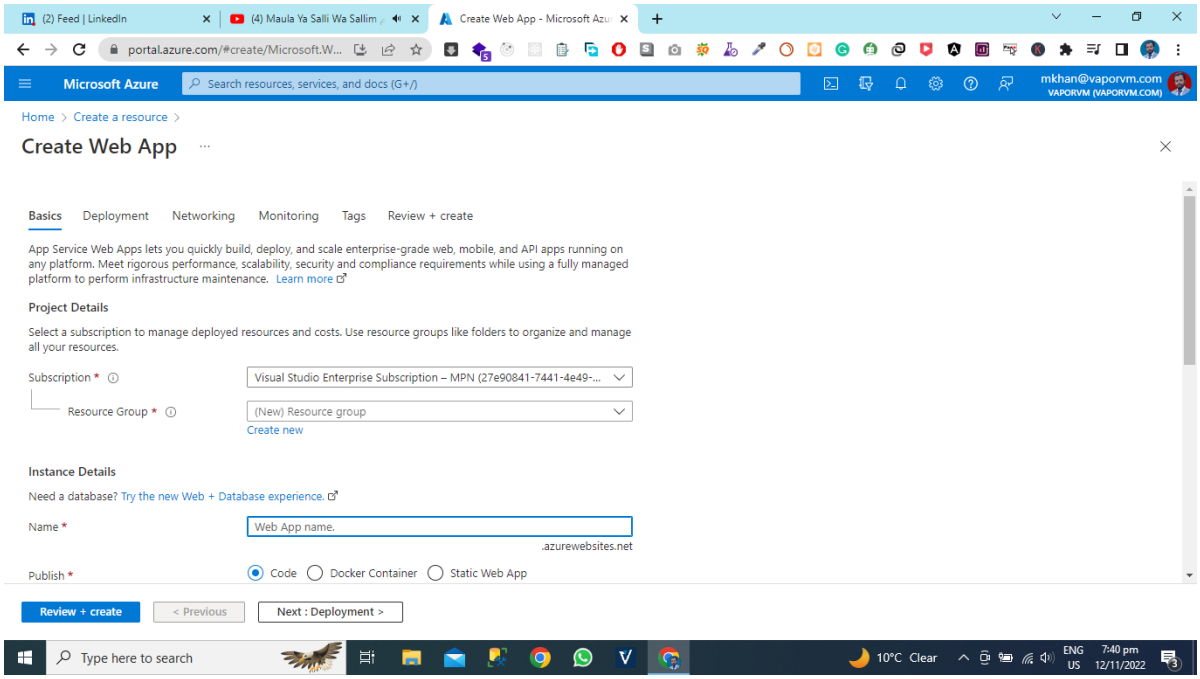


Create the Azure Resource Group.

Now Select the Azure Subscription and create the Azure resource group.

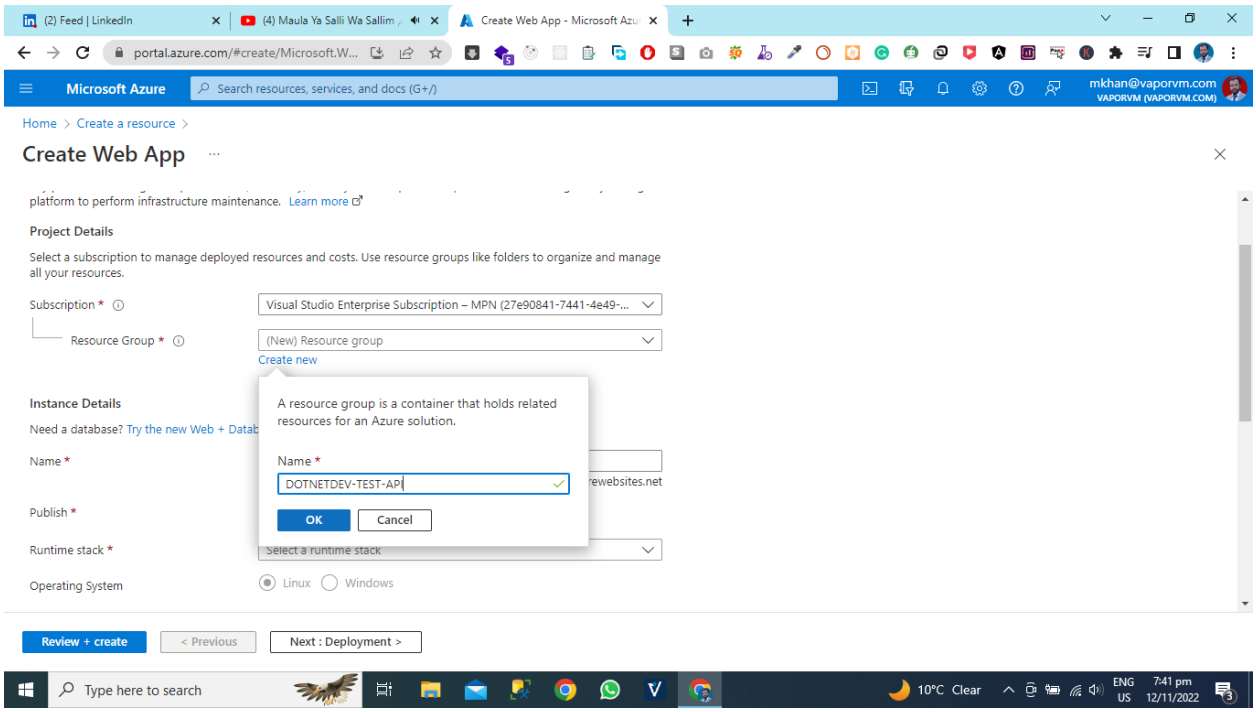


Select the Name of Your Application

Select the Azure App Name and I am selecting my web app name is DOTNET-Auth-API

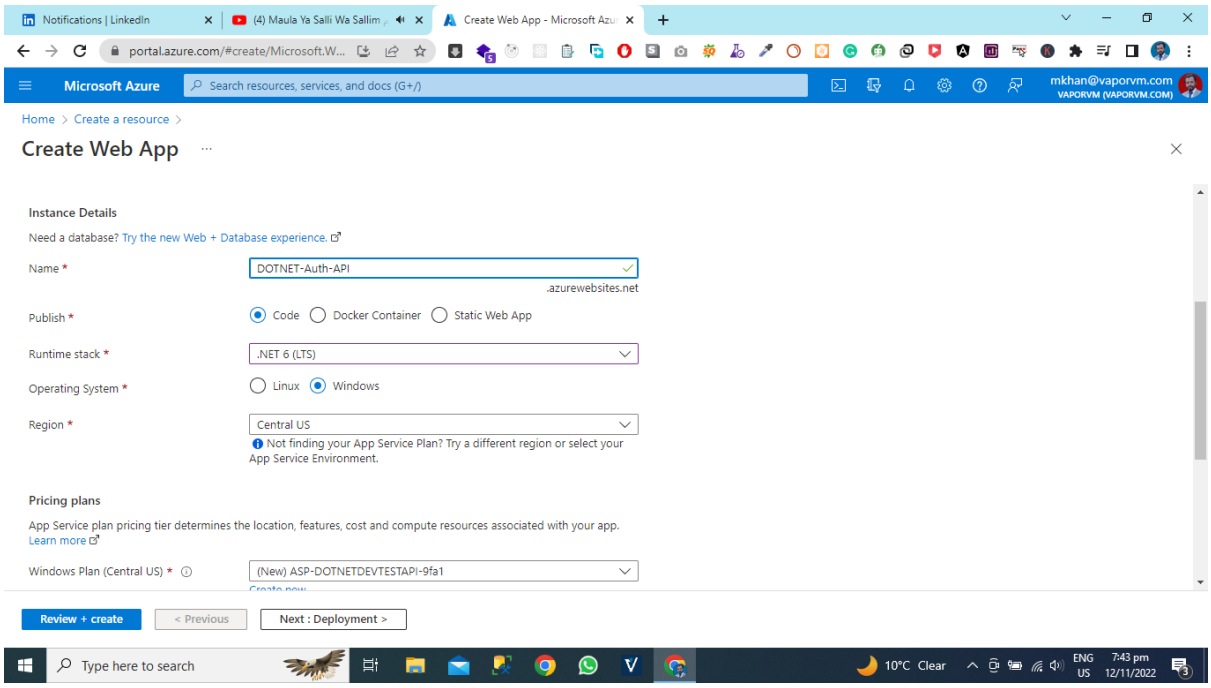


Select the Runtime Stack

After selecting the name and Recourse group now select the code version for your application and my application is using Microsoft Azure Asp.Net 6 so I am selecting .NET 6 Latest stable Version.

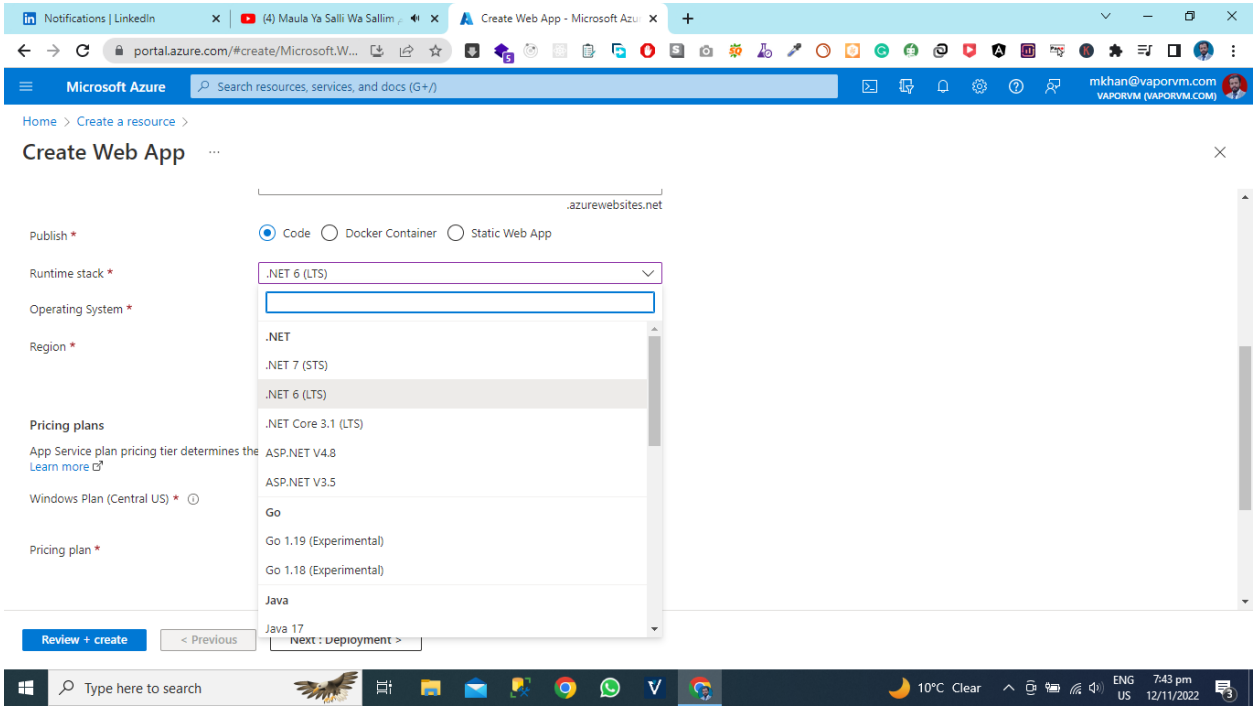


Select the Azure Region

After Selecting the Azure Code Runtime and then select the azure region where you want to deploy your application azure regions are very important for application cost and application deployment cost. So I am selecting **Central US.**

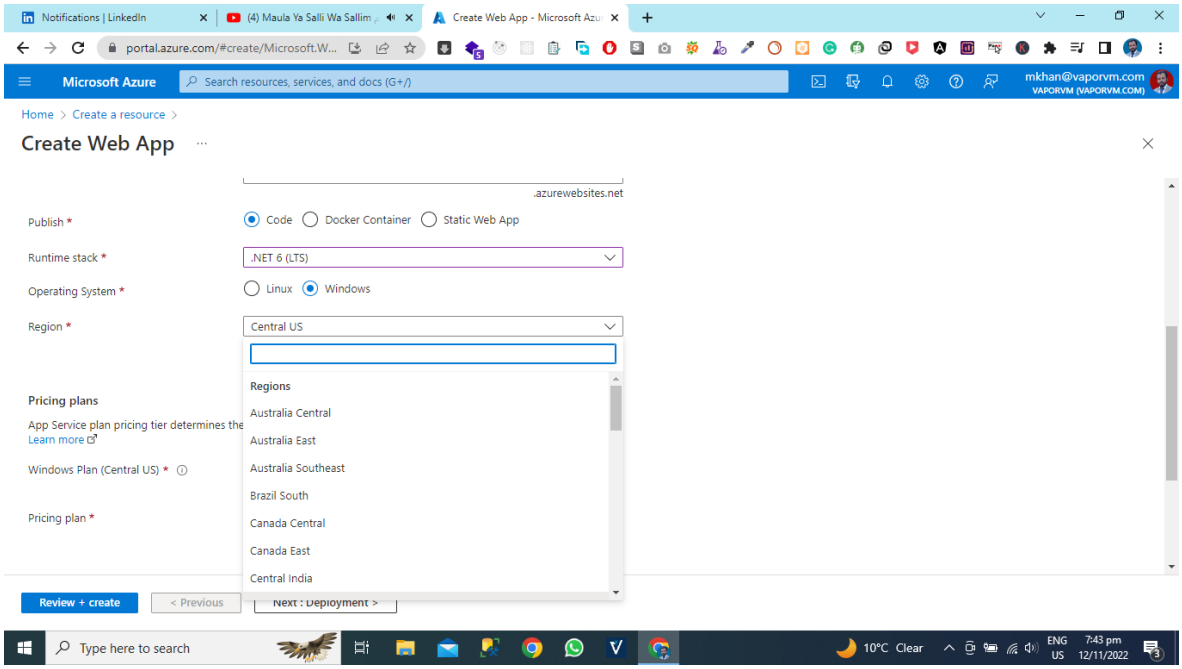


Create App Service Plan

An App Service plan defines a set of compute resources for a web app to run. These compute resources are analogous to the server farm in conventional web hosting. One or more apps can be configured to run on the same computing resources (or in the same App Service plan).

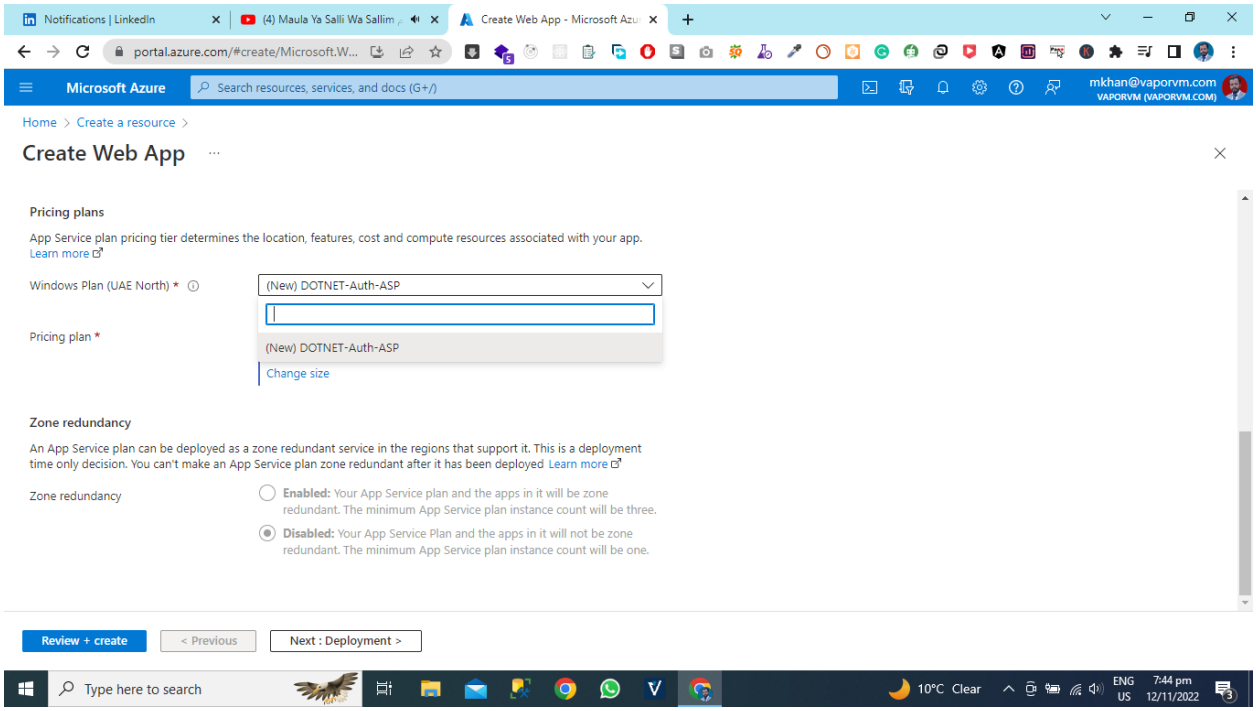


Select the pricing plan.

Now Select the pricing Tier Dev/Test, Production, Isolated

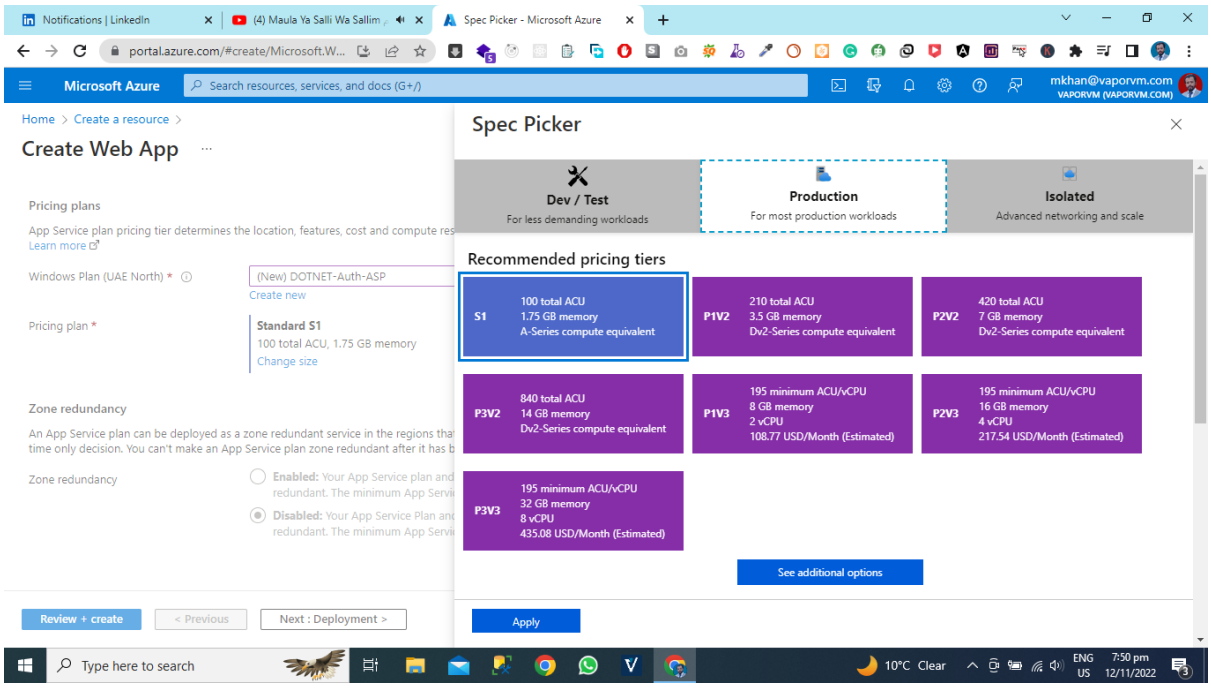


Now our purpose of application is development and testing so we are selecting Dev/Test

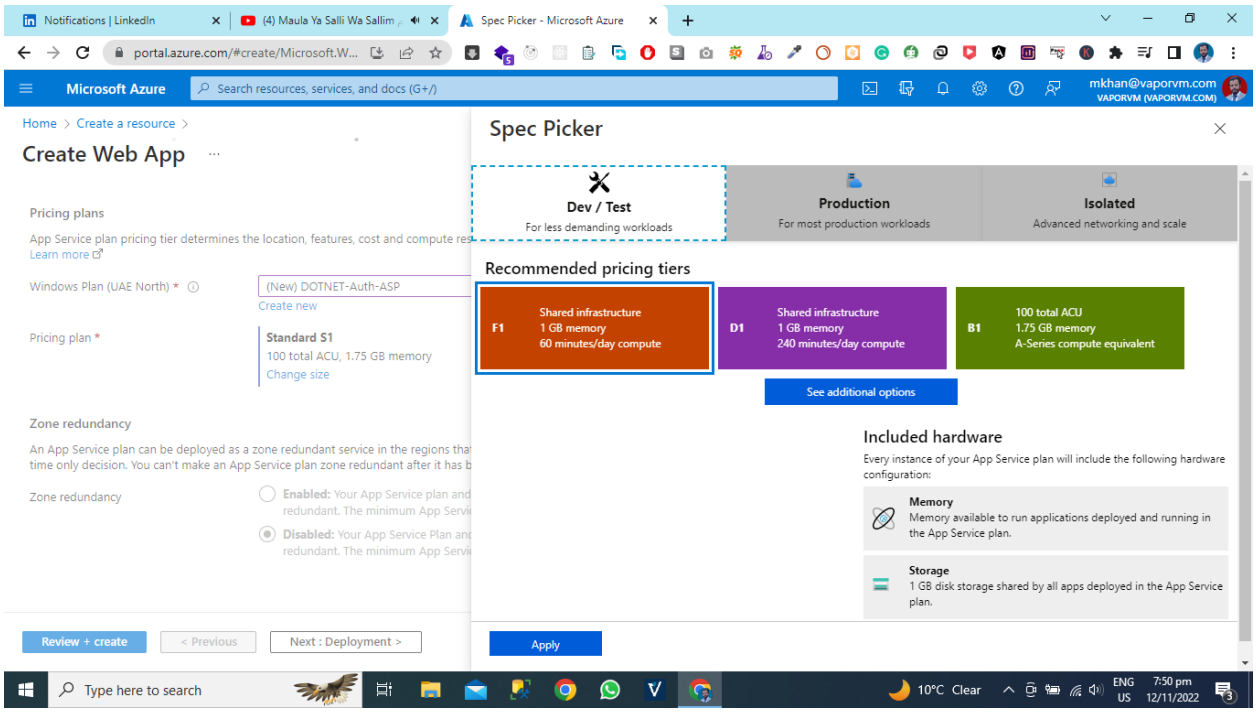


Select the Recommended Pricing Tier

Here you can see the recommended pricing tier and we are selecting the BI Green

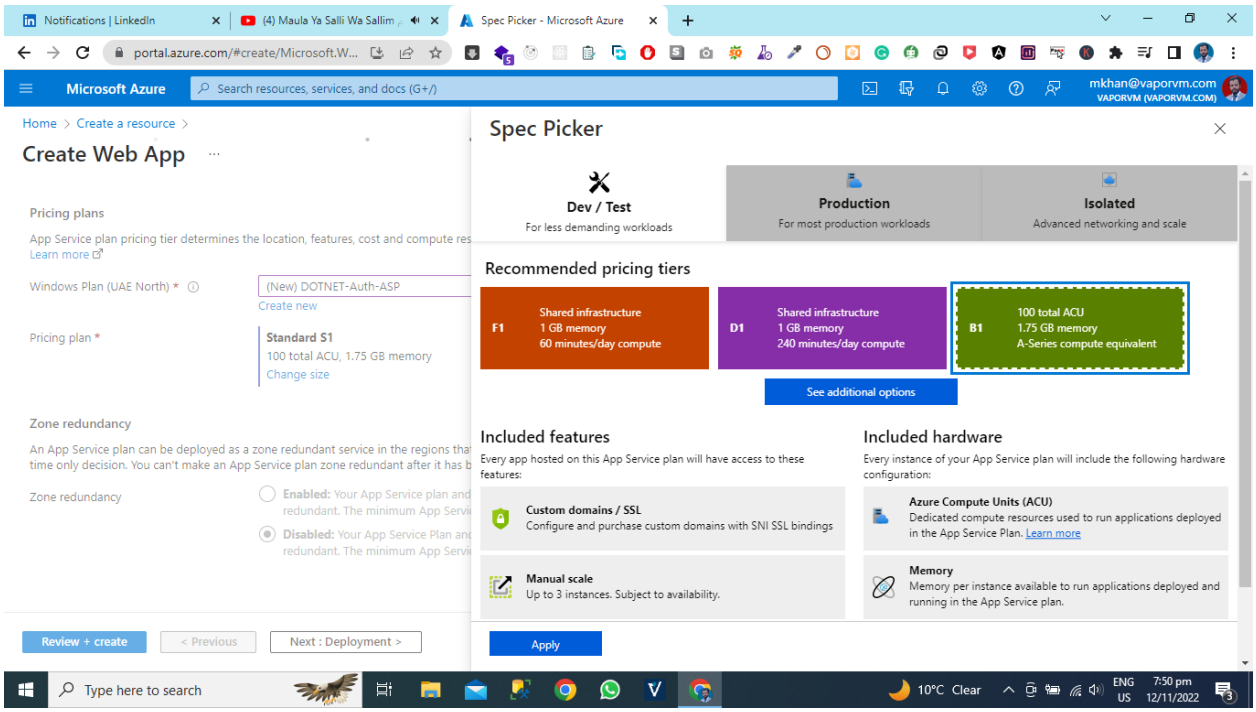


Select the Deployment Option.

Enable GitHub Actions to continuously deploy your app. GitHub Actions is an automation framework that can build, test, and deploy your app whenever a new commit is made in your repository. If your code is in GitHub, choose your repository here and we will add a workflow file to automatically deploy your app to App Service. If your code is not in GitHub, go to the Deployment Center once the web app is created to set up your deployment.

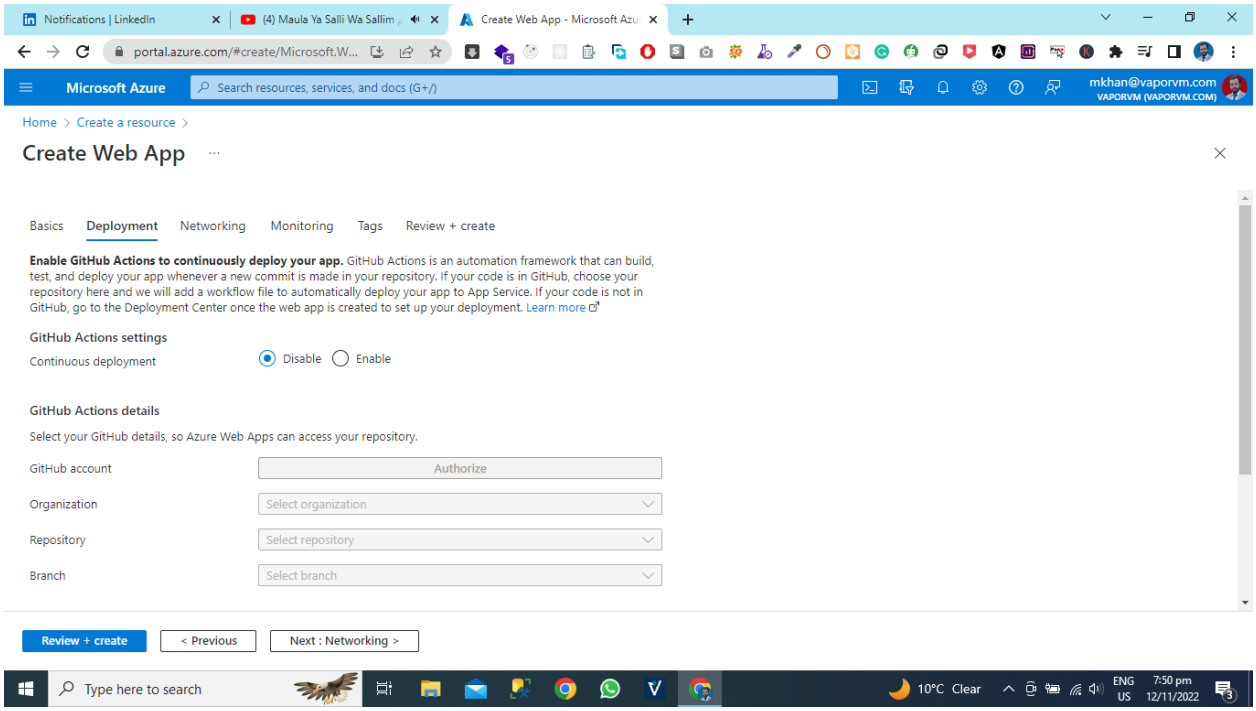


Select the Net Working Options

Web Apps can be provisioned with the inbound address being public to the internet or isolated to an Azure virtual network. Web Apps can also be provisioned with outbound traffic able to reach endpoints in a virtual network, be governed by network security groups or affected by virtual network routes. By default, your app is open to the internet and cannot reach into a virtual network. These aspects can also be changed after the app is provisioned.

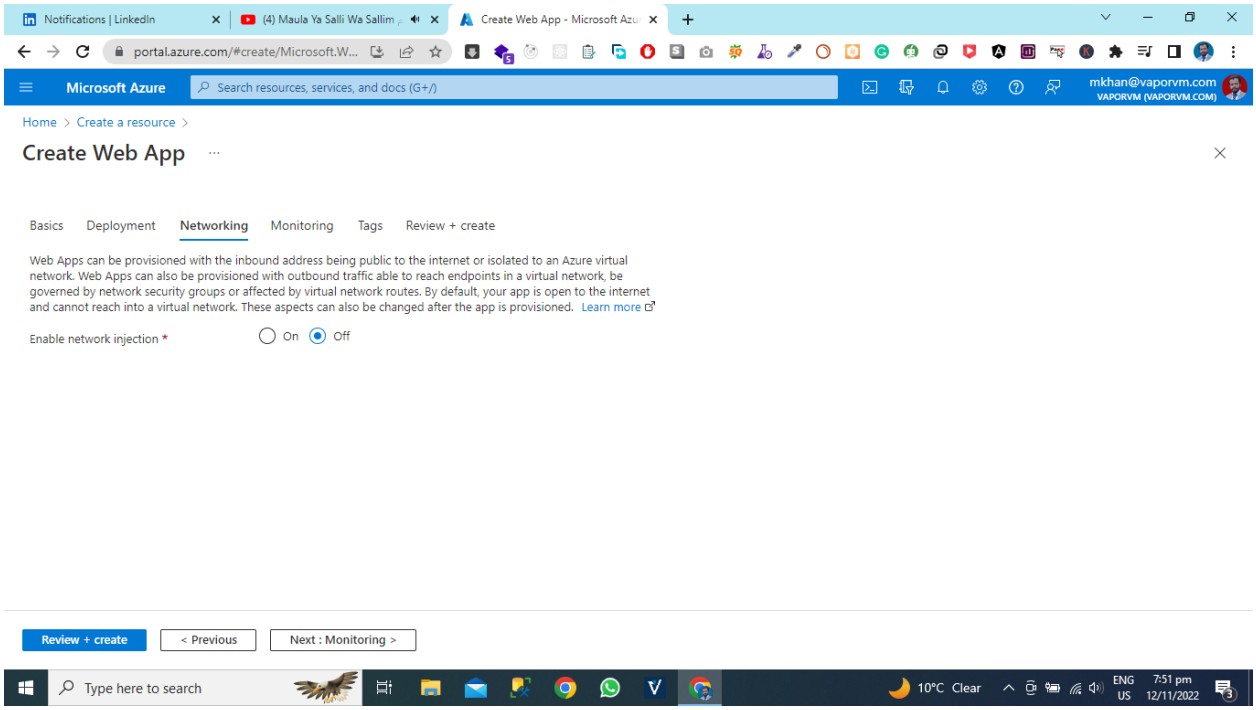

Select the Azure Monitoring Options


Azure Monitor application insights is an Application Performance Management (APM) service for developers and DevOps professionals. Enable it below to automatically monitor your application. It will detect performance anomalies, and includes powerful analytics tools to help you diagnose issues and to understand what users actually do with your app.

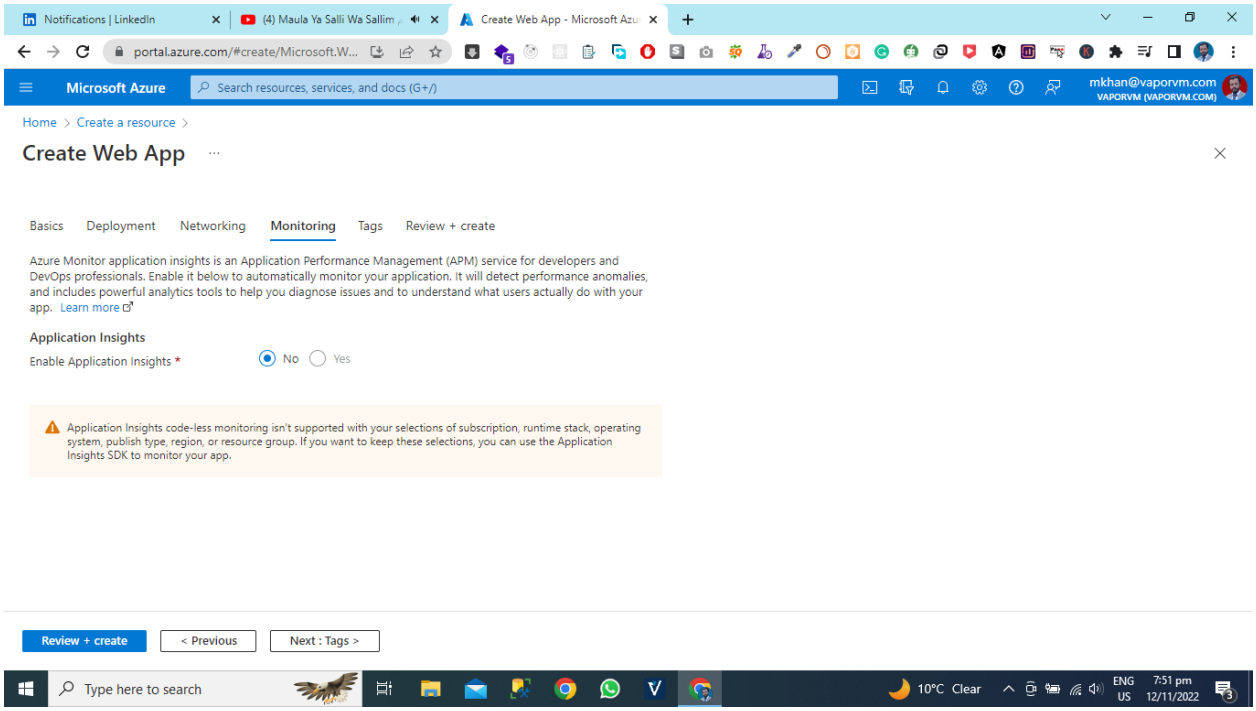

Select the Tags Options


Tags are name/value pairs that enable you to categorize resources and view consolidated billing by applying the same tag to multiple resources and resource groups.

Note that if you create tags and then change resource settings on other tabs, your tags will be automatically updated.

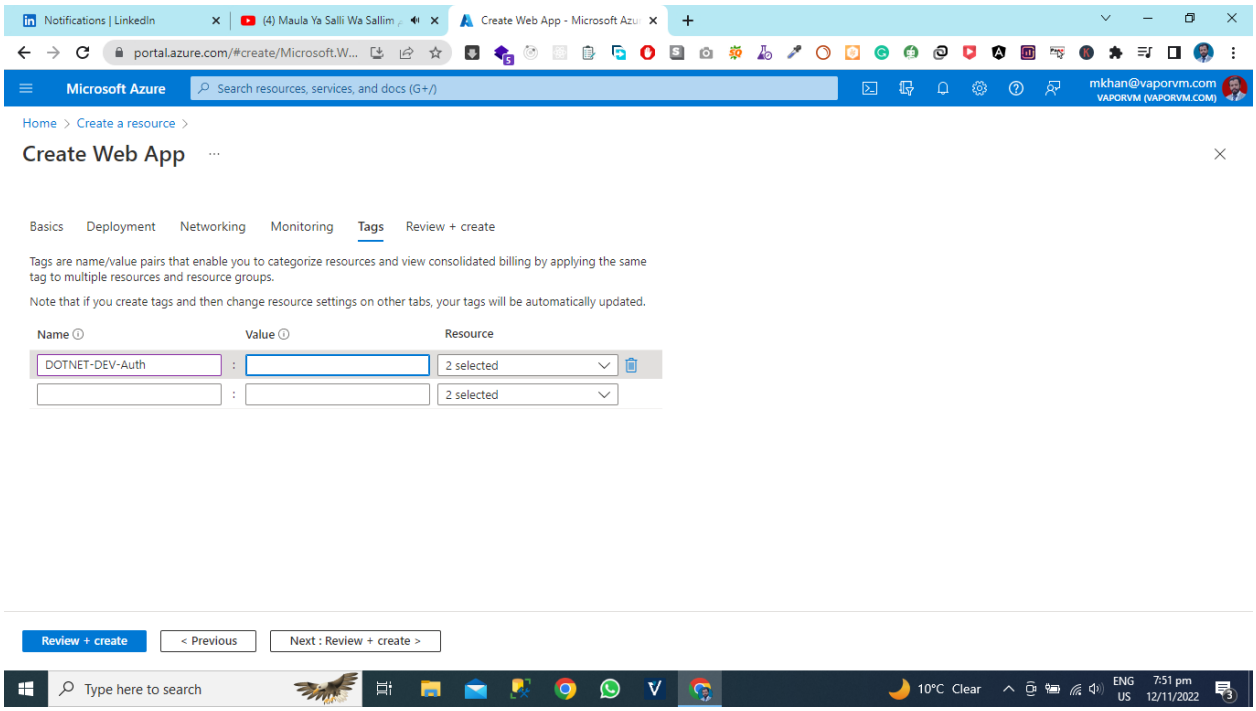


Review and Create


Now Review all your Steps and Create the Azure App.

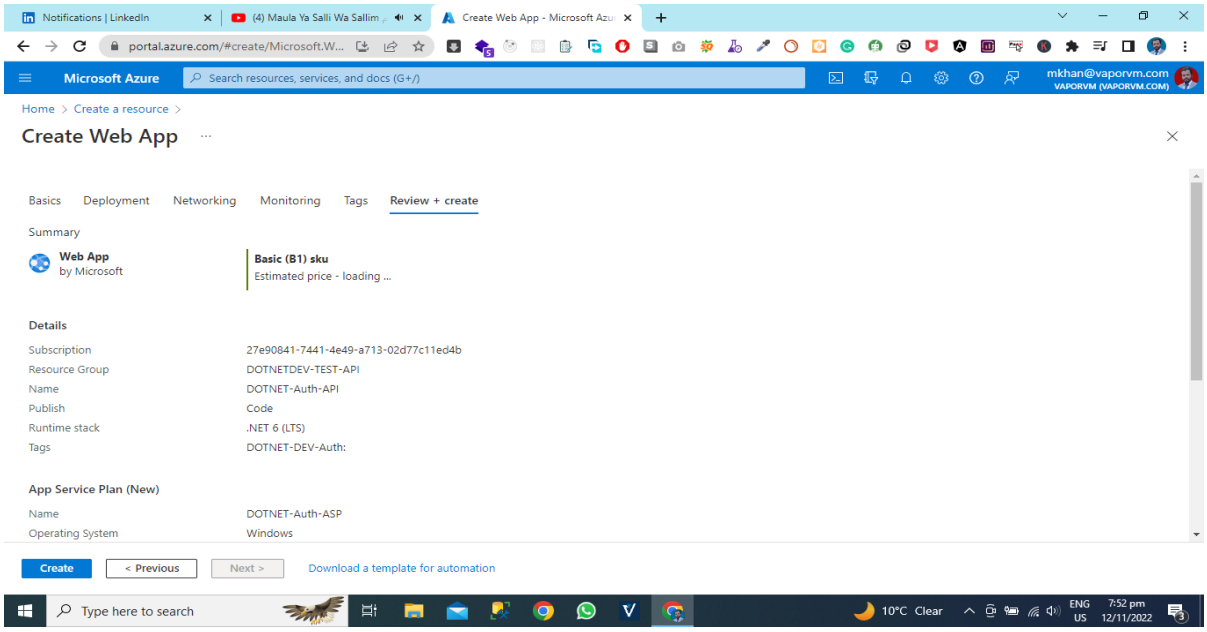


Now hit the create button and then Azure app creation process has will start.

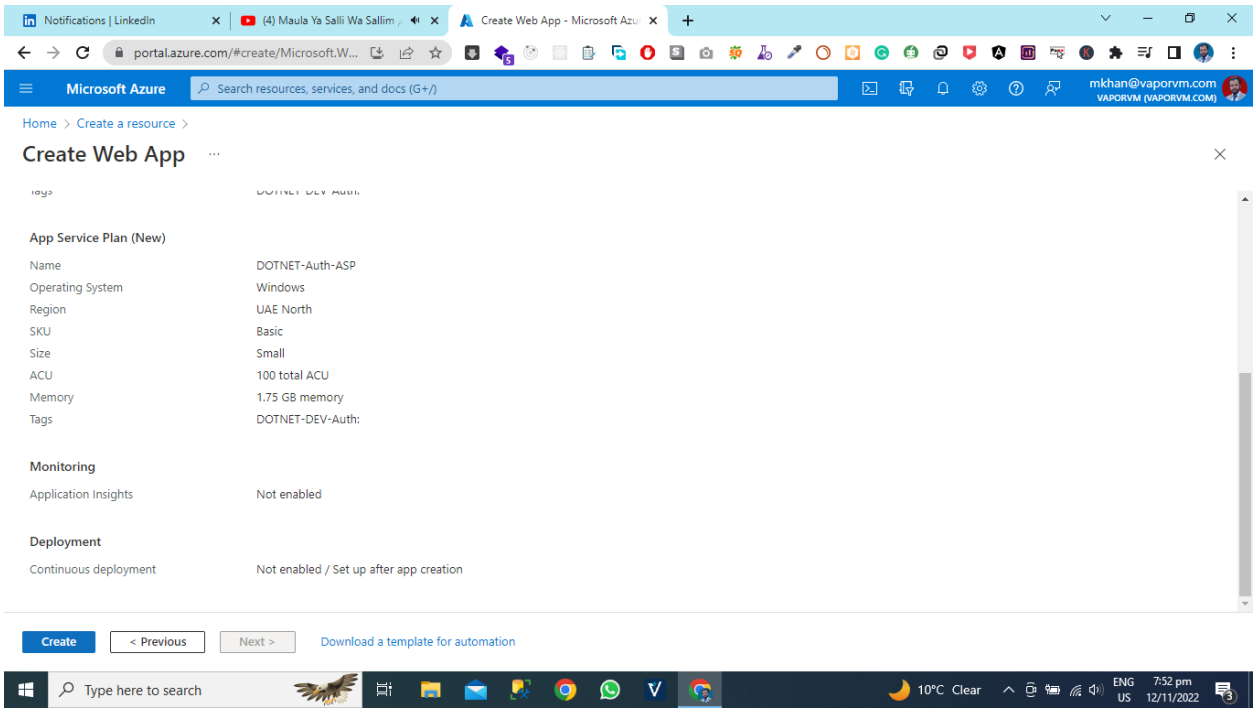


You can see in the given below picture is application deployment process is in progress.

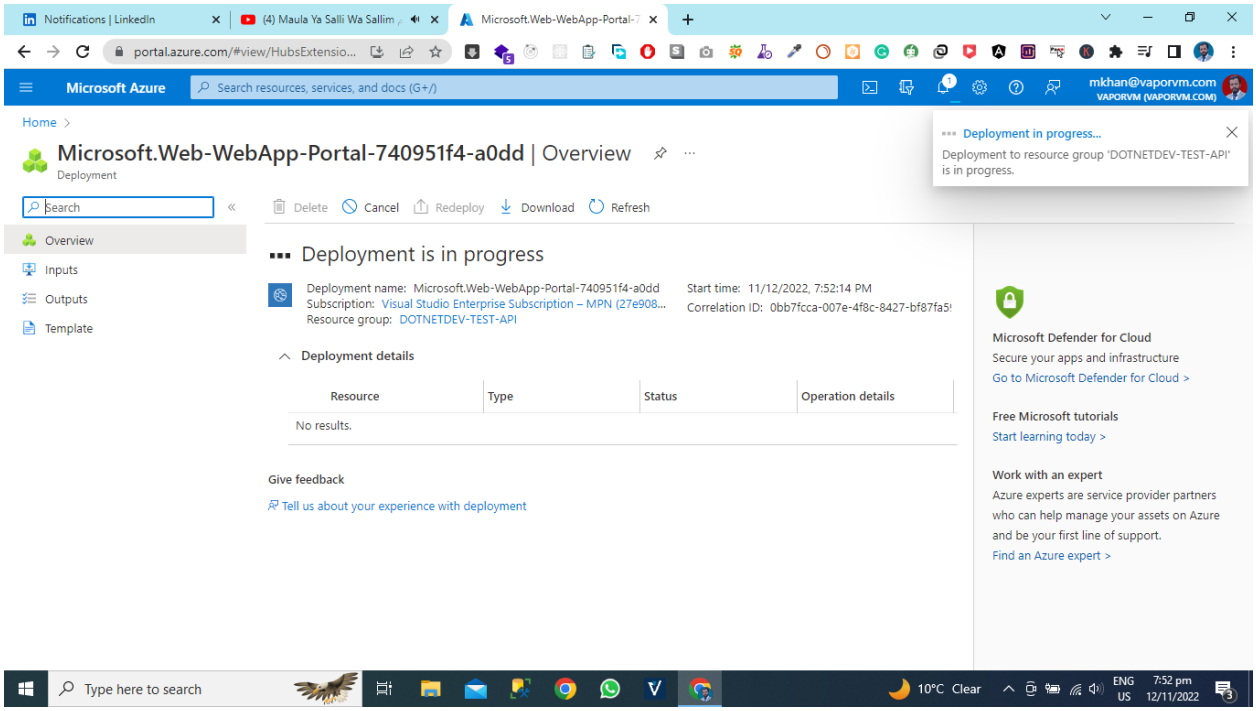


Now you can see that our deployment process succeeded and we can go to the Created resource.

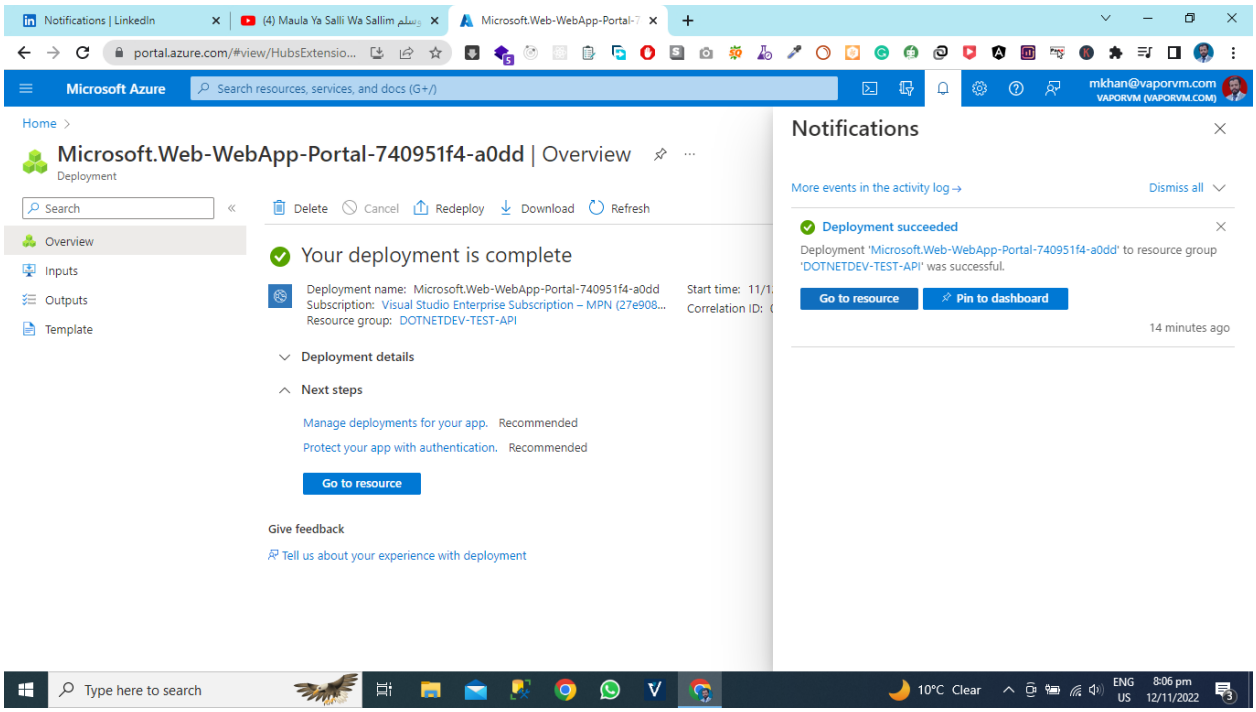

Our Azure App Creation Process Has Been Done.

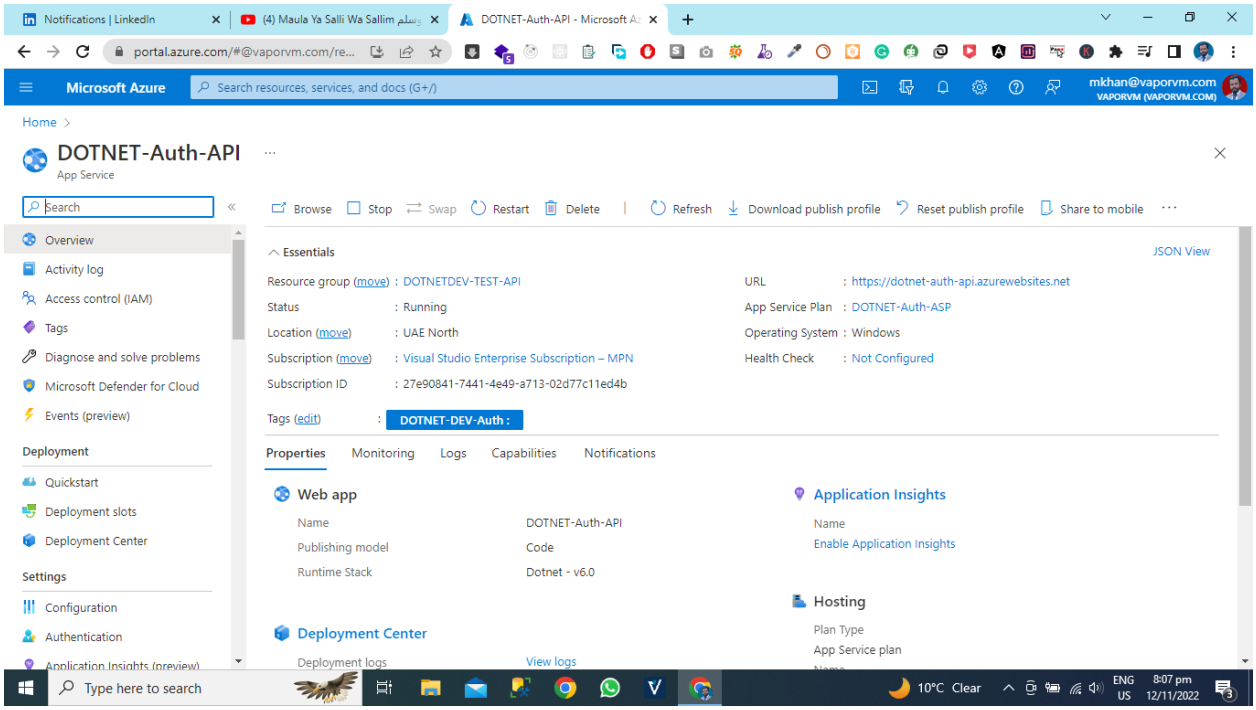


Now you need to hit the Azure App URL.

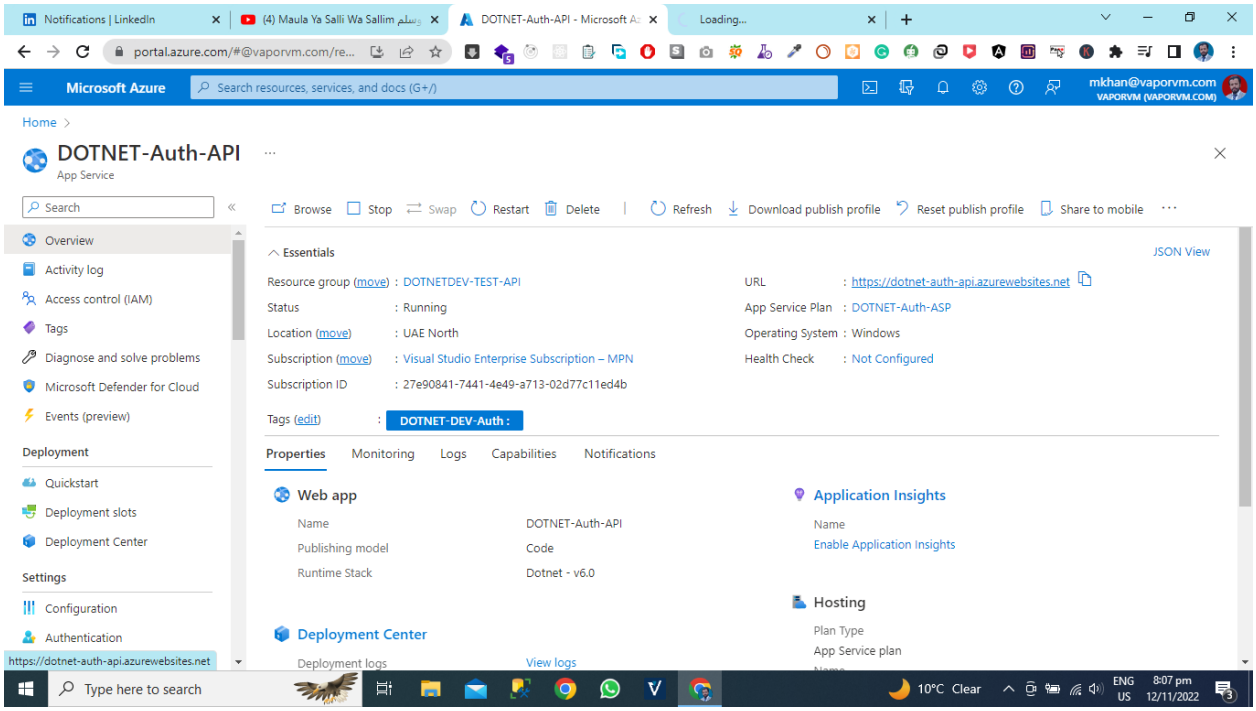


Application Status

Now You Can See that Our Application is Live on the Azure Cloud.

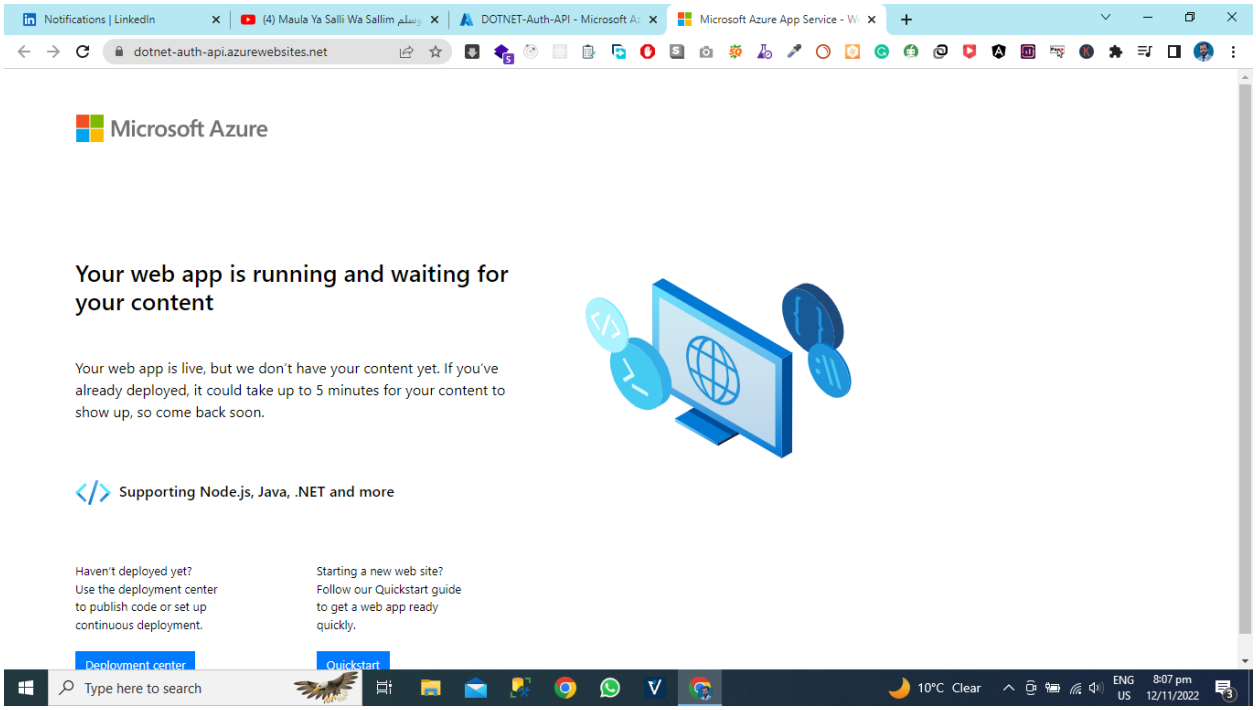


Get the publish profile.

Now you need to download the publish profile for deployment of Asp.net core application using Visual Studio.

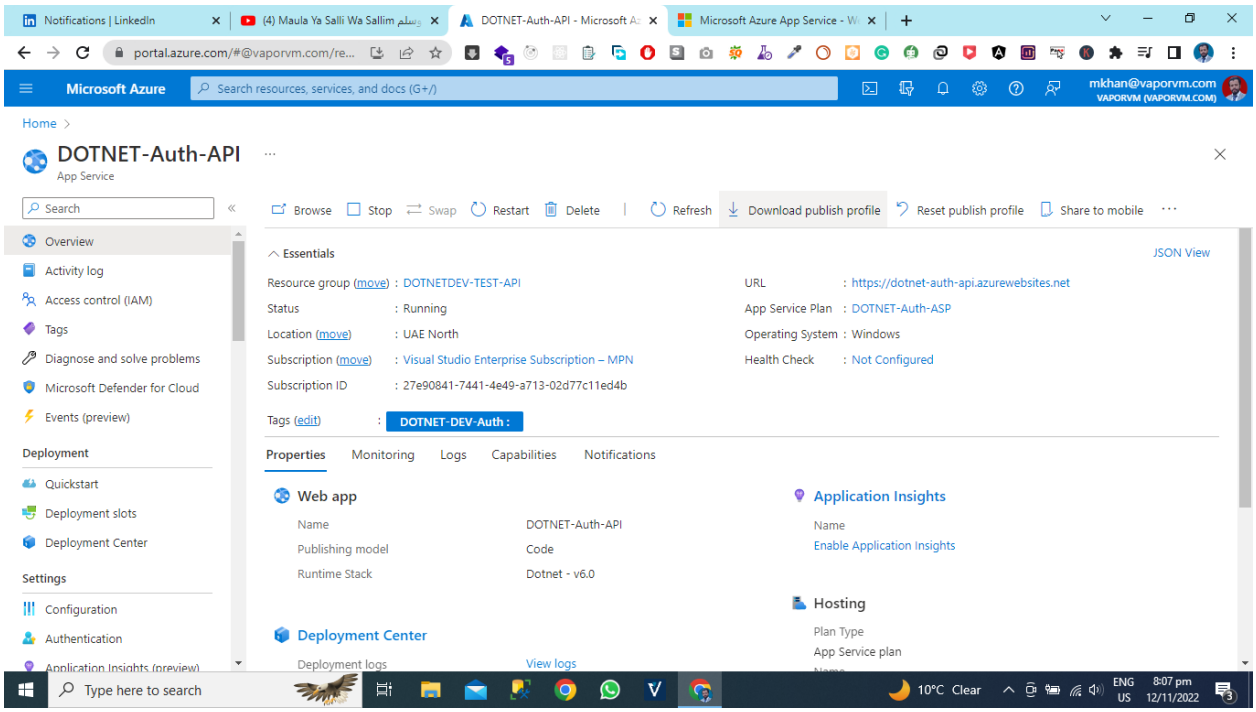


We have Downloaded the Our Application Publish Profile

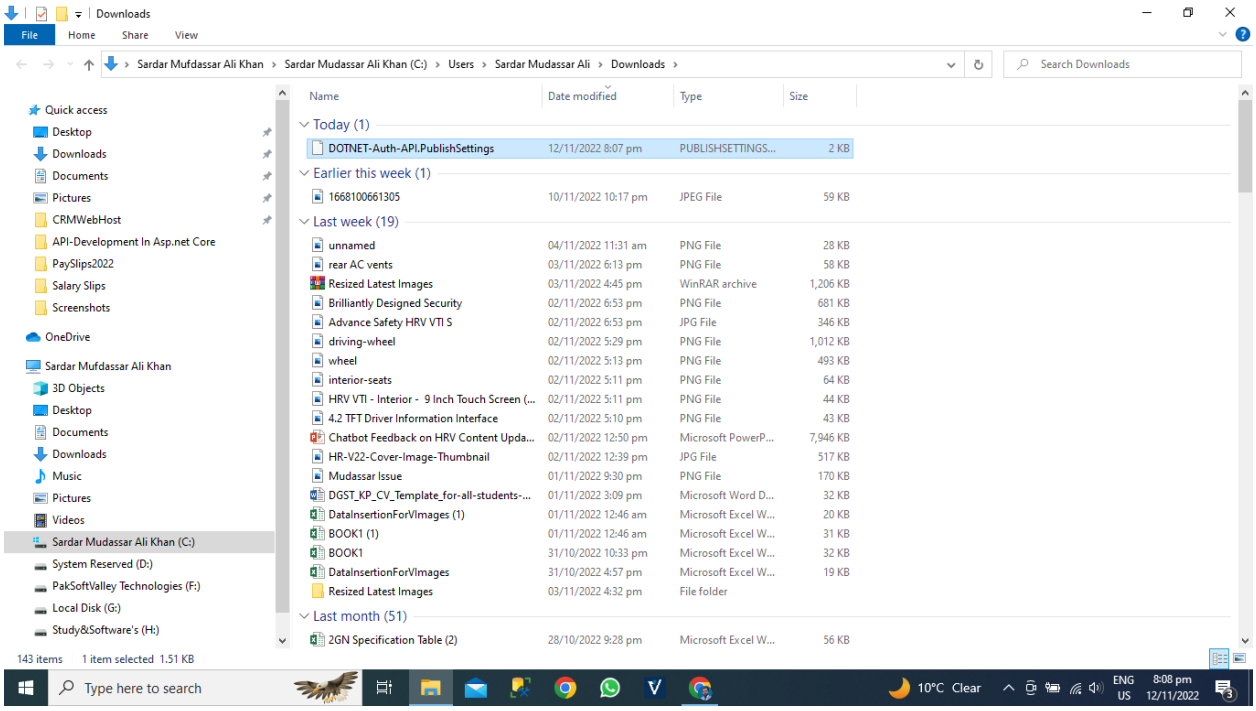


Publish the App Using Visual Studio


Now we will open the visual studio and then open the Auth API Project after the Right click on project select the publish Option.

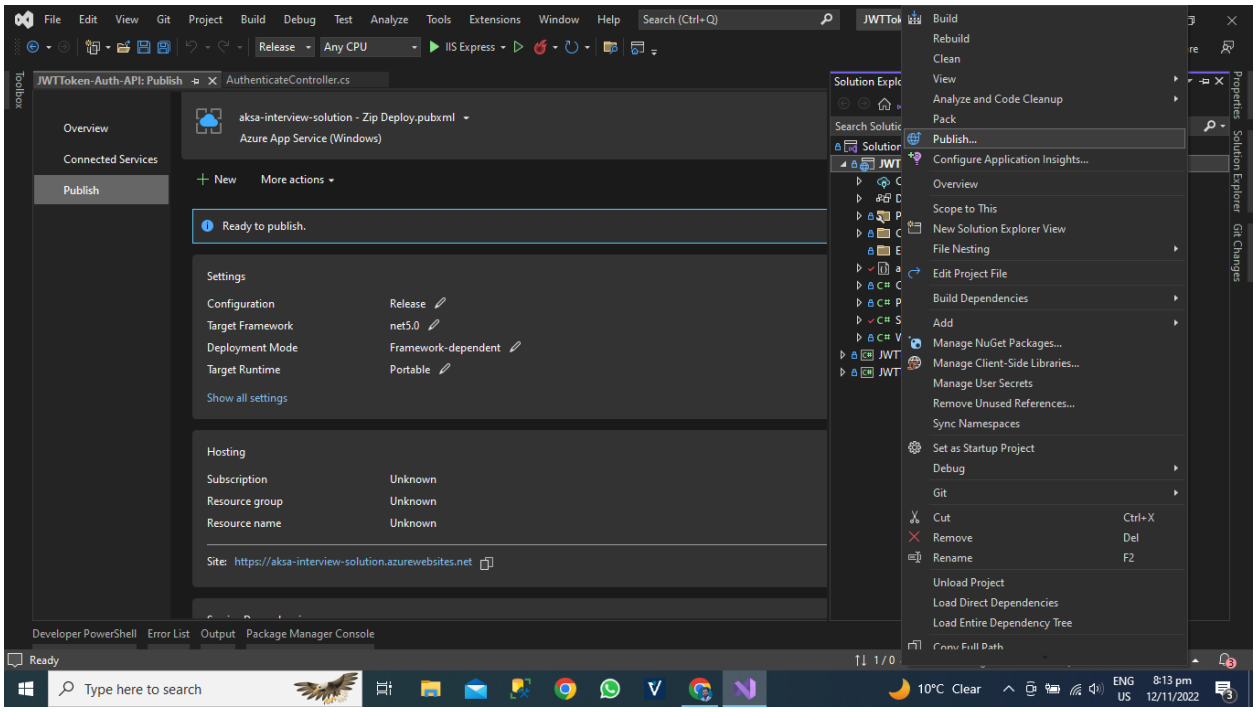


A new window will be visible in front of you and you can see the we have the option for Add Publish Profile. Click the button add publish profile.

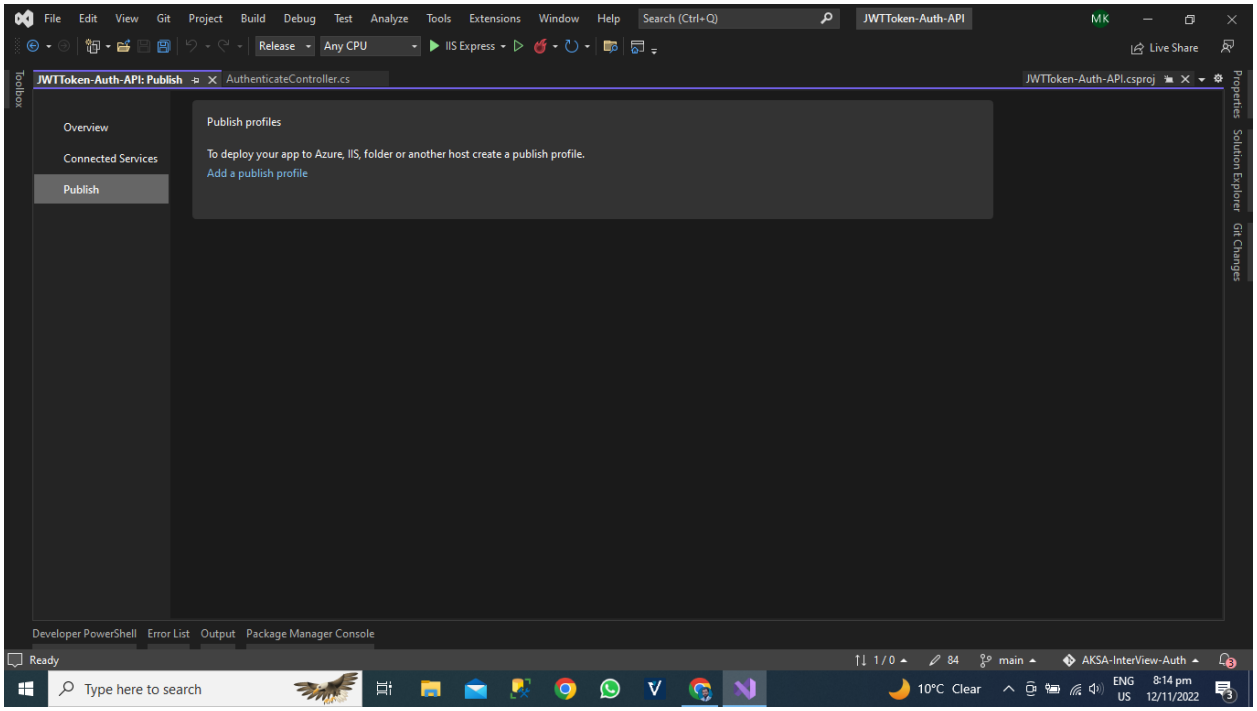

Now you can see that we have the option for Import Profile and we will import the profile that we have downloaded from the Azure App Service portal. Click the Import Profile Option.

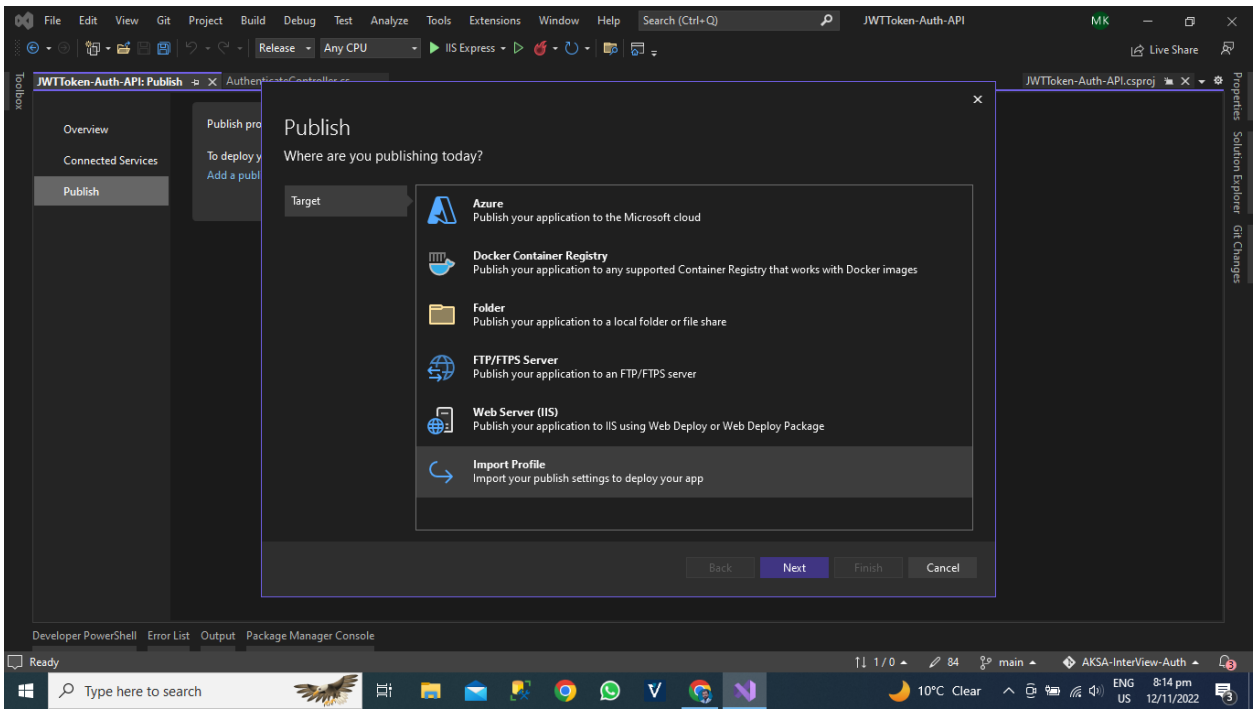


Browse the file for Azure App Publish Profile where you have saved the file.

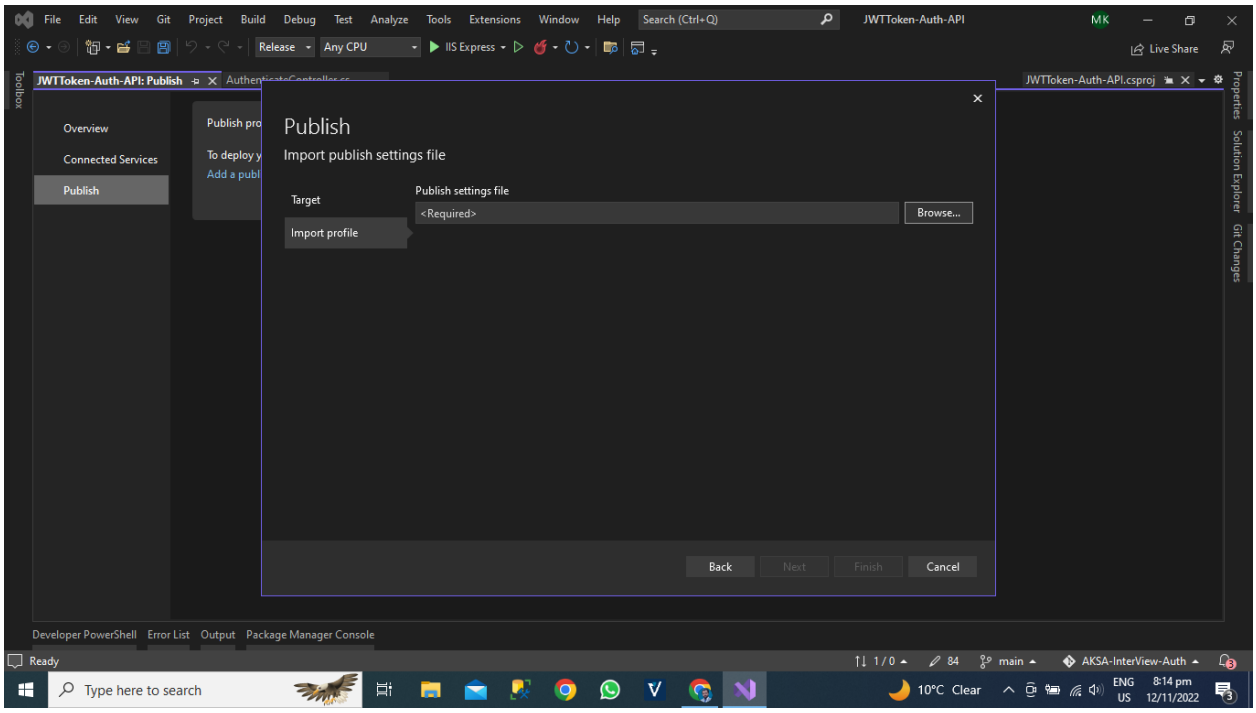


Select the Publish Profile


I have selected the file from the downloads folder now click the finish button after some processing visual studio will get the all information the azure portal for our Azure App.

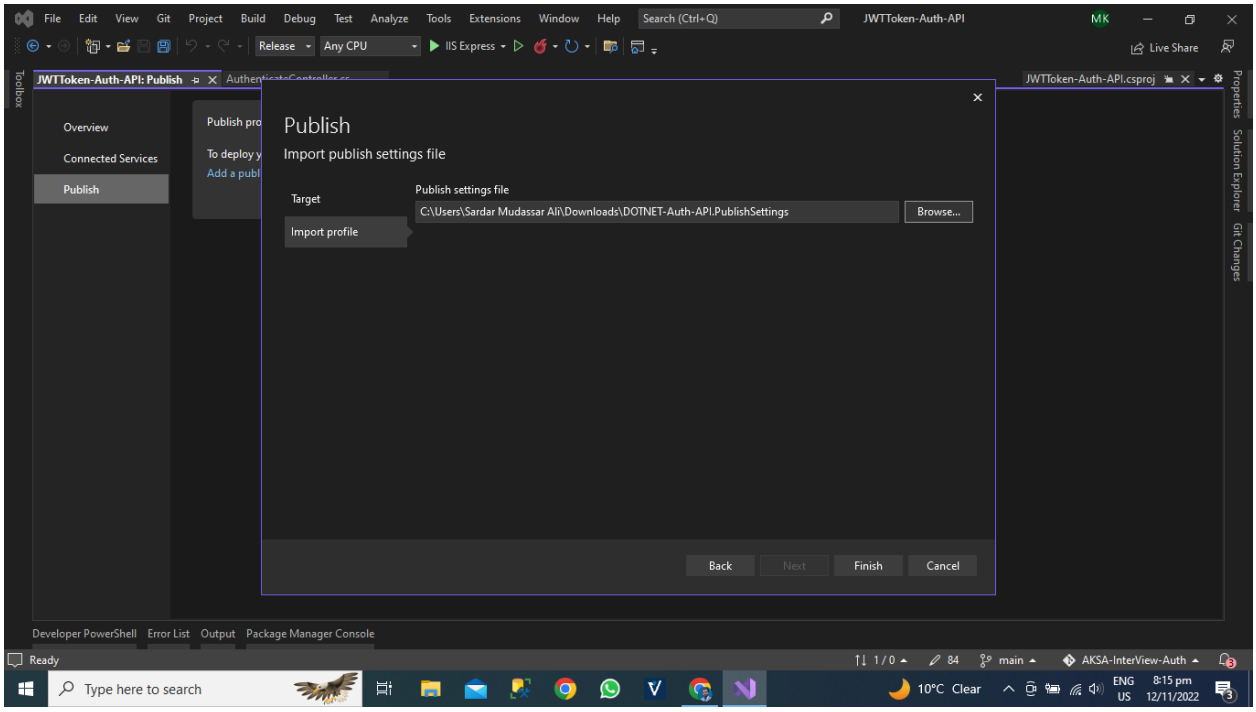

Now you can see that visual studio get all the information about our Azure App you can see the URL of our application.

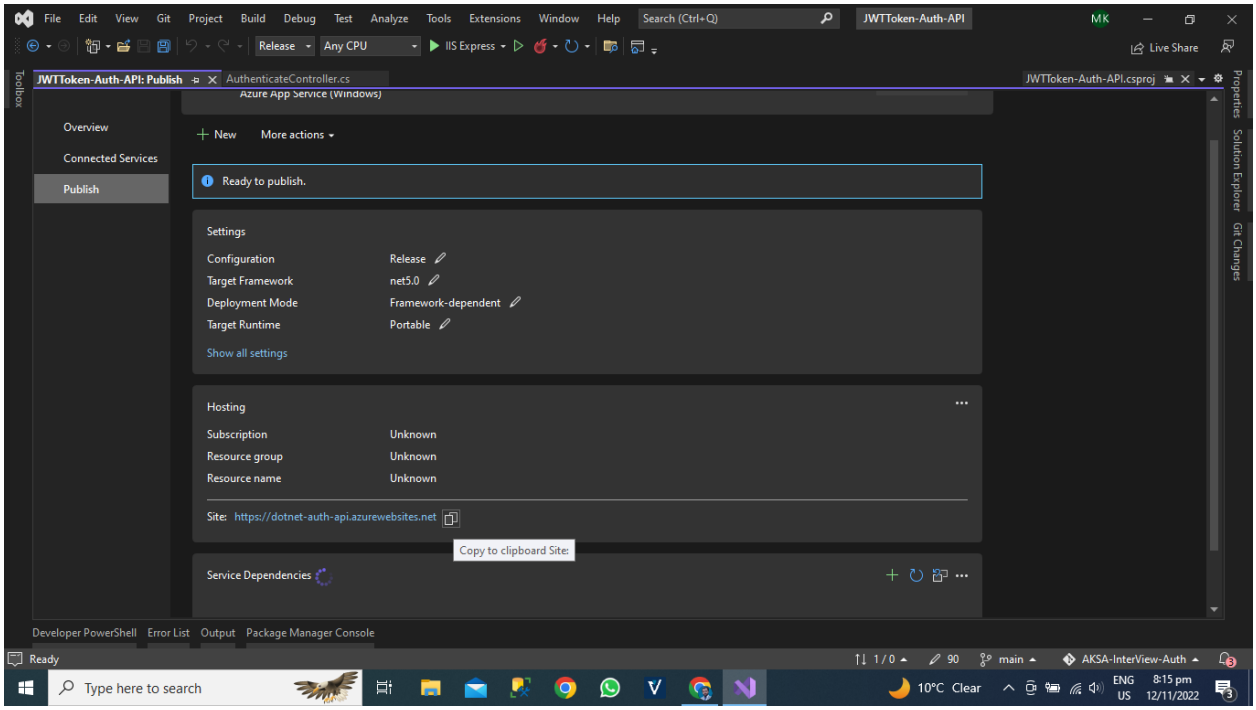


Now Hit the Publish Button after that publishing of our application on azure cloud has been started.

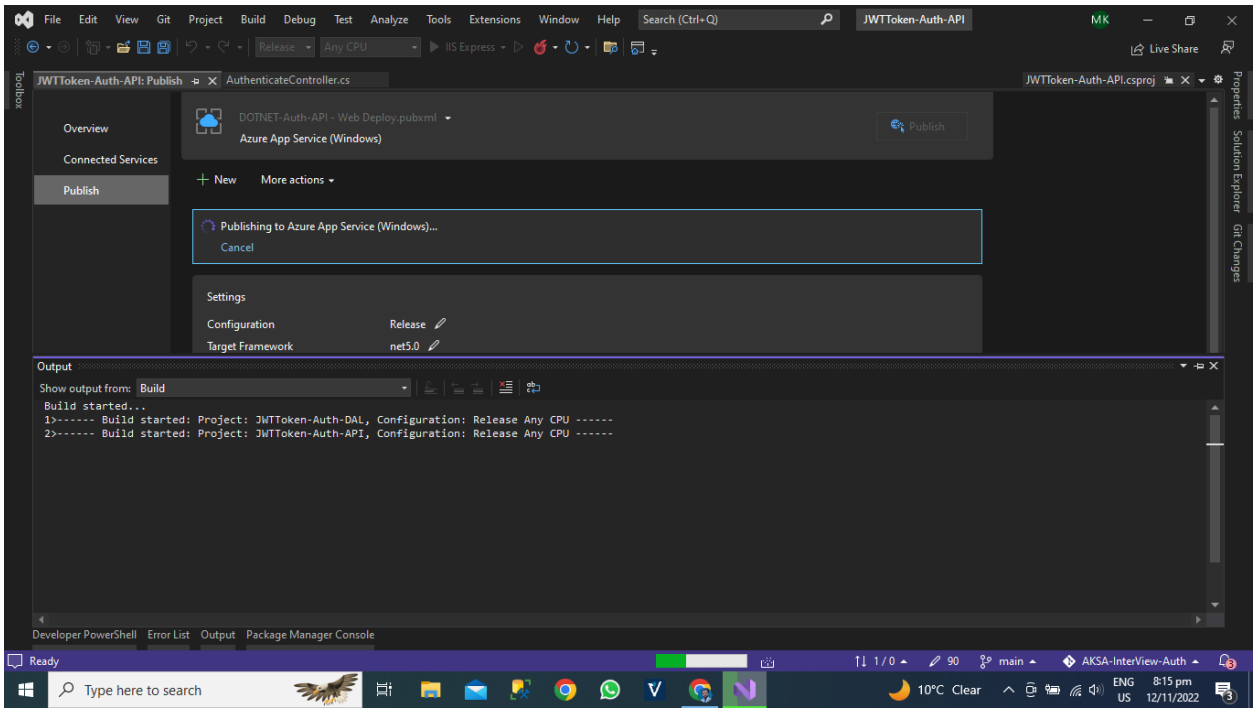


Deployment Status

Our Publication on Azure Cloud has been done. You can see the publication status successful.

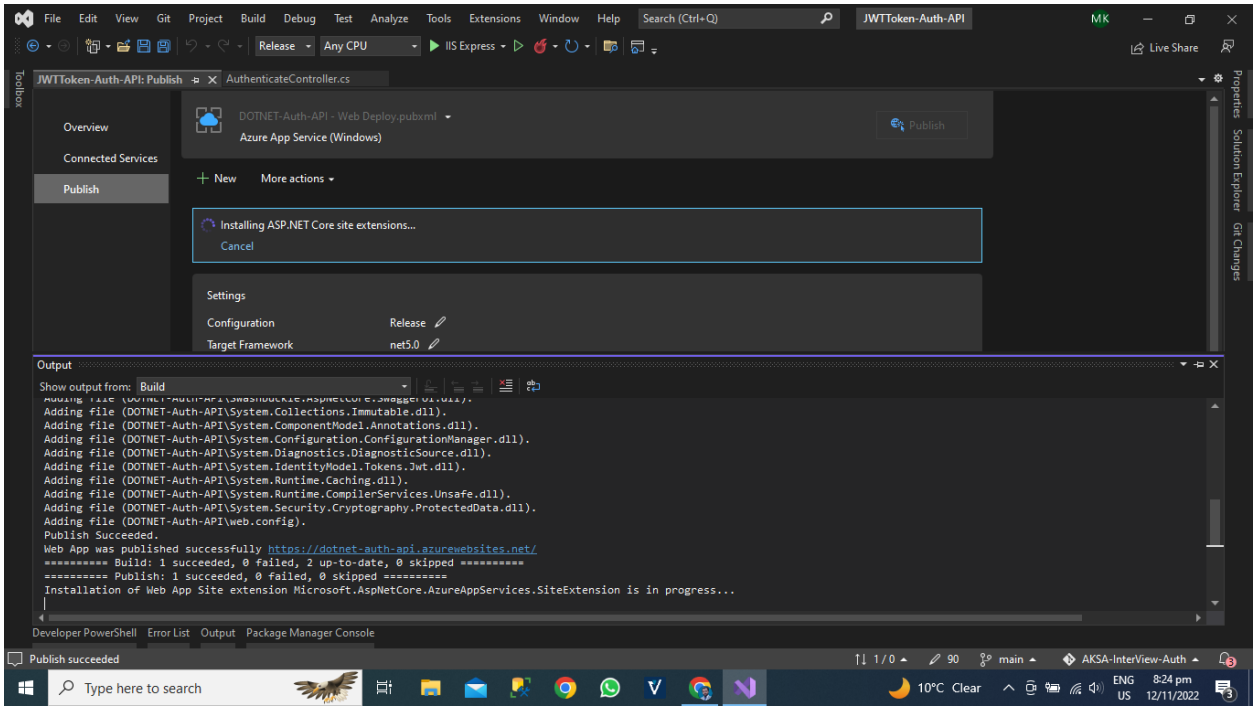

Application Deployed on Azure Cloud

Now Hit the URL Of Azure App after URL Just Write URL OF *YOUR APPLICATION*/Swagger You can see that our all APIS Are Now Live on Azure Cloud Using Azure App service.

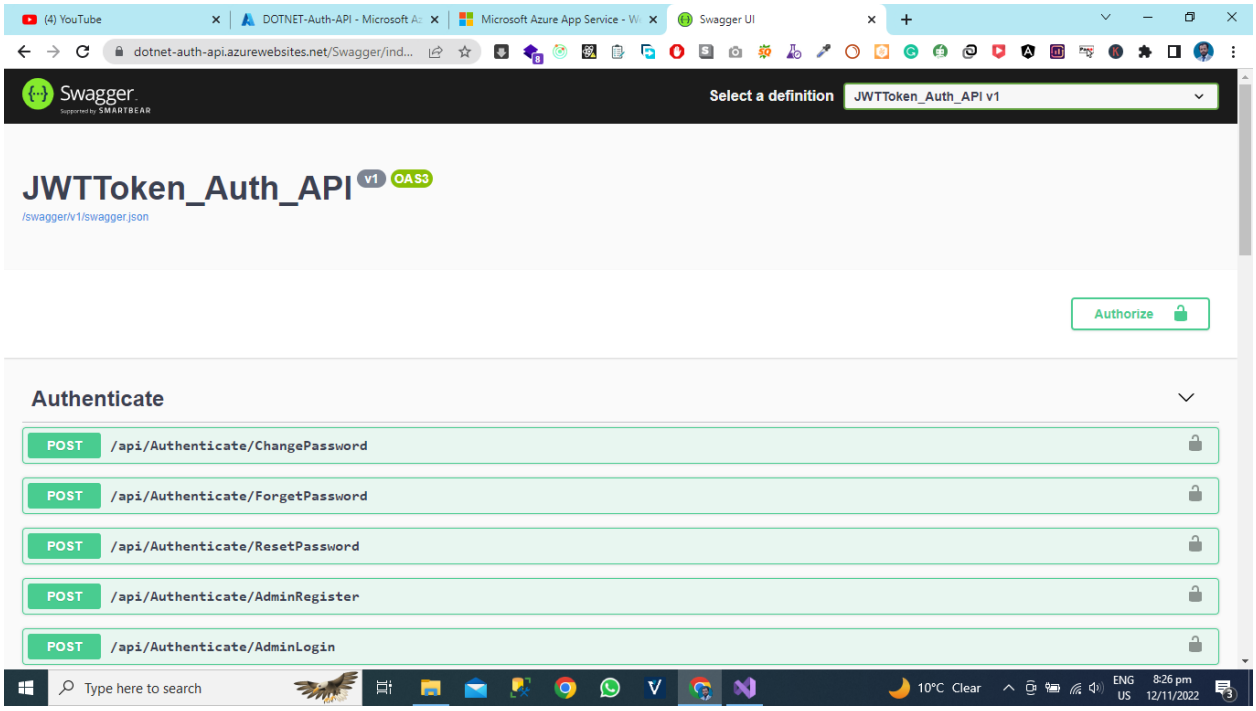

6

Application Deployment on Server

Overview

- Introduction
- Deployment Procedure
- Server Configuration
- Deployment Steps
- Conclusion

Introduction

In this chapter, we will learn about how to deploy the asp.net core 5 websites on a server using visual studio 2019.


Step 1 Account Setup on Server

The first step for deployment of asp.net core web API is to create an account on the hosting provider website that supports the asp.net web application framework and then follow the steps in the given chapter.


- Create a website in the hosting panel.
- Then Create the SQL Server Website using the Hosting Panel

Step 2 Create the project asp.net Core 5 Web API using Visual Studio

Create the project using visual studio and select the asp.net core version .Net 5.0 Current.

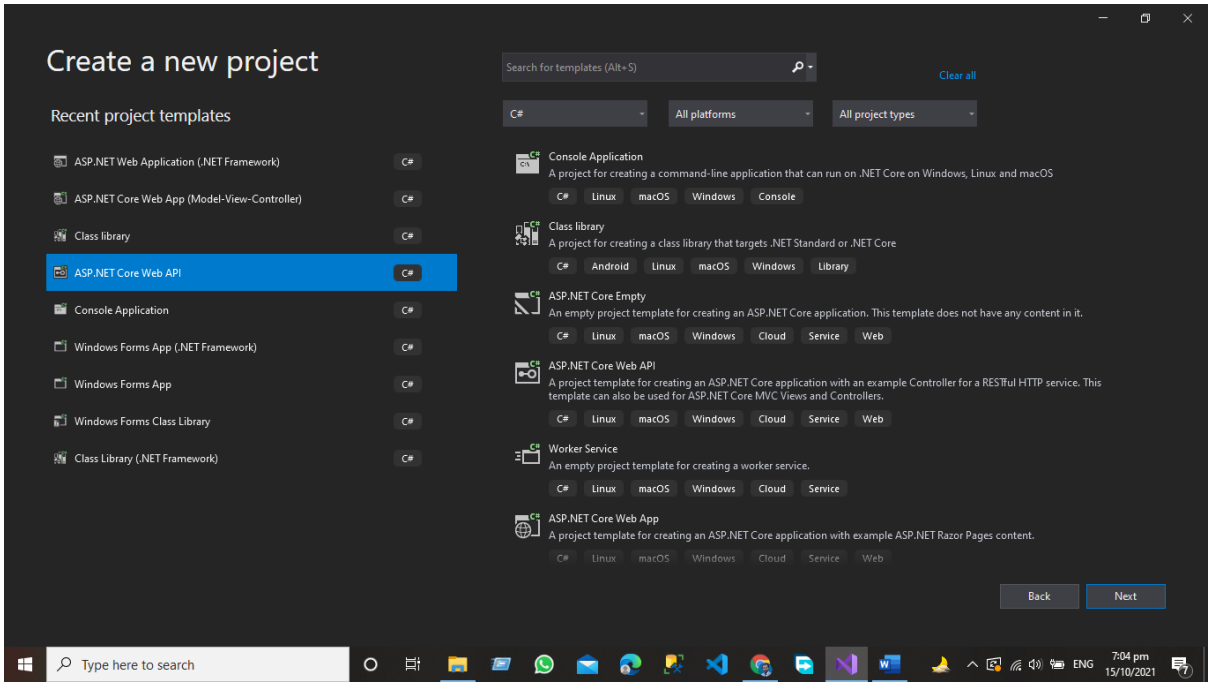

Give the Name of your project that you want to develop My Project is ONP (Online Prescription Application)

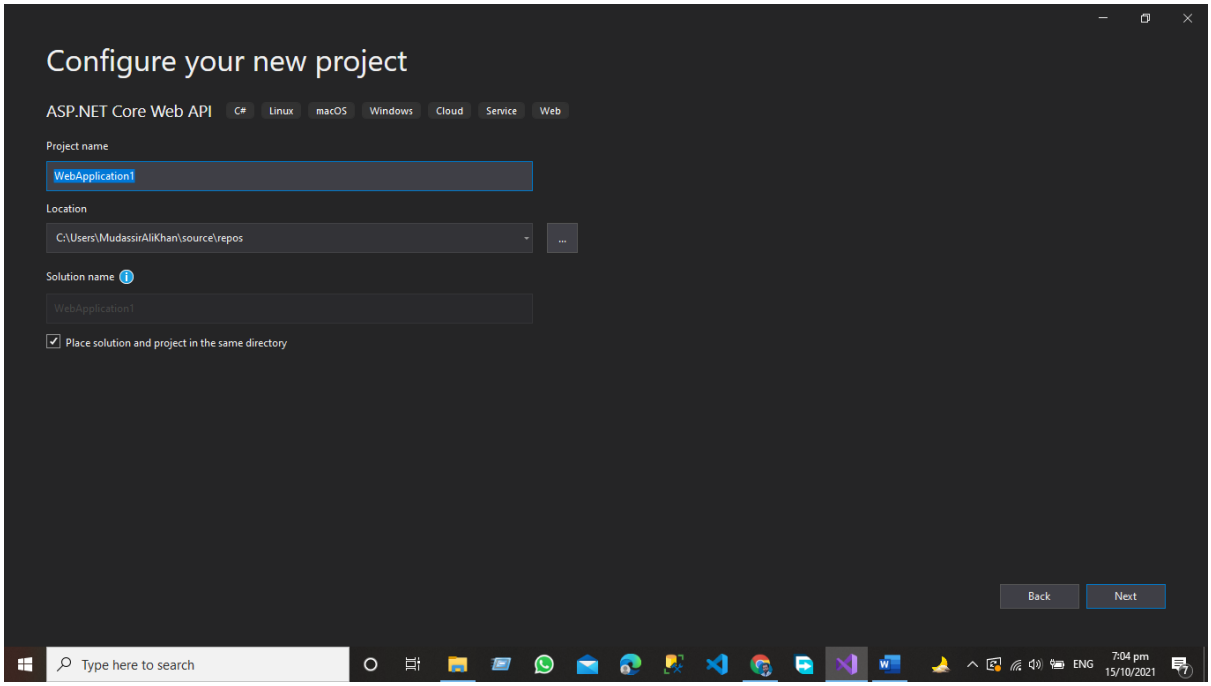

Step 3 Set the Live Server Database Connection string in your application appsetting.json file


{

"DefaultConnection": "Data Source=SQL5108.site4now.net;Initial Catalog=*YOUR ONLINE DB NAME*;User Id=*YOUR ONLINE DB USERNAME*;Password=*YOUR ONLINE DB PASSWORD*"


```
  },
  "Logging": {
    "LogLevel": {
      "Default": "Information",
      "Microsoft": "Warning",
      "Microsoft.Hosting.Lifetime": "Information"
    }
  },
  "AllowedHosts": "*"
}
```

Step 4 Publish Your Project


After Creating your project and Final Testing from QA Section now it's time to deploy our website Now go to solution explorer in visual studio 2019.

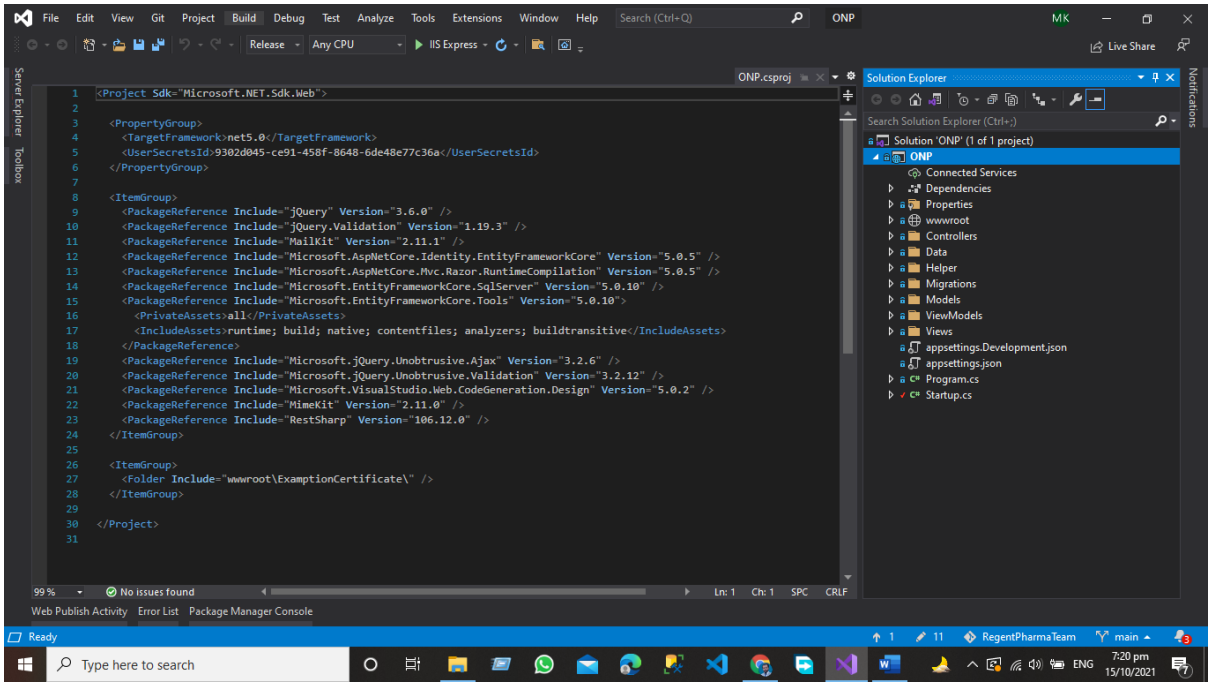


Now Right Click on your Project and select the option to publish.

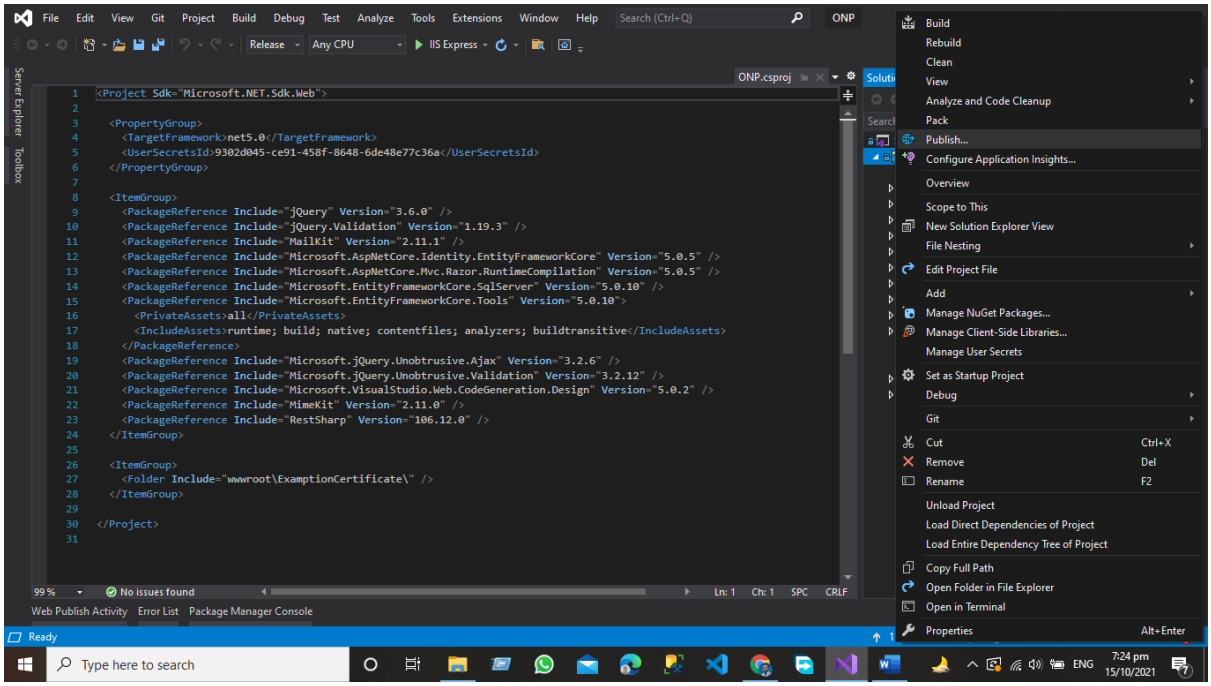


Click the Publish option a new window will appear now select the project publication option here you have 5 to 6 options given below.

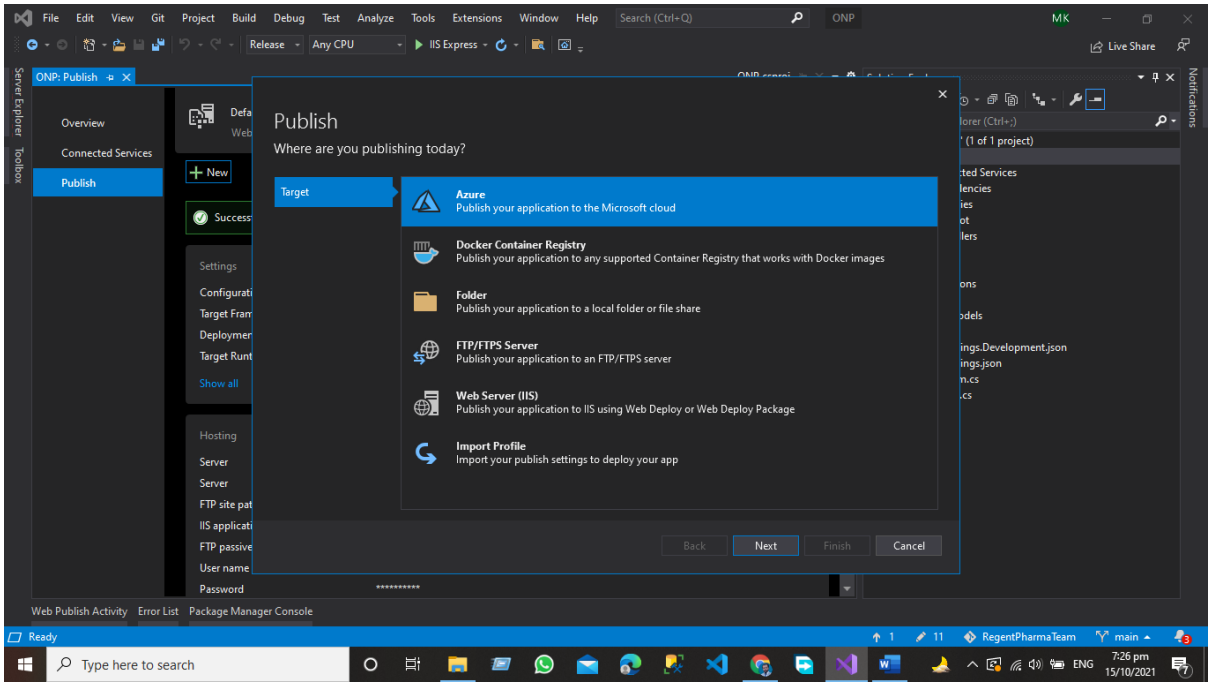


Now select the option Import to publish profile.

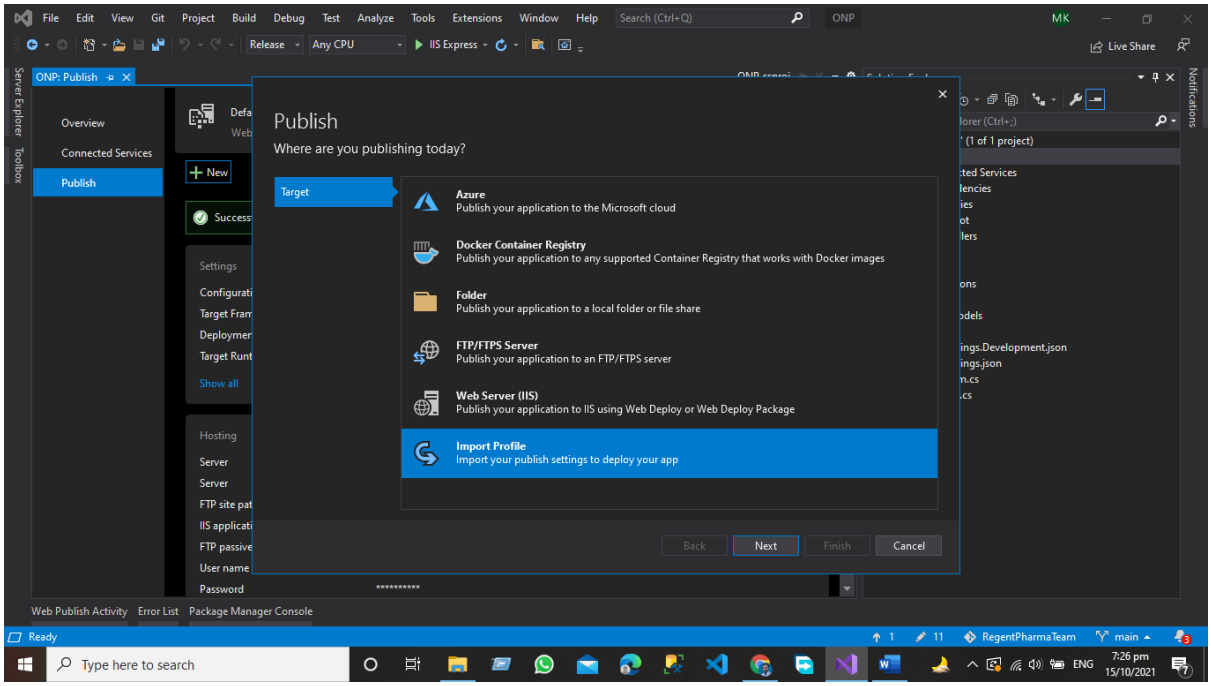


After Selecting the Option Import Profile click next.

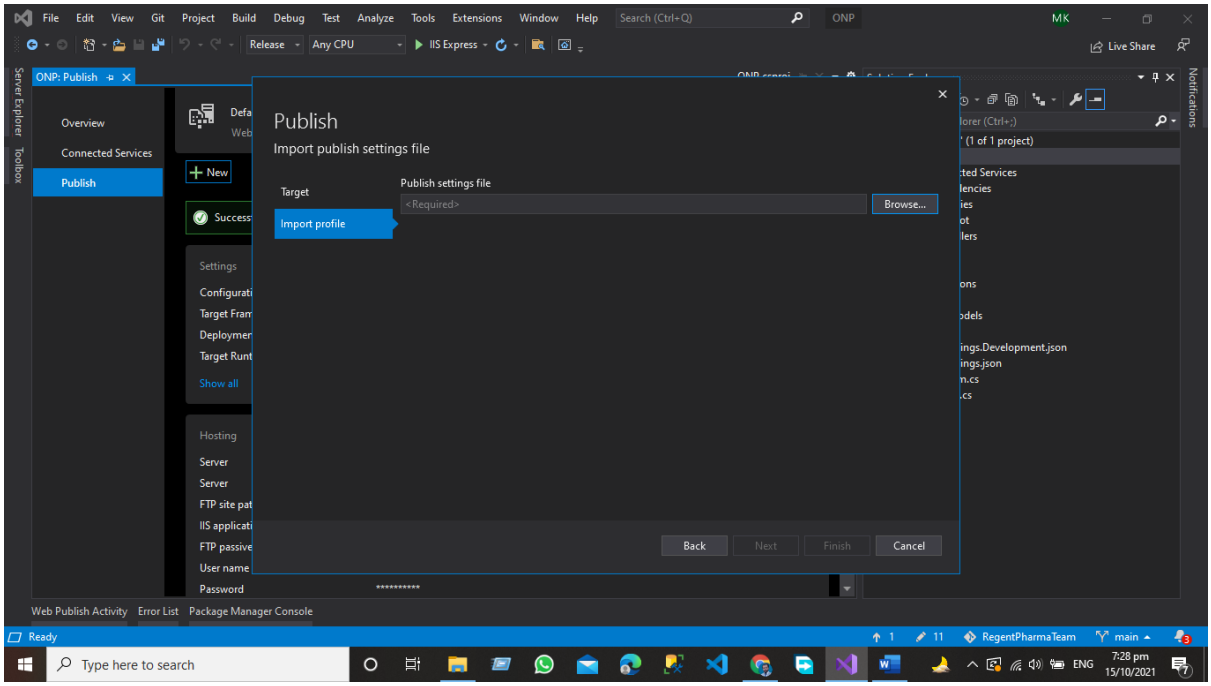


But here question will raise in your mind how to get the publish profile just login to the hosting proving server that supports Asp.net core website applications and then go to the deployment option and get the publish profile file and download it in your local system.

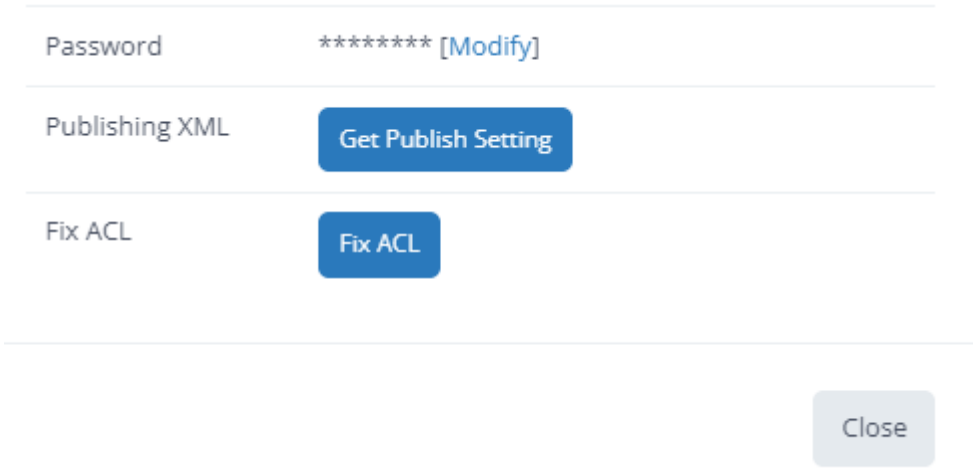


You all get this type of option in your control panel just get the publish profile from and down that file in your system.

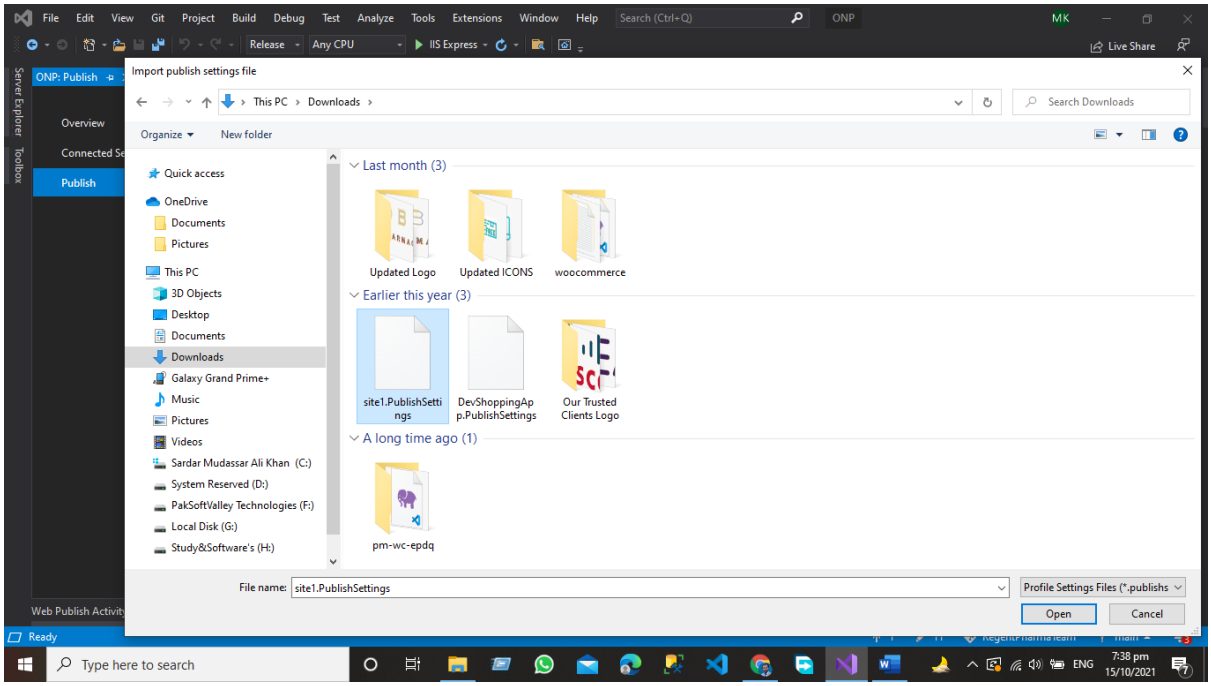


Then upload the file in the visual studio using the browse option from the downloaded location.

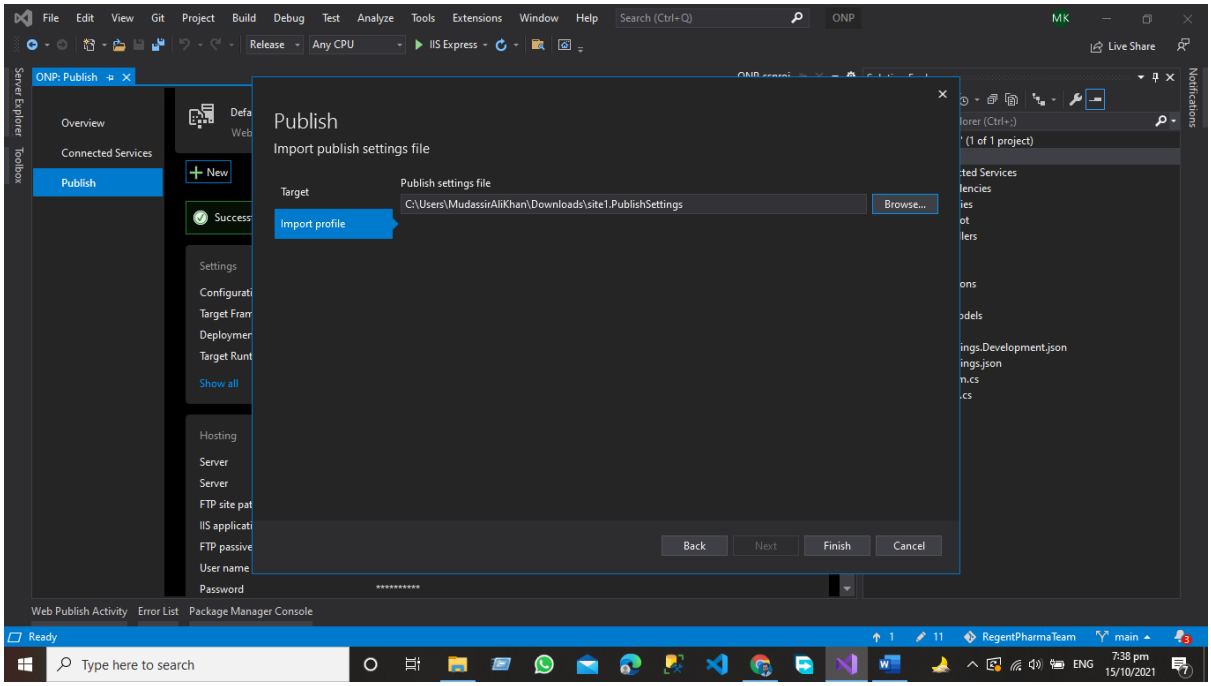


After Uploading the publish profile setting file in the visual studio just click on the Finish option and you will get given the below window.

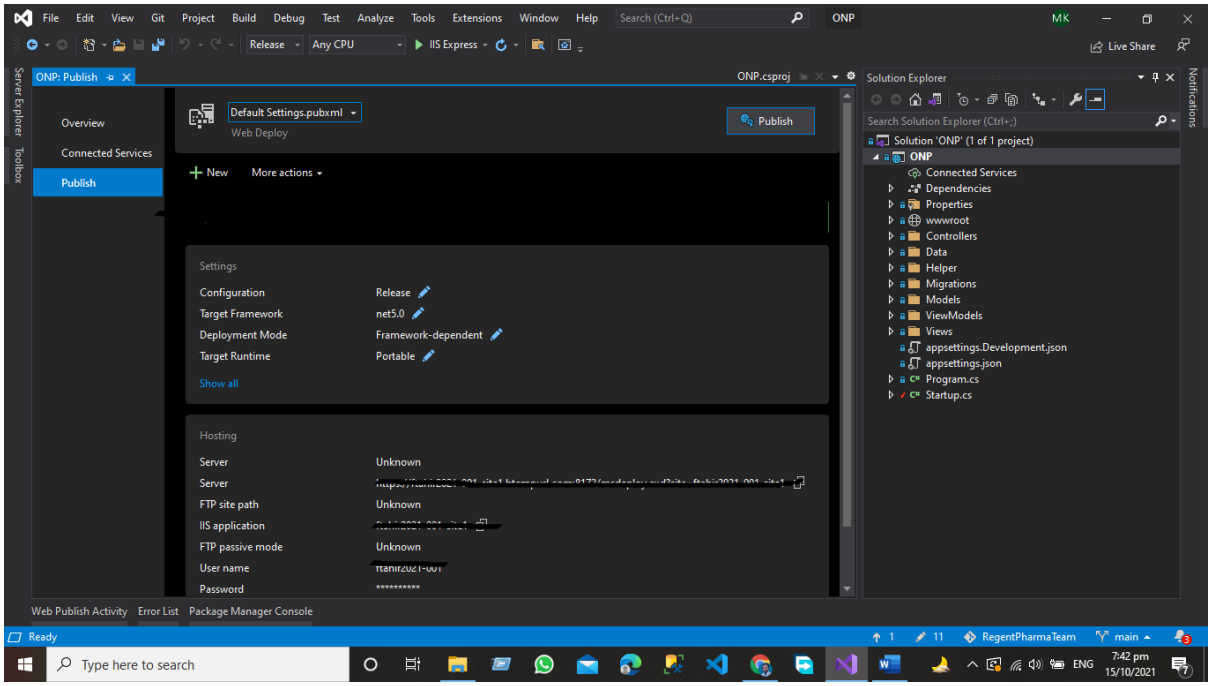


Now Click on More Actions.

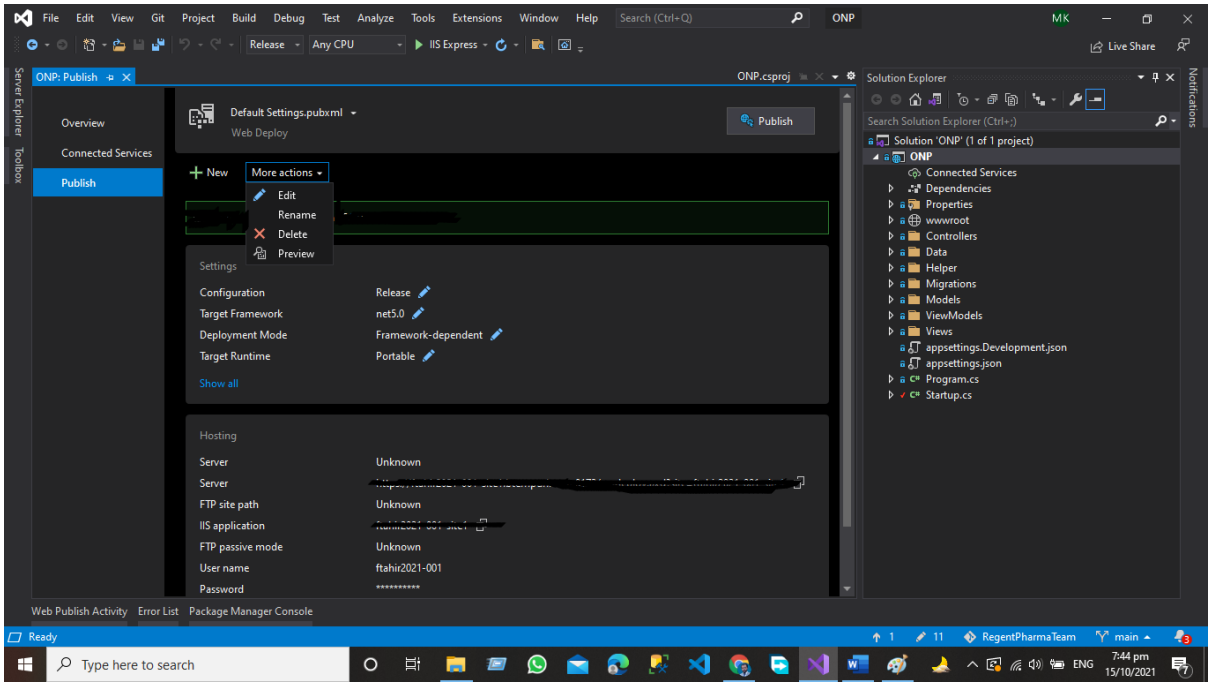

Click the Edit Option.

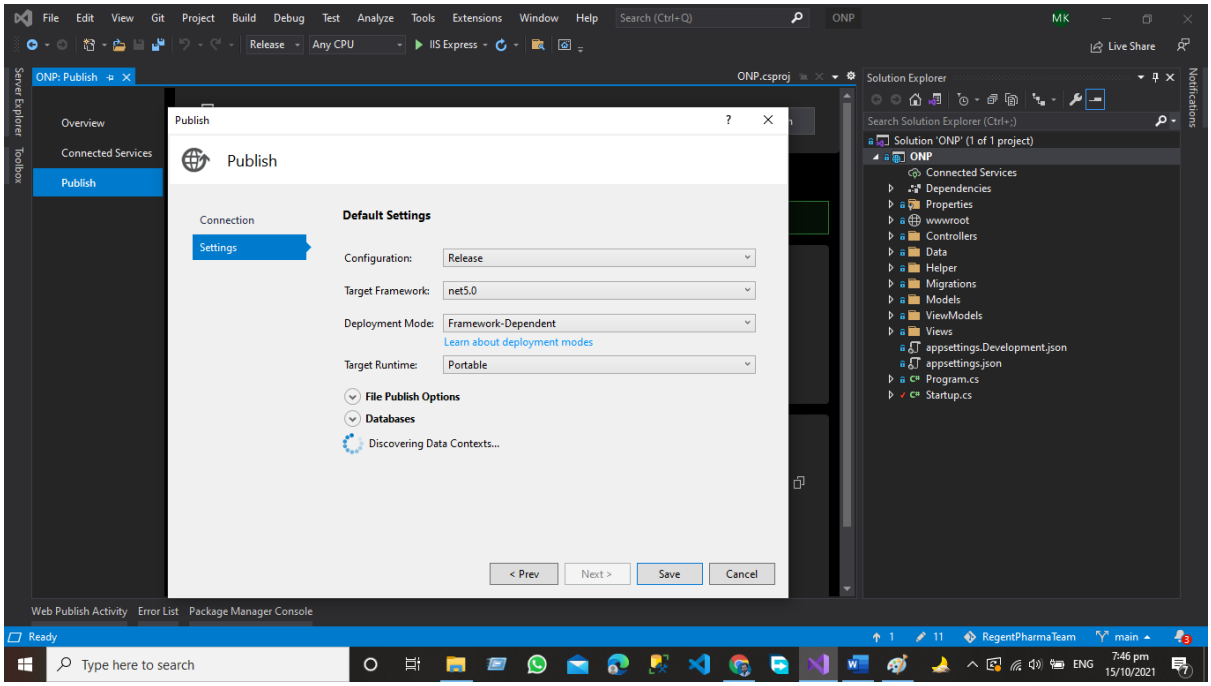


Click On Connection.

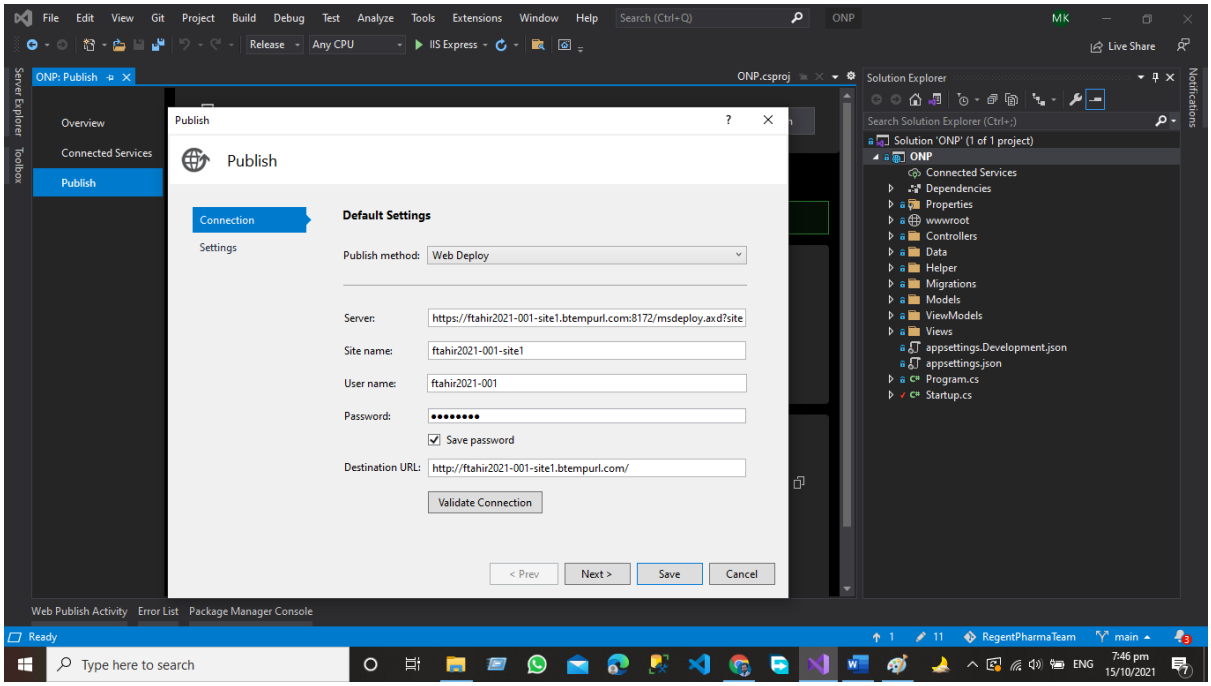

All the information will automatically upload fetched from the uploaded publish profile and this information will automatically save in the visual studio for future deployments.


Step 5 Validate the Connection

In this step, visual studio validates the connection with the server and then you can publish your application on the server.

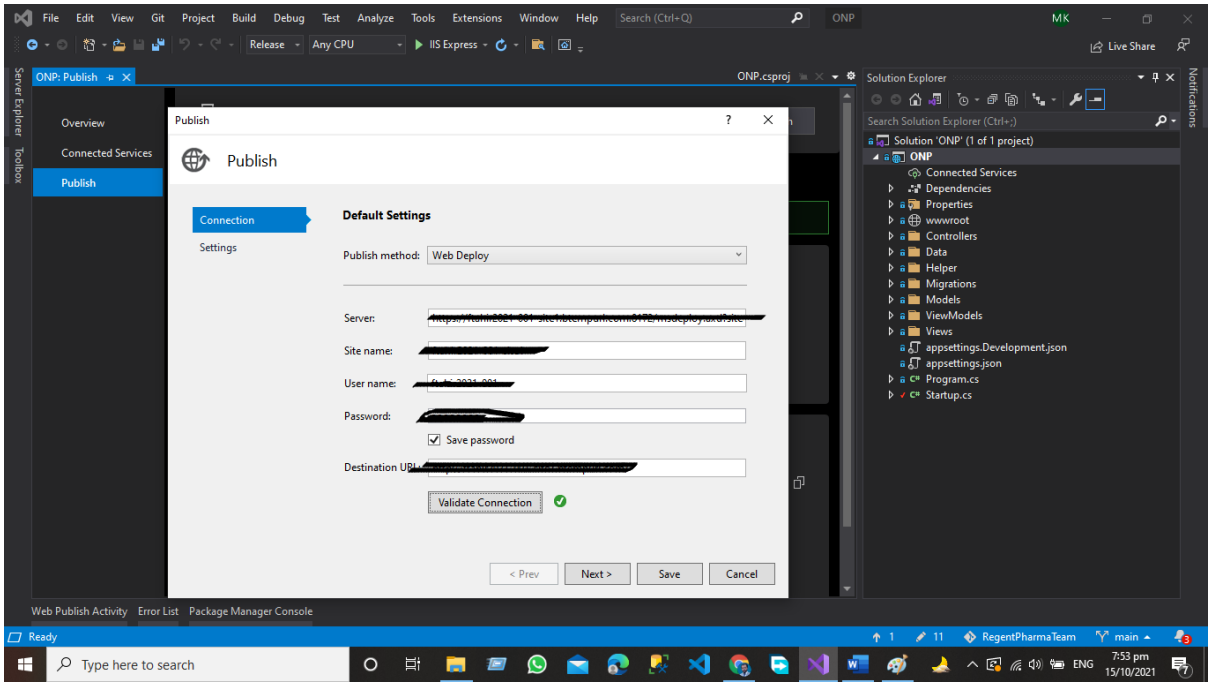


Now you can see that our connection has been validated from visual studio with the server now we are ready to publish the application.

Now Click on Next

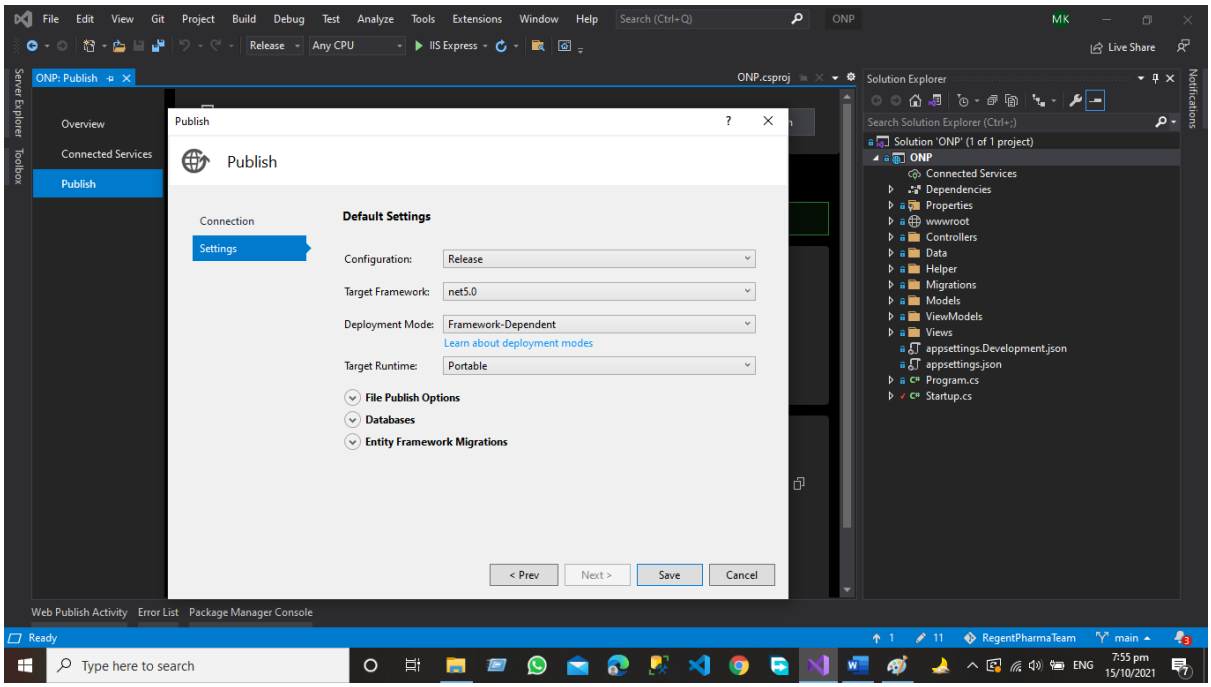


Click Save the Setting

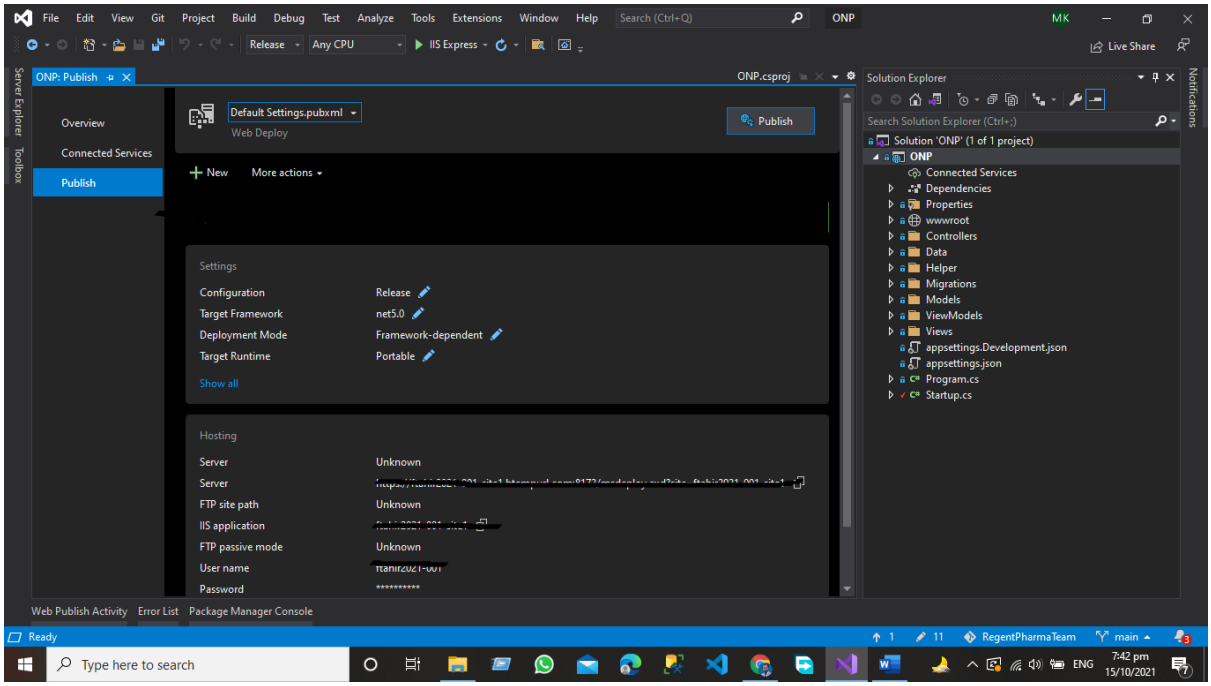


Now Click on Publish


But before the publication just checks your application should be in release mode and the Webhost environment should be in production mode.

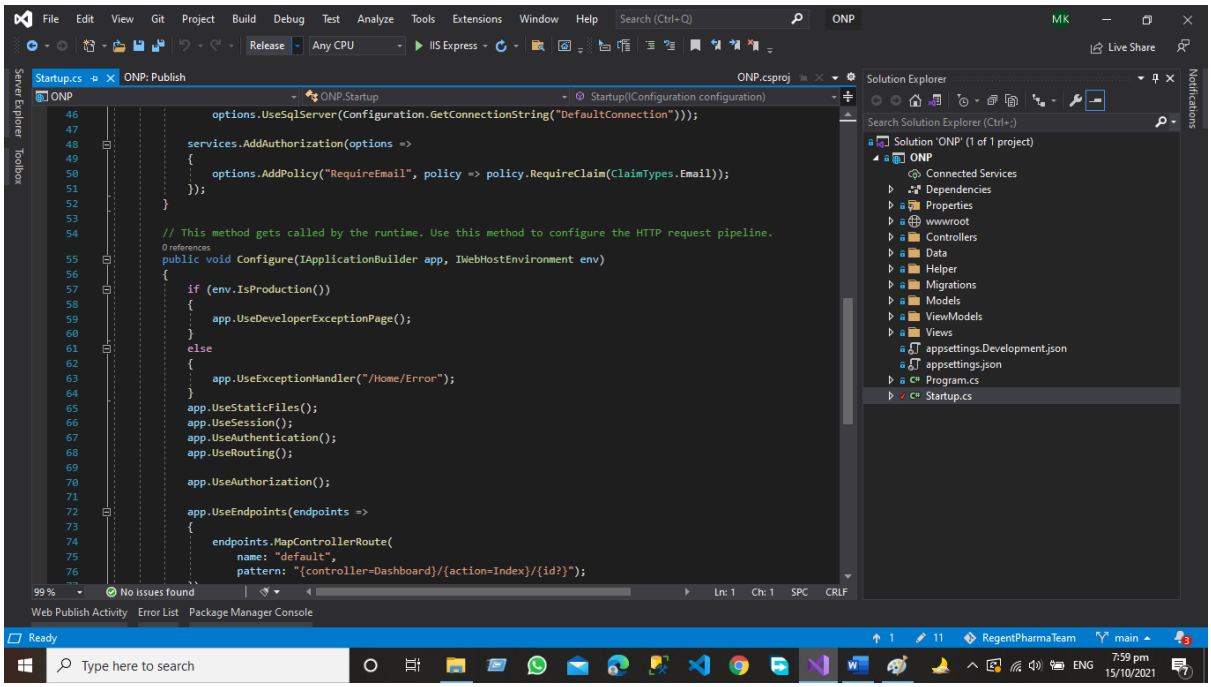


Publication of the website has been started.

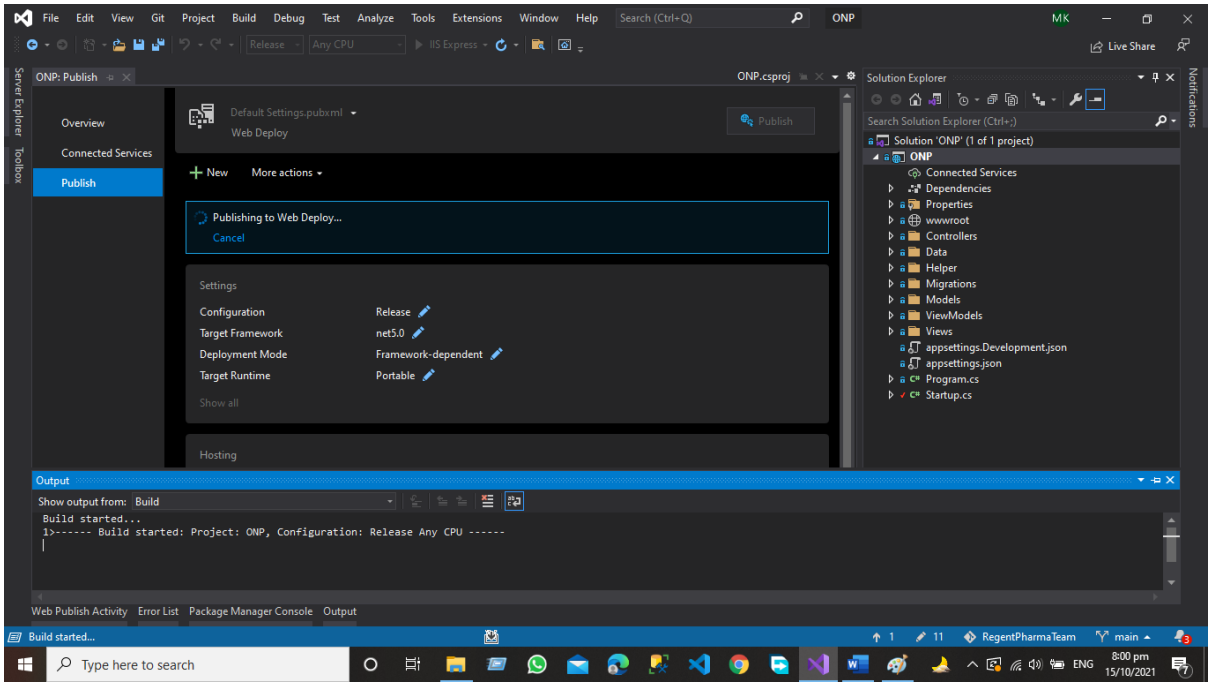

Our Deployment of the website on the server has been successfully done.

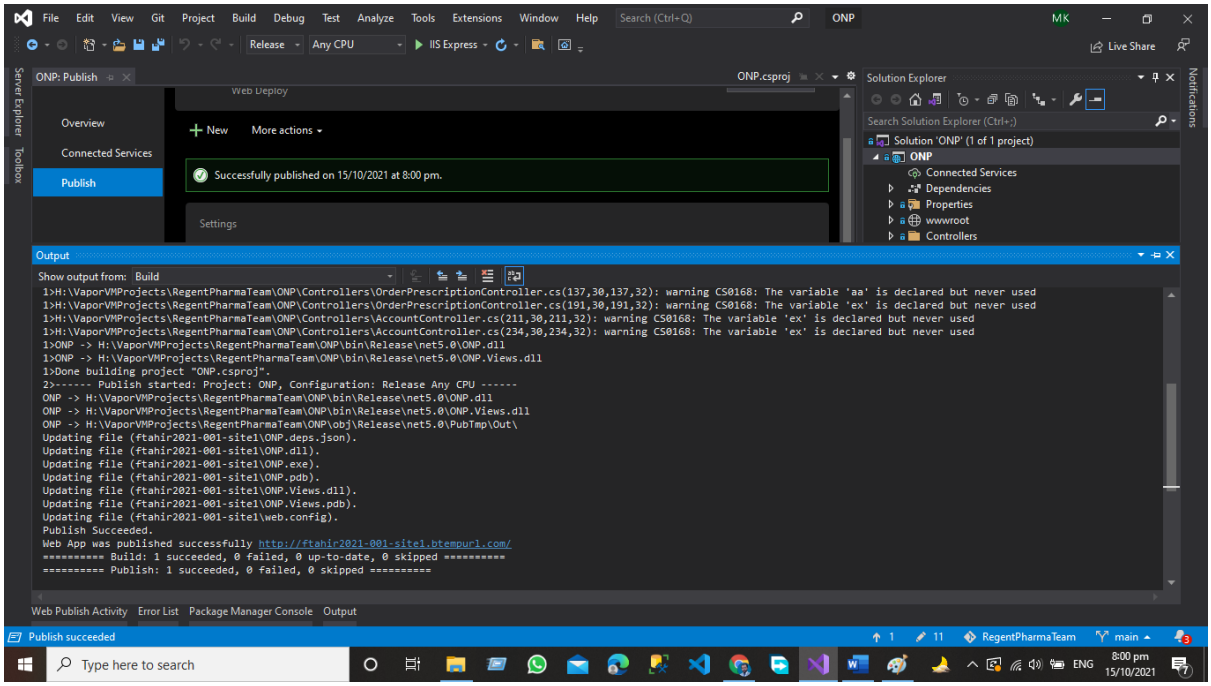

Now we are live on the website.

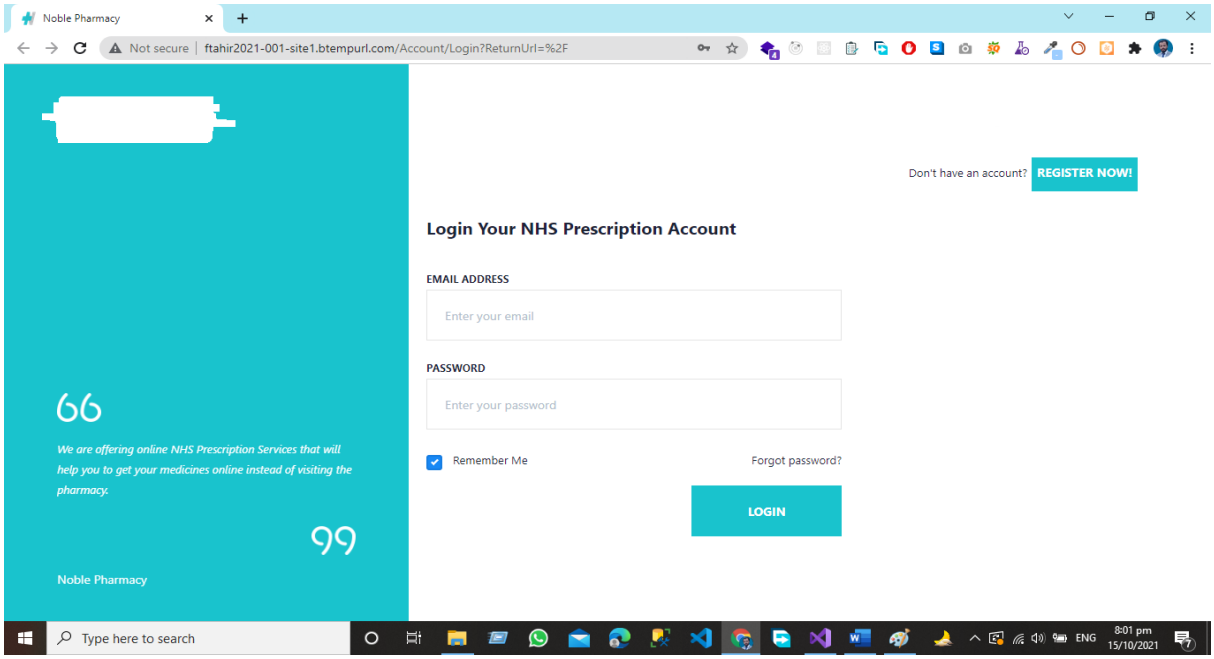

Conclusion

We learned how to publish our asp.net Core web application using Visual Studio in this chapter, and in the next post, we'll learn how to deploy our application using FileZilla Software FTP.

"Happy Coding"

References

1. *https://www.c-sharpcorner.com/*
2. *https://docs.microsoft.com/en-us/*
3. *https://google.com/*
4. *https://www.castsoftware.com/*
5. *https://www.guru99.com/restful-web-services.html*

Feedback

If you want to submit your feedback regarding the book theme book content or any other suggestion for improvement, then scan the QR Code and submit your feedback.



C#Corner

OUR MISSION

Free Education is Our Basic Need! Our mission is to empower millions of developers worldwide by providing the latest unbiased news, advice, and tools for learning, sharing, and career growth. We're passionate about nurturing the next young generation and help them not only to become great programmers, but also exceptional human beings.

ABOUT US

CSharp Inc, headquartered in Philadelphia, PA, is an online global community of software developers. C# Corner served 29.4 million visitors in year 2022. We publish the latest news and articles on cutting-edge software development topics. Developers share their knowledge and connect via content, forums, and chapters. Thousands of members benefit from our monthly events, webinars, and conferences. All conferences are managed under Global Tech Conferences, a CSharp Inc sister company. We also provide tools for career growth such as career advice, resume writing, training, certifications, books and white-papers, and videos. We also connect developers with their potential employers via our Job board. Visit C# Corner

MORE BOOKS

