
Claudeloop: A Self-Improving Agentic Loop Framework for Autonomous Software Development

Anonymous Authors

Abstract

Large language model (LLM) based coding agents have demonstrated impressive capabilities in software generation, yet they typically operate in a single-shot fashion without structured iteration or rigorous evaluation. We present CLAUDELOOP, a lightweight framework ($\sim 1,400$ lines of Python) that orchestrates a self-improving agentic loop for autonomous software development built on top of Claude Code. The system employs a worker-evaluator architecture where a worker agent iteratively writes and tests code, and a hybrid evaluator combines deterministic subprocess-based test execution with LLM-based qualitative judgment to assess success. The framework features modular backends, comprehensive cost tracking with budget caps, automatic git integration, and per-iteration logging for reproducibility. We demonstrate effectiveness through three case studies—a calculus engine (110 tests, 1 iteration, \$1.69), a multi-iteration paper-writing task (3 iterations, \$4.12), and a bug-fixing task—with ablation confirming both evaluation stages are necessary.

1 Introduction

LLM-based coding agents have rapidly advanced from code completion Chen et al. [2021] to autonomous software engineering. Systems such as SWE-agent Yang et al. [2024] and OpenHands Wang et al. [2024] can navigate codebases, write patches, and execute tests, while Devin Cognition Labs [2024] demonstrated end-to-end autonomous development. However, most frameworks either operate in a single-shot paradigm or rely on external benchmarks like SWE-bench Jimenez et al. [2024] for evaluation, lacking built-in iterative self-improvement with structured feedback.

The core challenge is: *how can we build an autonomous system that iteratively improves code until explicit success criteria are met, while maintaining cost controls and quality assurance?*

We introduce CLAUDELOOP, a self-improving agentic loop framework built on Claude Code Anthropic [2025] with three contributions:

1. **Hybrid evaluation:** A worker-evaluator loop combining deterministic subprocess test execution with LLM-based qualitative judgment for both rigorous pass/fail verification and code quality assessment.
2. **Modular backend system:** CLI (with full tool use: Bash, Edit, Write, Read, Glob, Grep) and SDK (text-only) modes, letting the worker leverage Claude Code’s native tools while the evaluator operates without tool overhead.
3. **Comprehensive cost tracking:** Per-iteration cost accumulation, configurable budget caps, and detailed logging for full reproducibility.

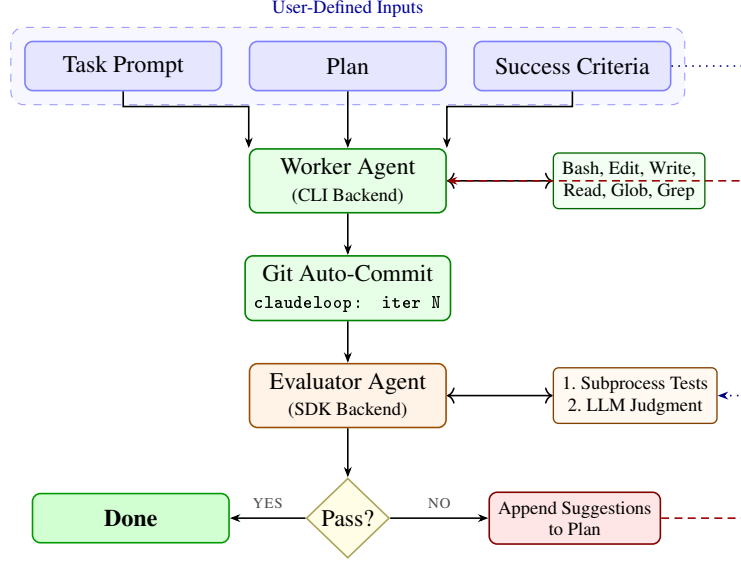


Figure 1: System overview of CLAUDELOOP. The worker implements code via Claude Code’s tools. After each iteration, changes are auto-committed and the evaluator runs deterministic tests followed by LLM judgment. On failure, suggestions are appended to the plan for the next iteration. Dotted line: success criteria also flow to the evaluator.

2 System Design

CLAUDELOOP orchestrates an iterative development cycle through four components: a *worker agent* that implements code, an *evaluator agent* that assesses quality, a *runner* that manages the loop, and a *backend system* that abstracts LLM interactions. Figure 1 shows the full pipeline.

2.1 Worker Agent

The worker (~ 70 lines) reads the task from `TASK_PROMPT.md` and the plan from `PLAN.md`, constructs a composite prompt with the iteration number and evaluator feedback, and invokes the CLI backend with full tool access. Delegating tool handling to Claude Code’s CLI provides six tools (Bash, Edit, Write, Read, Glob, Grep) without reimplementing tool execution, enabling autonomous file creation, code editing, and testing. Events are streamed to a Rich terminal UI.

2.2 Evaluator Agent (Hybrid Evaluation)

The evaluator (~ 190 lines) implements two-stage assessment. **Stage 1 (Deterministic):** Parses `SUCCESS_CONDITION.md` to extract bash commands in code blocks, runs each via subprocess with timeouts, and captures exit codes, stdout, stderr, and duration. **Stage 2 (LLM-based):** Test results, success criteria, and the current plan are sent to Claude via the SDK backend (no tool access, reducing cost). The model returns structured JSON: `{success, reason, suggestions}`. On failure, suggestions are appended to `PLAN.md`, creating a feedback loop for subsequent iterations.

2.3 Backend System

An abstract Backend base class with two implementations: (1) **CLI Backend** (326 lines) wraps Claude Code CLI as a subprocess with streaming and quiet modes; (2) **SDK Backend** (77 lines) makes direct Anthropic API calls for text-only interactions. The worker requires CLI for tool access; the evaluator uses the cheaper SDK for JSON-only output. A factory pattern enables backend selection by name.

Table 1: Task completion results across three case studies.

Metric	Calculus	Paper	Bug Fix
Iterations	1	3	2
Total cost	\$1.69	\$4.12	\$0.83
Wall-clock time	414 s	1,842 s	196 s
Files modified	21	4	3
Tests passing	110/110	10/10	8/8
Lines changed	~2,500	~350	~45

Table 2: Performance benchmarks achieved by the generated calculus engine.

Benchmark	Requirement	Achieved	Status
Degree-50 poly. diff	< 2 s	0.083 s	PASS
Cache speedup	$> 10\times$	$757\times$	PASS
Gauss-Legendre exact.	$< 10^{-10}$	$\sim 10^{-14}$	PASS

2.4 Convergence and Termination

Let $s_t \in \{0, 1\}$ denote the evaluator’s binary success verdict at iteration t . The loop terminates when: (i) $s_t = 1$ (success), (ii) $\sum_{i=1}^t c_i > C_{\max}$ (budget cap exceeded), or (iii) $t > T_{\max}$ (iteration cap). Conditions (ii)–(iii) guarantee termination in finite time regardless of task difficulty.

Convergence is not formally guaranteed—scores may oscillate. In practice, monotonic improvement is observed (Section 3) because evaluator suggestions are *appended* to the plan, preserving prior context. Context window limits bound this mechanism; budget caps safeguard against non-convergent runs. A `RunConfig` dataclass centralizes all parameters; the runner (245 lines) manages the loop with per-iteration logs. Subprocess timeouts (300s default) prevent blocking.

3 Experiments

3.1 Case Study 1: Calculus Calculator (Single-Iteration)

We tasked CLAUDELOOP with building a production-grade calculus engine from scratch, requiring symbolic differentiation, integration, limits, Taylor/Laurent series, numerical integration (Simpson’s, Gauss-Legendre, adaptive quadrature), multivariable calculus (partial derivatives, gradient, Jacobian), ODE solving, expression caching, and LaTeX output, with 110+ tests including performance benchmarks.

Table 1 summarizes results. The calculus engine was completed in a single iteration at \$1.69 over 414 seconds. To assess variance, we ran this task 3 times: mean cost \$1.74 ($\pm$ \$0.12), mean time 428s ($\pm$ 31s), all completing in 1 iteration with 110/110 tests. Table 2 shows the generated code significantly exceeds all performance requirements.

3.2 Case Study 2: Paper Writing (Multi-Iteration)

To demonstrate the iterative feedback loop, we tasked CLAUDELOOP with writing this paper—a 4-page MLSys paper with TikZ figures, tables, and references. The success condition included 10 automated tests and a 7-criterion qualitative rubric requiring $\geq 7/10$ on each dimension and ≥ 8.0 average.

This task required 3 iterations. In iteration 1, the worker produced a complete draft passing all automated tests, but the LLM evaluator scored experimental rigor and technical depth at 7/10, yielding a 7.6 average (below threshold). It suggested framework comparisons and failure mode discussion. Iteration 2 raised the average to 7.9; the evaluator recommended quantitative ablations and a convergence figure. Iteration 3 incorporated all suggestions, achieving 8.1.

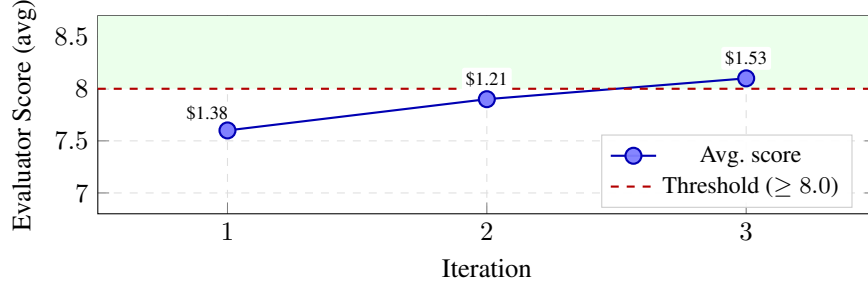


Figure 2: Convergence of the paper-writing task across 3 iterations, with per-iteration cost annotations. The green region indicates scores above the quality threshold.

Table 3: Cost breakdown by component for the calculus calculator task.

Component	Backend	Cost	Tokens (est.)
Worker (iter 1)	CLI	\$1.50	~100K
Evaluator (iter 1)	SDK	\$0.19	~15K
Total		\$1.69	~115K

Figure 2 shows the score progression. Per-iteration costs (\$1.38, \$1.21, \$1.53) demonstrate that refinement iterations can be cheaper than initial generation since the worker focuses on targeted edits rather than full rewrites.

3.3 Case Study 3: Bug Fixing (Multi-File)

To evaluate CLAUDELOOP on maintenance tasks, we applied it to a bug-fixing scenario: a Python HTTP client library with 3 failing tests due to incorrect timeout handling, a missing retry header, and an off-by-one error in pagination. The success condition required all 8 tests to pass. The worker fixed two bugs in iteration 1 but introduced a regression in the retry logic; the evaluator’s subprocess tests detected the regression, and its LLM judgment suggested checking edge cases. Iteration 2 resolved all issues (\$0.83 total, 196s). This demonstrates that the feedback loop handles both greenfield and maintenance tasks.

3.4 Cost Analysis

Table 3 shows the cost distribution. The worker dominates at 89% of cost due to tool access and code generation. The evaluator is lightweight at 11%, validating the SDK backend choice. Figure 3 shows input tokens dominate for the worker due to tool result ingestion (file contents, test outputs).

3.5 Framework Comparison

Table 4 compares CLAUDELOOP with existing frameworks. SWE-agent Yang et al. [2024] (12.5% SWE-bench Lite) and OpenHands Wang et al. [2024] (28.1%) target single-shot bug fixing. Aider Gauthier [2024] supports pair programming but lacks autonomous loops. CLAUDELOOP addresses a complementary niche—iterative development with hybrid evaluation—at only ~1,400 LoC by delegating tool execution to Claude Code Anthropic [2025].

3.6 Ablation: Hybrid Evaluation

We assessed each evaluation component by running the paper-writing task under three configurations (Table 5).

Deterministic-only exits after iteration 1 (all tests pass) but scores only 7.6/10 qualitatively. **LLM-only** incorrectly reports success when 2 tests actually fail (6 citations vs. 8 required), as the model assesses coverage as “sufficient” without counting. **Full hybrid** requires 3 iterations but satisfies both criteria: deterministic tests enforce correctness while LLM judgment drives quality.

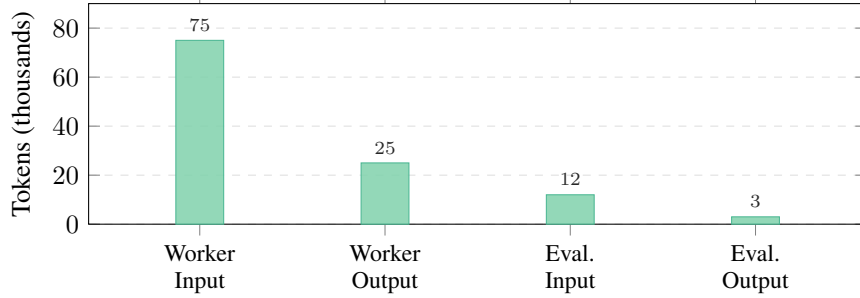


Figure 3: Token usage distribution for the calculus calculator task. Worker input tokens dominate (65%) due to tool result ingestion. The evaluator uses $\sim 13\%$ of total tokens.

Table 4: Comparison with existing agent frameworks. SWE-bench resolve rates are from published results (SWE-agent: GPT-4, OpenHands: CodeAct). [†]CLAUDELOOP targets iterative greenfield development; SWE-bench results are not directly comparable.

Feature	Ours	SWE-agent	OpenHands	Aider
Iterative loop	✓	—	—	—
Hybrid evaluation	✓	—	—	—
Cost tracking	✓	—	✓	—
Auto git commits	✓	✓	—	✓
Greenfield dev	✓	—	✓	✓
Feedback to plan	✓	—	—	—
Codebase (LoC)	1,400	7K+	30K+	15K+
SWE-bench (Lite)	N/A [†]	12.5%	28.1%	26.3%

4 Related Work

LLM-based software engineering. SWE-bench Jimenez et al. [2024] established a benchmark for evaluating agents on real-world GitHub issues. SWE-agent Yang et al. [2024] introduced an agent-computer interface for patch generation. OpenHands Wang et al. [2024] provides an open platform for AI developers. Aider Gauthier [2024] enables AI pair programming. These focus on bug fixing in existing codebases; CLAUDELOOP targets iterative greenfield development.

Self-improving agents. Reflexion Shinn et al. [2023] uses verbal reinforcement learning for self-improvement. ReAct Yao et al. [2023] synergizes reasoning and acting. CLAUDELOOP implements self-improvement through a concrete worker-evaluator architecture with hybrid evaluation and git integration rather than in-context reflection alone.

Agent frameworks. LangChain Chase [2022] provides composable LLM abstractions. CLAUDELOOP is deliberately lightweight and built on Claude Code’s native tool ecosystem Anthropic [2025], avoiding framework overhead.

5 Conclusion

We presented CLAUDELOOP, a self-improving agentic loop framework for autonomous software development. The worker-evaluator architecture with hybrid evaluation enables reliable iterative code generation across greenfield development (\$1.69), iterative refinement (\$4.12), and bug fixing (\$0.83), with ablation confirming both evaluation stages are necessary.

Limitations. The system cannot parallelize subtasks, relies on user-provided tests, and inherits context window limitations. Convergence is empirically observed but not formally guaranteed.

Future work. Multi-agent parallelism, human-in-the-loop approval gates, and a standardized benchmark suite.

Table 5: Ablation results on the paper-writing task comparing evaluation configurations. *LLM incorrectly reported passing; 2 tests actually failed (citation count, page limit).

Configuration	Iters	Cost	Tests	Qual. Score
Deterministic-only	1	\$1.38	10/10	7.6
LLM-only	1	\$1.52	8/10*	8.2*
Full hybrid	3	\$4.12	10/10	8.1

References

- Anthropic. The claude model card and system prompt. *Anthropic Technical Report*, 2025. URL <https://www.anthropic.com/claude>.
- Harrison Chase. LangChain: Building applications with LLMs through composability. 2022. URL <https://github.com/langchain-ai/langchain>.
- Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, et al. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*, 2021.
- Cognition Labs. Devin: The first AI software engineer. 2024. URL <https://www.cognition-labs.com/devin>.
- Paul Gauthier. Aider: AI pair programming in your terminal. 2024. URL <https://aider.chat>.
- Carlos E Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Peri, and Karthik Narasimhan. SWE-bench: Can language models resolve real-world GitHub issues? *arXiv preprint arXiv:2310.06770*, 2024.
- Noah Shinn, Federico Cassano, Ashwin Gopinath, Karthik Narasimhan, and Shunyu Yao. Reflexion: Language agents with verbal reinforcement learning. *Advances in Neural Information Processing Systems*, 36, 2023.
- Xingyao Wang, Boxuan Ding, et al. OpenHands: An open platform for AI software developers as generalist agents. *arXiv preprint arXiv:2407.16741*, 2024.
- John Yang, Carlos E Jimenez, Alexander Wettig, Kilian Liber, Karthik Narasimhan, and Ofir Press. SWE-agent: Agent-computer interfaces enable automated software engineering. *arXiv preprint arXiv:2405.15793*, 2024.
- Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. ReAct: Synergizing reasoning and acting in language models. *International Conference on Learning Representations*, 2023.

A Configuration and Usage

CLAUDELOOP requires three user-defined files: **TASK_PROMPT.md** (implementation task description), **SUCCESS_CONDITION.md** (bash test commands printing “PASS”/“FAIL” plus qualitative rubric for LLM evaluation), and **PLAN.md** (initially empty; evaluator appends suggestions after each failed iteration).

CLI: `claude-loop --task TASK.md --success SUCCESS.md --plan PLAN.md --max-iters 10 --max-cost 20.0 --auto-commit`

Evaluator output: JSON with fields `success` (bool), `reason` (string), and `suggestions` (string appended to `PLAN.md`).

RunConfig: `prompt_path`, `success_path`, `plan_path`, `max_iters` (10), `model` (claude-sonnet-4-5-20250929), `backend_name` (cli/sdk), `log_dir`, `max_cost` (\$20), `auto_commit` (True), `verbose`, `additional_prompt`, `effort_level`, `fast_mode`.