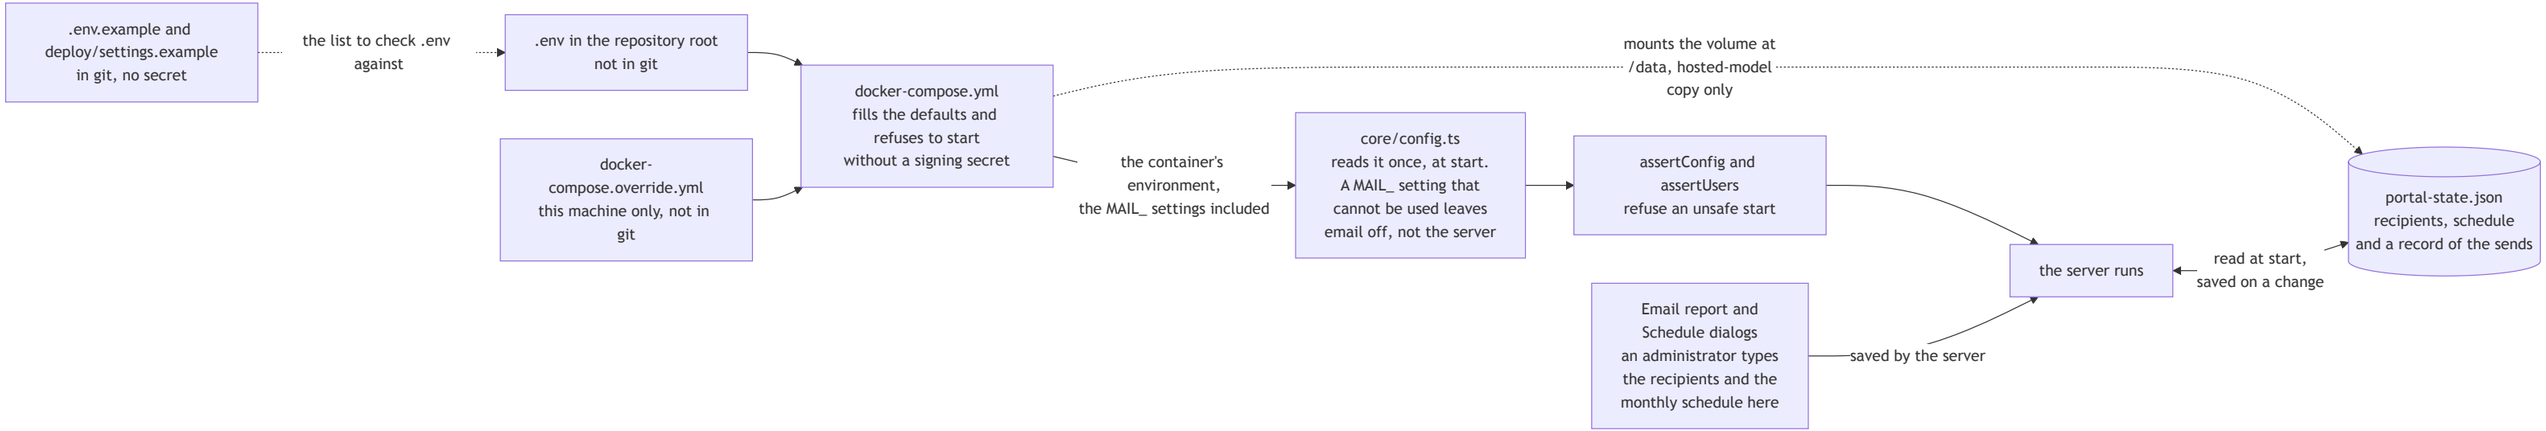
HCML Monitoring Portal: how a setting reaches the server
.env.example and deploy/settings.example in git, no secret
the list to check .env against
.env in the repository root not in git
docker-compose.override.yml this machine only, not in git
docker-compose.yml fills the defaults and refuses to start without a signing secret
mounts the volume at /data, hosted-model copy only
the container's environment, the MAIL_ settings included
core/config.ts reads it once, at start. A MAIL_ setting that cannot be used leaves email off, not the server
assertConfig and assertUsers refuse an unsafe start
portal-state.json recipients, schedule and a record of the sends
the server runs
read at start, saved on a change
Email report and Schedule dialogs an administrator types the recipients and the monthly schedule here
saved by the server