

Therefore™ Setup: Installation Customizations & Silent Installations

www.therefore.net
© 2024 Therefore Corporation

All rights reserved. No parts of this work may be reproduced in any form or by any means - graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems - without the written permission of the publisher.

3rd Party Products that are referred to in this document, are the property of, and may be either trademarks and/or registered trademarks of the respective owners in the USA and/or other countries. The publisher and the author make no claim to these trademarks.

While care has been taken in the preparation of this document, the publisher and the author assume no responsibility for errors or omissions, or for damages resulting from the use of information contained in this document.

VERSION: 2024 - 01

Table of Contents

1. Introduction	4
1.1 First Steps	4
2. Setup Installation Customization.....	5
2.1 What are Transform files?	5
2.1.1 Extract Setup	5
2.1.2 Create Transform file	6
2.1.3 Do Setup Customizations	6
2.1.4 Save Transform file	7
2.1.5 How to apply the Transform file along with the Setup	7
2.2 Setup Customization Samples	7
2.2.1 Add and Remove Features	8
2.2.2 Add or Modify Installation Properties	9
3. Setup Silent Installation.....	11
3.1 Silent Setup	11
3.1.1 Basic Silent Setup	11
3.1.2 Silent Setup with Server Name	11
3.1.3 Silent Setup and Installation Customizations	11
3.1.4 Silent Setup with Tenant Name	12
3.2 Additional information	12
4. Appendix	14
4.1 Registry-Keys for detecting installations	14
4.2 Server Feature List	15
4.3 Client Feature List	17

1. Introduction

This document contains instructions for setup customization and a silent installation. Though these are independent steps, they can be combined as this document will demonstrate.

1.1 First Steps

Download the Windows Installer SDK samples, tools, and documentation from the following Web page:
<https://www.microsoft.com/en-us/download/details.aspx?id=8279>

Install Orca using Typical setup. Orca itself is part of the Windows SDK and it is not necessary to install all SDK contents. For more information about Orca, please refer to:
[https://msdn.microsoft.com/en-us/library/windows/desktop/aa370557\(v=vs.85\).aspx](https://msdn.microsoft.com/en-us/library/windows/desktop/aa370557(v=vs.85).aspx)

2. Setup Installation Customization

2.1 What are Transform files?

Transform files allow users to collect installation options for programs that use the Microsoft Windows Installer in a file. They can be used on the Installer command line, or used in a software installation Group Policy in a Microsoft Active Directory domain.

The Transform file is only available for a specific setup package (each new version of Therefore™ requires a new one). A transform file only changes the way in which the current setup is installed by essentially transforming the default setting of the setup. E.g. it is not possible to add custom or remove files from setup.

There are five stages to file transformation, which include:

1. Extract setup file
2. Create Transform file
3. Do setup customizations
4. Save Transform file
5. How to use the Transform file along with the Setup


To create a Transform file (MST), the original MSI file's properties will need to be edited using a modification tool such as Orca. In this document, a demonstration of editing the properties of an MSI file will be using Orca software.

2.1.1 Extract Setup

1. The MSI file will need to be extracted from the Therefore™ Client setup by launching the command line tool as administrator.
2. Navigate to the location of the EXE file (e.g. TheServer.exe or TheClient.exe) depending on what needs to be extracted.
3. Extraction can be then accomplished using the `/extract` command e.g. `C:\Therefore\Setup\TheClient.exe /extract` or `TheServer.exe /extract`
4. The entered command will not trigger the installation but will extract the MSI installer file. The new file will be displayed next to the location of the original EXE file.
5. Once the MSI file has been extracted, the user can use an MSI editor tool such as Orca to create Transform (MST) files.

2.1.2 Create Transform file


1. An MST file will need to be created from an MSI file using an MSI editing software (such as Orca) in order to customize the file properties and edit accordingly.
2. Click on the menu Transform, then click on New Transform (New Transform option is now grayed out).

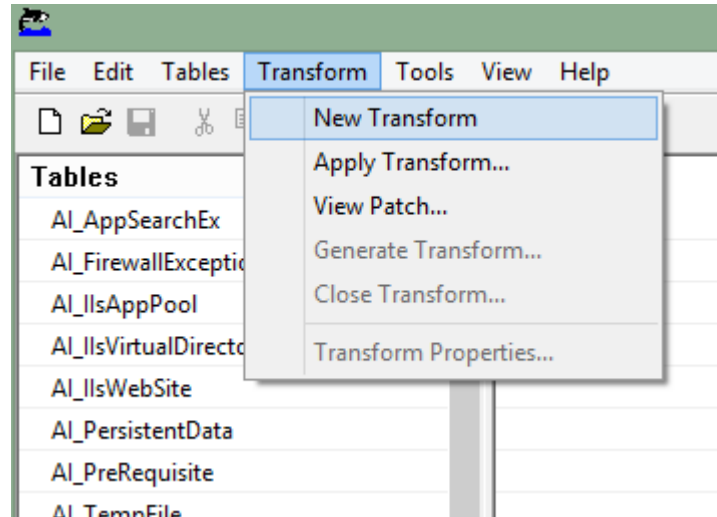

2.1.3 Do Setup Customizations


Implement customizations with Orca in order to modify the elements within the installer (e.g. modifying registry values, add/remove features).

Note: The Features table can be altered (depending on the user's objectives), but this may not be necessary depending on the objectives of the user.

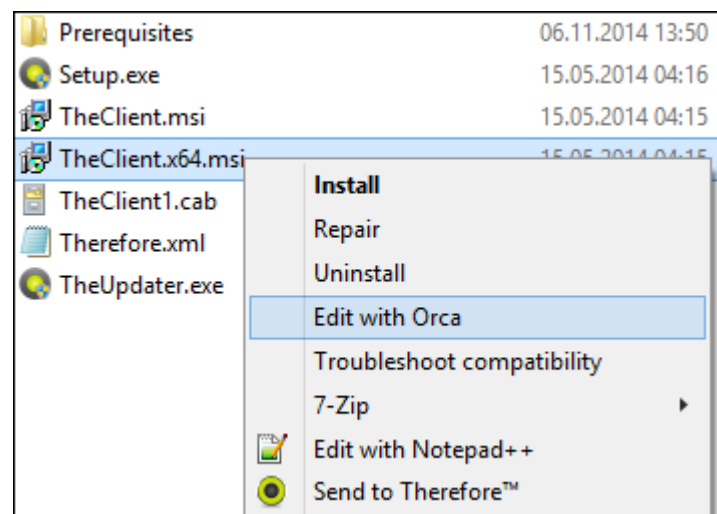


2.1.4 Save Transform file

1. Click on the Transform menu, then click on Generate Transform.

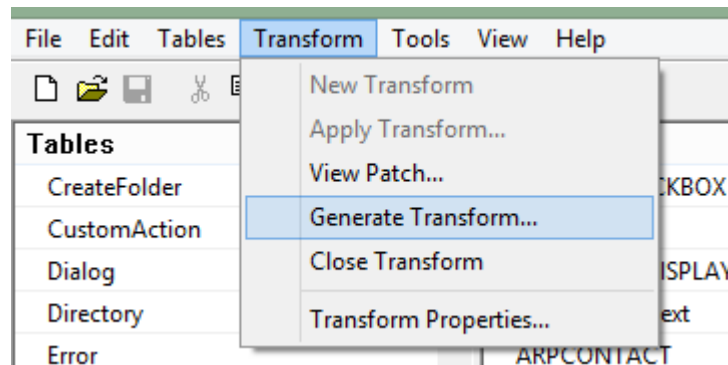

2. Define the file name and click Save.

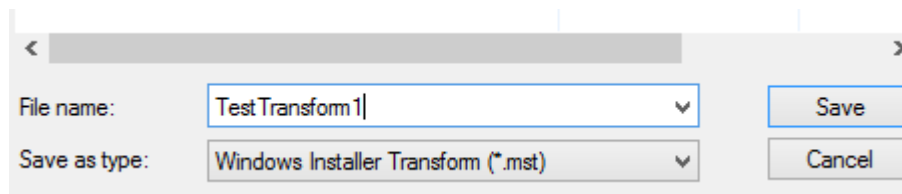

2.1.5 How to apply the Transform file along with the Setup

Specify Transform file on command line



Example: `msiexec /i "TheClient.x64.msi"`

Note: The transform files can be applied to 'TheServer...-Bit.msi' files in the same way as the above example.

2.2 Setup Customization Samples

Here we will provide some example of how to edit the Feature table and change the install Level column.

The following install behaviors can be inputted with the corresponding feature in the Level column:

- Installed (Level: 1) - The feature will be installed on the typical and complete installations.
- Not installed (Level: 4) - The feature will not be installed on a typical installation.
- Disabled (Level: 0) - The feature will be disabled

2.2.1 Add and Remove Features

1. On the left pane, click on the Feature table.

Feature	Feature_Parent	Title	Description	Disp...	Le...	Directo...	Attribu...
A5FAD2_A0AB_492E_9F3A_F3AED8E676FF	TheNavigator	SQL Server Compa...	SQL Server Compa...	0	1	APPPDIR	10
AdobePdfLibrary	TheCore	Adobe PDF Library		0	32767	APPPDIR	26
TheCore		Therefore™ Core	Installs Therefore™ ...	2	32767	APPPDIR	24
TheDocumentation_French	TheDocumentation	French	Installs French doc...	5	32767	APPPDIR	8
TheDocumentation_Spanish	TheDocumentation	Spanish	Installs Spanish do...	11	32767	APPPDIR	8
B6B4DA29_4C9D_4CCC_B9CF_7A79BD06DD79	TheNavigator	SQL Server Compa...	SQL Server Compa...	0	1	APPPDIR	10
Stellent	TheCore	Stellent		0	32767	APPPDIR	26
FA7311BF_F3EC_4BB8_83E3_3C8B092B6665	TheMicrosoftOffice	VSTO 2010 Runtime	VSTO 2010 Runtime	0	32767	APPPDIR	10
TheMicrosoftOffice	TheIntegrateApps	Microsoft® Office	Installs component...	4	32767	APPPDIR	8
TheSolutionDesigner	TheAdminApps	Solution Designer	Installs Therefore™ ...	3	32767	APPPDIR	8
TheAdminApps		Therefore™ Admini...	Components for m...	9	32767	APPPDIR	8
IRIS	TheCore	I.R.I.S		0	32767	APPPDIR	26
PixTools	TheCore	PixTools		0	32767	APPPDIR	26
TheClientOnly	TheCore	Client Only		0	32767	APPPDIR	26
RequiredApplication	TheCore	Update Check	Therefore™ Update...	0	32767	APPPDIR	8
TheDummy	TheCore	_Dummy		0	32767	APPPDIR	26
SXPDFLIB	TheCore	SX-PDF		0	32767	APPPDIR	26
TheBase	TheCore	Base		0	32767	APPPDIR	26
TheConsole	TheAdminApps	Console	Installs Therefore™ ...	5	32767	APPPDIR	8

2. On the right pane, you can see all Therefore™ features.

Feature	Feature_Parent	Title	Description	Disp...	Level	Directo...	Attribu...
TheLang_English	TheLang_WesternE...	English	Installs display lang...	7	32767	APPPDIR	24
TheViewer	TheNavigator	Viewer	Installs Therefore™ ...	0	1	APPPDIR	10
TheNavigator	TheUserApps	Navigator	Installs Therefore™ ...	3	1	APPPDIR	8
TheUserApps		Therefore™ Use	Components for m...	11	1	APPPDIR	8
TheLang_WesternEuropean	TheLanguageSupp...	Western European	Western European ...	8	1	APPPDIR	26
TheLanguageSupport		Languages	Display languages f...	14	1	APPPDIR	24
TheEcopsyShareScan	TheIntegrateApps	eCopy® ShareScan	Installs component...	9	4	APPPDIR	8
TheIntegrateApps		Therefore™ Integrate	Components for in...	13	1	APPPDIR	8
TheLang_Danish	TheLang_WesternE...	Danish	Installs display lang...	3	4	APPPDIR	10
TheLang_Swedish	TheLang_WesternE...	Swedish	Installs display lang...	23	4	APPPDIR	10

3. On the right pane, set the Level column value to 1 if the feature should be installed, and to 4 if not.

Feature	Feature_Parent	Title	Description	Display	Level	Directory	Attributes
TheLang_Finnish	ClientUserinterface...	Finnish	Installs language s...	20	4	APPPDIR	10
TheLang_French	ClientUserinterface...	French	Installs language s...	22	4	APPPDIR	10
TheLang_German	ClientUserinterface...	German	Installs language s...	24	4	APPPDIR	10

2.2.1.1 Add Therefore™ Document Loader

1. On the left pane, click on the Feature table.
2. On the right pane, set the Level column value to 1 for the feature Document Loader.

Feature	Feature Parent	Title	Descript...	Display	Level	Directory	Attributes
TheDocumentLoader	AdministrativeTools	Therefore™ Document Loader	Installs Ther...	11	1	INSTALLDIR	8

2.2.1.2 Add Therefore™ Capture Client

1. On the left pane, click on the Feature table.
2. On the right pane, set the Level column value to 1 for the feature CaptureClient.

Feature	Feature Parent	Title	Descript...	Display	Level	Directory	Attributes
TheCaptureClient		Therefore™ Capture Client	Installs Ther...	14	1	INSTALLDIR	8

2.2.1.3 Modify client language

The figure represented under the 'Level' column denotes the desired action that is to be taken with the respective feature, where '1' represents installation and '4' is to not install.


1. On the left pane, click on the Feature table.
2. On the right pane, set the Level column value to 4 for the feature TheLang_XXXX, where XXXX represents the desired language (for example, TheLang_French for French).

2.2.2 Add or Modify Installation Properties



It's possible to define the server name during setup. For more information, see the section [Silent Setup](#).

1. On the left pane: click on the Registry table.
2. Press Ctrl+F on your keyboard to open the Find dialog.

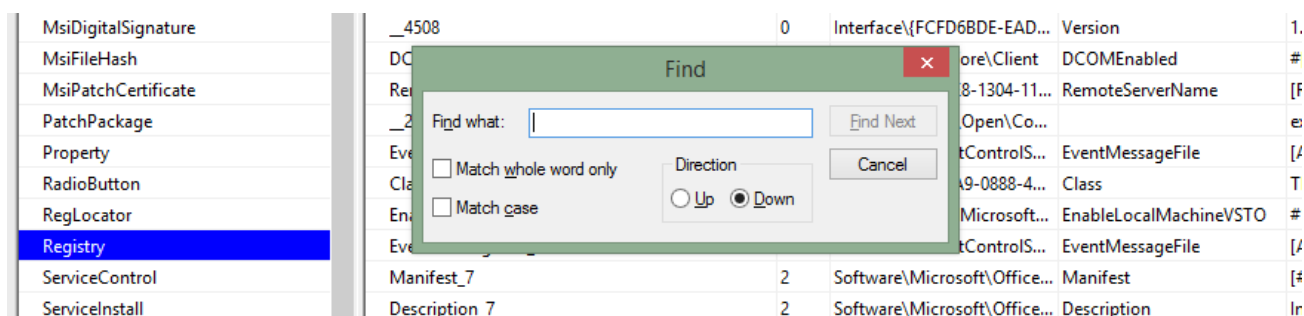

2.2.2.1 DCOM connection

If connecting to the Therefore™ Server using DCOM, follow these steps. If connecting using XML Web Service, see the section [XML connection](#) instead.

1. Search for REMOTESERVER. The row for RemoteServerName will be found.

Note: Locate the RemoteServerName row if necessary, otherwise it will need to be created manually.

2. On the right pane, modify the value in the Value column for this row. Replace the value [REMOTESERVER] with the valid DCOM connection string.
3. On the left pane, click on the Property table.
4. Set the property IS_DCOM_ENABLED to 1.

MsiFileHash	MsiLogging	v
MsiPatchCertificate	IS_DCOM_ENABLED	1
PatchPackage	AI_ThemeStyle	style14
Property	ARPPRODUCTICON	ThereforeLogo_1.exe
RadioButton	Manufacturer	Therefore Corporation
RegLocator	UpDirIcon	Up
Registry	ARPURLINFOABOUT	http://therefore.net/The-LV

Note: Instead of editing the Registry table, it is more suitable to create a new property in the Property table and defined with the following command:

REMOTESERVER=CustomerThereforeServerName in order to maintain consistency.

2.2.2.2 XML connection


If connecting to the Therefore™ Server using XML Web Service, follow these steps. The screenshots of the procedure in [DCOM connection](#) are similar to the procedure below.

1. Search for XMLSERVER. The row for XMLServer will be found.
2. On the right pane, modify the value in the Value column for this row. Replace the value [XMLSERVER] with the valid XML connection string.
3. On the left pane, click on the Property table
4. Set the property IS_XML_ENABLED to 1.

3. Setup Silent Installation

3.1 Silent Setup

msiexec must be called from an elevated command prompt.

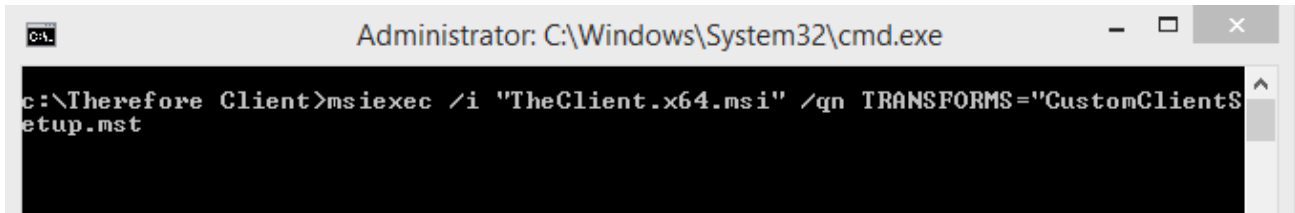

```
Administrator: C:\Windows\System32\cmd.exe
c:\Therefore Client>msiexec /i "TheClient.x64.msi" /qn TRANSFORMS="CustomClientSetup.mst"
```

3.1.1 Basic Silent Setup

Open the command prompt, then switch to the folder where the Therefore client setup is located and execute this command:

```
msiexec /i "TheClient...msi" /qn
```



Example: `msiexec /i "TheClient.x64.msi" /qn`

More information about msiexec can be retrieved with `msiexec /?`

3.1.2 Silent Setup with Server Name

If the Therefore™ Server name needs to be defined for client connections, execute this command:

```
msiexec /i "TheClient...msi" /qn REMOTESERVER="therefore_servername"
IS_DCOM_ENABLED=1
```

Note: REMOTESERVER is only necessary when it is not contained in the Transform files and DCOM is used.



Example: `msiexec /i "TheClient.x64.msi" /qn REMOTESERVER="TheServer1" IS_DCOM_ENABLED=1`

3.1.3 Silent Setup and Installation Customizations

If the installation customization properties need to be included, include Transforms in the command:

```
msiexec /i "TheClient...msi" /qn TRANSFORMS="transform_file_name.mst"
```



Example: `msiexec /i "TheClient.x64.msi" /qn TRANSFORMS="CustomClientSetup.mst"`

or to include the Therefore™ Server name as well as installation customizations:

```
msiexec /i "TheClient...msi" /qn TRANSFORMS="transform_file_name.mst"
REMOTESERVER="therefore_servername" IS_DCOM_ENABLED=1
```



Example: `msiexec /i "TheClient.x64.msi" /qn TRANSFORMS="CustomClientSetup.mst" REMOTESERVER="vie1there4" IS_DCOM_ENABLED=1`

3.1.4 Silent Setup with Tenant Name

If the Therefore™ Tenant name needs to be defined for client connections, execute this command:

```
msiexec /i "TheClient...msi" /qn TENANTNAME="tenantname"
```



Example: `msiexec /i "TheClient.x64.msi" /qn TENANTNAME="tenantname"`

3.2 Additional information

Command Line Options:

`/qn`

Will not include a User Interface during silent installation.

`/qb`

Will include a basic User Interface during silent installation.

`+`

If included alongside either of the above commands, a success message will be displayed following installation (e.g. `/qn+`, `/qb+`).

Note: Command line options must be added at the begin of the command-line before entering the property values (e.g. `TRANSFORMS=...`)

Logging Options:

`/L*` or `/L*vx` and the log file name

Provides extended error analysis.

Restart Options:

It's also possible to add commands that control the restart behavior.

`/norestart`

Do not restart after the installation is complete.

`/promptrestart`

Prompts the user for restart if necessary.

`/forcerestart`

Always restart the computer after installation.

4. Appendix

The presented lists of feature names from the [Output Server](#) and [Output Client](#) can be applied to the instructions in chapters 2.3 and 2.4.

4.1 Registry-Keys for detecting installations


The client and the server have one central place in the registry where keys that describe the installation type, location and the installed version are stored. The key exists both under HKLM\Software\Therefore and HKLM\Software\Syswow64\Therefore\Installation and can be accessed with 32-bit and 64-bit tools.

HKKEY_LOCAL_MACHINE\SOFTWARE\Therefore\Installation


Currently, these are the following values:

- InstallDir32: Points to the installation directory of the 32-bit files. This value is always present whether the system is running a 32-bit or 64-bit operating system.
- InstallDir64: Points to the installation directory of the 64-bit files. This value is not present if the system is running a 32-bit operating system.
- InstallType: Contains either "Client" or "Server" to show which kind of installation was implemented on the system.
- InstallVersion: Contains the version string of the installed Therefore™ Client or Server. This value does give any indication about installed hotfixes.
- ProductCode: Contains the Product Code of the ".msi" file that is inside the executable files of the installer. It can be used to remove the installation or to perform any other operation with "msiexec". It is not possible to use this value to detect an installed version as this code can be used across different Therefore™ versions.
- WebRoot: This value points to the directory on the server side only, where the Web Client is installed.


This is how the registry represents that a Therefore™ 2016 Update 8 client is installed:

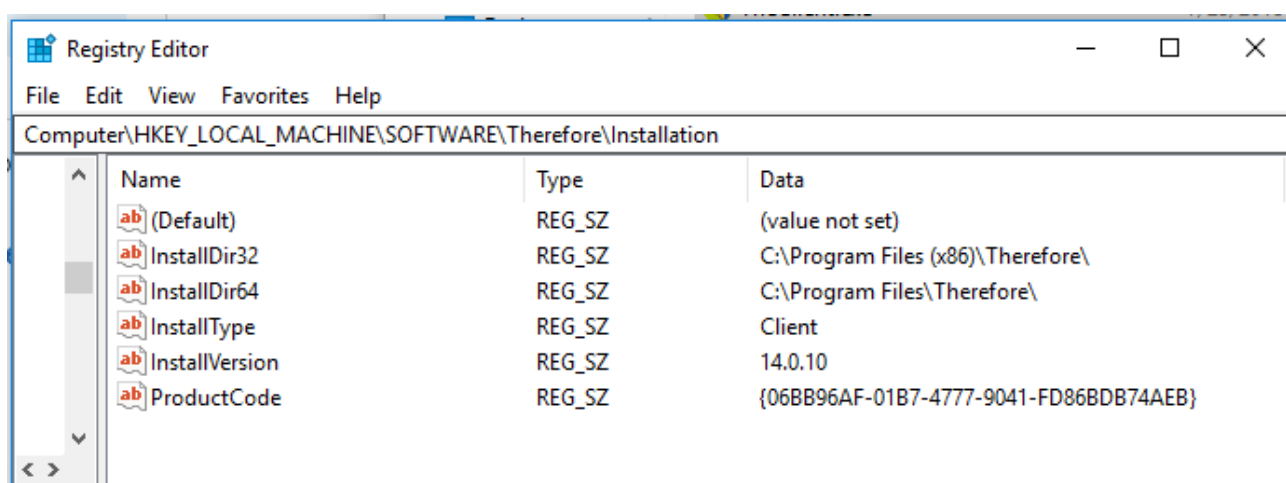

This is how the registry represents that a Therefore™ 2017 Update 5 server is installed:

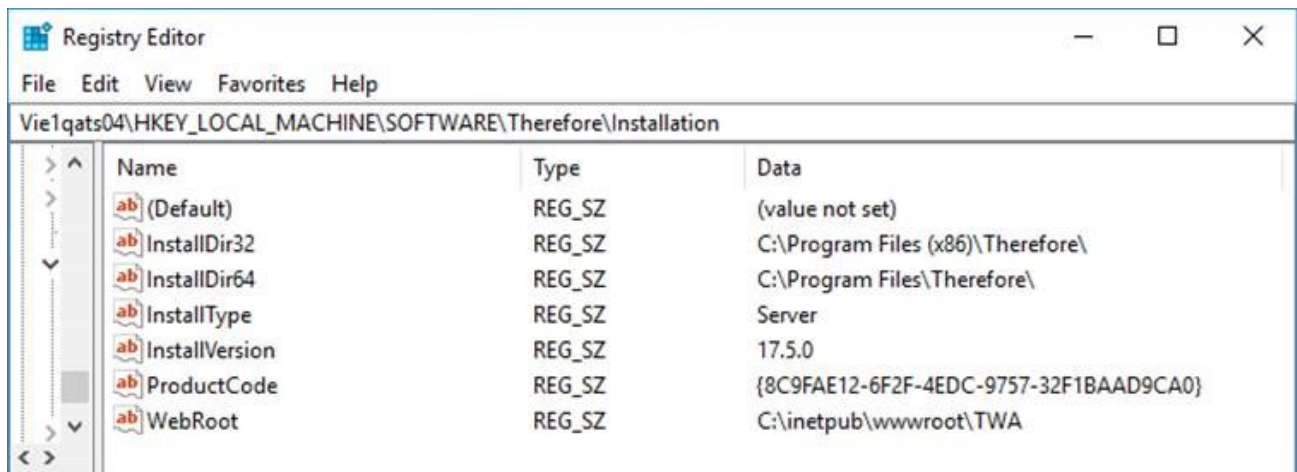

The ProductCode should not be used to detect whether the installation is a client or a server, nor should it be used to detect the exact version number as multiple versions can possess the same product code.

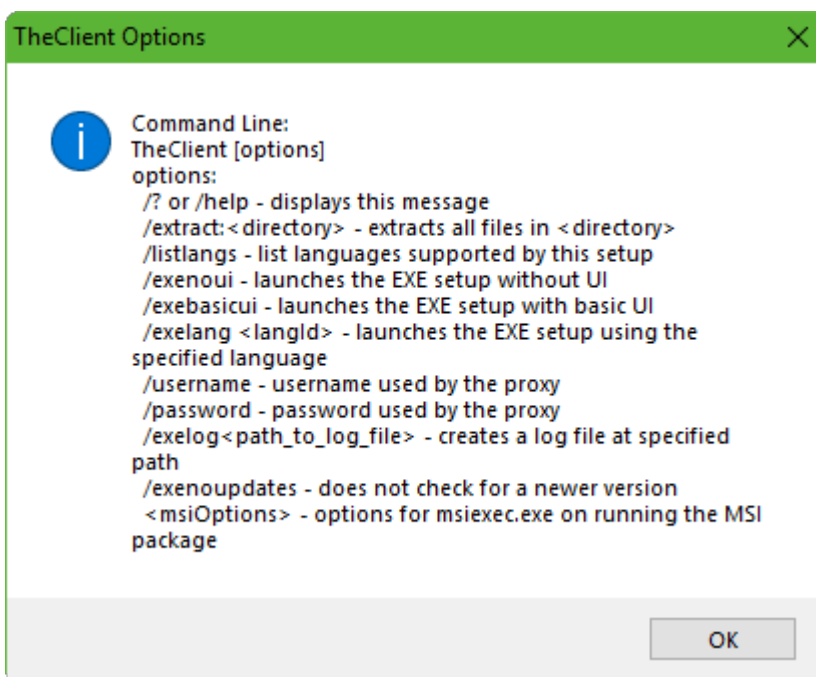

The command option TheClient.exe /x // is used to uninstall the client or server installations of Therefore™.

4.2 Server Feature List

Therefore features:

> Feature Name: "Therefore™ Core" Identifier: "TheCore"

```

---> Feature Name: "BCG" Identifier: "TK_BCG"
---> Feature Name: "I.R.I.S" Identifier: "TK_IRIS"
---> Feature Name: "PixTools" Identifier: "TK_PixTools"
---> Feature Name: "Rebex" Identifier: "TK_Rebex"
---> Feature Name: "SX-PDF" Identifier: "TK_SXPDF"
---> Feature Name: "Stellent" Identifier: "TK_Stellent"
---> Feature Name: "Base" Identifier: "TheBase"
---> Feature Name: "Client Only" Identifier: "TheClientOnly"
---> Feature Name: "_Dummy" Identifier: "TheDummy"
---> Feature Name: "Server Only" Identifier: "TheServerOnly"
---> Feature Name: "Update Check" Identifier: "TheUpdateCheck"
-----
> Feature Name: "Therefore™ Server" Identifier: "TheServer"
---> Feature Name: "Configuration Wizard" Identifier: "TheConfigWizard"
---> Feature Name: "Full-Text Search" Identifier: "TheFullTextSearch"
---> Feature Name: "Server Tools" Identifier: "TheServerTools"
-----
> Feature Name: "Therefore™ Connect" Identifier: "TheConnect"
---> Feature Name: "Web Access" Identifier: "TheWebAccess"
-----> Feature Name: "Web MFP Print" Identifier: "TheMFPWebPrint"
-----> Feature Name: "Web AddIn" Identifier: "TheWebAddIn"
-----> Feature Name: "Web Client" Identifier: "TheWebClient"
---> Feature Name: "Portal" Identifier: "TheWebPortal"
---> Feature Name: "XML Web" Identifier: "TheXMLWebService"
---> Feature Name: "MFP Manager" Identifier: "TheMFPManager"
---> Feature Name: "Mobile Manager" Identifier: "TheMobileManager"
---> Feature Name: "Content Connector" Identifier: "TheContentConnector"
---> Feature Name: "Microsoft® SQL Reporting Extension" Identifier: "TheReporting"
---> Feature Name: "Microsoft® Power BI" Identifier: "ThePowerBIIntegration"
---> Feature Name: "Microsoft® Exchange Server" Identifier: "TheExchangeServer"
-----
> Feature Name: "Therefore™ Adminstrate" Identifier: "TheAdminApps"
---> Feature Name: "Solution Designer" Identifier: "TheSolutionDesigner"
-----> Feature Name: "Exchange" Identifier: "TheExchangeAdmin"
---> Feature Name: "Console" Identifier: "TheConsole"
---> Feature Name: "Document Loader" Identifier: "TheDocumentLoader"
---> Feature Name: "Export Utility" Identifier: "TheExportUtility"
---> Feature Name: "Tenants Manager" Identifier: "TheTenantsManager"
-----
> Feature Name: "Therefore™ Use" Identifier: "TheUserApps"
---> Feature Name: "Navigator" Identifier: "TheNavigator"
-----> Feature Name: "Viewer" Identifier: "TheViewer"
---> Feature Name: "Capture Client" Identifier: "TheCaptureClient"
---> Feature Name: "PDF Printer" Identifier: "ThePDFPrinter"
-----
> Feature Name: "Therefore™ Integrate" Identifier: "TheIntegrateApps"
---> Feature Name: "Windows® Explorer" Identifier: "TheWindowsExplorer"
-----> Feature Name: "Save to Therefore™" Identifier: "TheSaveToTherefore"
-----> Feature Name: "Therefore™ Tree View" Identifier: "TheTreeView"
---> Feature Name: "Microsoft® Office" Identifier: "TheMicrosoftOffice"
-----> Feature Name: "VSTO 2010 Runtime" Identifier: "PRE_VSTO2010RT"
---> Feature Name: "Microsoft® Dynamics NAV" Identifier: "TheNavision"
---> Feature Name: "DocuSign®" Identifier: "TheDocuSignIntegration"
---> Feature Name: "eCopy® PDF Pro Office" Identifier: "TheEcopypdfPro"

```



```

---> Feature Name: "eCopy® ShareScan" Identifier: "TheEcopyShareScan"
---> Feature Name: "Kofax Capture®" Identifier: "TheKofaxCapture"
---> Feature Name: "Replication" Identifier: "TheReplication"
---> Feature Name: "SAP NetWeaver®" Identifier: "TheSAPNetweaver"
---> Feature Name: "Universal Connector" Identifier: "TheUniversalConnector"
-----
> Feature Name: "Languages" Identifier: "TheLanguageSupport"
---> Feature Name: "North/South American" Identifier: "TheLang_American"
-----> Feature Name: "Portuguese (brasil)" Identifier: "TheLang_PortugueseBrasil"
-----> Feature Name: "English (US)" Identifier: "TheLang_EnglishUS"
-----> Feature Name: "Spanish" Identifier: "TheLang_SpanishAg"
---> Feature Name: "Asian/Arabic" Identifier: "TheLang_AsianArabic"
-----> Feature Name: "Arabic" Identifier: "TheLang_Arabic"
-----> Feature Name: "Chinese (Simplified)" Identifier: "TheLang_ChineseSimplified"
-----> Feature Name: "Chinese (Traditional)" Identifier: "TheLang_ChineseTraditional"
-----> Feature Name: "Japanese" Identifier: "TheLang_Japanese"
-----> Feature Name: "Korean" Identifier: "TheLang_Korean"
---> Feature Name: "Eastern European" Identifier: "TheLang_EasternEuropean"
-----> Feature Name: "Bulgarian" Identifier: "TheLang_Bulgarian"
-----> Feature Name: "Croatian" Identifier: "TheLang_Croatian"
-----> Feature Name: "Czech" Identifier: "TheLang_Czech"
-----> Feature Name: "Hungarian" Identifier: "TheLang_Hungarian"
-----> Feature Name: "Polish" Identifier: "TheLang_Polish"
-----> Feature Name: "Russian" Identifier: "TheLang_Russian"
-----> Feature Name: "Serbian (Cyrillic)" Identifier: "TheLang_SerbianCyrillic"
-----> Feature Name: "Serbian (Latin)" Identifier: "TheLang_SerbianLatin"
-----> Feature Name: "Slovenian" Identifier: "TheLang_Slovenian"
-----> Feature Name: "Turkish" Identifier: "TheLang_Turkish"
---> Feature Name: "Western European" Identifier: "TheLang_WesternEuropean"
-----> Feature Name: "Danish" Identifier: "TheLang_Danish"
-----> Feature Name: "Dutch" Identifier: "TheLang_Dutch"
-----> Feature Name: "English" Identifier: "TheLang_English"
-----> Feature Name: "Finnish" Identifier: "TheLang_Finnish"
-----> Feature Name: "French" Identifier: "TheLang_French"
-----> Feature Name: "German" Identifier: "TheLang_German"
-----> Feature Name: "Italian" Identifier: "TheLang_Italian"
-----> Feature Name: "Norwegian" Identifier: "TheLang_Norwegian"
-----> Feature Name: "Portuguese" Identifier: "TheLang_Portuguese"
-----> Feature Name: "Spanish" Identifier: "TheLang_Spanish"
-----> Feature Name: "Swedish" Identifier: "TheLang_Swedish"
-----

```

4.3 Client Feature List

Therefore features:

```

> Feature Name: "Therefore™ Core" Identifier: "TheCore"
---> Feature Name: "BCG" Identifier: "TK_BCG"
---> Feature Name: "I.R.I.S" Identifier: "TK_IRIS"
---> Feature Name: "PixTools" Identifier: "TK_PixTools"
---> Feature Name: "Rebex" Identifier: "TK_Rebex"
---> Feature Name: "SX-PDF" Identifier: "TK_SXPf"

```

```

---> Feature Name: "Stellent" Identifier: "TK_Stellent"
---> Feature Name: "Base" Identifier: "TheBase"
---> Feature Name: "Client Only" Identifier: "TheClientOnly"
---> Feature Name: "_Dummy" Identifier: "TheDummy"
---> Feature Name: "Easy Updater" Identifier: "TheEasyUpdater"
---> Feature Name: "Update Check" Identifier: "TheUpdateCheck"
-----
> Feature Name: "Therefore™ Adminstrate" Identifier: "TheAdminApps"
---> Feature Name: "Solution Designer" Identifier: "TheSolutionDesigner"
-----> Feature Name: "Exchange" Identifier: "TheExchangeAdmin"
---> Feature Name: "Console" Identifier: "TheConsole"
---> Feature Name: "Document Loader" Identifier: "TheDocumentLoader"
---> Feature Name: "Export Utility" Identifier: "TheExportUtility"
-----
> Feature Name: "Therefore™ Use" Identifier: "TheUserApps"
---> Feature Name: "Navigator" Identifier: "TheNavigator"
-----> Feature Name: "SQL Server Compact 4.0 x64" Identifier: "PRE_SQLCOMP40X64"
-----> Feature Name: "SQL Server Compact 4.0 x86" Identifier: "PRE_SQLCOMP40X86"
-----> Feature Name: "Viewer" Identifier: "TheViewer"
---> Feature Name: "Capture Client" Identifier: "TheCaptureClient"
---> Feature Name: "PDF Printer" Identifier: "ThePDFPrinter"
-----
> Feature Name: "Therefore™ Integrate" Identifier: "TheIntegrateApps"
---> Feature Name: "Windows® Explorer" Identifier: "TheWindowsExplorer"
-----> Feature Name: "Save to Therefore™" Identifier: "TheSaveToTherefore"
-----> Feature Name: "Therefore™ Tree View" Identifier: "TheTreeView"
---> Feature Name: "Microsoft® Office" Identifier: "TheMicrosoftOffice"
-----> Feature Name: "VSTO 2010 Runtime" Identifier: "PRE_VSTO2010RT"
---> Feature Name: "Microsoft® Dynamics NAV" Identifier: "TheNavision"
---> Feature Name: "DocuSign®" Identifier: "TheDocuSignIntegration"
---> Feature Name: "eCopy® PDF Pro Office" Identifier: "TheEcopyPDFPro"
---> Feature Name: "eCopy® ShareScan" Identifier: "TheEcopyShareScan"
---> Feature Name: "Kofax Capture®" Identifier: "TheKofaxCapture"
---> Feature Name: "Replication" Identifier: "TheReplication"
---> Feature Name: "SAP NetWeaver®" Identifier: "TheSAPNetweaver"
---> Feature Name: "Universal Connector" Identifier: "TheUniversalConnector"
-----
> Feature Name: "Languages" Identifier: "TheLanguageSupport"
---> Feature Name: "North/South American" Identifier: "TheLang_American"
-----> Feature Name: "Portuguese (brasil)" Identifier: "TheLang_PortugueseBrasil"
-----> Feature Name: "English (US)" Identifier: "TheLang_EnglishUS"
-----> Feature Name: "Spanish" Identifier: "TheLang_SpanishAg"
---> Feature Name: "Asian/Arabic" Identifier: "TheLang_AsianArabic"
-----> Feature Name: "Arabic" Identifier: "TheLang_Arabic"
-----> Feature Name: "Chinese (Simplified)" Identifier: "TheLang_ChineseSimplified"
-----> Feature Name: "Chinese (Traditional)" Identifier: "TheLang_ChineseTraditional"
-----> Feature Name: "Japanese" Identifier: "TheLang_Japanese"
-----> Feature Name: "Korean" Identifier: "TheLang_Korean"
---> Feature Name: "Eastern European" Identifier: "TheLang_EasternEuropean"
-----> Feature Name: "Bulgarian" Identifier: "TheLang_Bulgarian"
-----> Feature Name: "Croatian" Identifier: "TheLang_Croatian"
-----> Feature Name: "Czech" Identifier: "TheLang_Czech"
-----> Feature Name: "Hungarian" Identifier: "TheLang_Hungarian"
-----> Feature Name: "Polish" Identifier: "TheLang_Polish"

```

```
-----> Feature Name: "Russian" Identifier: "TheLang_Russian"
-----> Feature Name: "Serbian (Cyrillic)" Identifier: "TheLang_SerbianCyrillic"
-----> Feature Name: "Serbian (Latin)" Identifier: "TheLang_SerbianLatin"
-----> Feature Name: "Slovenian" Identifier: "TheLang_Slovenian"
-----> Feature Name: "Turkish" Identifier: "TheLang_Turkish"
---> Feature Name: "Western European" Identifier: "TheLang_WesternEuropean"
-----> Feature Name: "Danish" Identifier: "TheLang_Danish"
-----> Feature Name: "Dutch" Identifier: "TheLang_Dutch"
-----> Feature Name: "English" Identifier: "TheLang_English"
-----> Feature Name: "Finnish" Identifier: "TheLang_Finnish"
-----> Feature Name: "French" Identifier: "TheLang_French"
-----> Feature Name: "German" Identifier: "TheLang_German"
-----> Feature Name: "Italian" Identifier: "TheLang_Italian"
-----> Feature Name: "Norwegian" Identifier: "TheLang_Norwegian"
-----> Feature Name: "Portuguese" Identifier: "TheLang_Portuguese"
-----> Feature Name: "Spanish" Identifier: "TheLang_Spanish"
-----> Feature Name: "Swedish" Identifier: "TheLang_Swedish"
-----
```