

Therefore™ Test Systems

www.therefore.net
© 2024 Therefore Corporation



All rights reserved. No parts of this work may be reproduced in any form or by any means - graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems - without the written permission of the publisher.

SQL Server and Windows are registered trademarks of Microsoft Corporation in the United States and/or other countries.

Any other 3rd Party products that are referred to in this document may be either trademarks and/or registered trademarks of the respective owners. The publisher and the author make no claim to these trademarks.

While care has been taken in the preparation of this document, the publisher and the author assume no responsibility for errors or omissions, or for damages resulting from the use of information contained in this document.

VERSION: 2024 - 01

Table of Contents

1. Introduction	4
1.1 Tutorial	5
1.2 Separation of systems	14

1. Introduction

It's possible to create a separate Therefore™ system along with a productive system for testing purposes. Test systems may be especially useful for large Therefore™ installations where experimental changes on a productive system may cause a negative impact both for the system and users if they are applied incorrectly or found to be inefficient. A test system could be used, for example, to test new workflows or changes to existing workflows, to test new security permissions, or for any other scenarios that must be thoroughly tested before going live on a productive system.



PLEASE READ THE FOLLOWING NOTICE CAREFULLY BEFORE SETTING UP A THEREFORE™ TEST SYSTEM:

- The creation of a test system which has the same conditions (documents, workflows, categories, etc.) as a productive system requires careful configuration and attention. It is only possible to create a test system with the same conditions as a productive system if the two systems are [physically separated](#). This is required to prevent mix-ups between the two systems; for example, so that users on the productive system don't get e-mails from the test system or vice-versa, and so that the creation or deletion of documents on the test system doesn't affect the documents on the productive system.


An incorrectly configured test system may harm a productive system if the two environments are not completely separated!

1.1 Tutorial




How do I set up a Therefore™ test system?


1. Create a backup of the Therefore™ database.

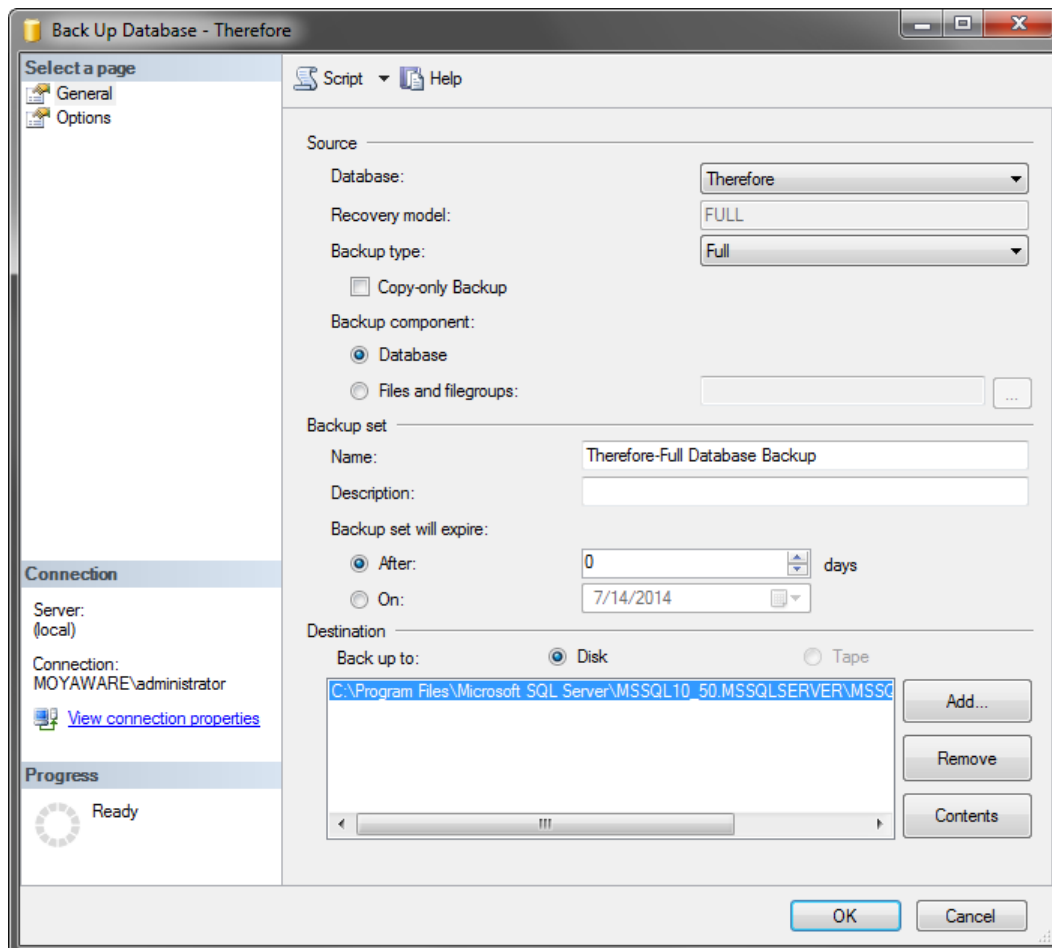


- On the new server, restore the Therefore™ database backup.

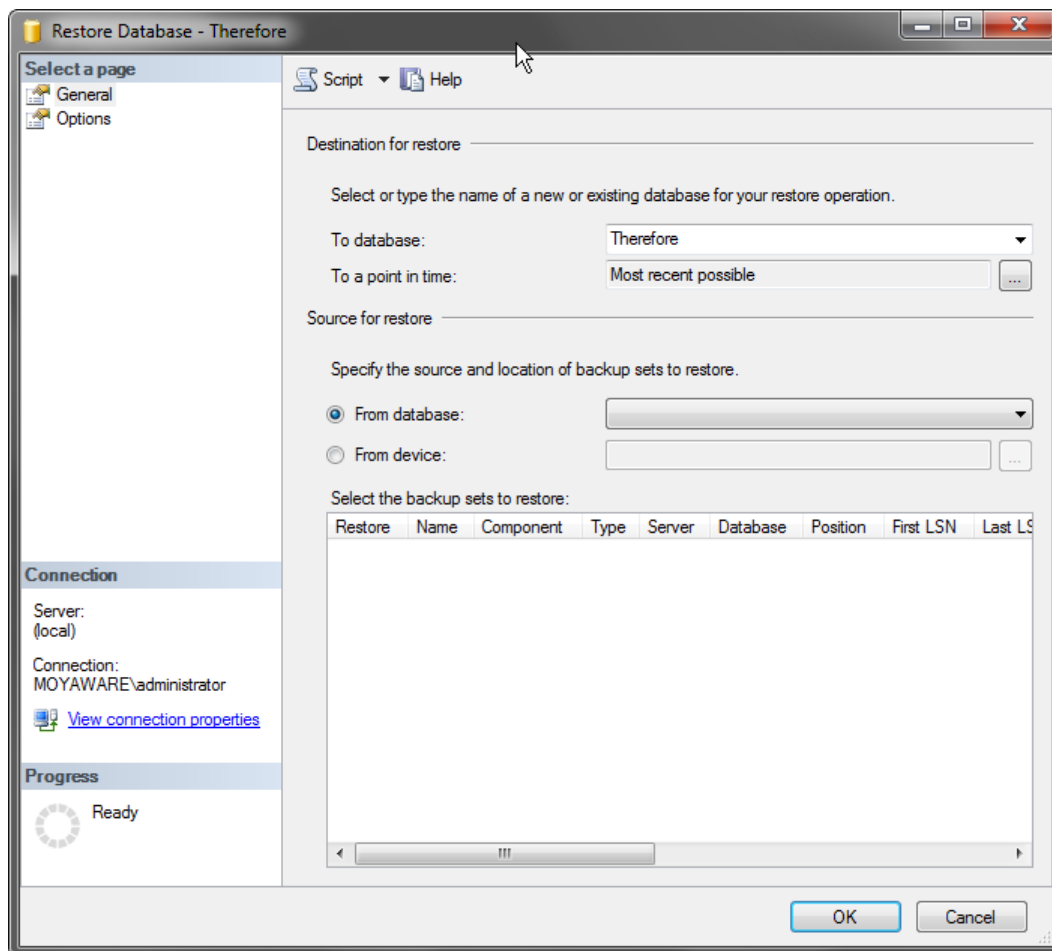


3. On the new server (if Therefore™ migration is configured): adjust the value for the "IsActive" column in TheDevice table. Set it to 0 for all rows.

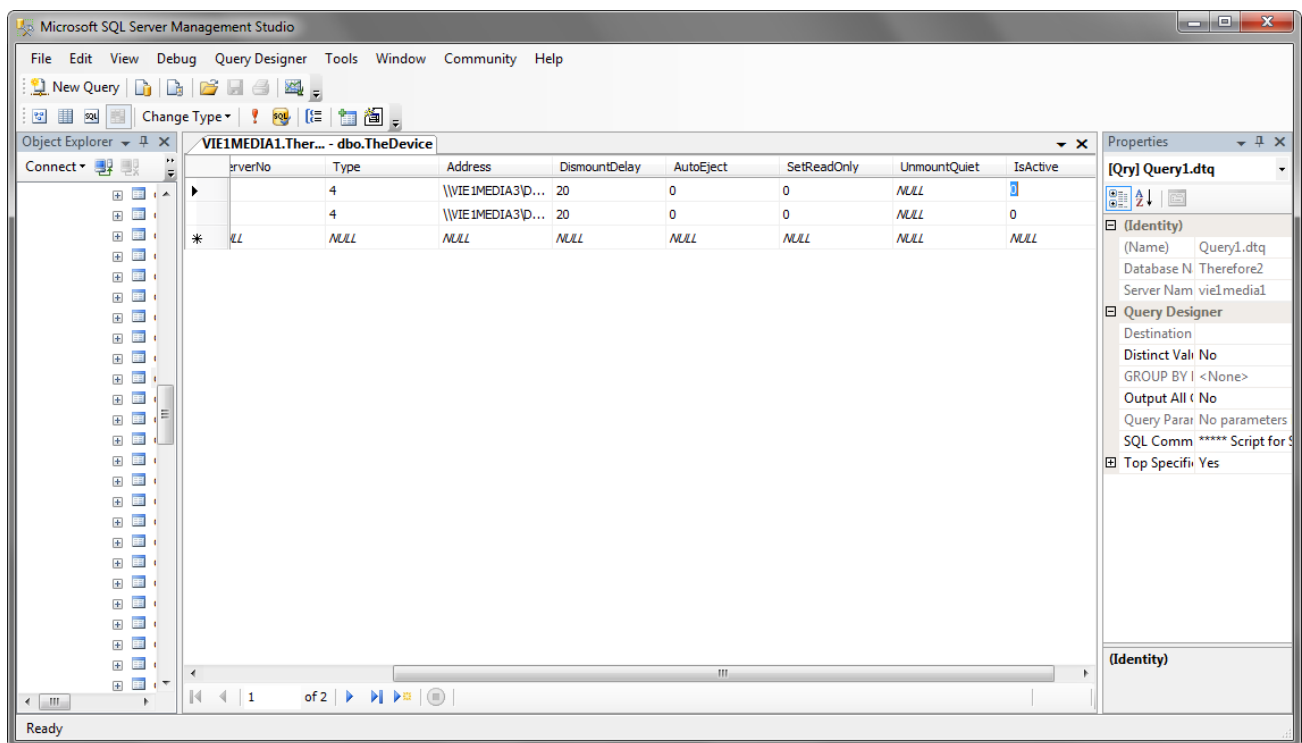


4. On the new server (if Therefore™ Workflow is in use): adjust the value for the "SettingValue" column for the row with SettingNo = 100 in TheSettings table. Set the value to NULL. This is required to prevent the Therefore™ Server from sending unwanted emails from a workflow.

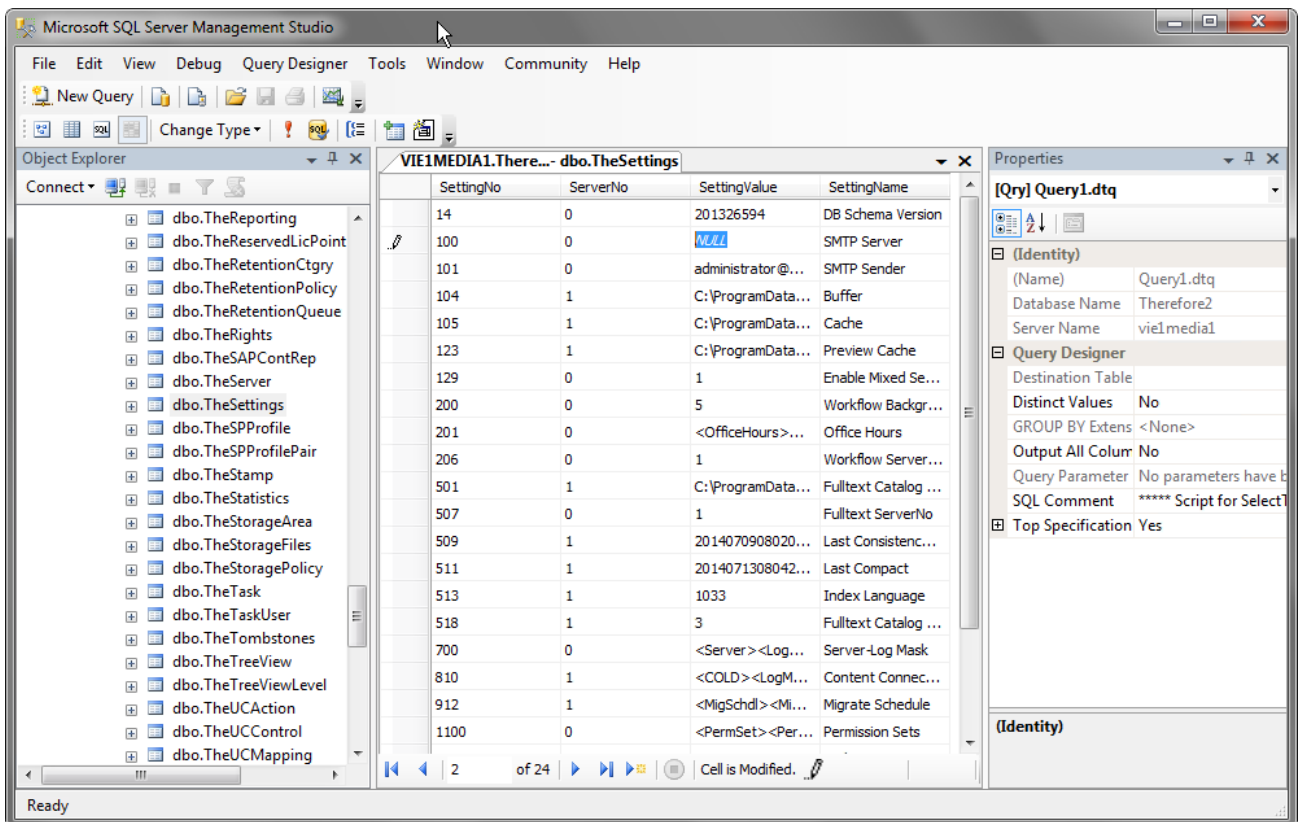


5. On the new server: adjust the value for the "Computer" column in TheServer table (if required, also the value for the "Domain" column in TheUser table).

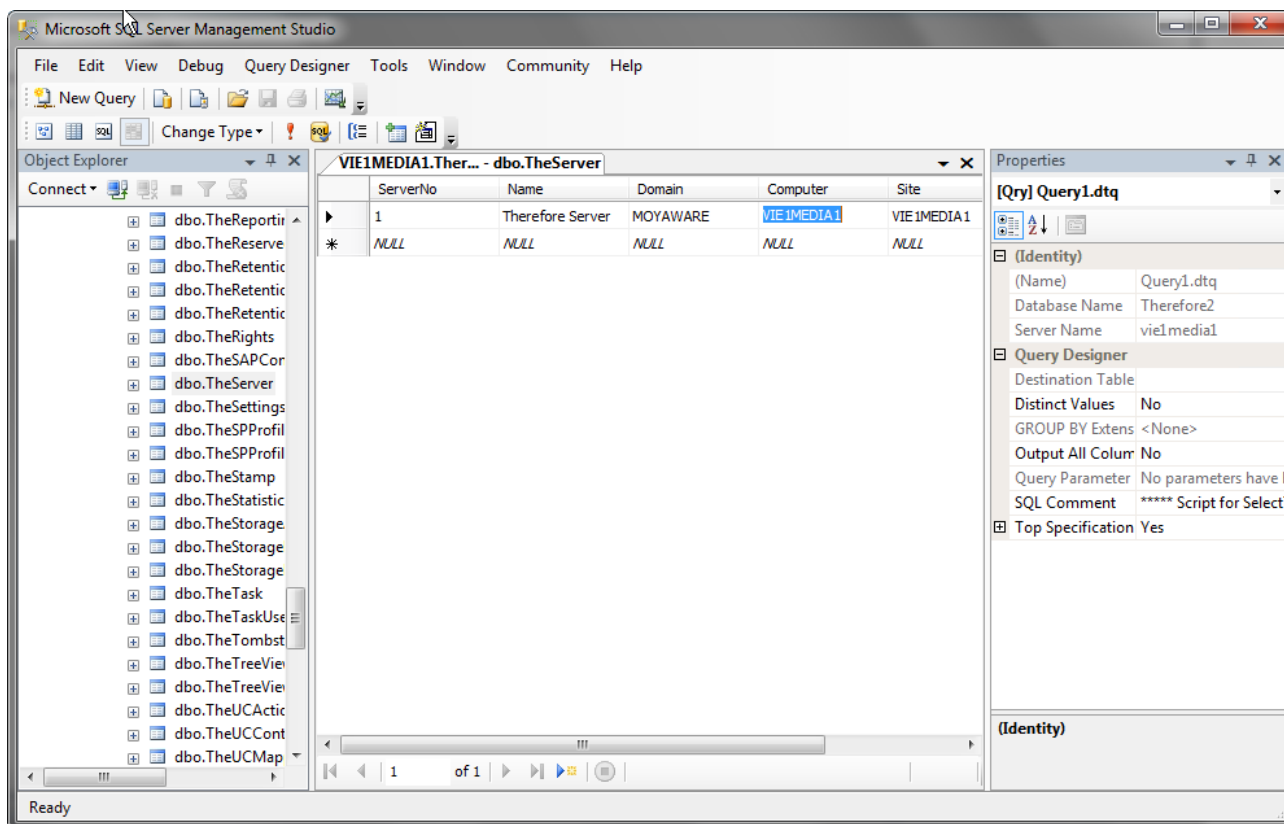


6. Copy the Buffer and Cache folders from the productive Therefore™ Server to the new one. Make sure the locations are the same as on the productive server. The path for these for these folders can also be specified later in the Configuration Wizard.

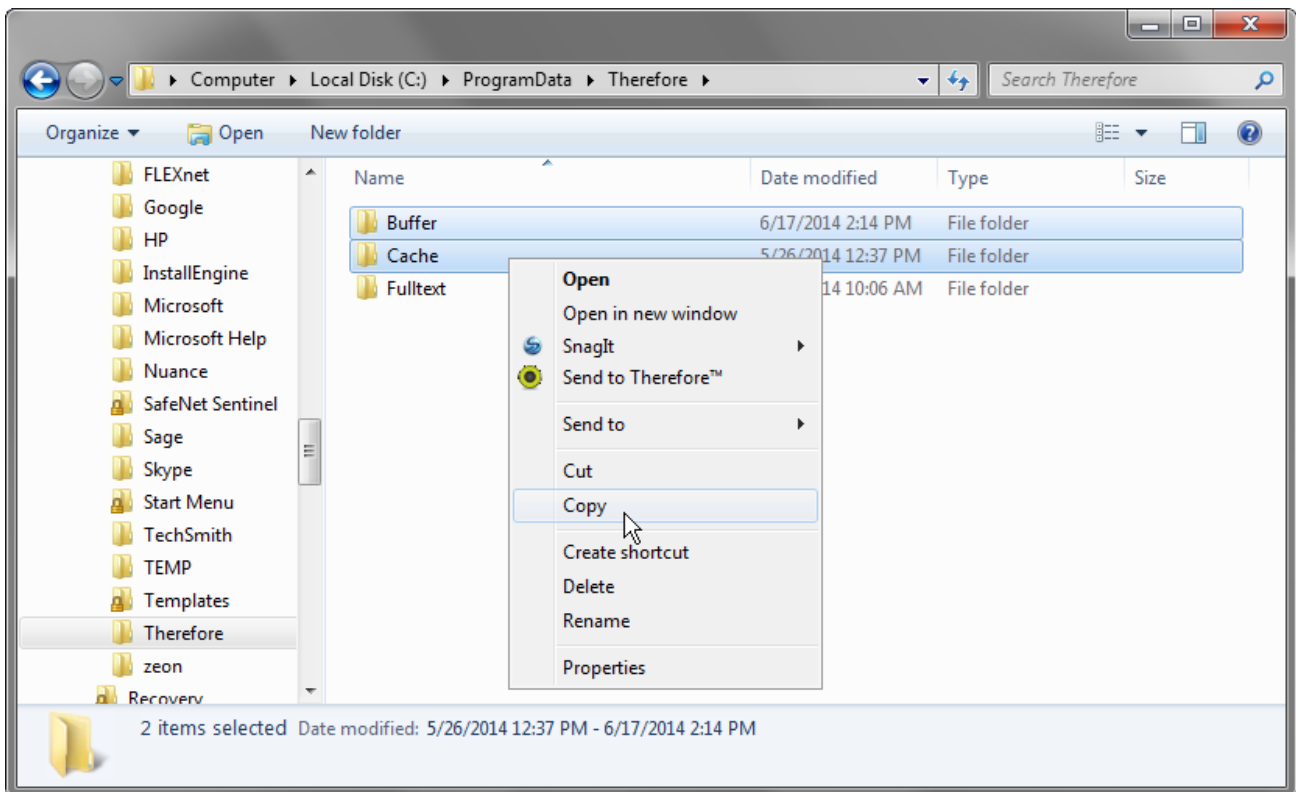

7. On the new server: install the Therefore™ software and run the Therefore™ Configuration Wizard.

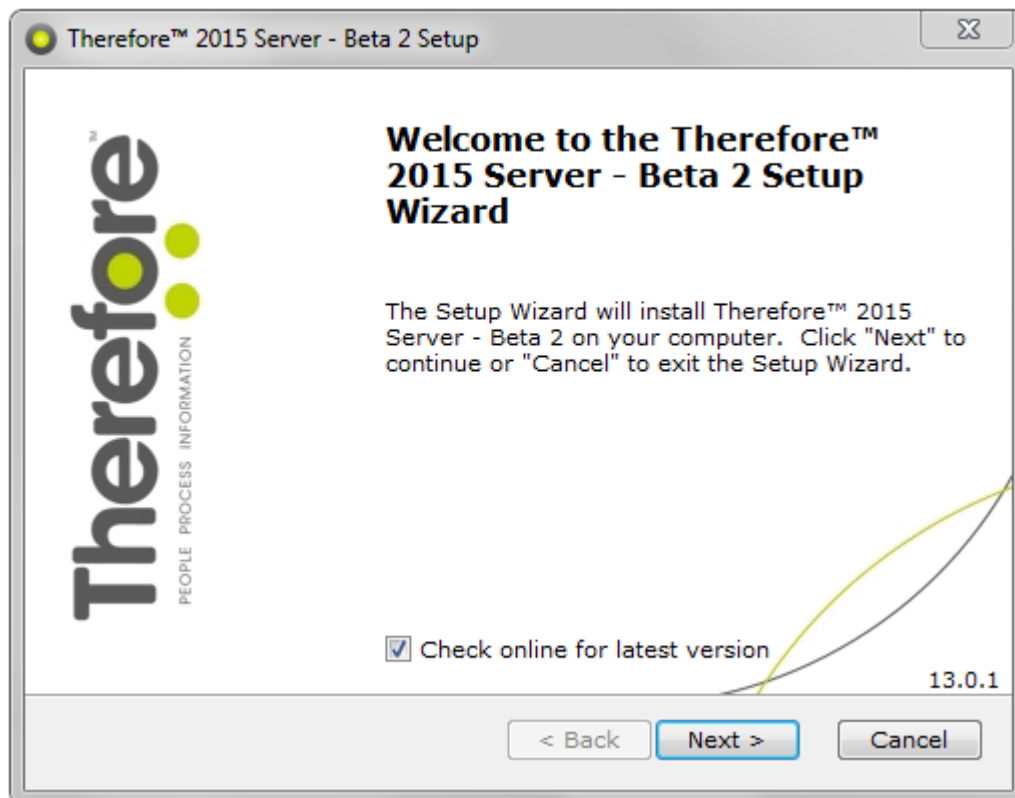

8. On the licensing dialog, click the **Browse** button to load the license information saved in an XML file.

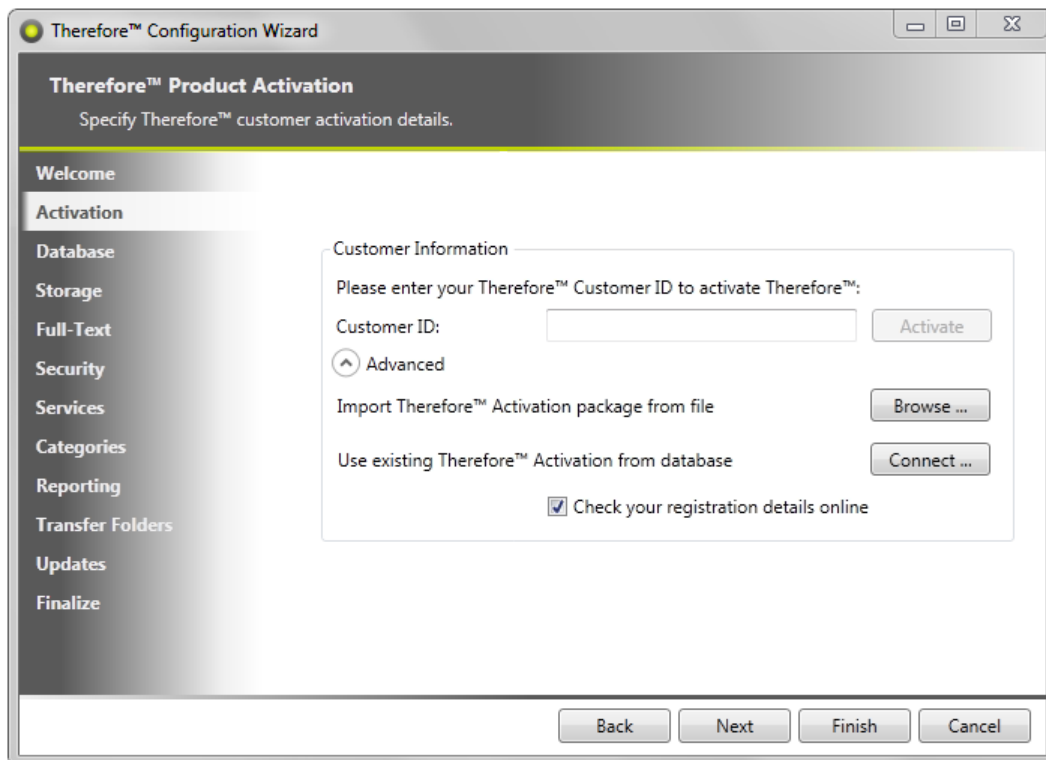

To purchase the appropriate license, please contact customerservice@therefore.net.

For Europe region only:



We recommend ordering a testing license for the test system. This can only be used in conjunction with the main Therefore™ license and includes 1 Therefore™ Server license as well as 1 license of each type used on the productive system.

For all other regions:

We recommend ordering a Therefore™ Developer Edition license for the test system.

9. In the database connection dialog input the database server and name; if Windows authentication will be used, leave the username/password fields empty. For SQL authentication, input the username and password for the SQL server.

The screenshot shows the 'Therefore™ Database Configuration' dialog box. The title bar reads 'Therefore™ Configuration Wizard'. The main title is 'Therefore™ Database Configuration' with the subtitle 'Configure Therefore™ database server and authentication method.' On the left is a vertical list of steps: Welcome, Activation, Database (selected), Storage, Full-Text, Security, Services, Categories, Reporting, Transfer Folders, Updates, and Finalize. The main area contains the following fields: 'Database platform:' with a dropdown menu set to 'Microsoft SQL Server' and a 'Test' button; 'Database server:' with a text box containing 'VIE1MEDIA1'; 'Database name:' with a text box containing 'Therefore'; and a section titled 'Specify database authentication method' containing 'User name:' and 'Password:' text boxes, and a checked checkbox labeled 'Use Windows Authentication'. At the bottom are four buttons: 'Back', 'Next', 'Finish', and 'Cancel'.


10. Finalize the configuration as usual.

The screenshot shows the 'Therefore™ Configuration Wizard' dialog box at the 'Finalize' step. The title bar reads 'Therefore™ Configuration Wizard'. The main title is 'Therefore™ Configuration Wizard'. The left sidebar shows the same list of steps as the previous screenshot, with 'Finalize' now selected. The main area contains the text: 'Therefore™ is ready to be configured. Press Finish to start system configuration!'. At the bottom are four buttons: 'Back', 'Next', 'Finish', and 'Cancel'.

1.2 Separation of systems

As mentioned earlier in this document, a productive system **MUST** be physically separated from its twinned test system in order to prevent one system from affecting the other. A test system which is not fully and completely separated from its productive system may cause serious problems in the productive environment up to and including loss of data and/or security breaches. The following conditions must be met to ensure a complete separation between the test system and the productive system:


1. The test system must run on its own physical server with its own Therefore™ database.

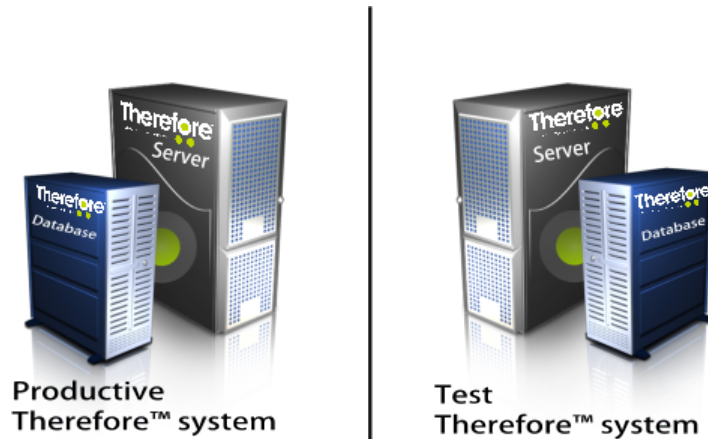

2. The test system must not be able to access the productive system over the network.



3. The test system's storage devices must be different from the ones used on the productive system (if Therefore™ migration is in use).

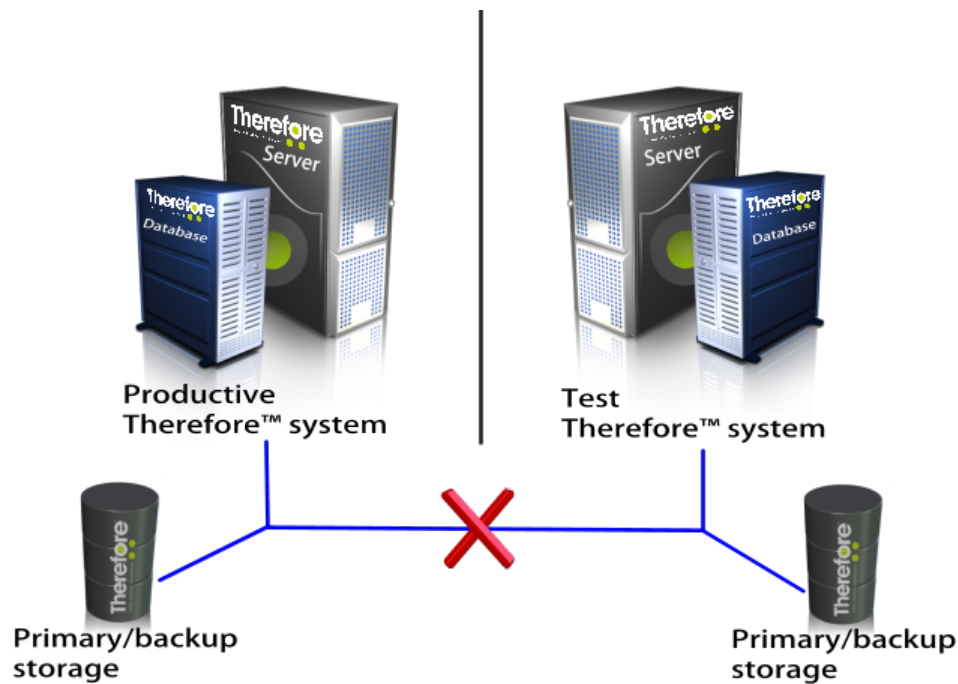

4. If workflows are running on the test system, e-mails sent out from its workflows must not negatively affect the users of the productive system.

