

# **Domain Driven Design**

## Domain Driven Design

- ❑ It is a way of looking the software from top to down.
- ❑ When we are **developing a software our focus should** not **be** primarily on technology, it should be primarily **on business** or whatever activity we are trying to assist with the software, the domain.
- ❑ Specifically we approach that by trying to develop models of that domain and make our software conformed to that.

**Domain-driven design** is an approach to software development for complex needs by connecting the implementation to an evolving model.

Domain-driven design is predicated on the following goals:

- ❑ placing the project's primary **focus on the core domain and domain logic**;
- ❑ basing complex **designs on a model of the domain**;
- ❑ initiating a creative **collaboration between technical and domain experts** to iteratively refine a conceptual model that addresses particular domain problems.

**Domain Driven Design**

**Tactical Design Tools**

**Service**

**Project**

**Layers**

**Modules**

**Design Patterns**

**OOP**

**Classes**

**Objects**

**jar/war/ear**

**Strategic Design Tools**

**Domain**

**Sub-Domain**

**Service**


**Sub-Domain**

**Service**

**Sub-Domain**

**Service**


## Problem Space

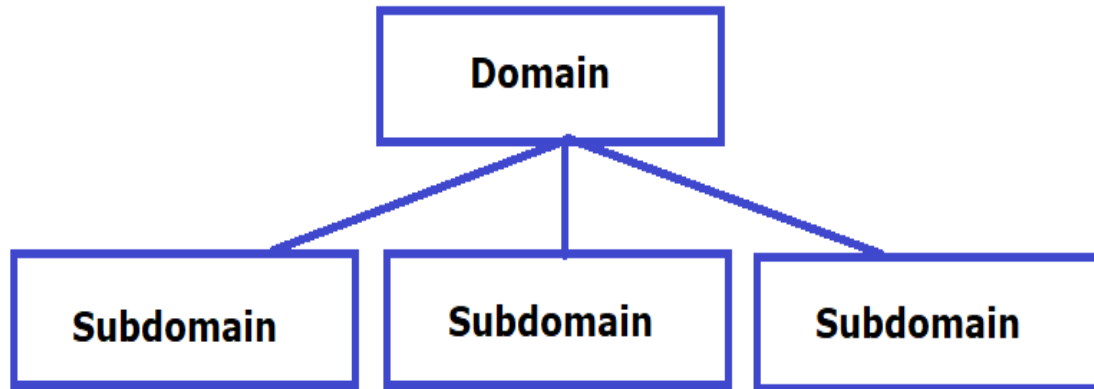

### Types of Subdomain:


Core Sub-Domain  
Supporting Sub-Domain  
Generic Subdomains

## Solution Space

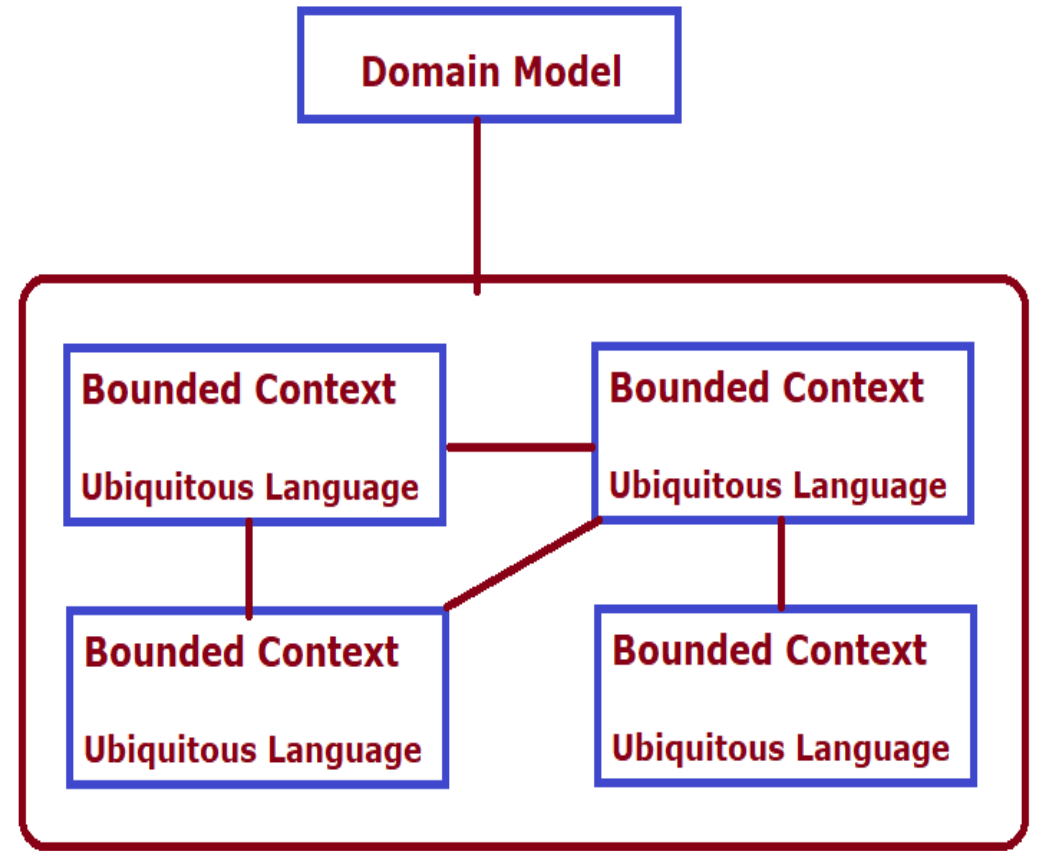

## Sub-Domain Categories

Sub-domains are categorized into 3 types based on their complexity & business value

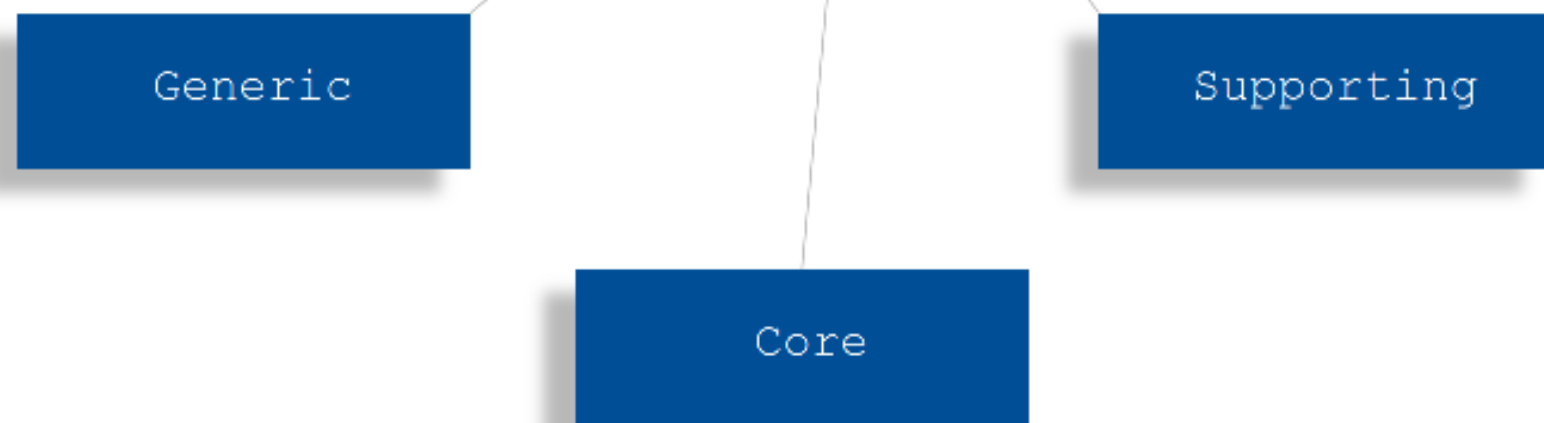

## Core Sub Domain

The core domain is so **critical and fundamental to the business** that it gives you a competitive advantage and is a foundational concept behind the business.

Ex : Order processing, loan processing, payment service etc.,

## Supporting Subdomain

These types of pieces are also necessary because they **help perform ancillary or, well, supporting functions** related directly to what the business does.

Ex : Customer Support, System manages all the banners, landing pages, and other creative materials produced by our design studio



## Generic Subdomains

Generic subdomains are those things that all companies do the same way. Those **are considered “solved” problems**.

Ex : identity and access management, ERP module , Invoicing & reporting, Human Resources, Facilities Management

## IT Solutions : Buy Vs Build

Generic

- Buy



Supporting

- Outsource
- Customized




Core

- Built by business

## Strategic Design

- ❑ It would be preferable to **have a single, unified model.**
- ❑ It is **a set of principles for maintaining model integrity.**

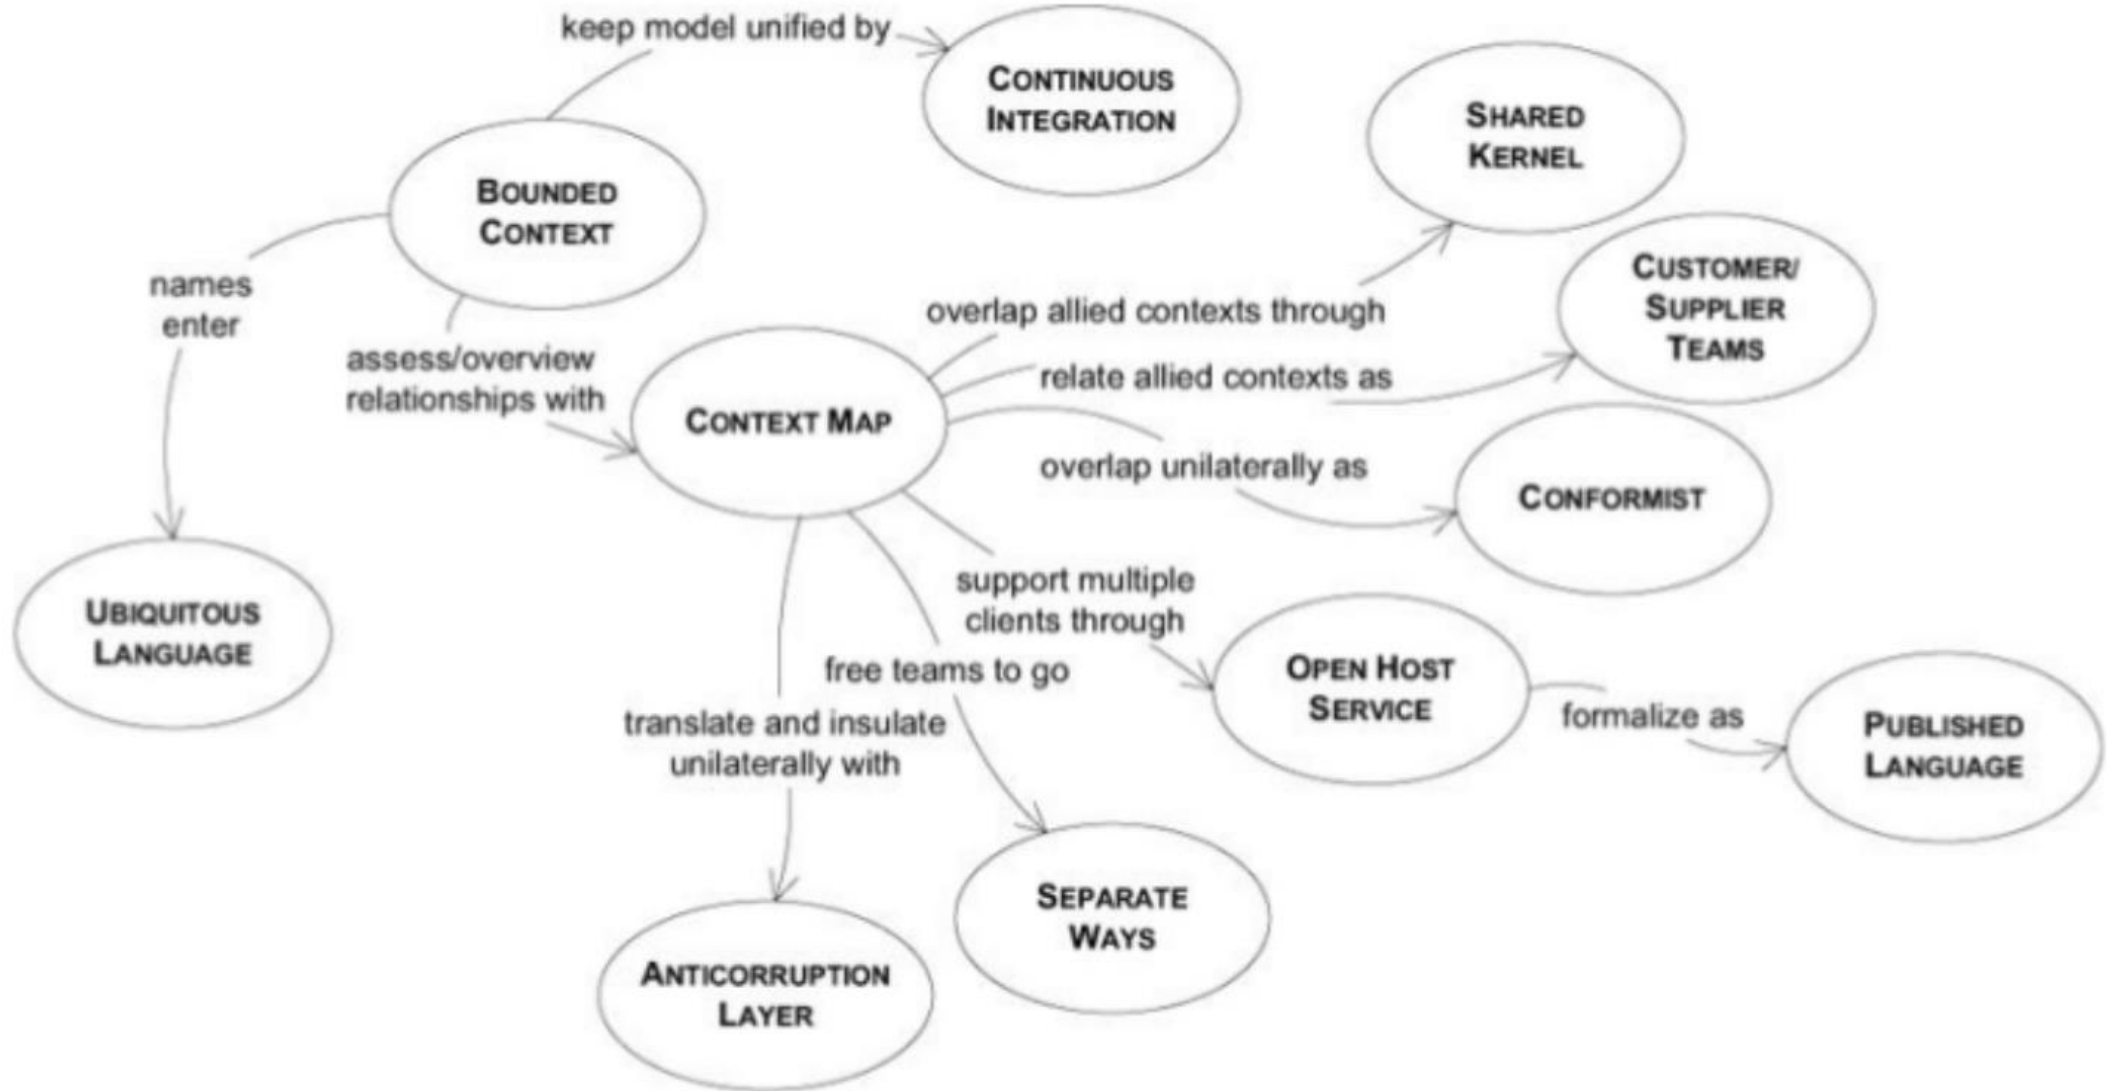


## Strategic Design Patterns

# **The Ubiquitous Language**

## **The Need for a Common Language**

- ❑ **Developer think** in terms of **inheritance, composition** etc. And they talk like that all the time.
- ❑ But the **Domain Experts** usually know nothing about any of that. They have no idea about software libraries, frameworks, persistence, in many case not even databases. They **know about their specific area of expertise.**
- ❑ It is absolutely necessary to **develop a model of the domain** by having the **software specialists work with the domain experts;**

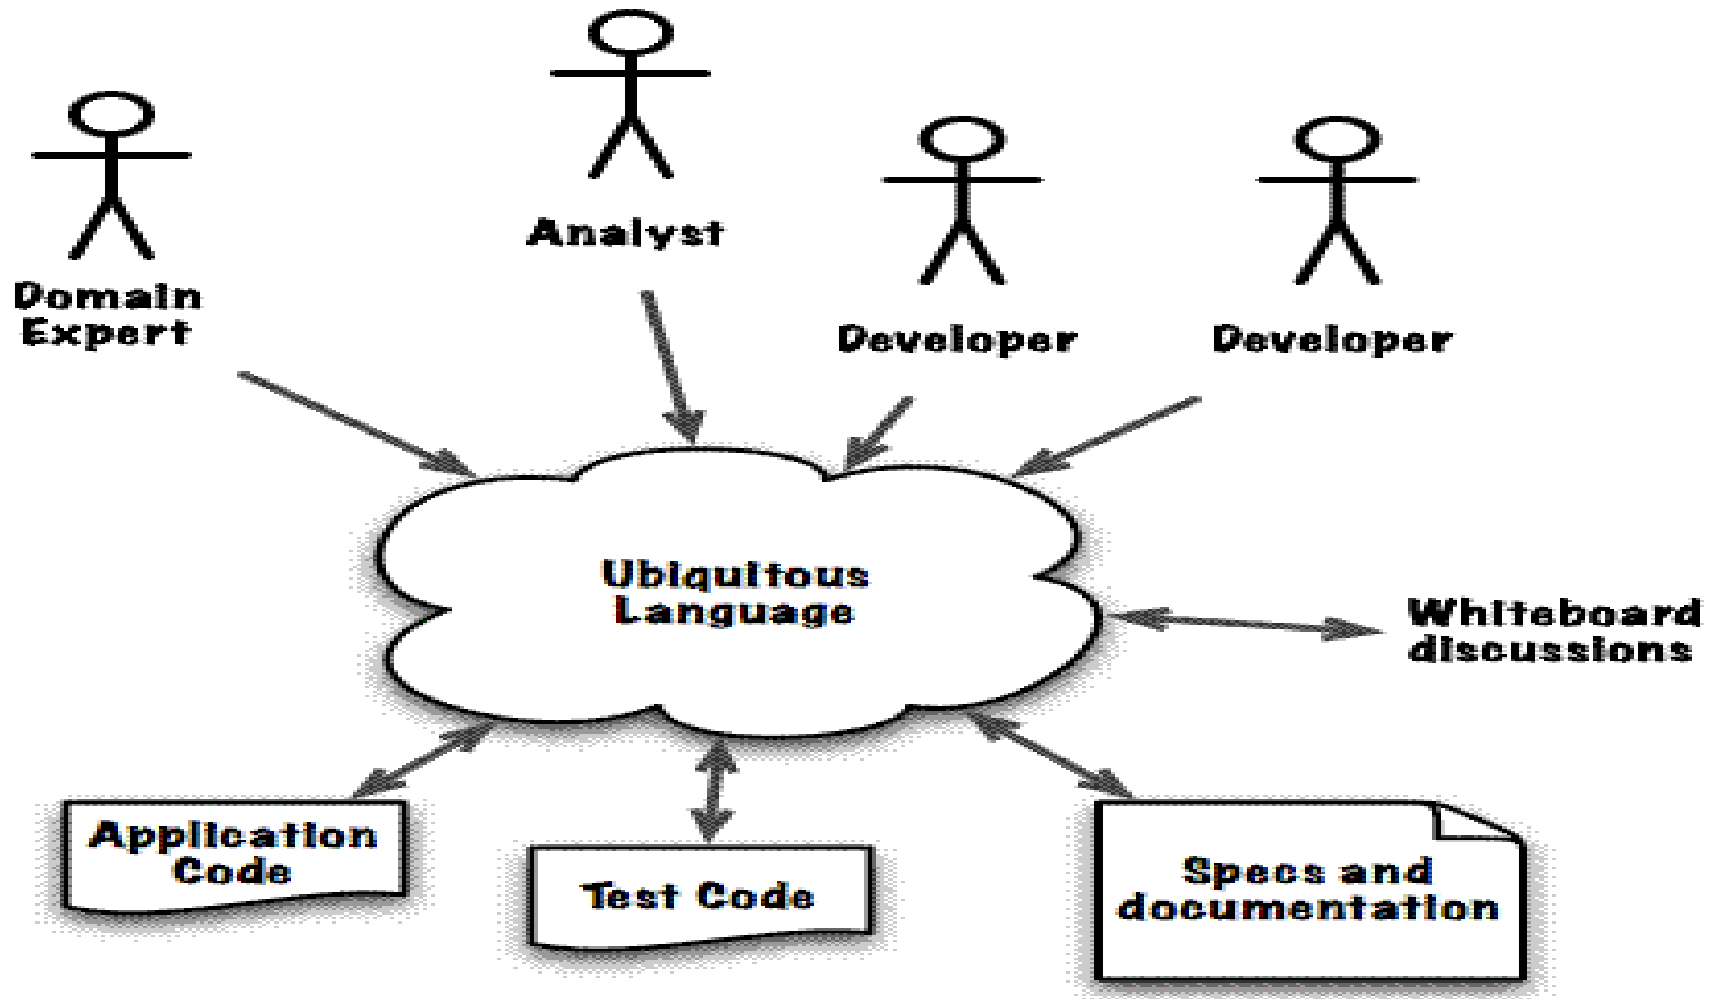


**The Ubiquitous Language** should be the **only language** used to express a model. Everybody in the team should be able to agree on every specific term without ambiguities and no translation should be needed

## Characteristics of UL

Not the business language imposed by experts


Not the language used in the industry

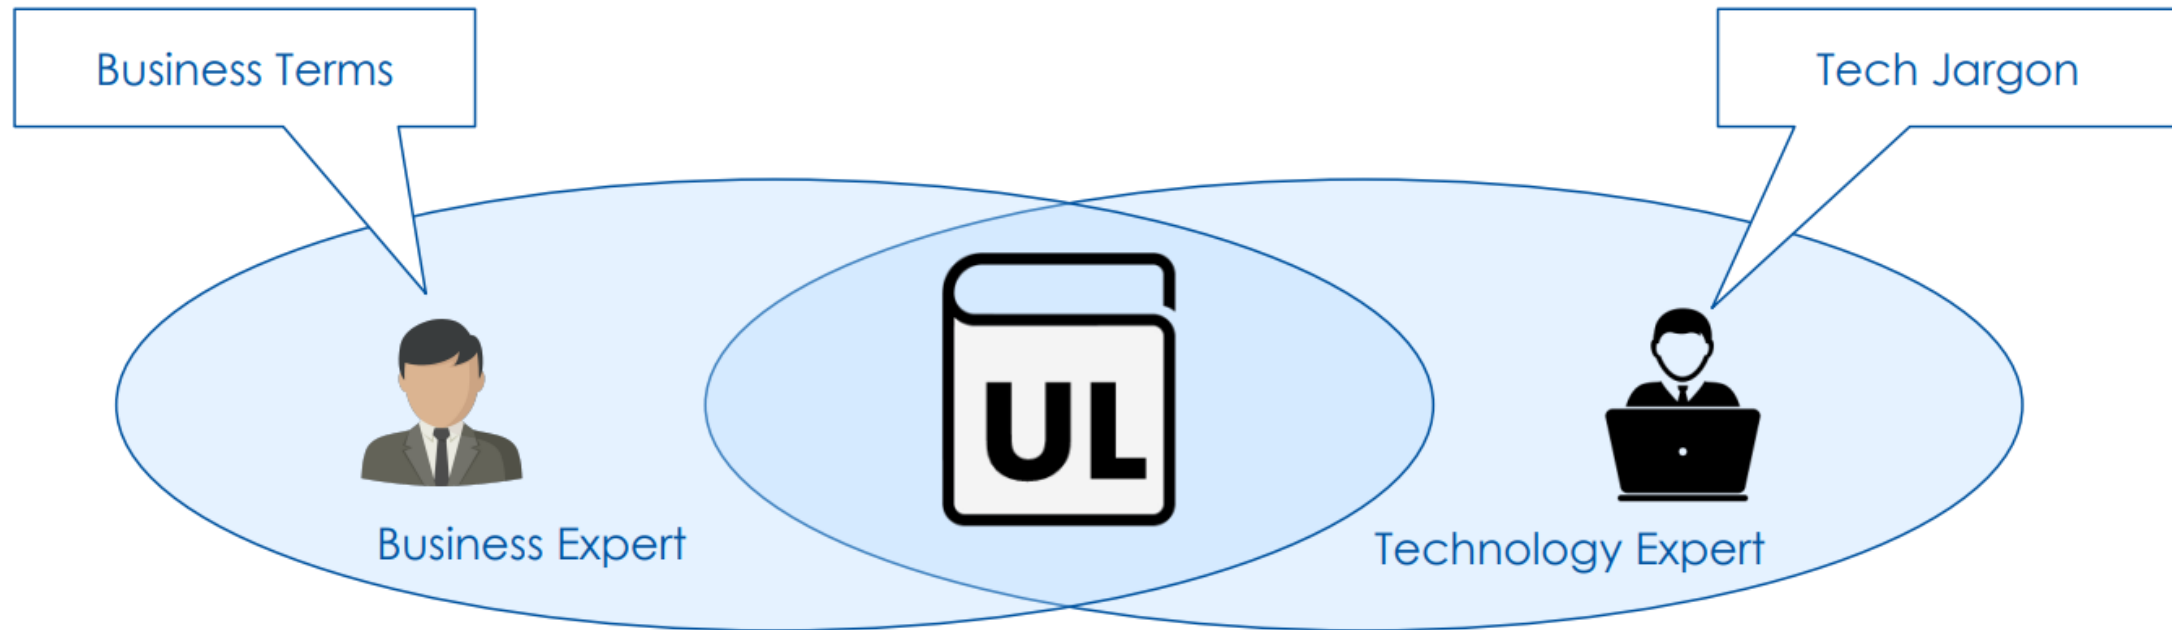






## Characteristics of UL


Developed collaboratively by Business experts & IT experts

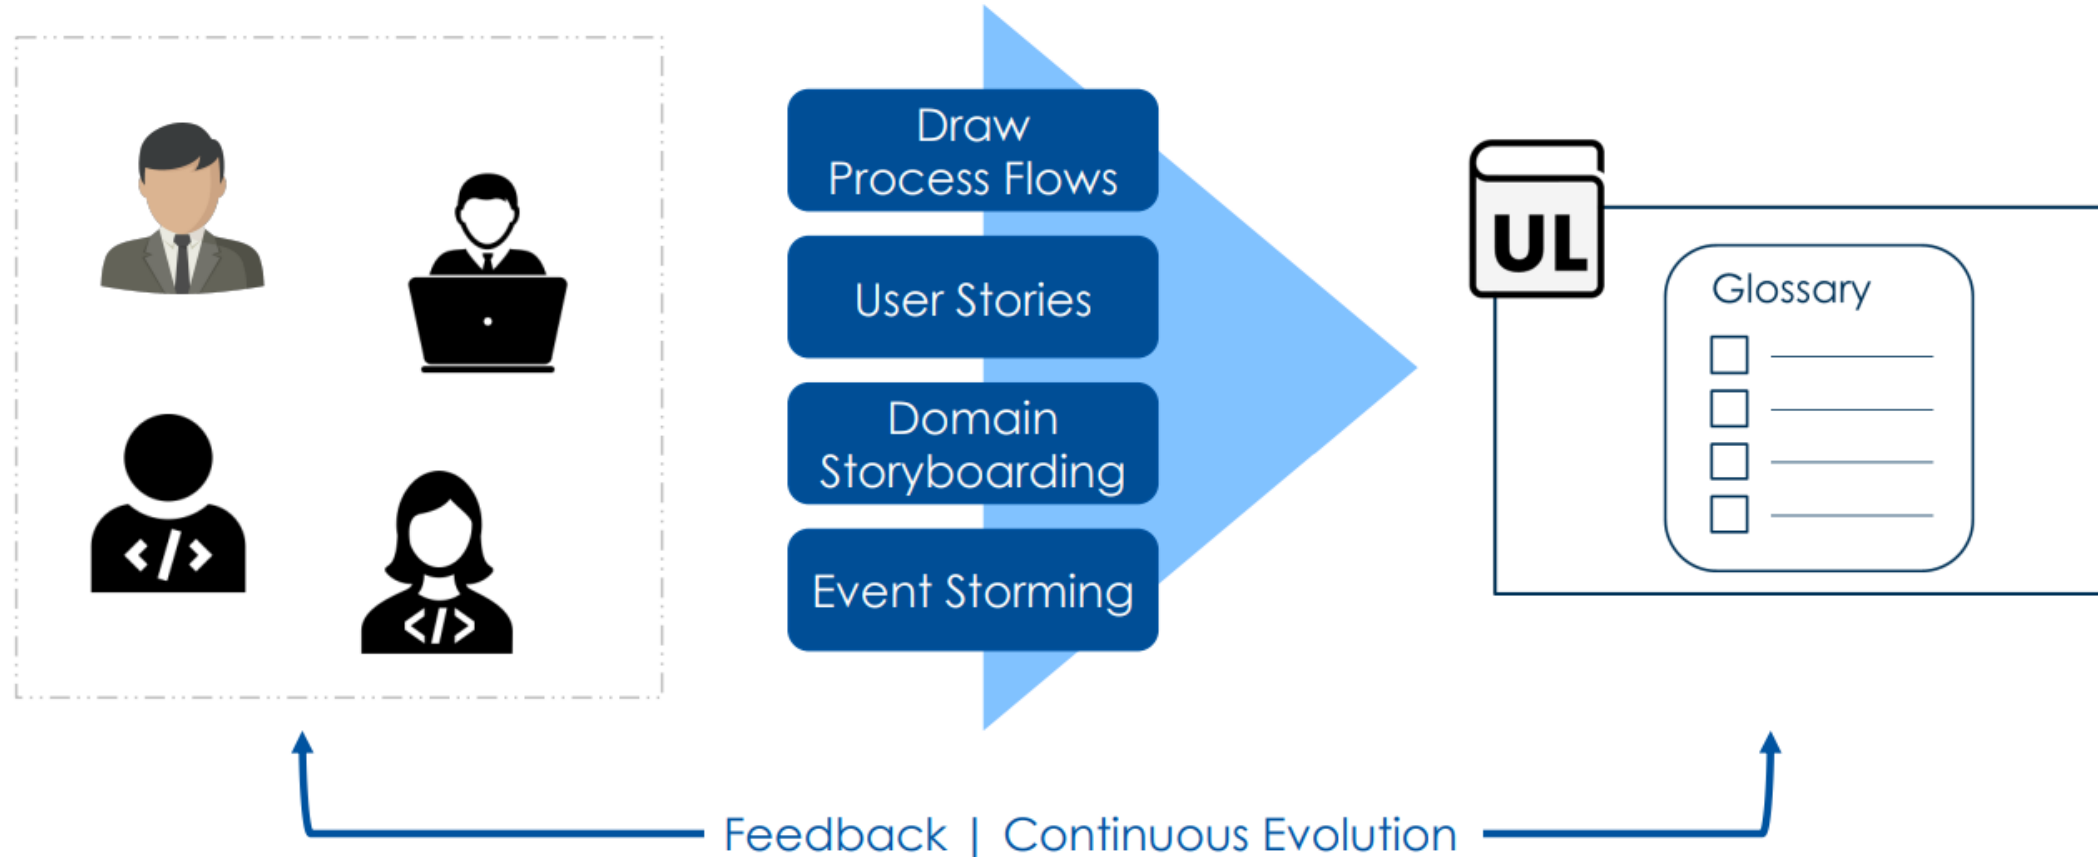

# ACME Organization Structure

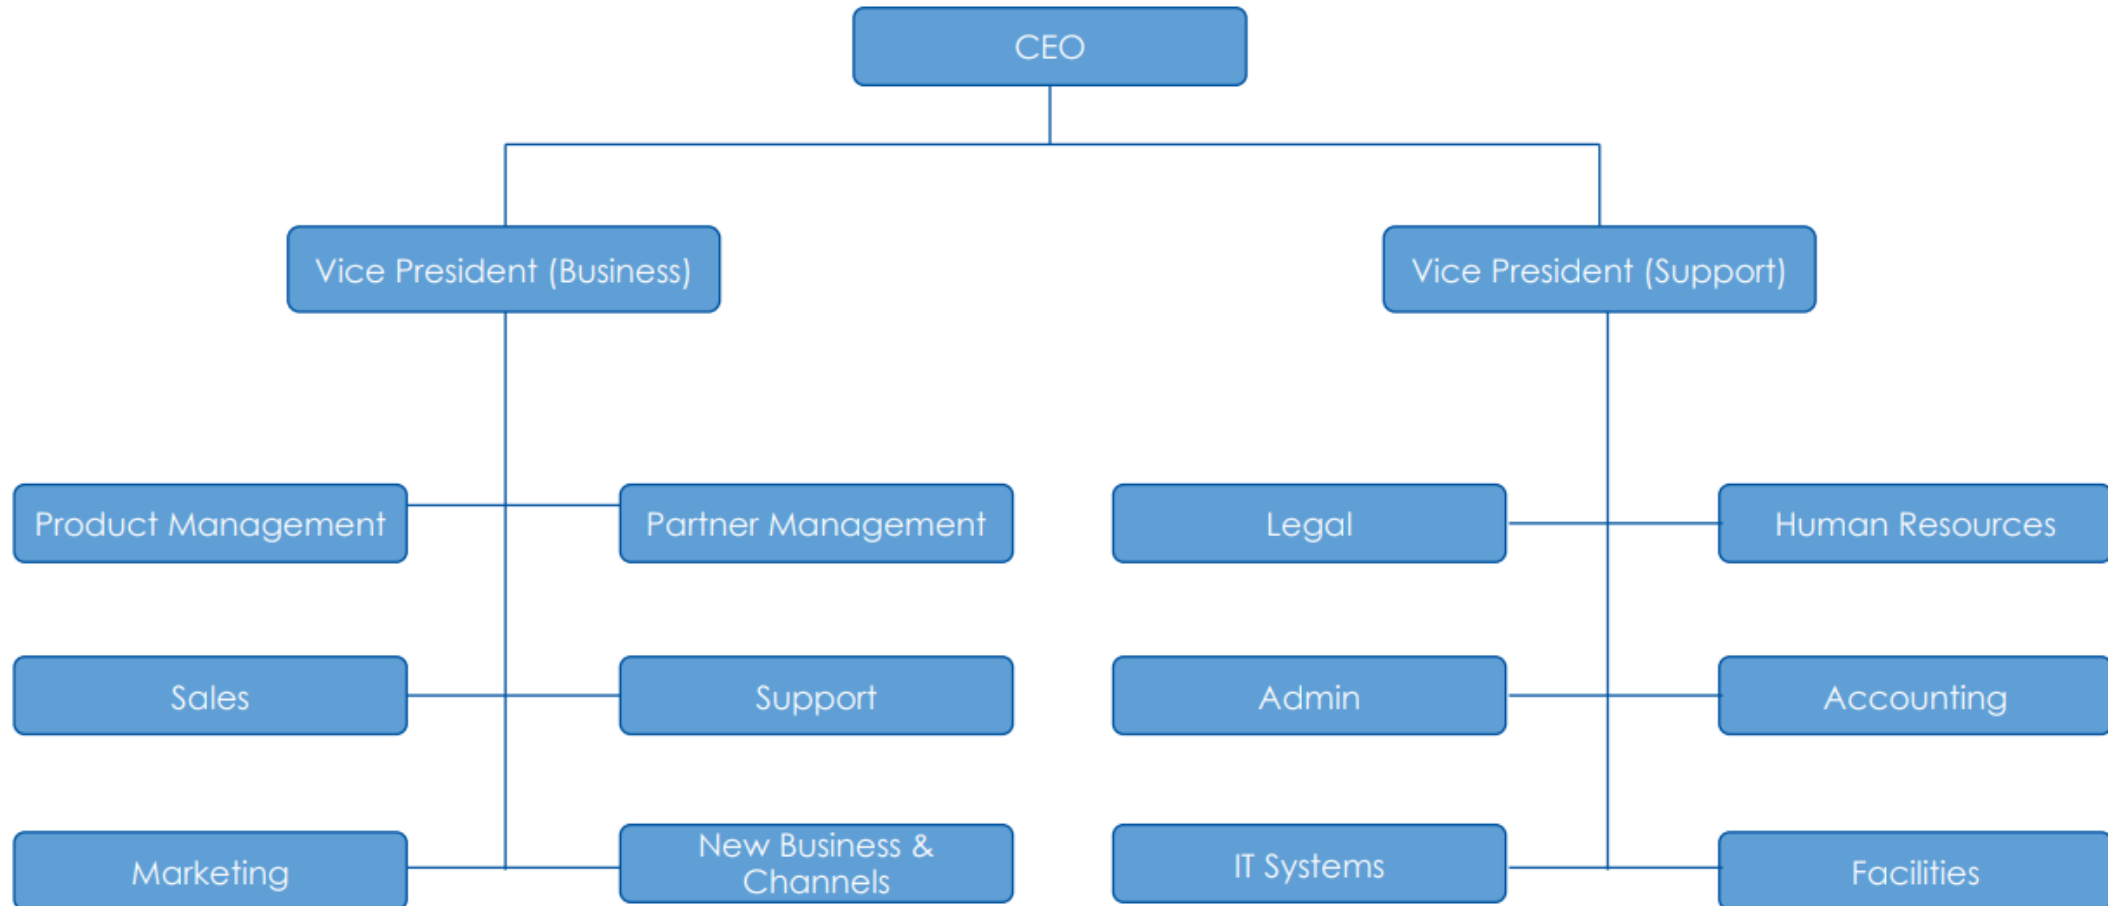

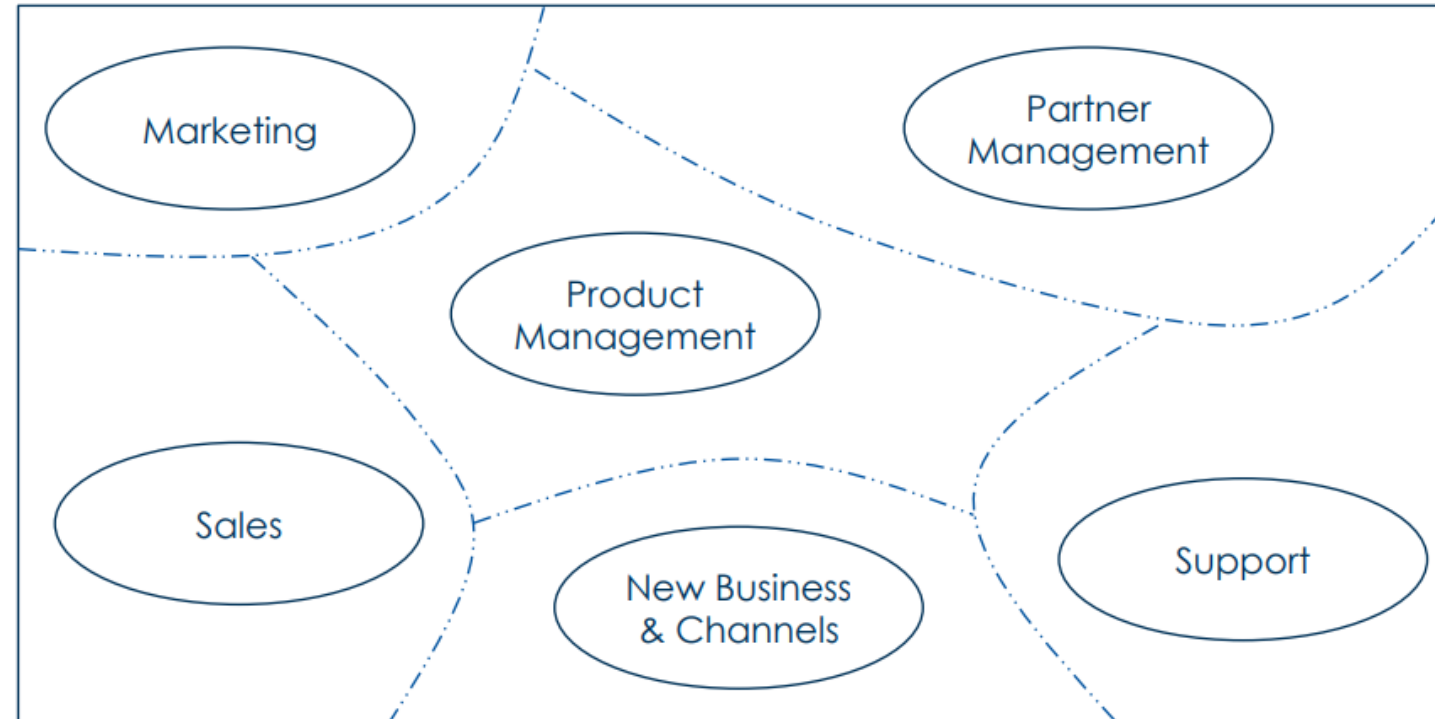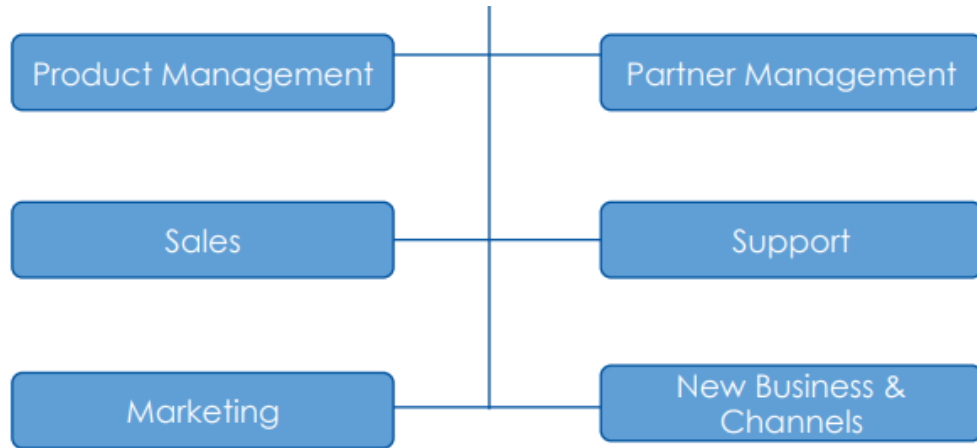

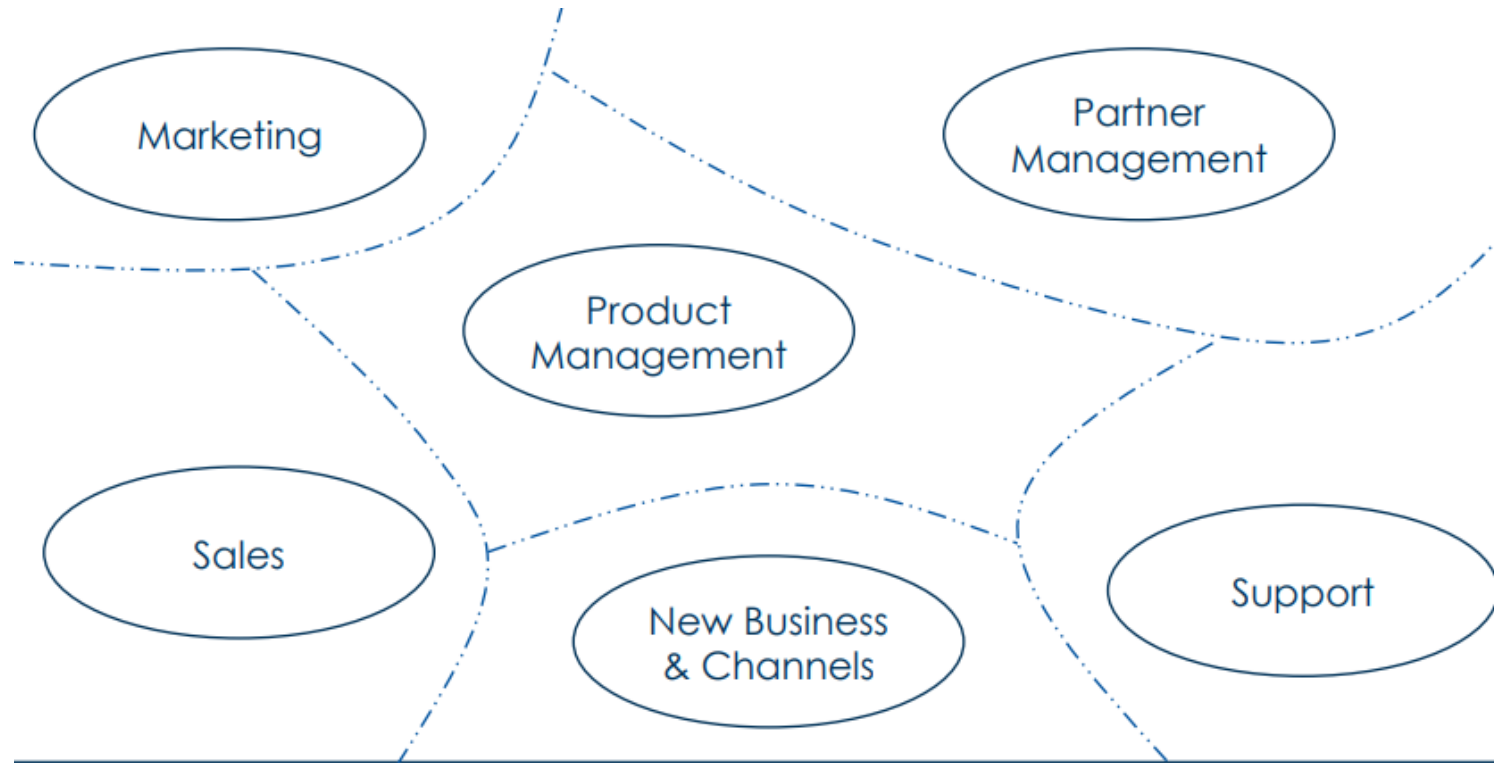

Kathy, Support

Responsible for supporting Customers and Partners

## Support function at ACME

Responsible for supporting Customers and Partners




Kathy, Support

Customer Support


24x7


Partner Support

8:00 AM to 5:00 PM ET  
Monday - Friday

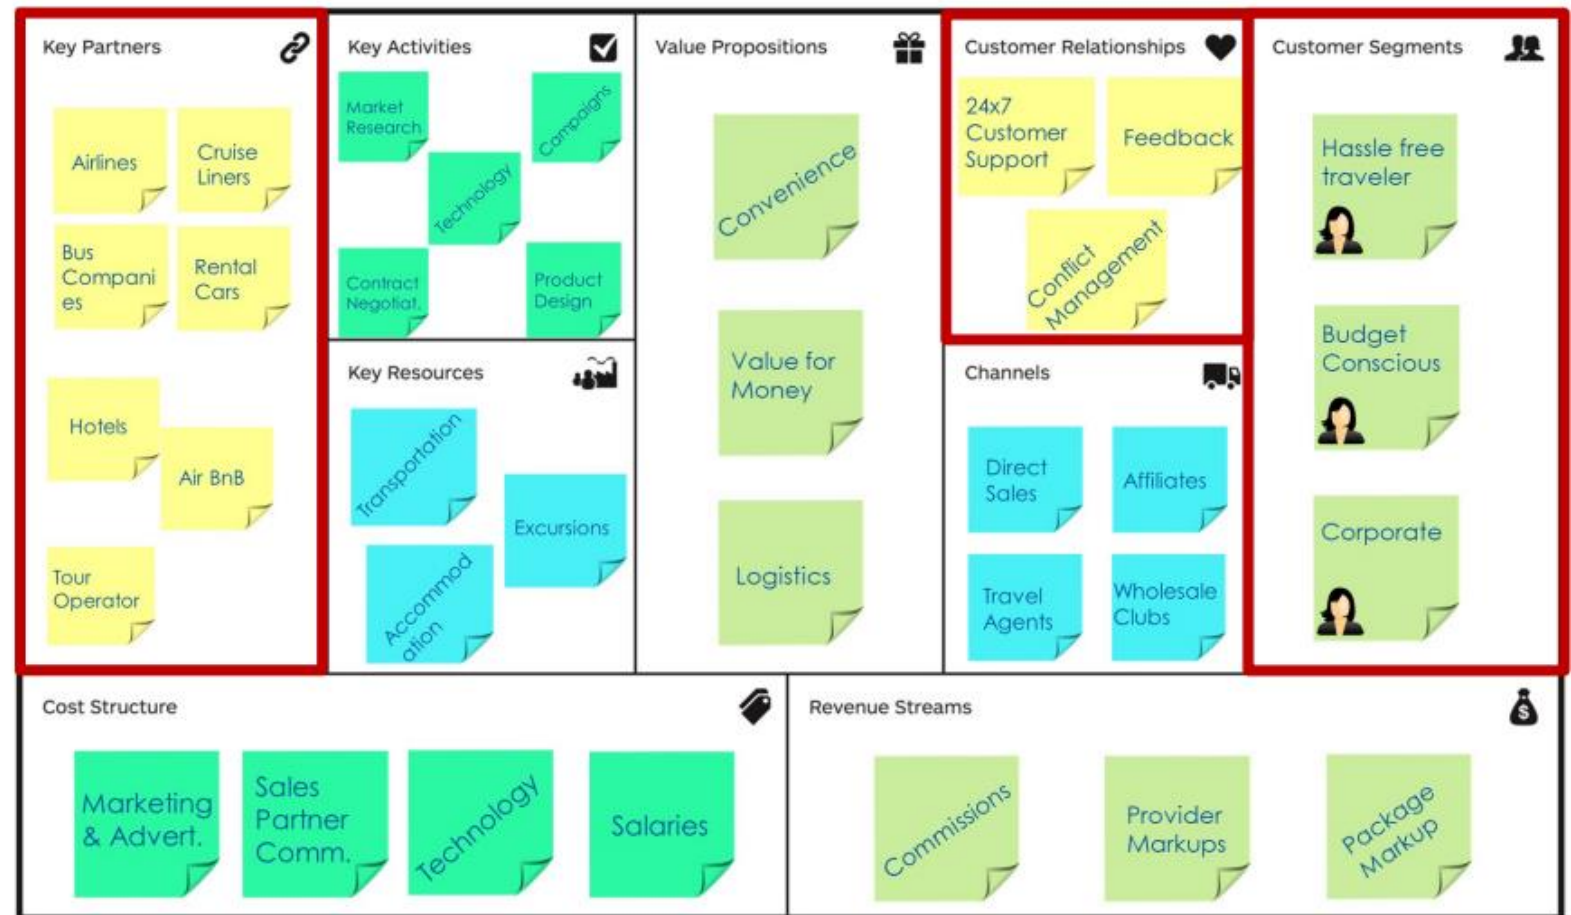

# Support | Key Activities

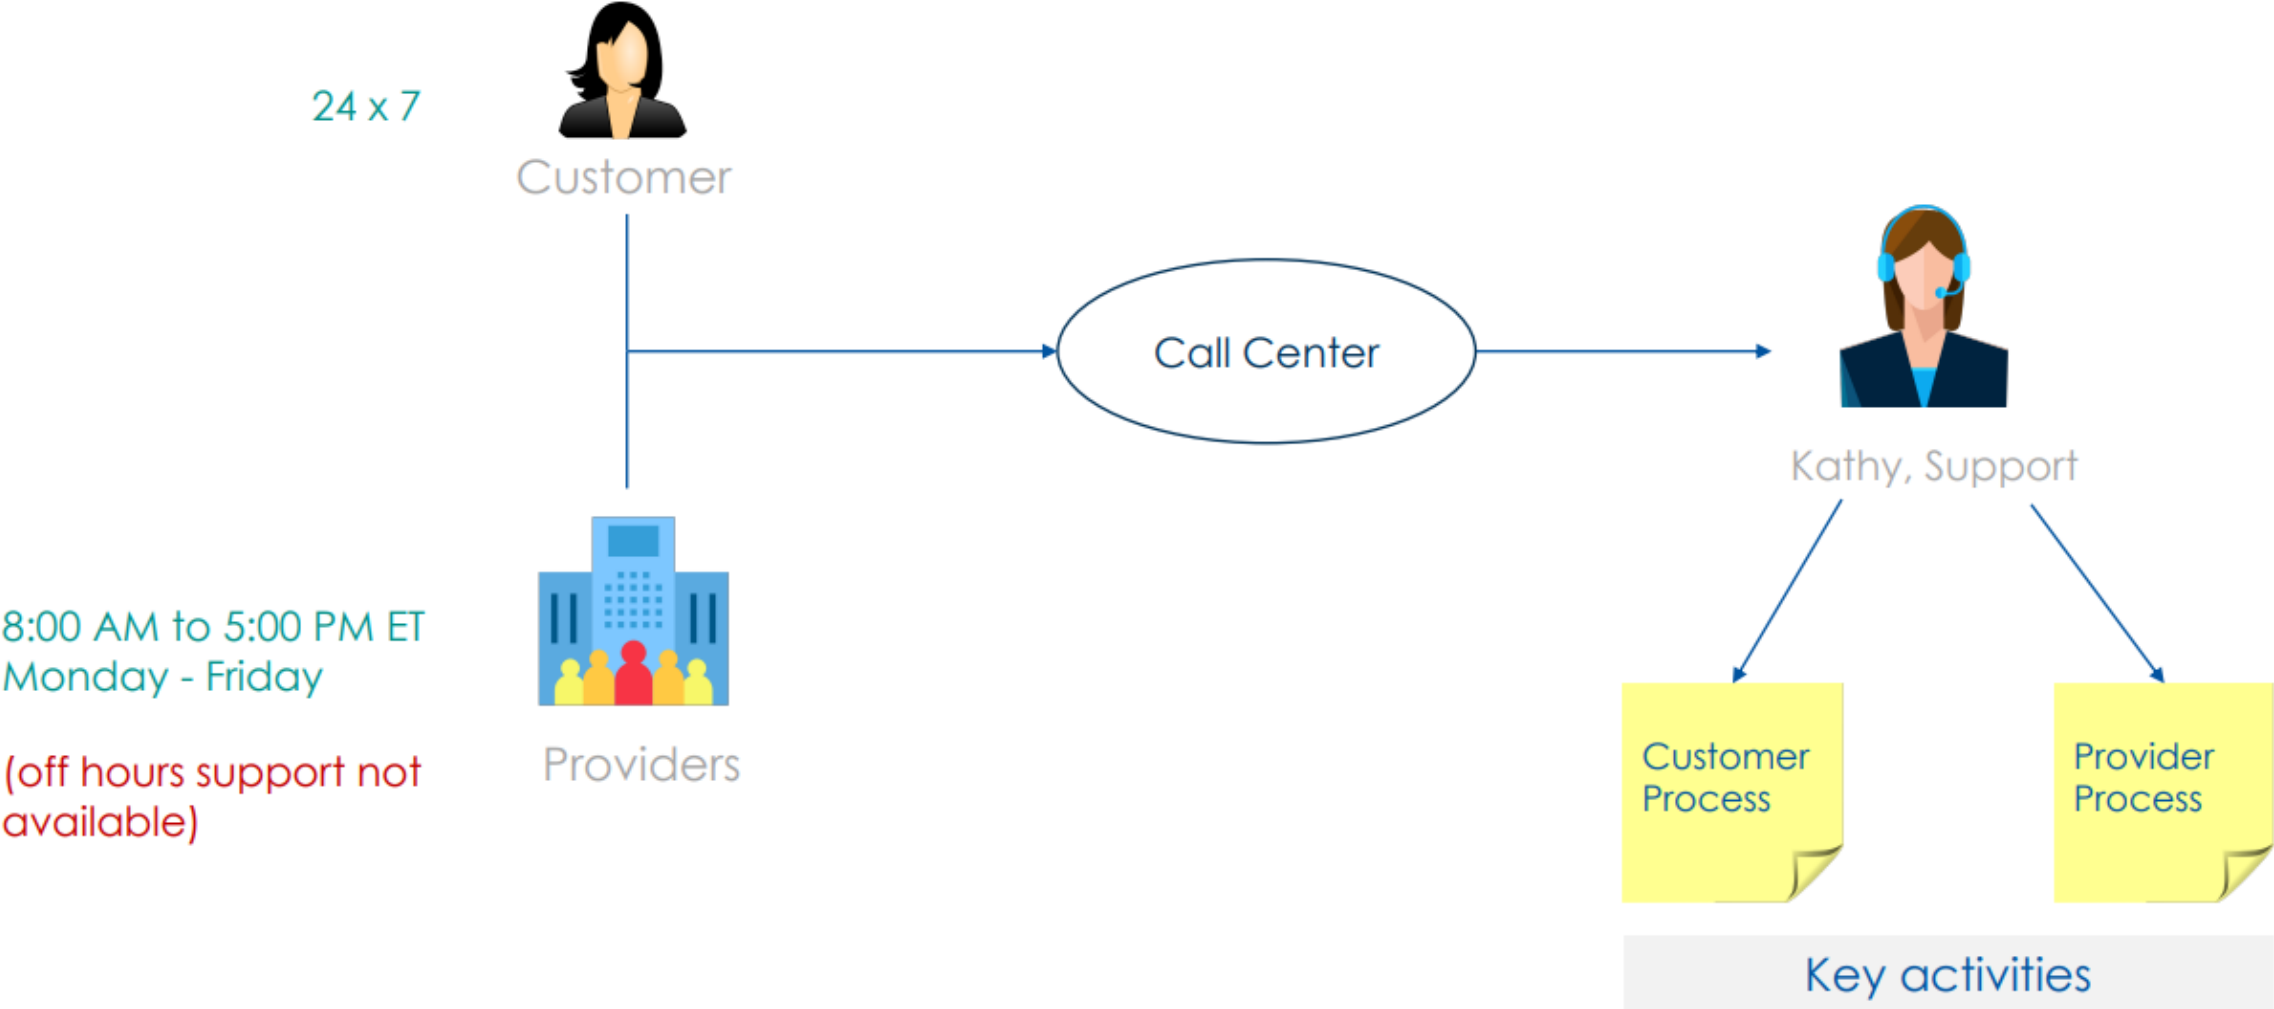

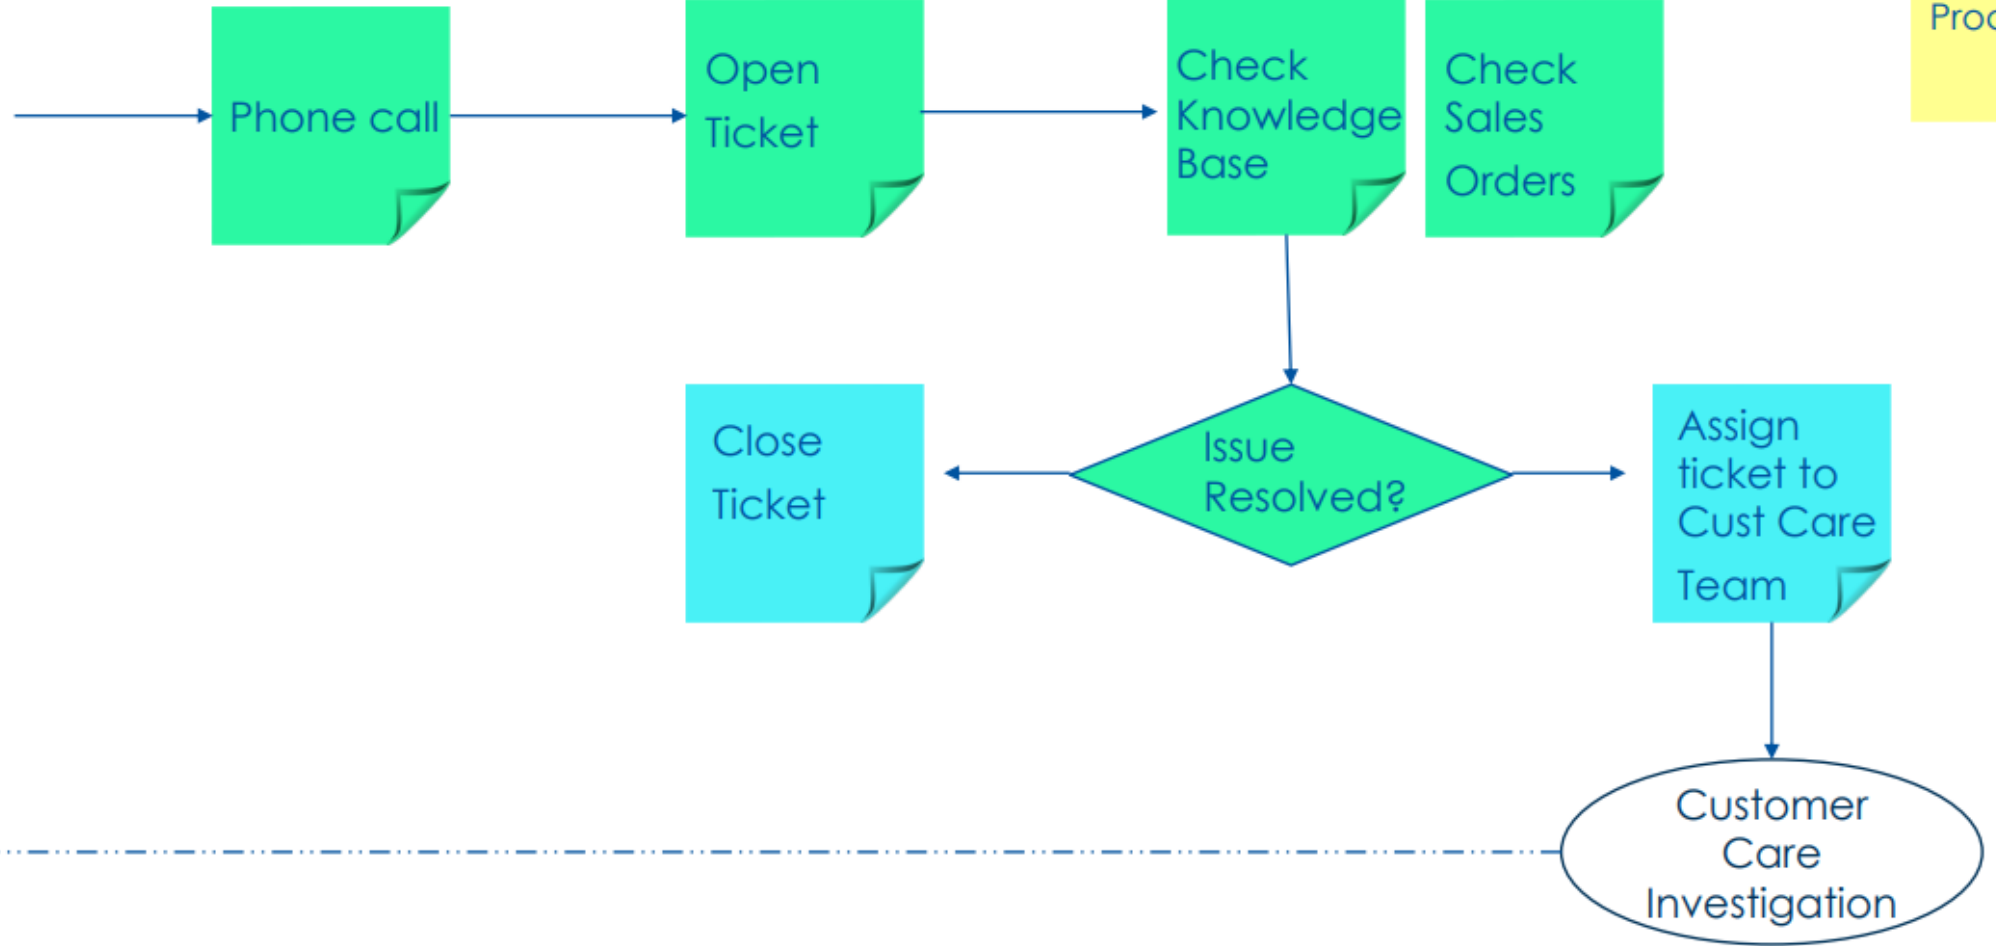

Customer  
Process




Ticket

Knowledge Base

Sales Orders

Customer Care

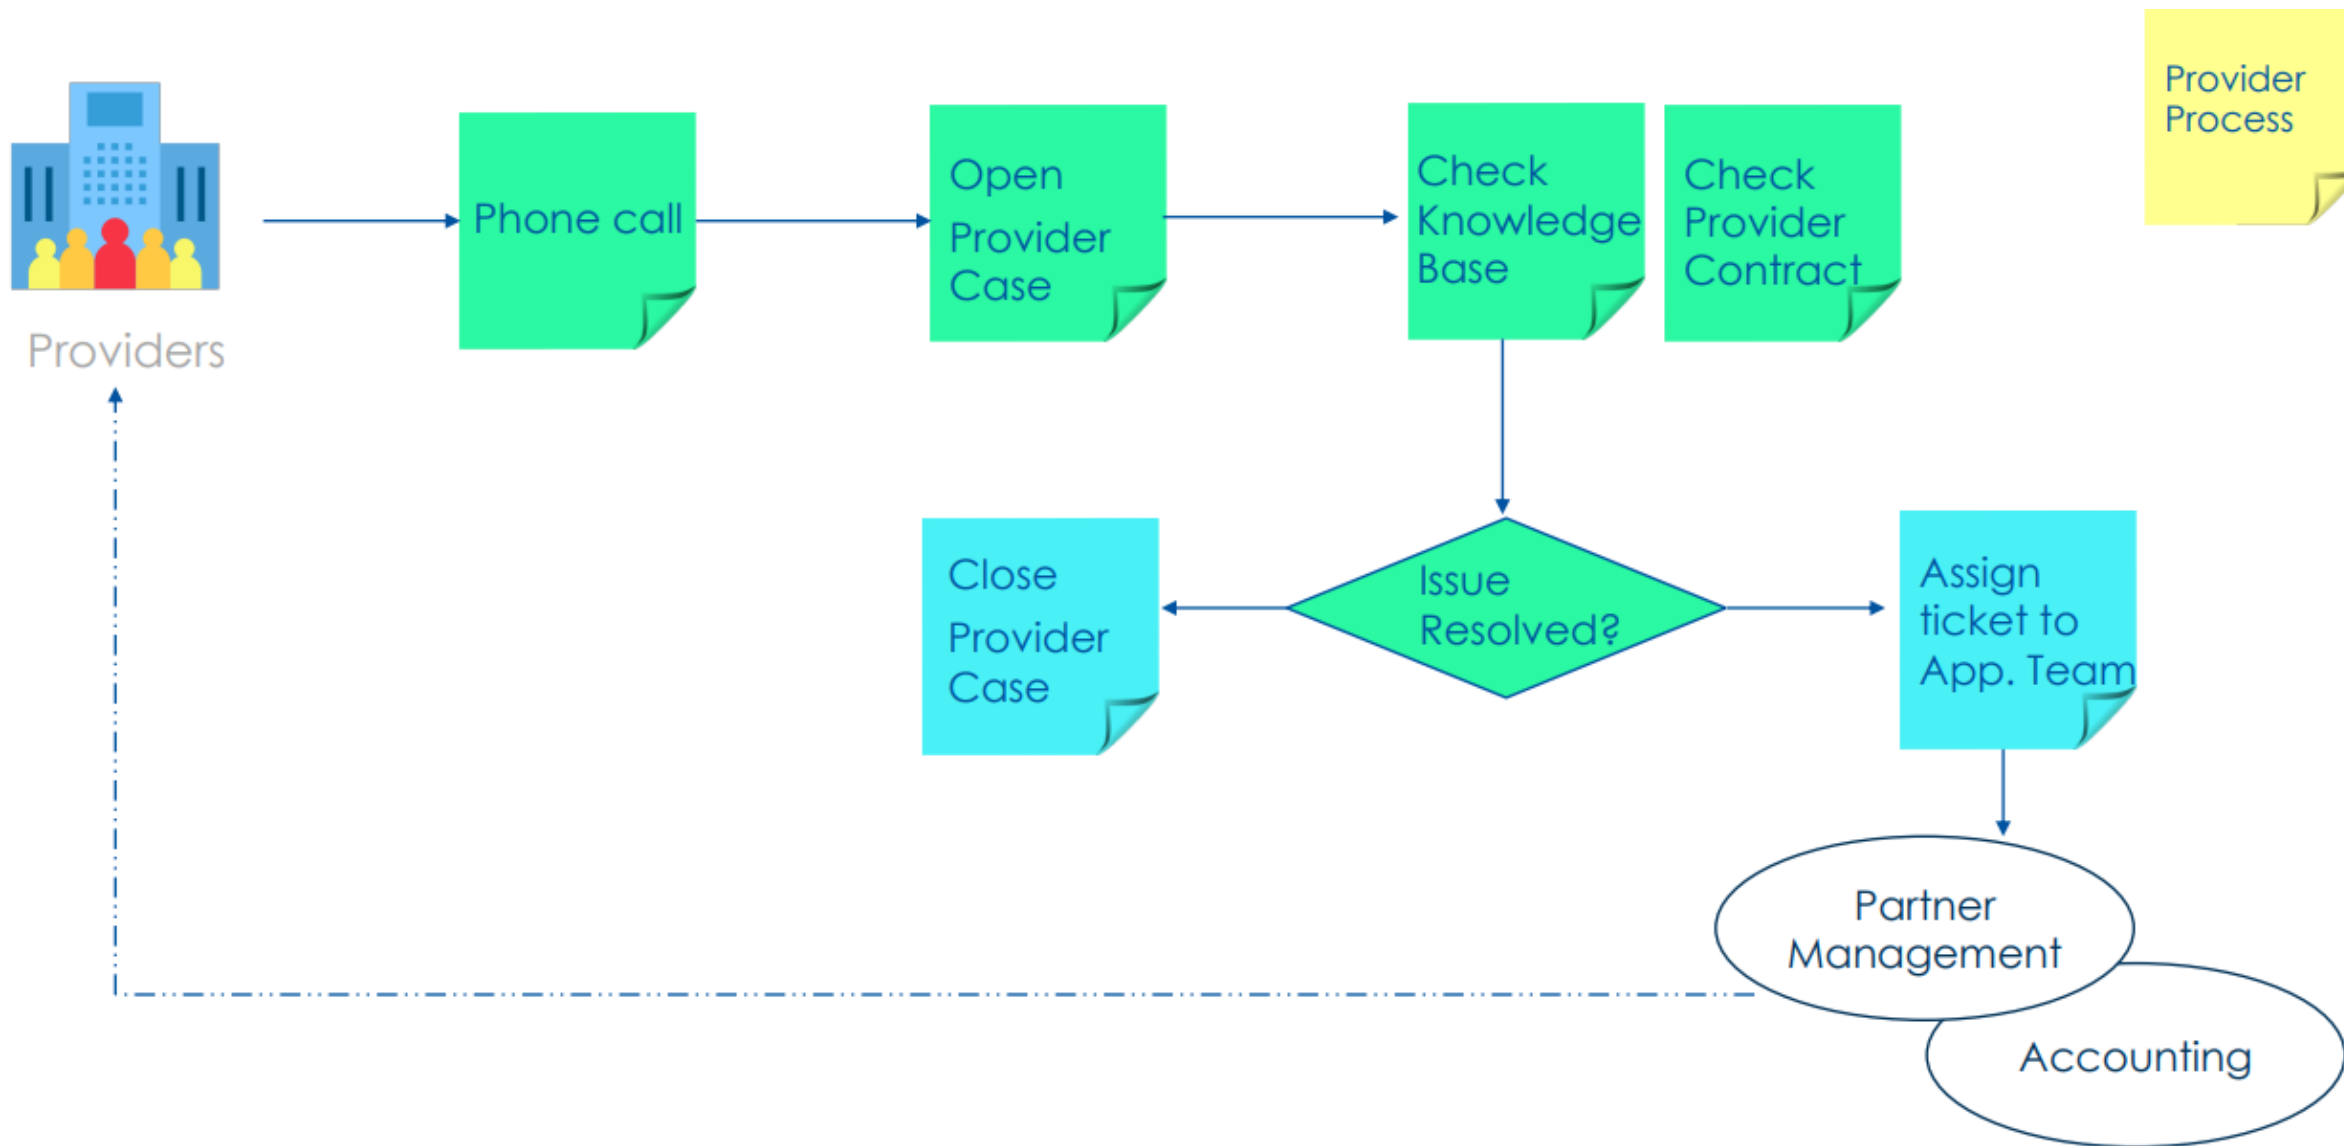


Provider Case a.k.a. Partner Case

Knowledge Base

Provider Contract




# Support | Business Language

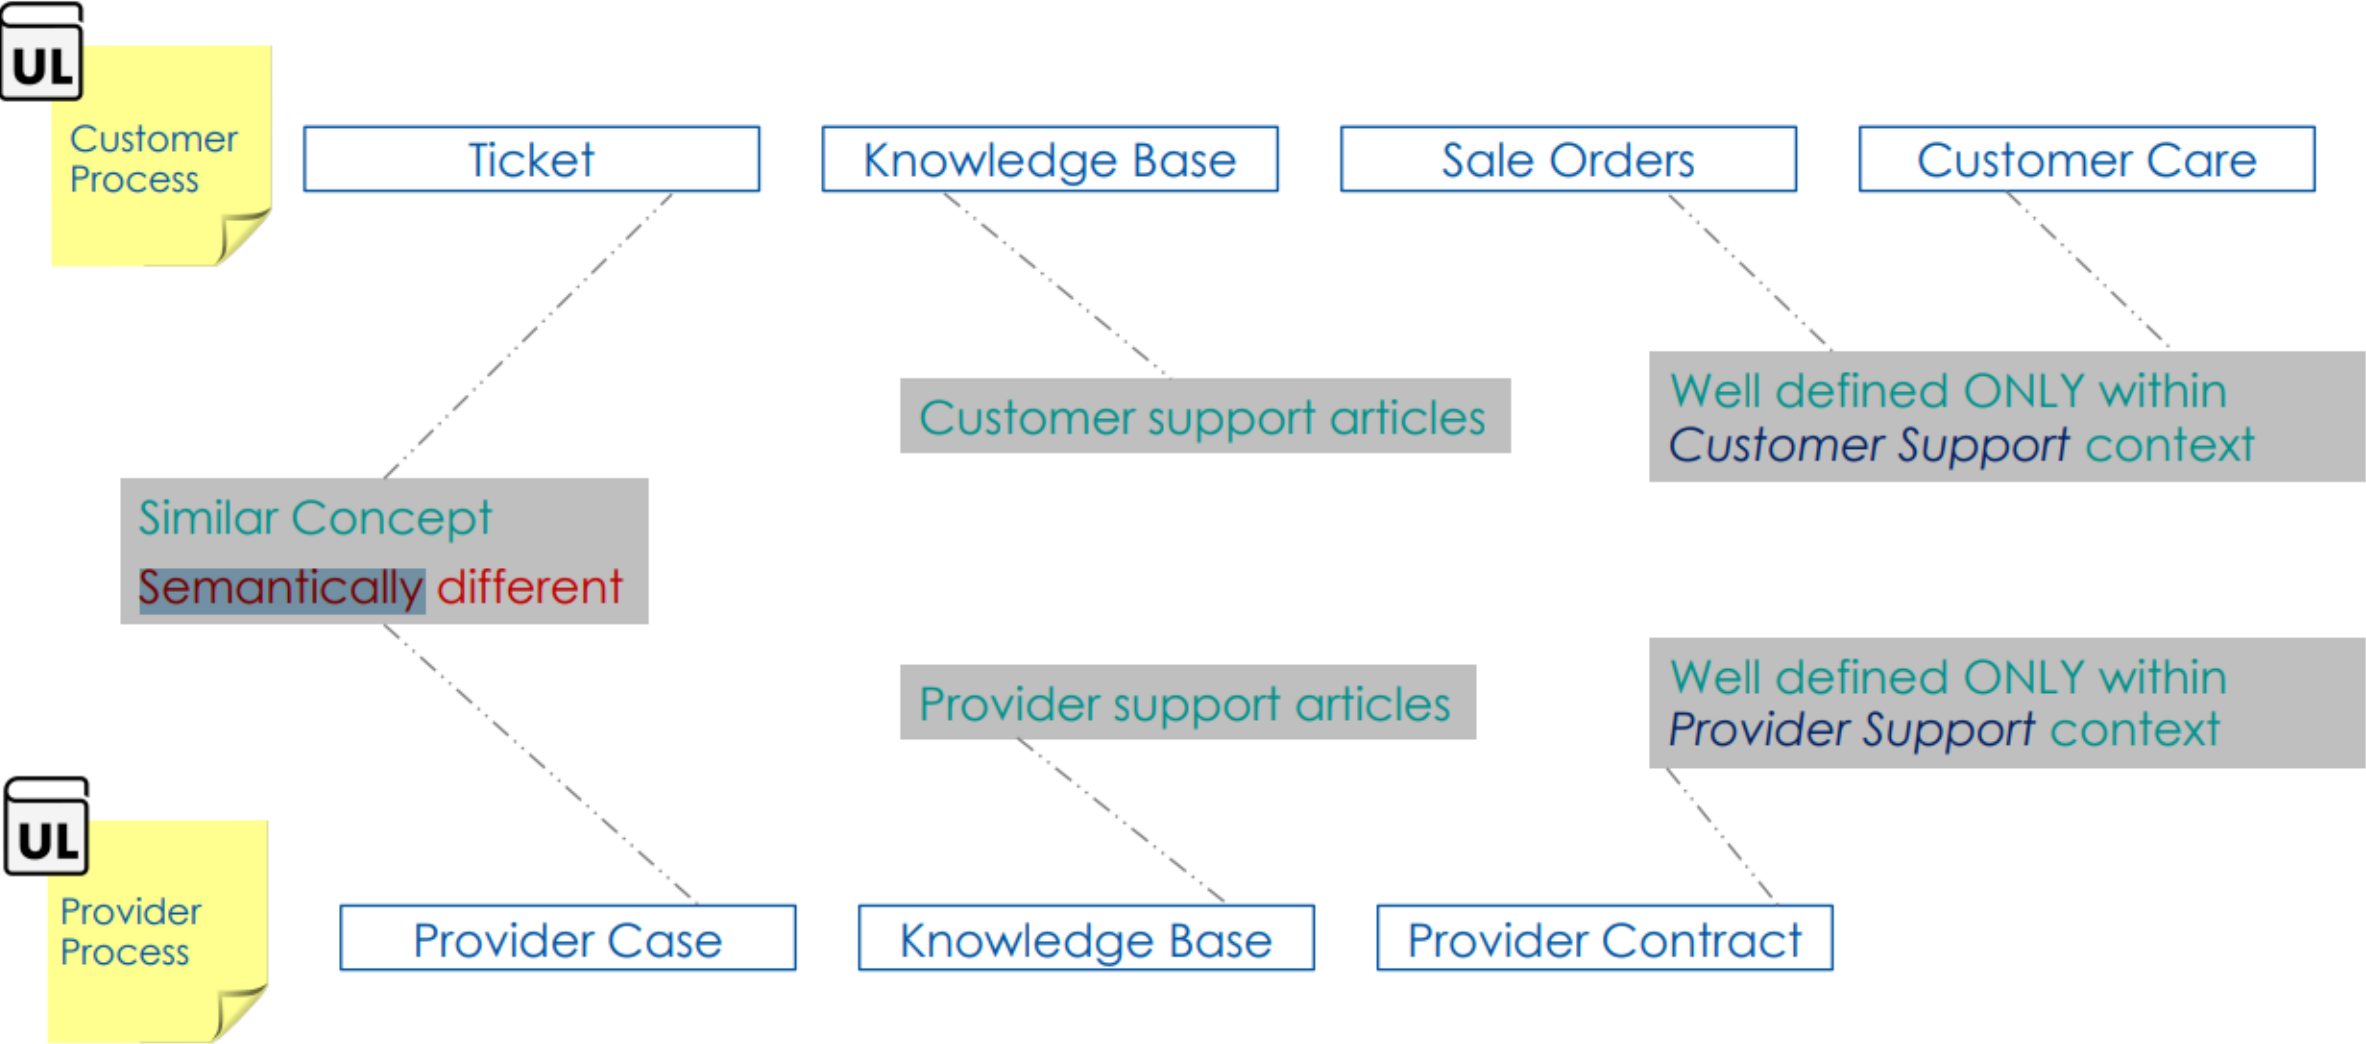


## Business Capabilities | Organization structure

Drawing the boundaries based on domain capabilities

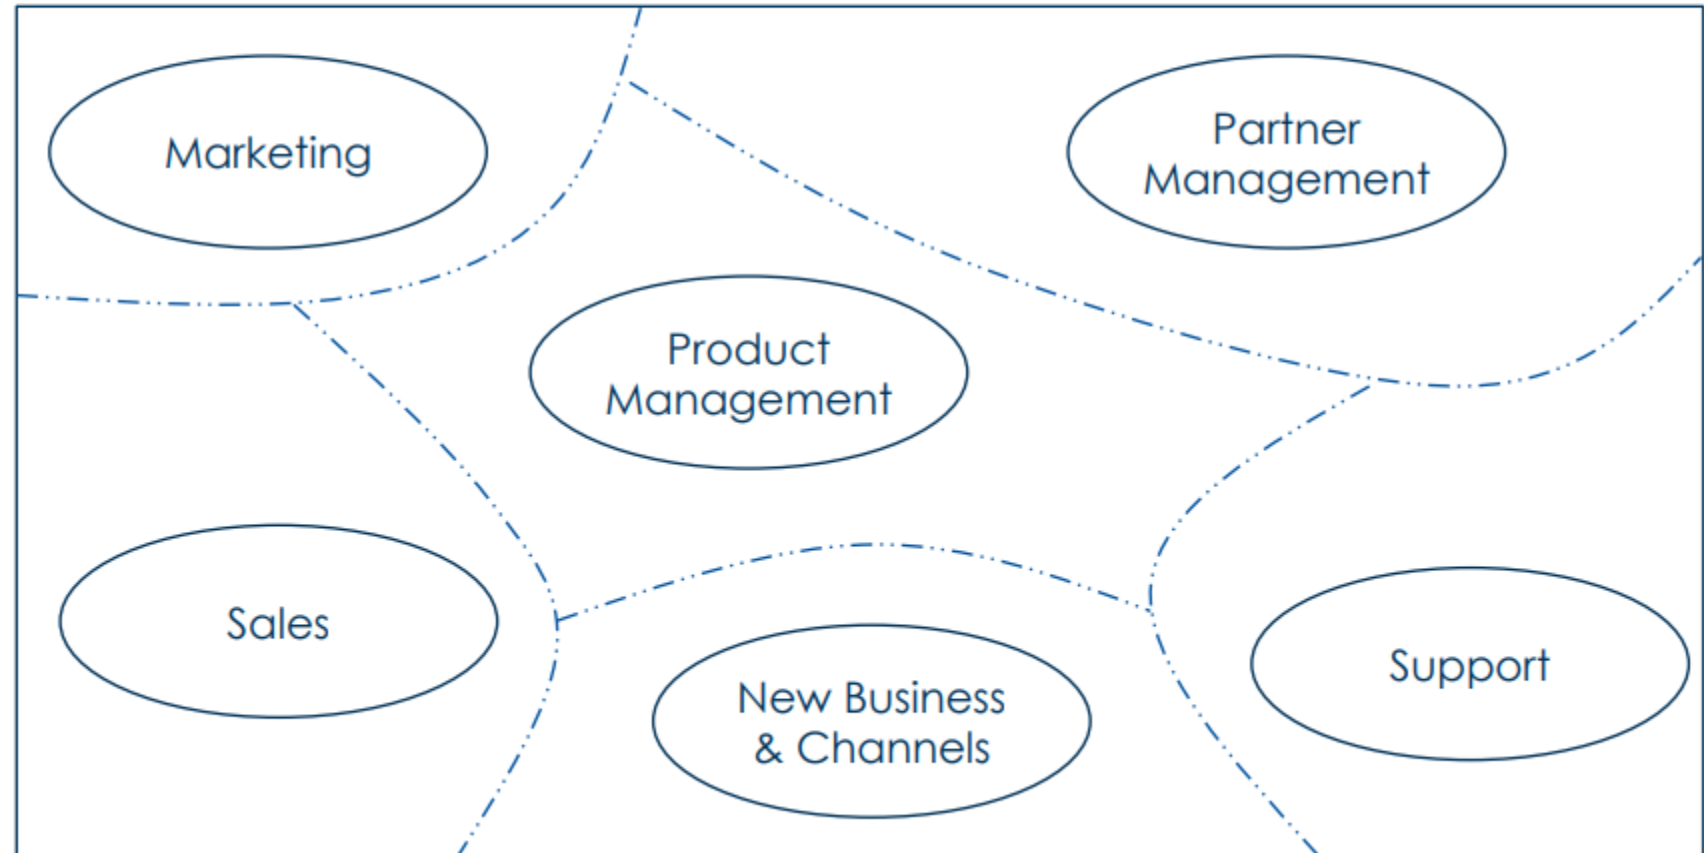

## Business Capabilities | Organization structure

Support context split into 2 independent Bounded Contexts

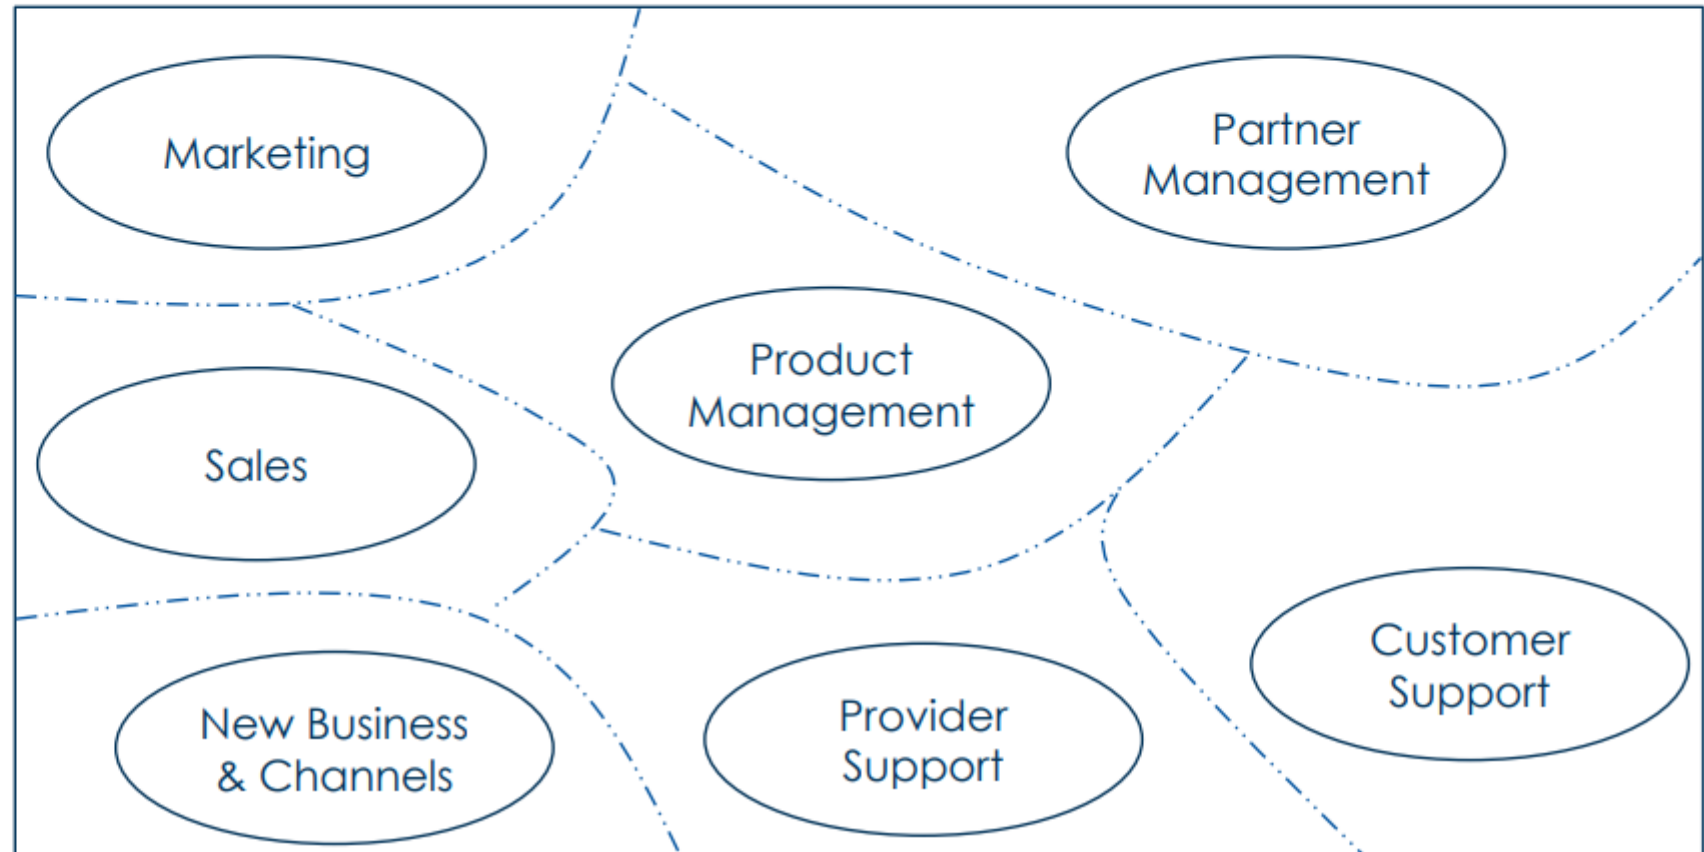

# **Bounded Context**


In DDD, a **subdomain in the problem space** is mapped to a **bounded context in the solution space**.

**A bounded context** is an area of the application that requires its **own ubiquitous language** and its own architecture. Or, put another way, a bounded context is a boundary within which the ubiquitous language is consistent. **A bounded context** can have **relationships to other bounded contexts**.


**Object Oriented Design** : Think in terms of Objects

**Strategic Design** : Think in terms of Contexts

Bounded Context is a central pattern in Domain-Driven Design. It is the focus of DDD's strategic design section which is all about dealing with large models and teams. DDD deals with large models by dividing them into different Bounded Contexts and being explicit about their interrelationships.

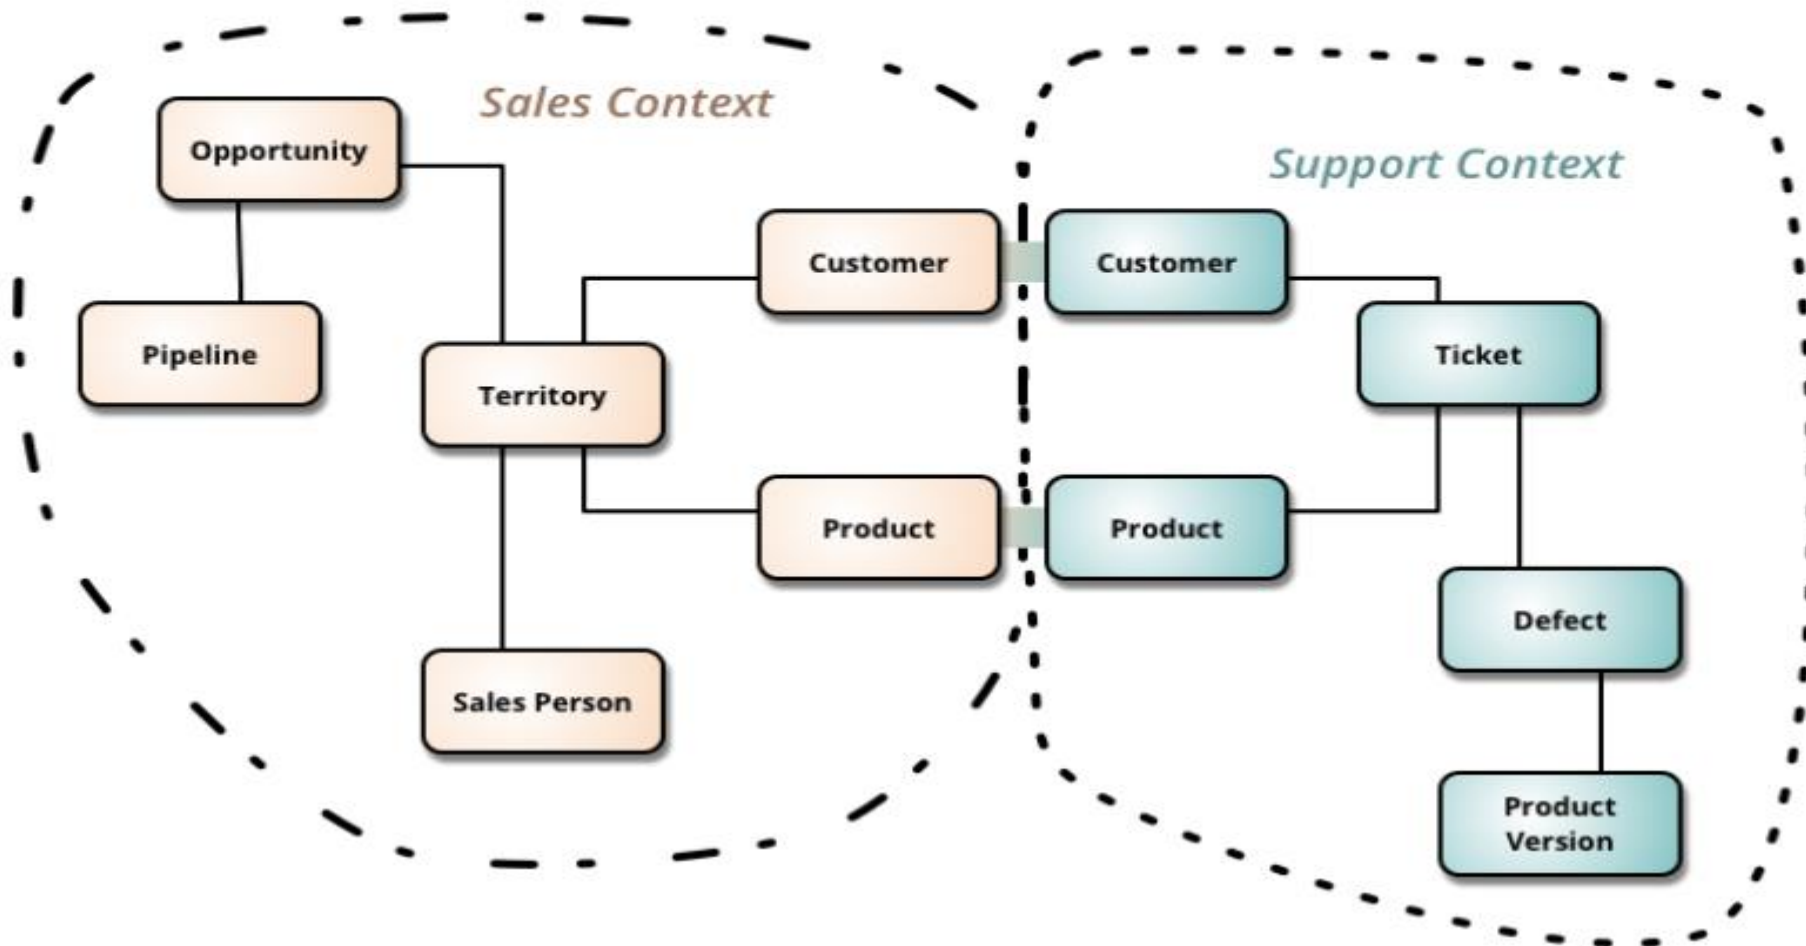

*Ubiquitous Language is modeled within a Limited context, where the terms and concepts of the business domain are identified, and there should be no ambiguity.*

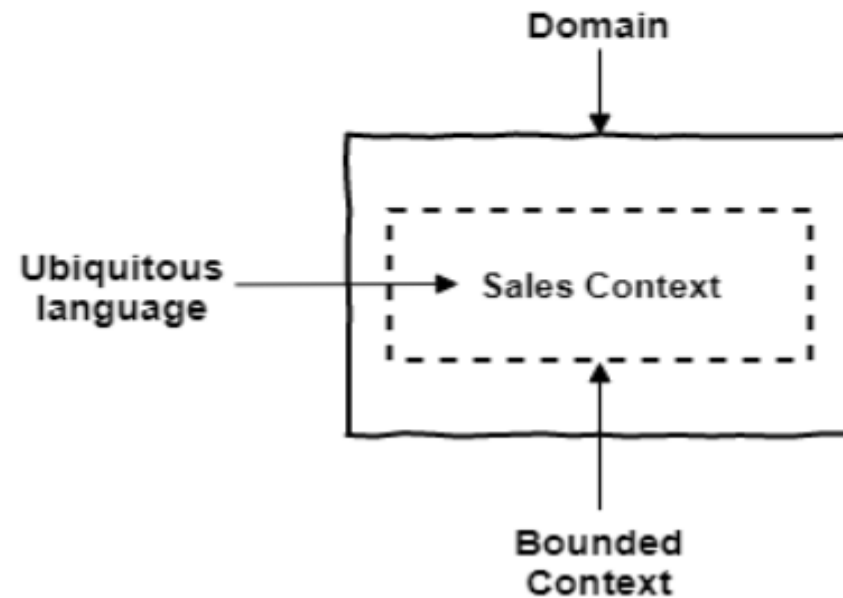




**Bounded Context Communication:** Any design has two common parts, abstraction of the data model and communicates with other parts of the system.

By Bounded context we separate the data model in a simple term abstracting the commonalities in the business but **How one Bounded context communicate with others?**

Here the concept of **Context Map** stepped in, Using Context map we can discover How one Context depends on other Bounded Context:

- ❑ Like are two Context has strong dependencies.
- ❑ or one domain sends a confirmation message to another domain(Conformist)
- ❑ or may use a shared kernel/Shared model,

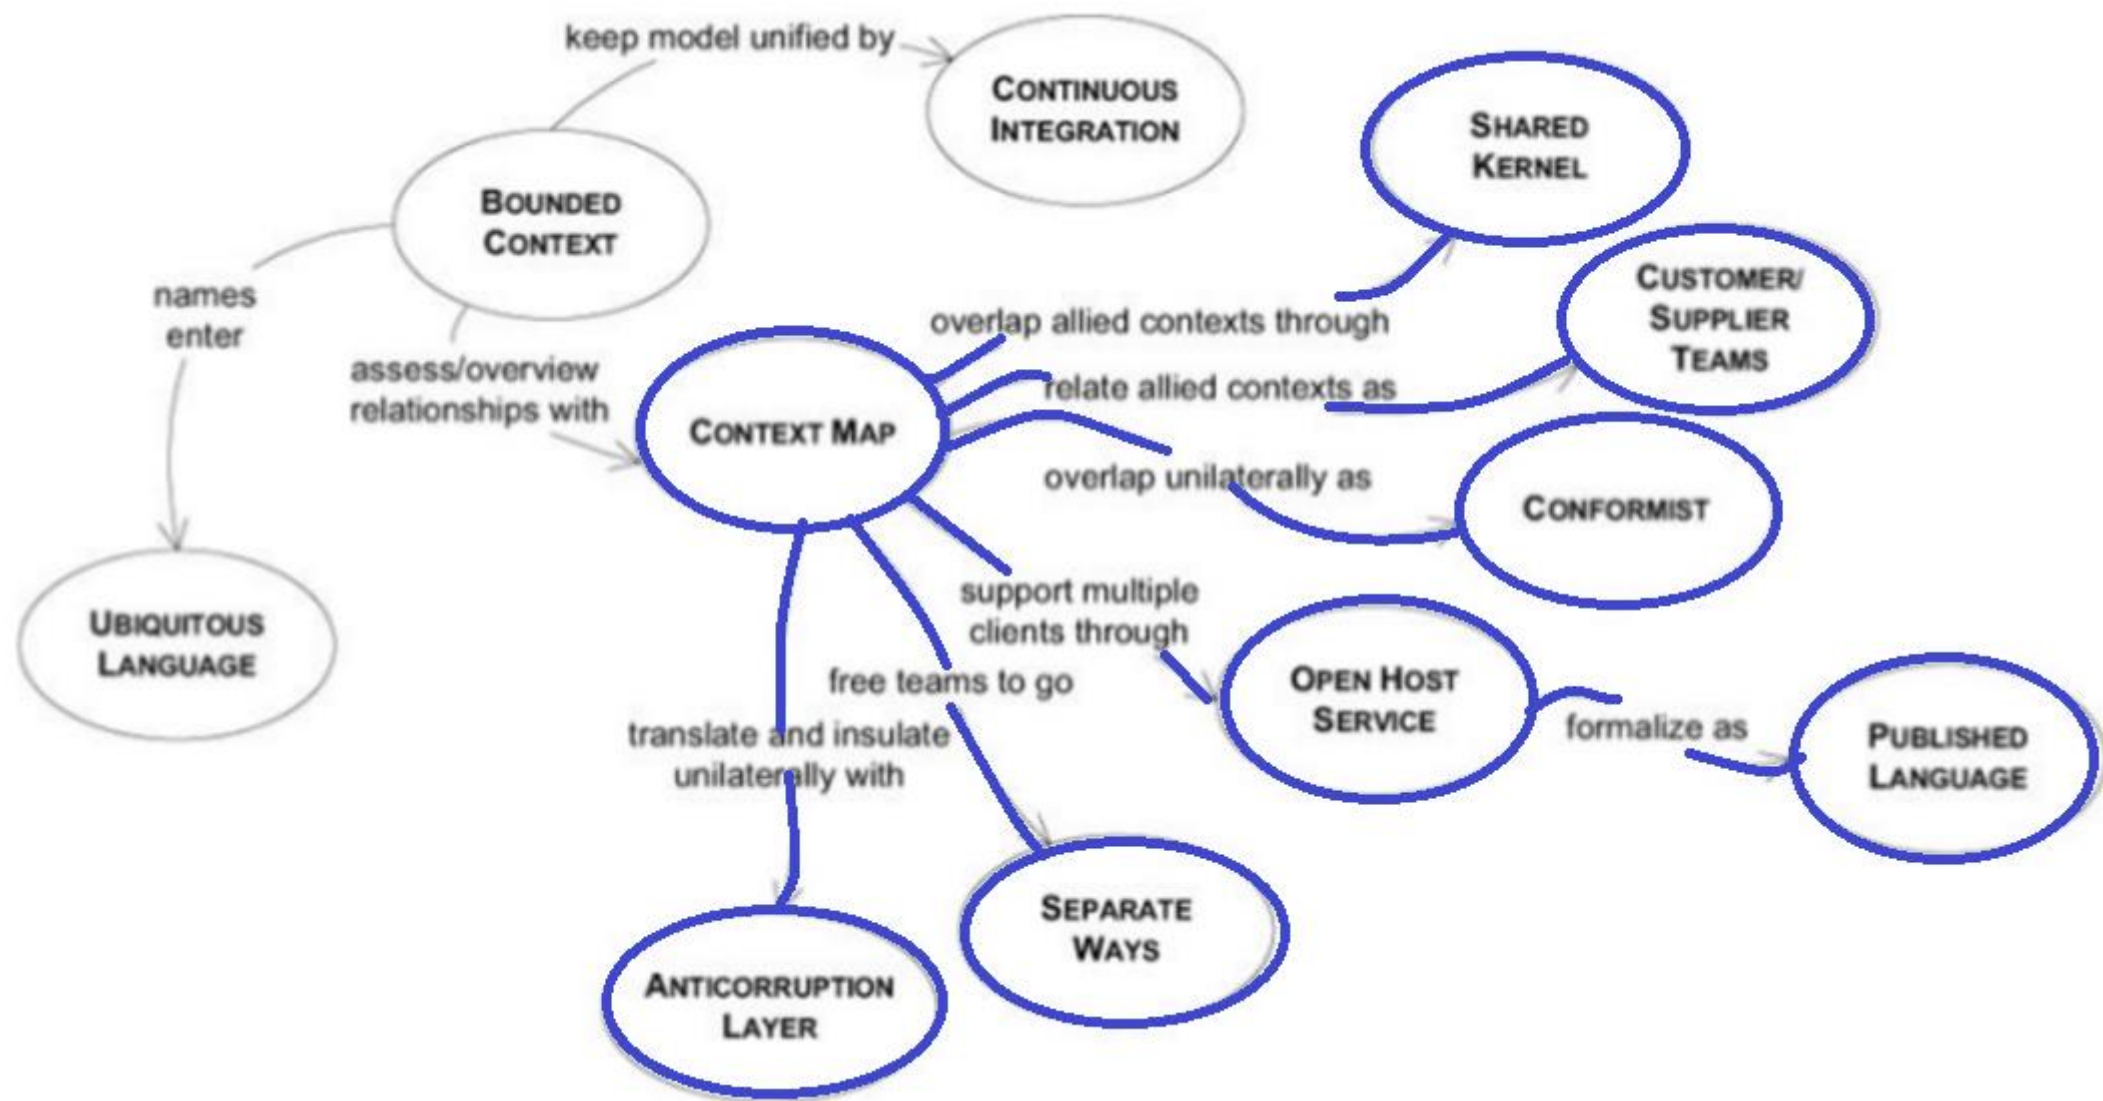

## **Domain : Online Student management system**

Online Student management system is where:

- ☐ Student can register to the site & choose course
- ☐ Pay the Course fee
- ☐ Student will be tagged to a batch
- ☐ Teacher & Student is notified about the batch details

We have to identify the bounded context of the different domain related to this business logic.

**There are 4 bounded contexts Registration, Payments, Scheduler, and Notification.**

- 1. Registration process:** Which takes care of Registration of Student.
- 2. Payment System:** Which will process the Course fee and publish online payment status.
- 3. Batch Scheduling:** Upon confirmation of payment, this function checks the Teacher availability, batch availability and based on that create a batch and assign the candidates or update an existing batch with the candidate.
- 4. Notification System:** It will notify Teacher and Student about the timings and slot information.

**Registration process:** It only wants the Student information and it needs it demographic information like Name, age, sex, address and which course student chooses.

There is no mean of Teacher in this context

**Payment System :** It treats Student as Candidates In Payment System only Student/Candidates financial information is required like Account number and based on the course fees it deduct the amount from given account,


So here perspective of a student is totally different, Information needed in payment Service is totally different from Registration although Payment system may need few pieces of information like name, address of the student those are very minimal information.

The term "Teacher" is not valid here,

In payment System Teacher treated as Faculty and they can be permanent or Contractor based on the Faculty type Payment System choose the payment calculation either per hour basis or per annum basis.

**Batch Scheduling:** In case of Batch Scheduling System, it needs bare minimum information from Teacher and Student like name, Address etc. But it needs detailed information, of Course, Batches under the Courses etc.

**Notification System:** For Notification System, we just need the Teacher and Student email address or Phone number and name nothing else, And it needs the name of the Student management system and Course details, here Student management site acts as Sender and Teacher and Student denotes as Reciever.

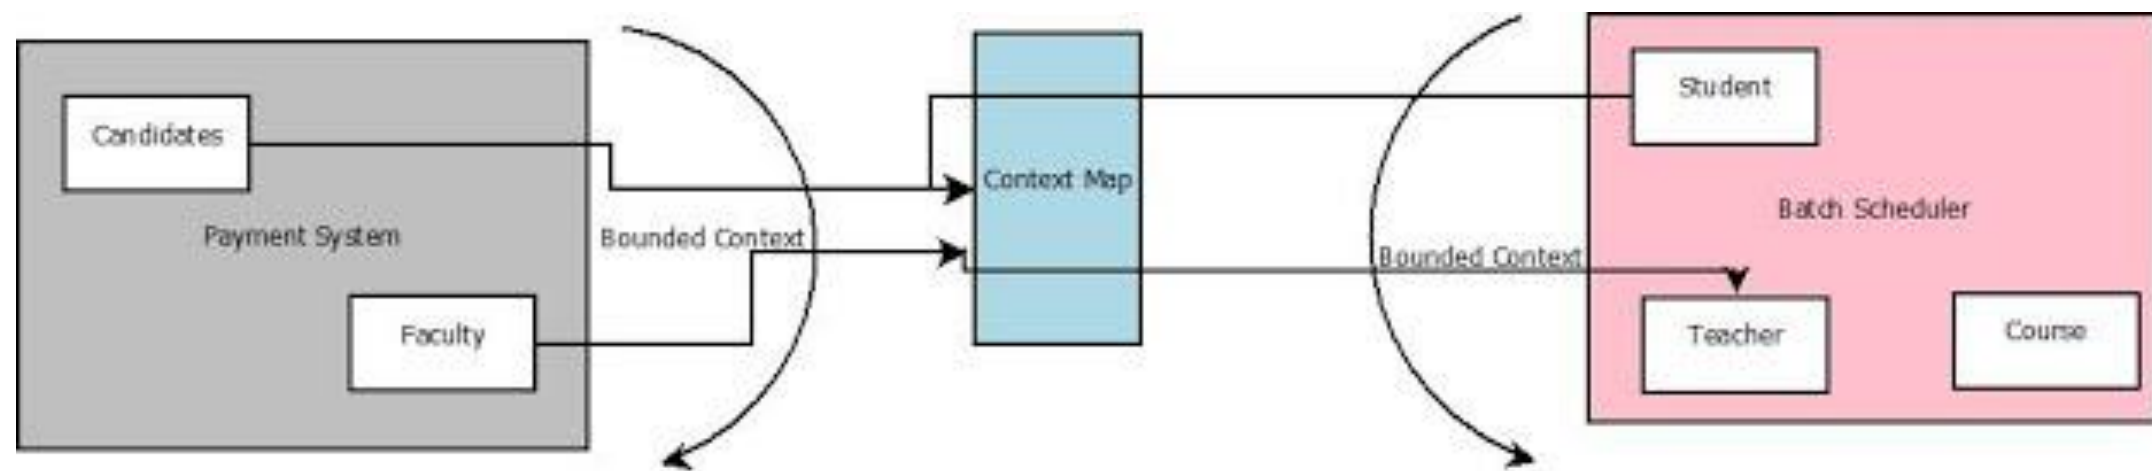

Bounded Context and Context Mapping



Domain Objects Teacher, Student, Course have different meaning and use-cases for different Context.

We can have multiple canonical models for same domain Object based on different context.

So developers, Business, user are always in the same phase when they are talking about a context, the concept of ubiquitous language is implement.

Using ubiquitous language DDD create a unified system where every participant understand the language based on the context.

A ubiquitous language which creates a unified language among business stakeholder.



- ❑ By Bounded context, we properly define a business model, create a different context based on the business domains, but always a functionality spans over multiple business entities , and those entities lie in the different Bounded contexts/domains.
- ❑ It is important to understand the relationship between the Bounded contexts and use the pattern "Context Map "

## Shared Kernel :


Shared kernel talks about a partnership relation where two or many teams shared common data model/ value object;

It reduces the code duplication as different context use that common model, but that common model/value object is very sensitive;

**Any changes major/minor should be agreed** upon all the parties unless it would break other parties code.

**Example** : Analytical module is used to analysis which courses are most chosen by the students, which students are chosen more than five courses etc, so that module works with Student model, course model.

Analytics module can share Registration modules student model, and they also agreed upon any changes on student model.

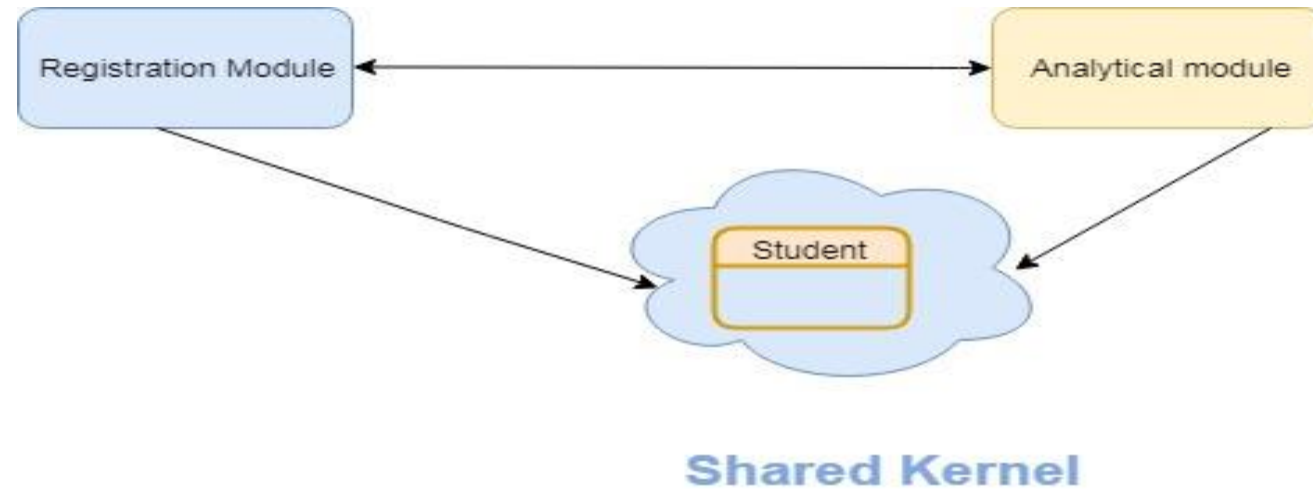

## Customer/ Supplier:

Generally this is the common relationship between two contexts, where a context consumers or depend on data from another context, the context which produces data marked as upstream and the context which consumes data called downstream.

### ❑ Upstream as the leader:

In this type of relationship, the upstream team is in a **commendable position**, that team does not care about the downstream team, as they producing the data and downstream team need to change their model based on the data structure produces by upstream.

**Example** : Payment application decide what information in which structure they provide and Notification module consumes that data structure.



**Upstream as the Leader**

### **Downstream as the Leader:**

In some cases, the relationship is revert although upstream is produces data, it must have to follow the rule, the data structure for downstream, in this scenario downstream is in a **commendable position**.

**Example** : Student registration system we need to submit Form 16 to government as a tax payee so our payment module has to submit form 16 data to Government exposed API but government API has certain rules and data structure for submitting form 16 data, so although government API is downstream it has total control, our Payment module should communicate with downstream in such a way so it can fulfil downstream rules.



The customer-supplier relation works best when both the parties upstream and downstream are aligned with the work both party agreed upon the interfaces and change in the structure.

In case of any changes in the contract both parties will do a discussion synchronize their priority backlogs and agreed upon the changes, If one party does not care upon another party then every time contract will be broken and it is tough to maintain a customer-supplier relationship.



## Conformist:

Sometimes, there is a relation between two parties in such a way that downstream team always dependent on an upstream team and they **can't do a mutual agreement** with upstream about requirements.


The **upstream** is not aligned with downstream and does not care they are **free to change there published endpoint** or contract any time and not taking any request from downstream.

It is happens when **Upstream team is an external system** or under a different management hierarchy , and many downstream systems are registered with it so it can't give a priority to any downstream, rather then all downstream system must be aligned with upstream contact and data structures.

**Example** : Free tutorial module is used by all students or other applications can embed them in their application.

Here Free tutorial module acts as upstream and independent of any other third party app who consumes our free tutorials.

We can't give any priority to them and we don't have any contract with them if we change the contracts or data structures it is other third parties duty to change their application accordingly to consume our free tutorials. Other parties are acting as a conformist.

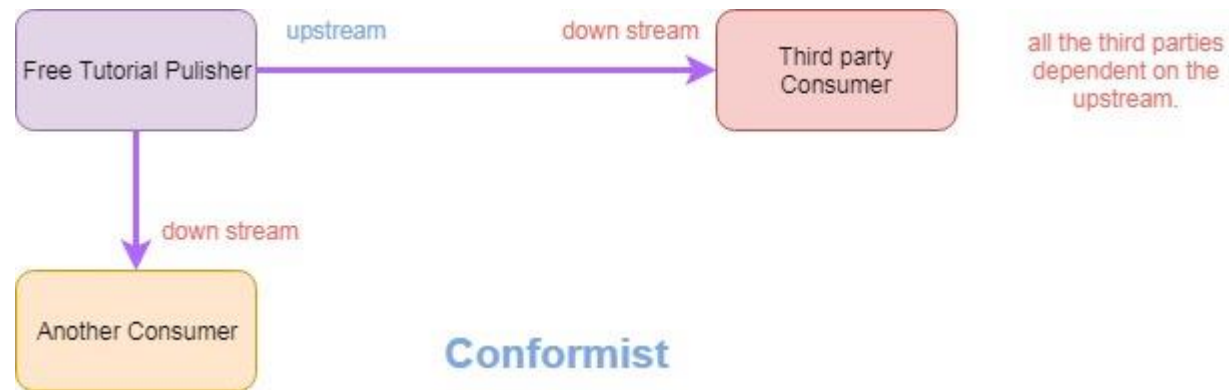

## Anti Corruption Layer:

When two system interacts if we consume the **data directly from upstream** we **pollute** our **downstream system** as upstream data structure leak through the downstream so if the upstream become polluted our downstream too as it imitates the upstream data while consuming.

So it is a good idea while consume data from third party or from a legacy application always use a translation layer where the **upstream data translate to downstream** data structure before fed in to downstream.

This will help to resist the data leakage from upstream, if upstream contract changes it does not pollute downstream internal system only Translation layer has to be changed in order to adopt new data structure from upstream and convert it into downstream data structure, **this technique is called Anti-corruption layer**.

Anti-corruption layers save the downstream system from upstream changes.

**Example** : Notification module can implement an ACL while consuming data from payment module so if payment module data structure changes only ACL layers affected.



**Open Host** : In some cases, your Domain API needs to be accessed by many other services like our Free Tutorial Publisher module, Many external or internal domains want to consume this service, so as **Upstream** it should be **hosted** as a service and maintains a protocol and **service contract** like REST and JSON structure so another system can consume the data.

**Published Language:** Often two or more system receive and send messages among themselves, in that case, a common language will be needed for the transformation of the data from one system to another like XML, JSON we call that structure as Published language.

## Tactical design tools

- ❑ Tactical design tools are **concerned with implementation details**.
- ❑ Generally takes care of components inside a bounded context.
- ❑ A de facto standard in development world
- ❑ **Tactical patterns are services, entities, repositories, factories etc.,**
- ❑ Tactical patterns is **expected to change** during product development.

# Model Driven Design

## Domain

**Subdomain  
Bounded Context**

**Domain Model**

**Ubiquitous Language**

**Subdomain  
Bounded Context**

**Domain Model**


**Ubiquitous Language**

**Subdomain  
Bounded Context**

**Domain Model**


**Ubiquitous Language**



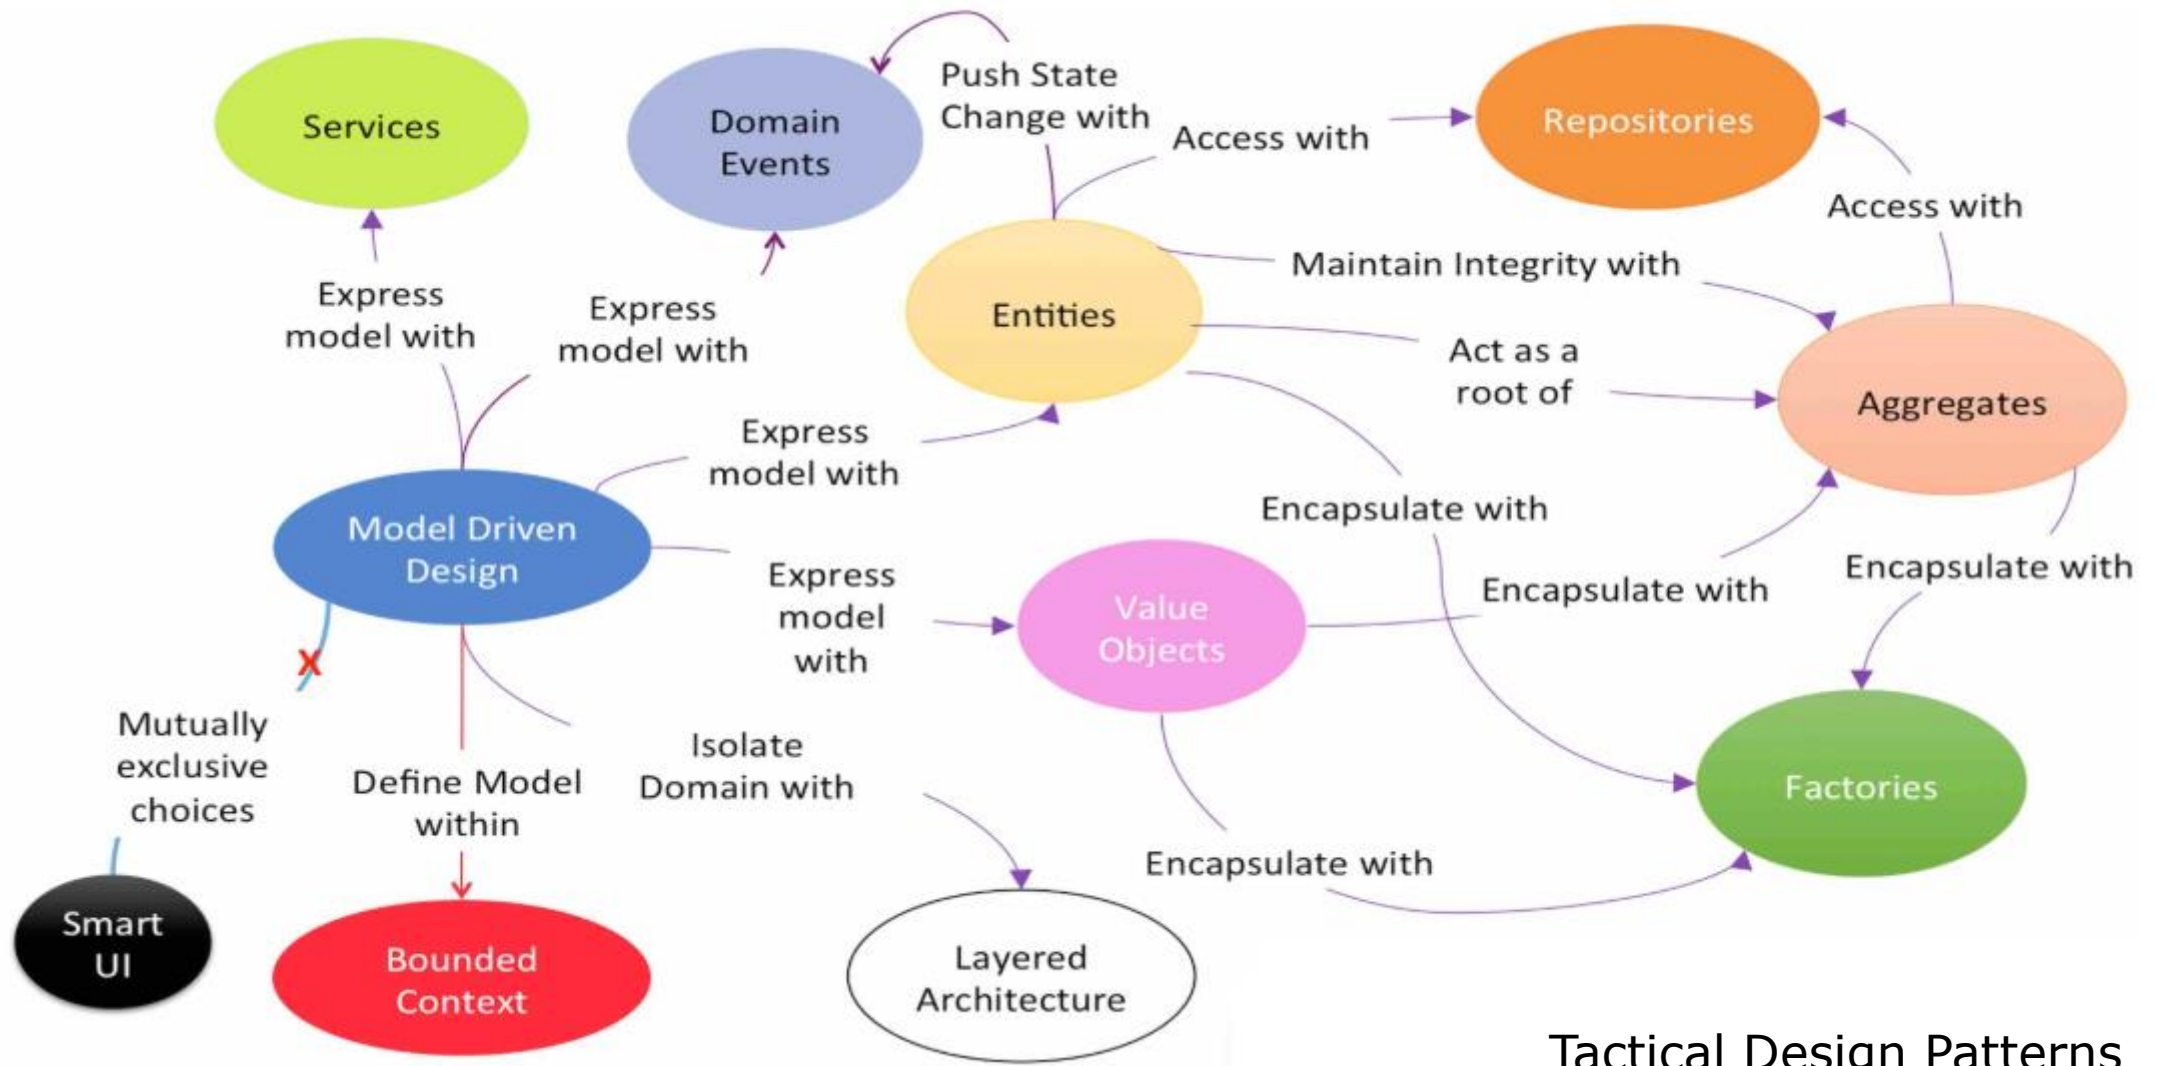



Tactical Design Patterns

# LAYERED ARCHITECTURE

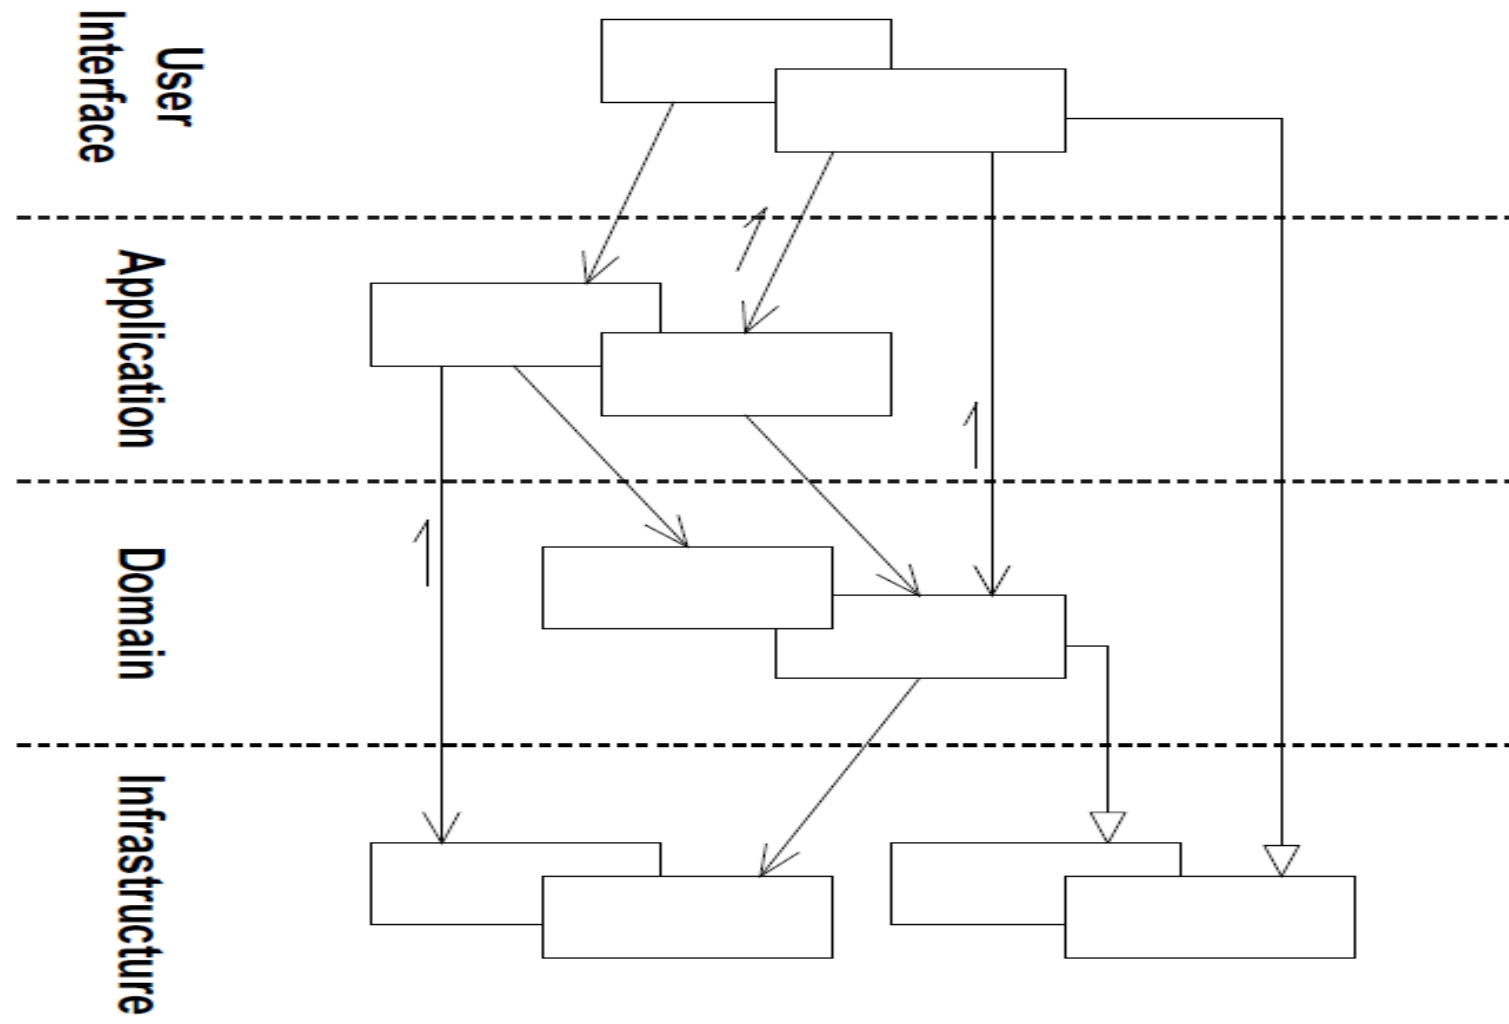

<b>User Interface (aka Presentation Layer)</b>	Responsible for showing information to the user and interpreting the user's commands. The external actor might sometimes be another computer system rather than a human user.
<b>Application Layer</b>	Defines the jobs the software is supposed to do and directs the expressive domain objects to work out problems. The tasks this layer is responsible for are meaningful to the business or necessary for interaction with the application layers of other systems. This layer is kept thin. It does not contain business rules or knowledge, but only coordinates tasks and delegates work to collaborations of domain objects in the next layer down. It does not have state reflecting the business situation, but it can have state that reflects the progress of a task for the user or the program.
<b>Domain Layer (aka Model Layer)</b>	Responsible for representing concepts of the business, information about the business situation, and business rules. State that reflects the business situation is controlled and used here, even though the technical details of storing it are delegated to the infrastructure. <i>This layer is the heart of business software.</i>
<b>Infrastructure Layer</b>	Provide generic technical capabilities that support the higher layers: message sending for the application, persistence for the domain, drawing widgets for the UI, etc. The infrastructure layer may also support the pattern of interactions between the four layers through an architectural framework.

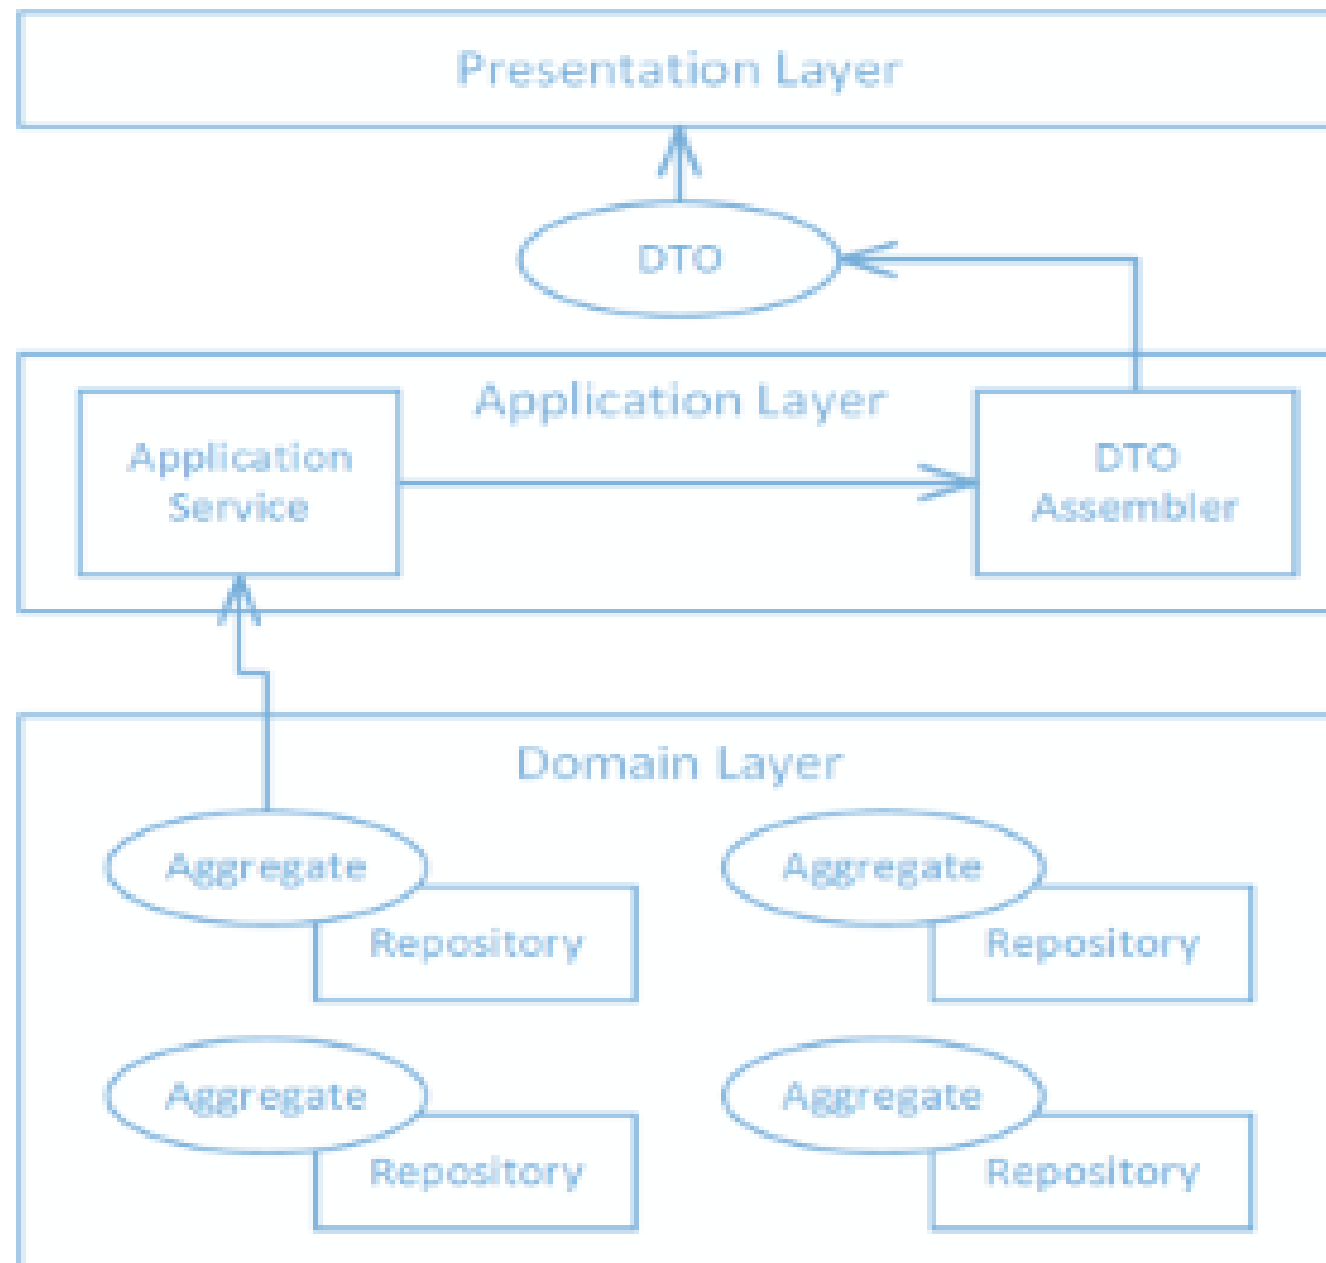

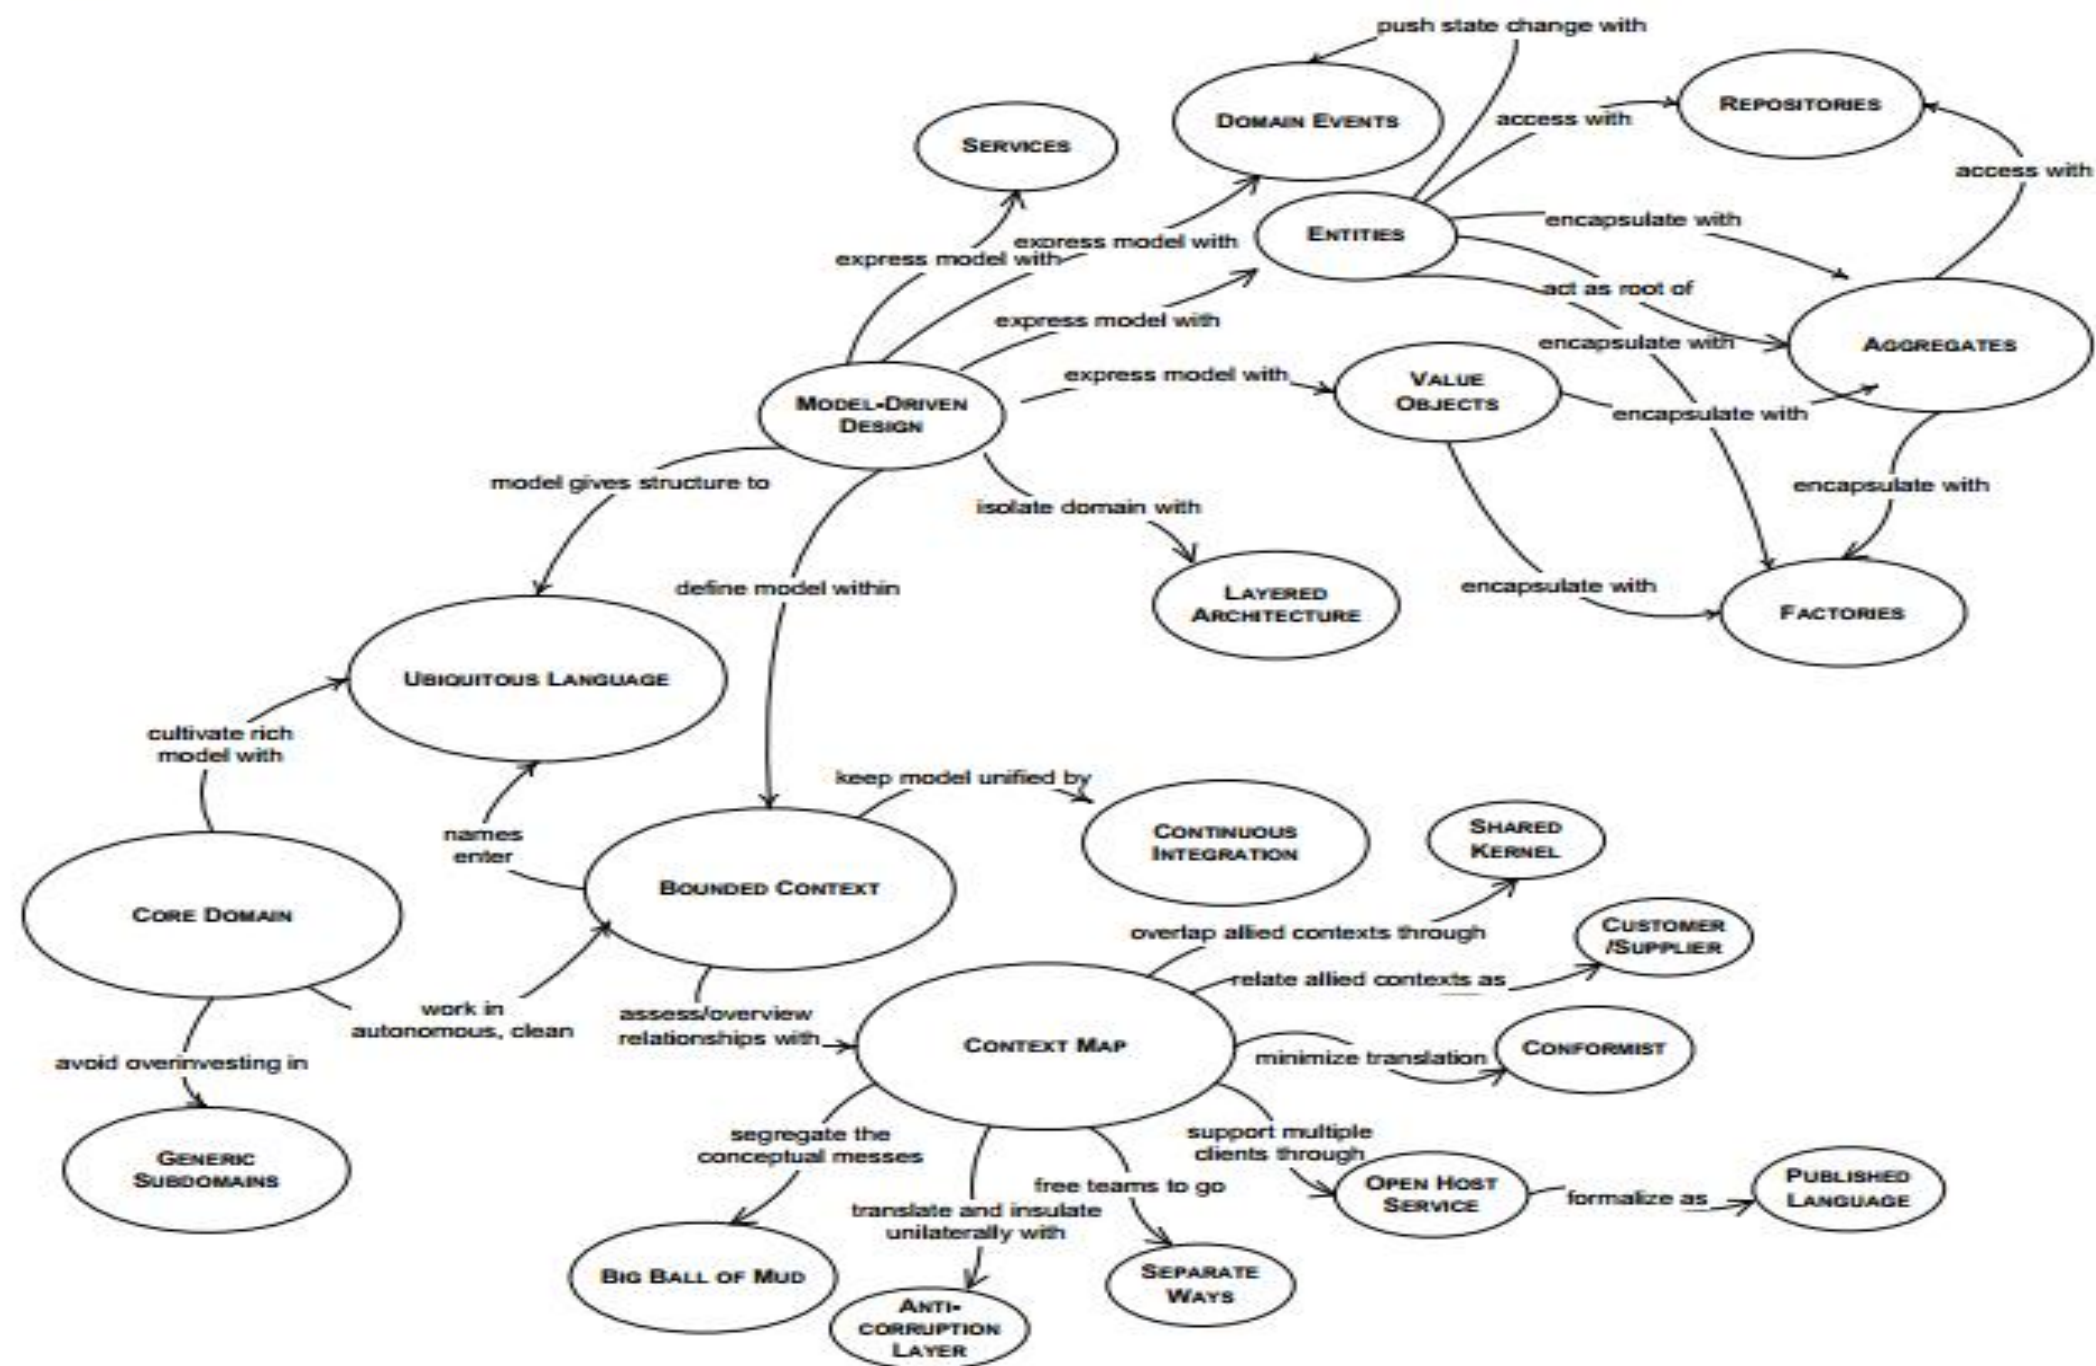

## **Domain-driven design leads to entities**


From the approach in domain-driven design, you get the following objects, among others:

**Entity** : “An object that is not defined by its attributes, but rather by a thread of continuity and its identity.”

**Value Objects** : “An object that contains attributes but has no conceptual identity. They should be treated as immutable.”


**Aggregate** : “A collection of objects that are bound together by a root entity, otherwise known as an aggregate root. The aggregate root guarantees the consistency of changes being made within the aggregate by forbidding external objects from holding references to its members.”

**Repository** : “Methods for retrieving domain objects should delegate to a specialized Repository object such that alternative storage implementations may be easily interchanged.”

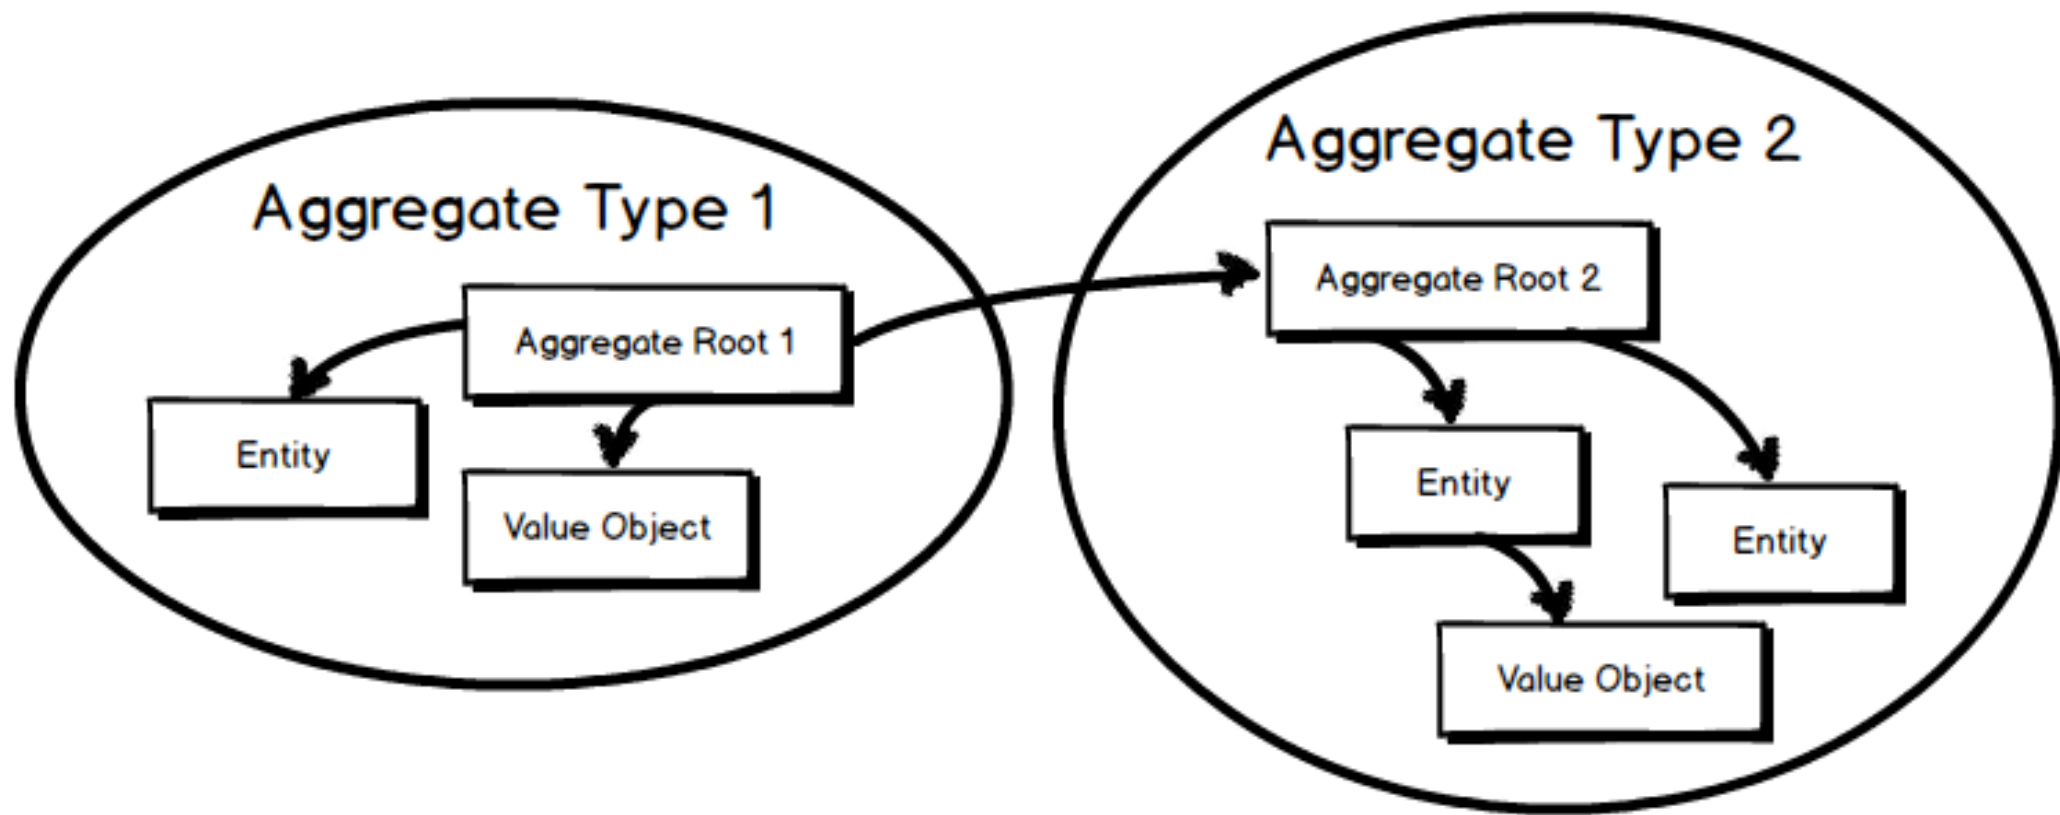



## Order Aggregate (Multiple entities and Value-Object)

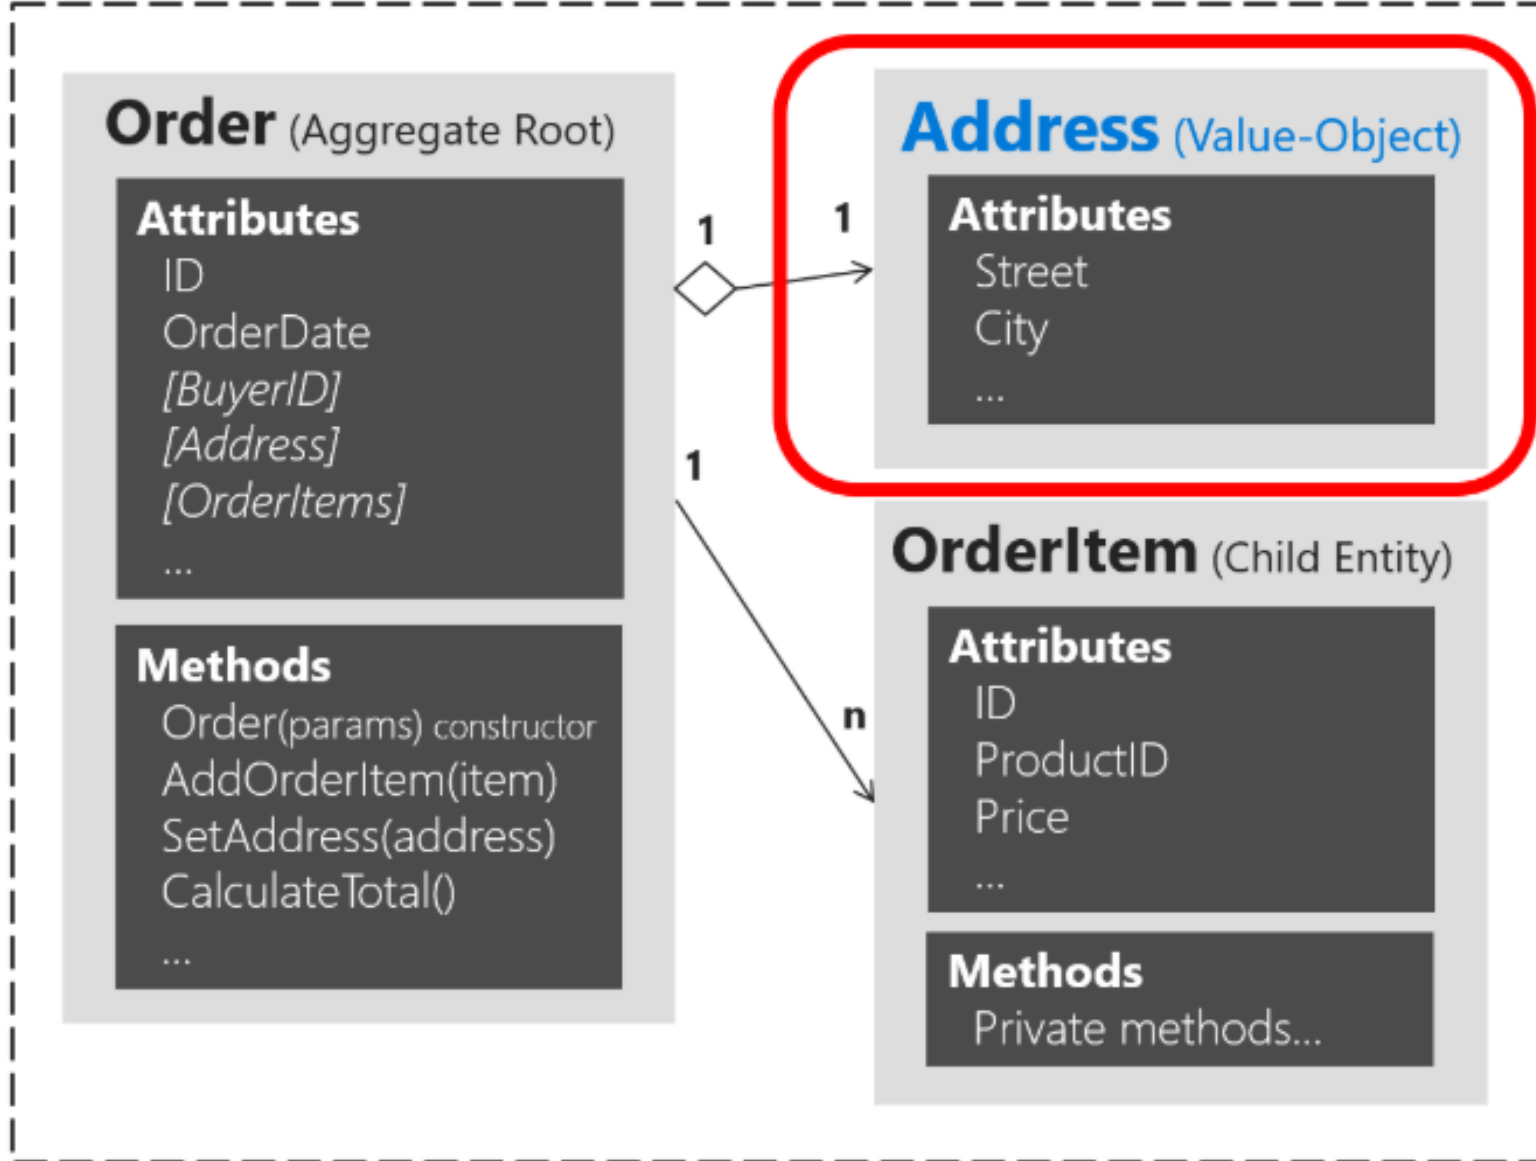



A **value object** is a small object that represents a simple entity whose equality is not based on identity: i.e. two value objects are equal when they have the same value, not necessarily being the same object.

Examples of value objects are objects representing an address, amount of money or a date range.

Value objects should be immutable; this is required for the implicit contract that two value objects created equal, should remain equal. It is also useful for value objects to be immutable, as client code cannot put the value object in an invalid state or introduce buggy behaviour after instantiation.

Value objects are among the building blocks of DDD.

```
// entity:
class Person {
    PersonId id; // global identity
    FirstName firstName;
    LastName lastName;
    Address address;
}
// value objects:
class PersonId {
    Long value;
}
class FirstName {
    String value;
}
class LastName {
    String value;
}
class Address {
    String street;
    String streetNo;
    String city;
    String postalCode;
}
```

As the value objects have no identity, we compare them together by simply comparing all the values they contain:

```
// Address
@Override
public boolean equals(Object o) {
    // basic checks and casting cut out for brevity
    return Objects.equals(street, address.street) &&
        Objects.equals(streetNo,
address.streetNo) &&
        Objects.equals(city, address.city) &&
        Objects.equals(postalCode,
address.postalCode);
}
@Override
public int hashCode() {
    return Objects.hash(street, streetNo, city,
postalCode);
}
```

Usually, we also make/treat the value objects as immutable, i.e. instead of changing the value objects, we create new instances that wrap the new values:

```
// wrong:  
this.address.setStreet(event.street);
```

```
// good:  
this.address = new Address(event.street, ...);
```

Immutable types are handy, as they can be easily shared between different objects and returned by the entities without the risk of compromising consistency.

From the conceptual perspective, it makes sense to create a new instance of a value object when the value changes, as we're literally assigning a new value.

The code gets more expressive:


// without:

Map<Long, String>

// with:

Map<PersonId, PhoneNumber>

## **Cohesion and Coupling**

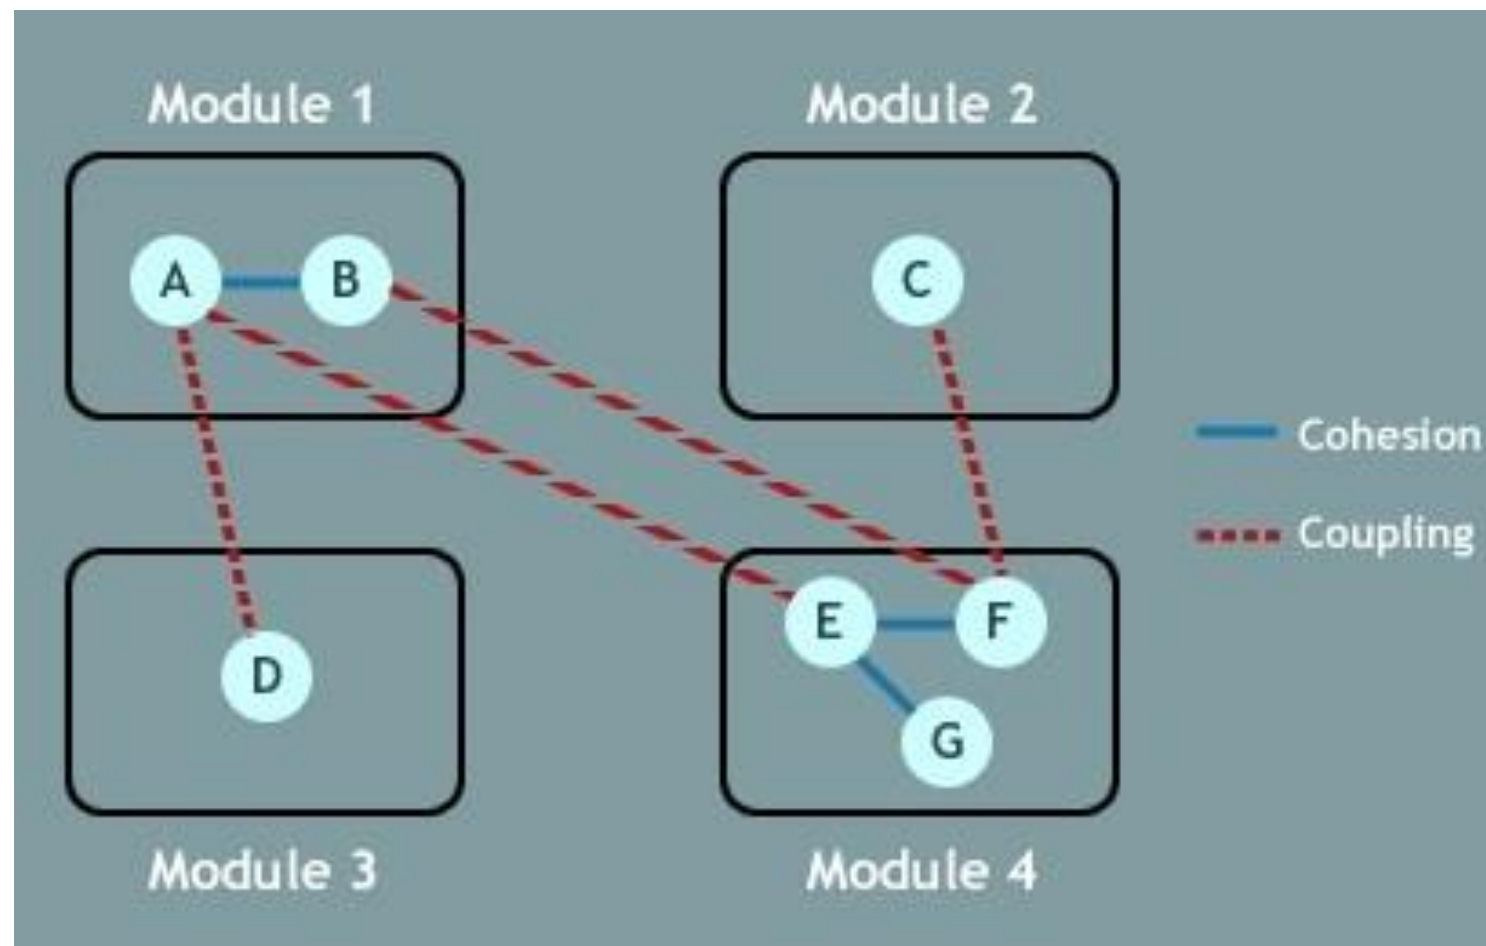

## Cohesion

**Cohesion** is the indication of the relationship within **module**.

Cohesion shows the module's relative **functional** strength.

Cohesion is a degree (quality) to which a component / module focuses on the **single** thing.

While designing you should strive for **high cohesion** i.e. a cohesive component/ module focus on a single task (i.e., **single-mindedness**) with little interaction with other modules of the system.

Cohesion is the kind of natural extension of data hiding for example, **class** having all members visible with a package having default visibility.

Cohesion is **Intra - Module** Concept.

## Coupling

**Coupling** is the indication of the relationships between modules.

Coupling shows the relative **independence** among the modules.

Coupling is a degree to which a component / module is connected to the **other** modules.

While designing you should strive for **low coupling** i.e. **dependency** between modules should be less.

Making private fields, private methods and non public classes provides loose coupling.

Coupling is **Inter -Module** Concept.



Our aim is to design Microservices that are autonomous, ie. have a low coupling with other services, have well defined interfaces, and implement a single business capability, ie. have high cohesion.

A successful equation is to keep high cohesion within a microservice and loose coupling between microservices.

# **Hexagonal Architecture**

## Ports and Adapters Pattern

**A hexagonal architecture** simplifies deferring or changing technology decisions.

It allows to isolate the core business of an application and automatically test its behaviour independently of everything else


We want to change to a different framework? Write a new adapter. You want to use a database, instead of storing data in files? Again, write an adapter for it.

## **Principles of Hexagonal Architecture**

The hexagonal architecture is based on three principles and techniques:


- ❑ Explicitly separate Application, Domain, and Infrastructure
- ❑ Dependencies are going from Application and Infrastructure to the Domain
- ❑ We isolate the boundaries by using Ports and Adapters

## Principle: Separate Application, Domain and Infrastructure

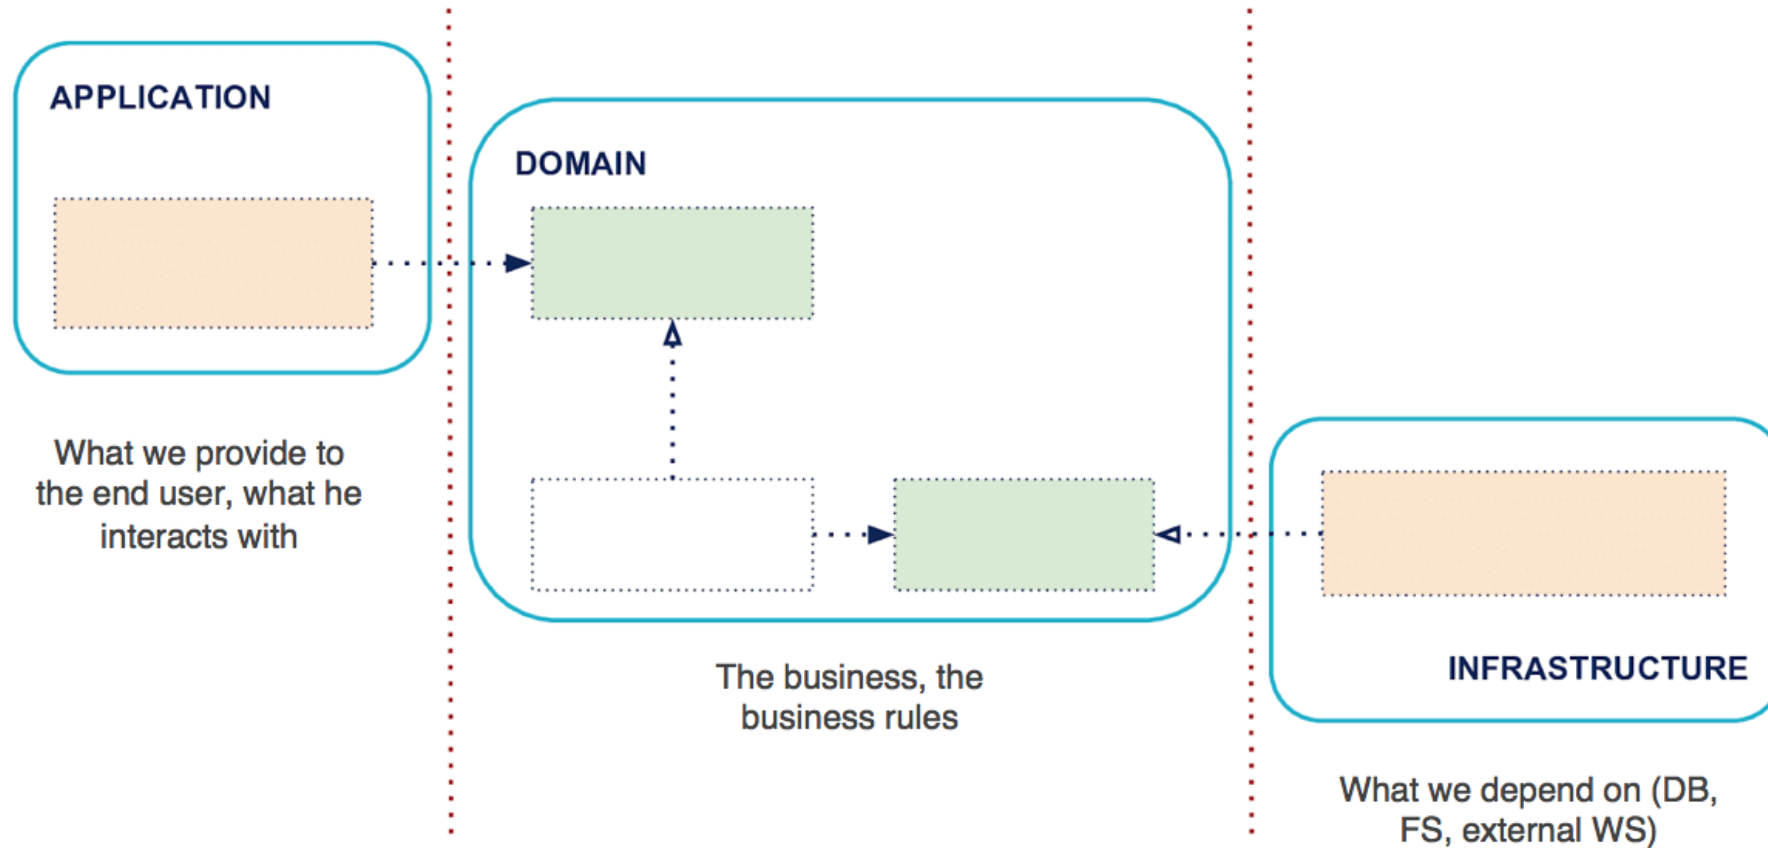


## Principle: dependencies go inside

The program can be controlled both by the console and by tests, there is no concept of a console in the Domain. The Domain does not depend on the Application side, it is the Application side that depends on the Domain.

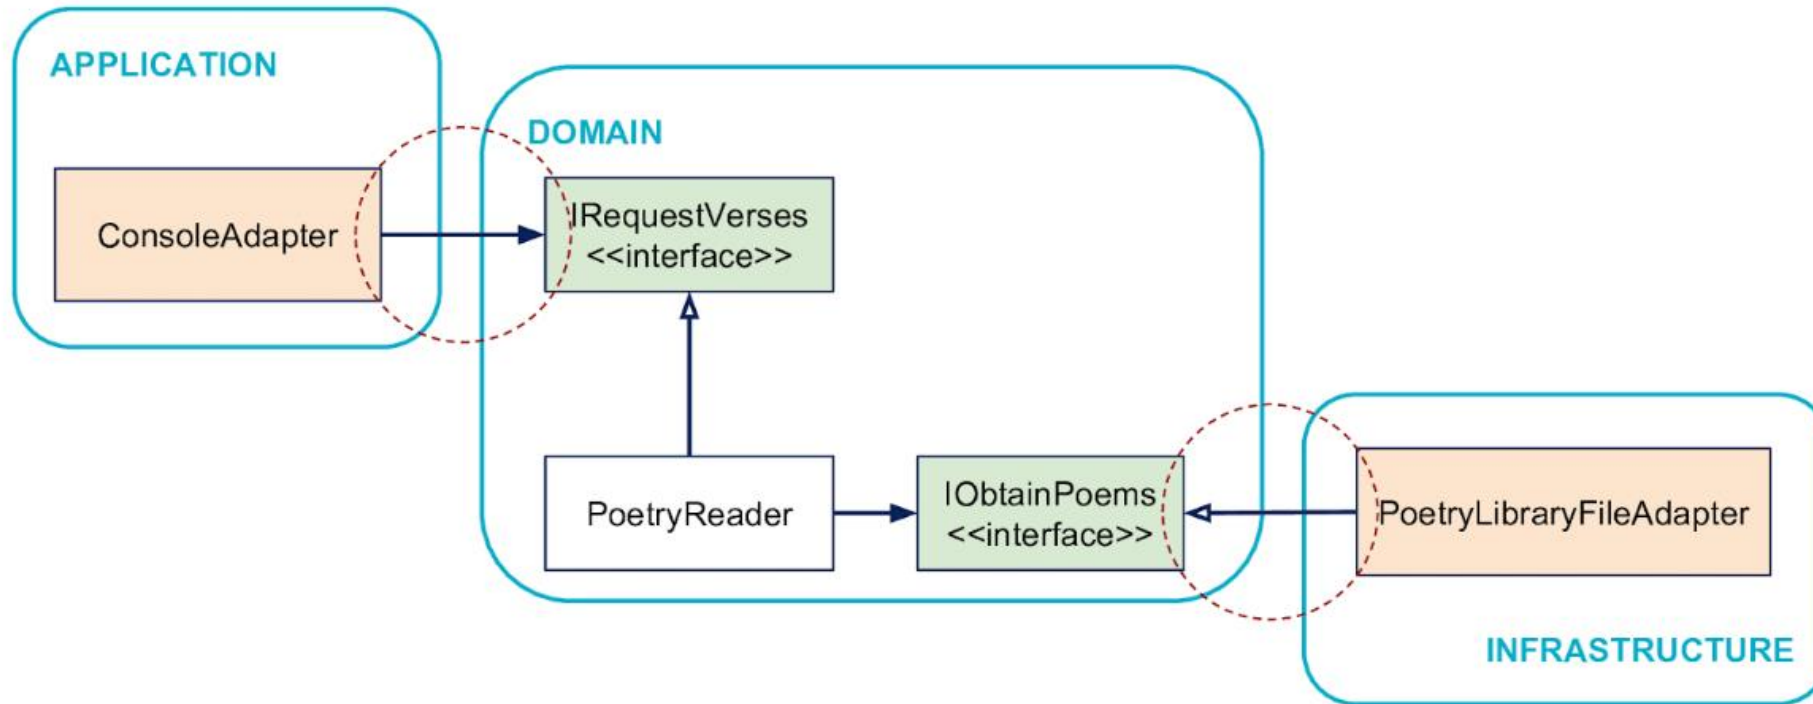

## Principle: boundaries are isolated with interfaces

The application code drives the business code through an interface (here IRequestVerses) defined in the business code. And the business code drives the infrastructure through an interface also defined in the business code (IObtainPoems). These interfaces act as explicit insulators between inside and outside.

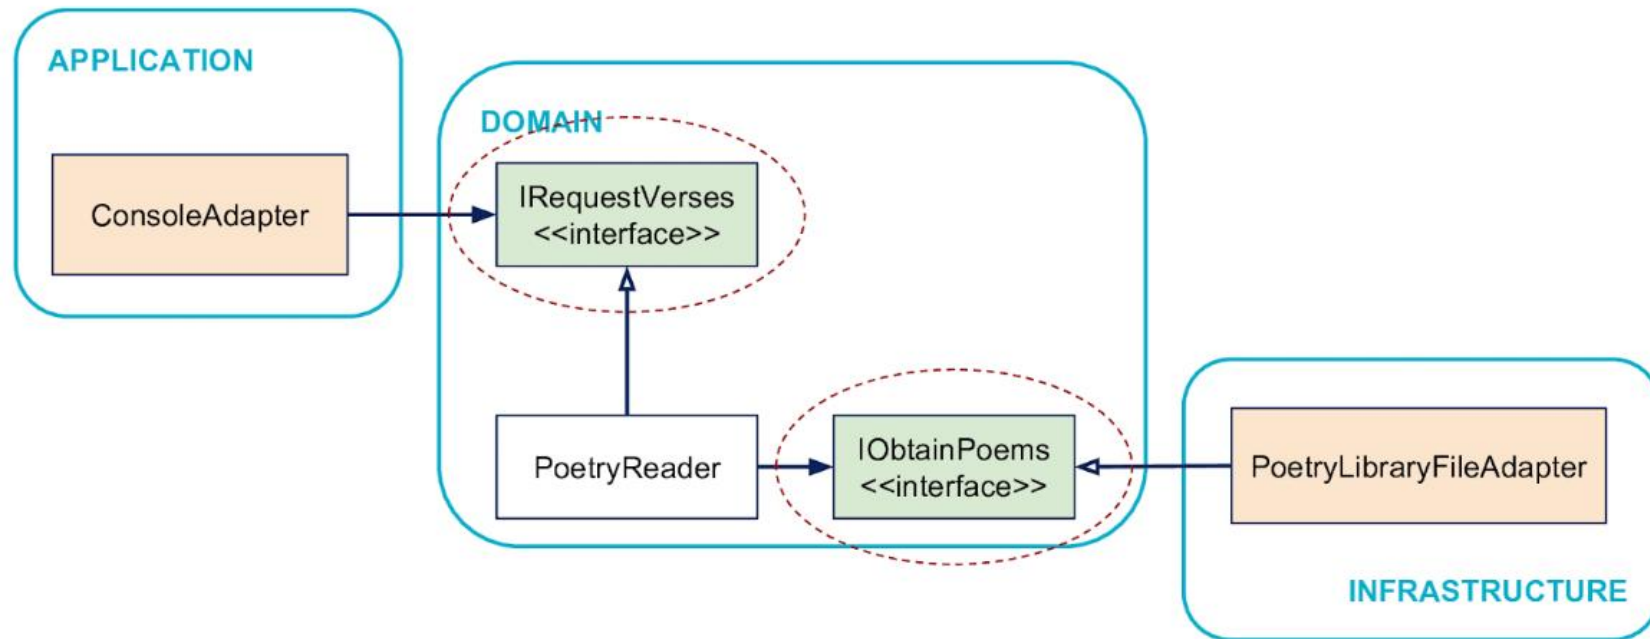

Draw a boundary around the business logic. The hexagon. Anything inside the hexagon must be free from technology concerns.

The outside of the hexagon talks with the inside only by using interfaces, called ports. Same the other way around. By changing the implementation of a port, you change the technology.

Isolating business logic inside the hexagon has another benefit. It enables writing fast, stable tests for the business logic. They do not depend on web technology to drive them.




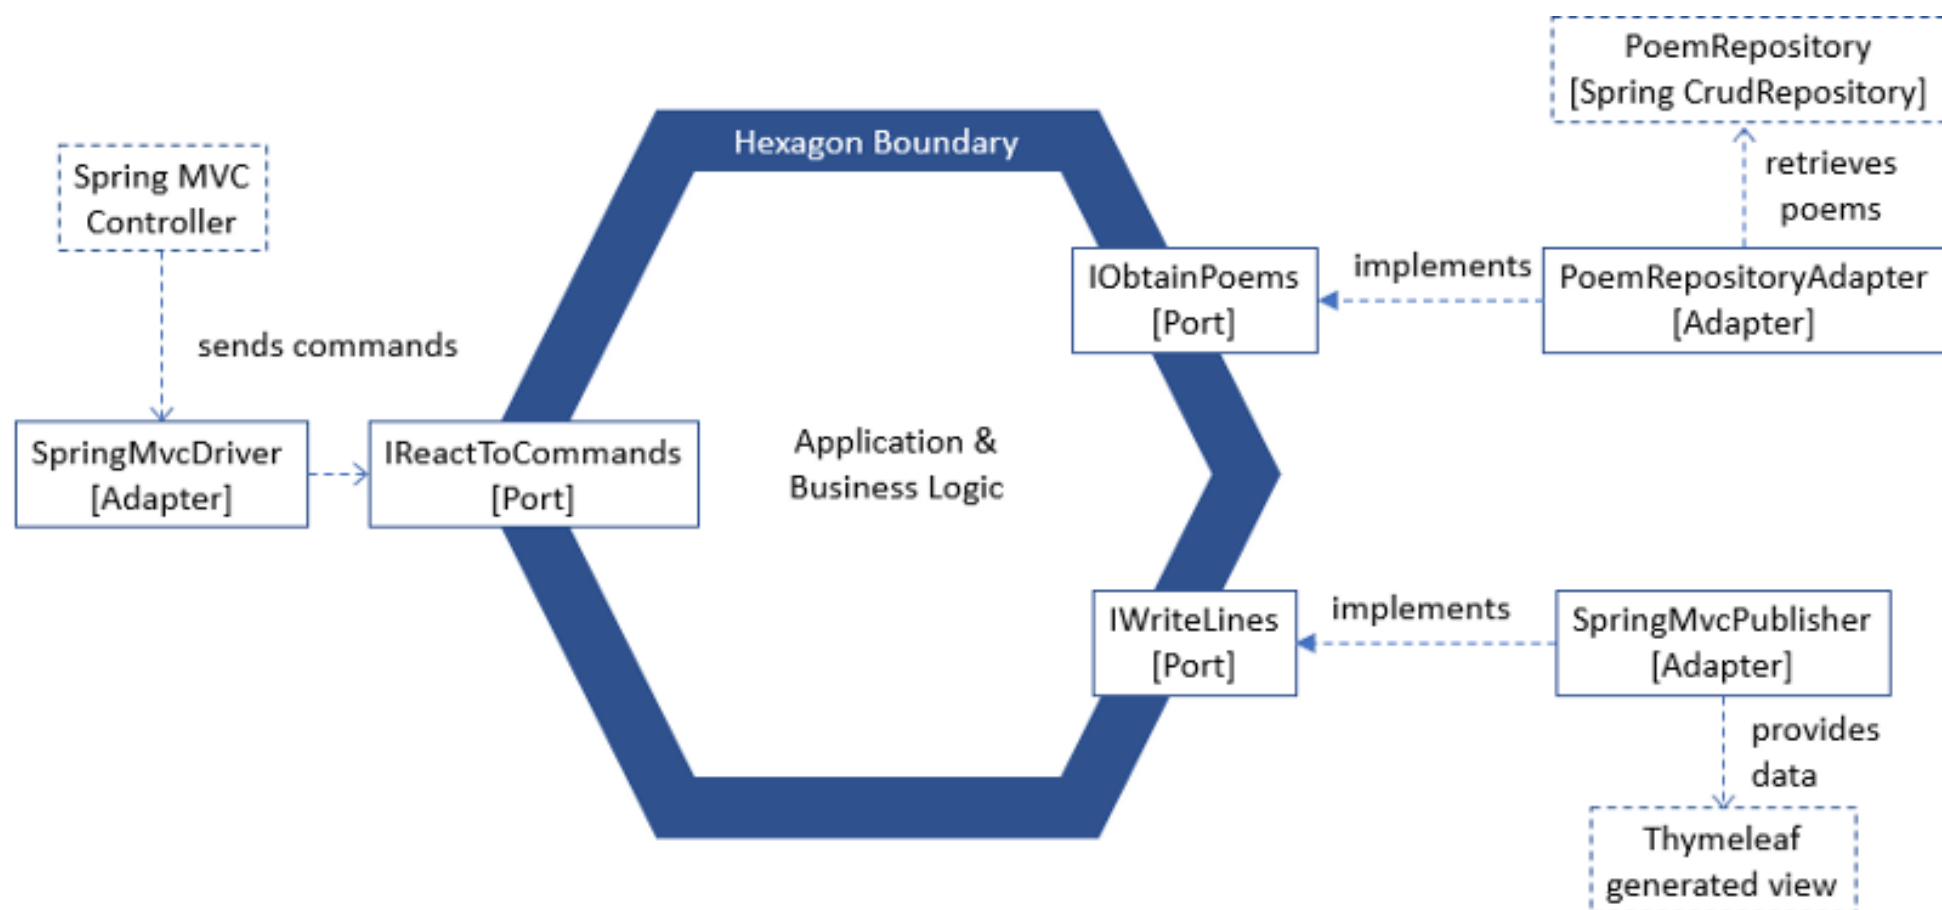


Diagram shows Spring MVC technology as boxes with dotted lines, ports and adapters as solid boxes, and the hexagon without its internals.

An adapter translates between a specific technology and a technology free port. The SpringMvcDriver adapter on the left forwards commands to the IReactToCommands port. Because the adapter actively uses the port, it's called a driver adapter. IReactToCommands is called a driver port. Its implementation is inside the hexagon


On the right side, the SpringMvcPublisher adapter implements the IWriteLines port. This time, the hexagon calls the adapter through the port. That's why SpringMvcPublisher is called a driven adapter. And IWriteLines is called a driven port.

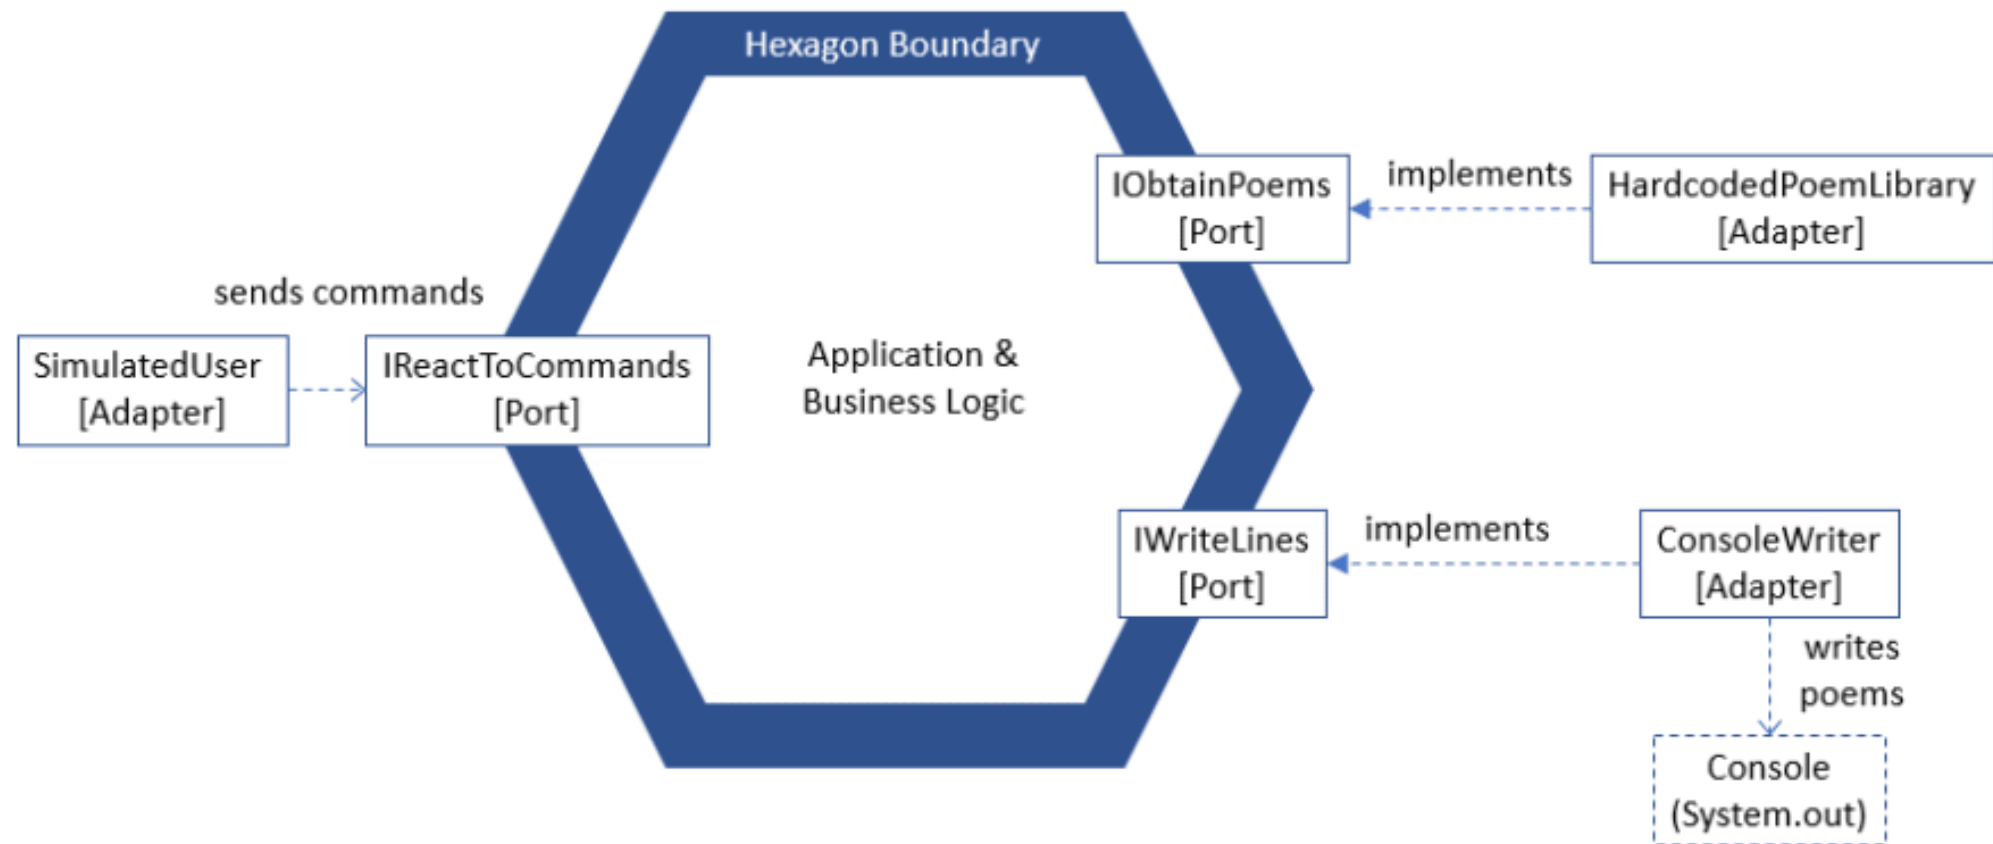

Next to be implemented

Not Implemented Yet

Not Implemented Yet

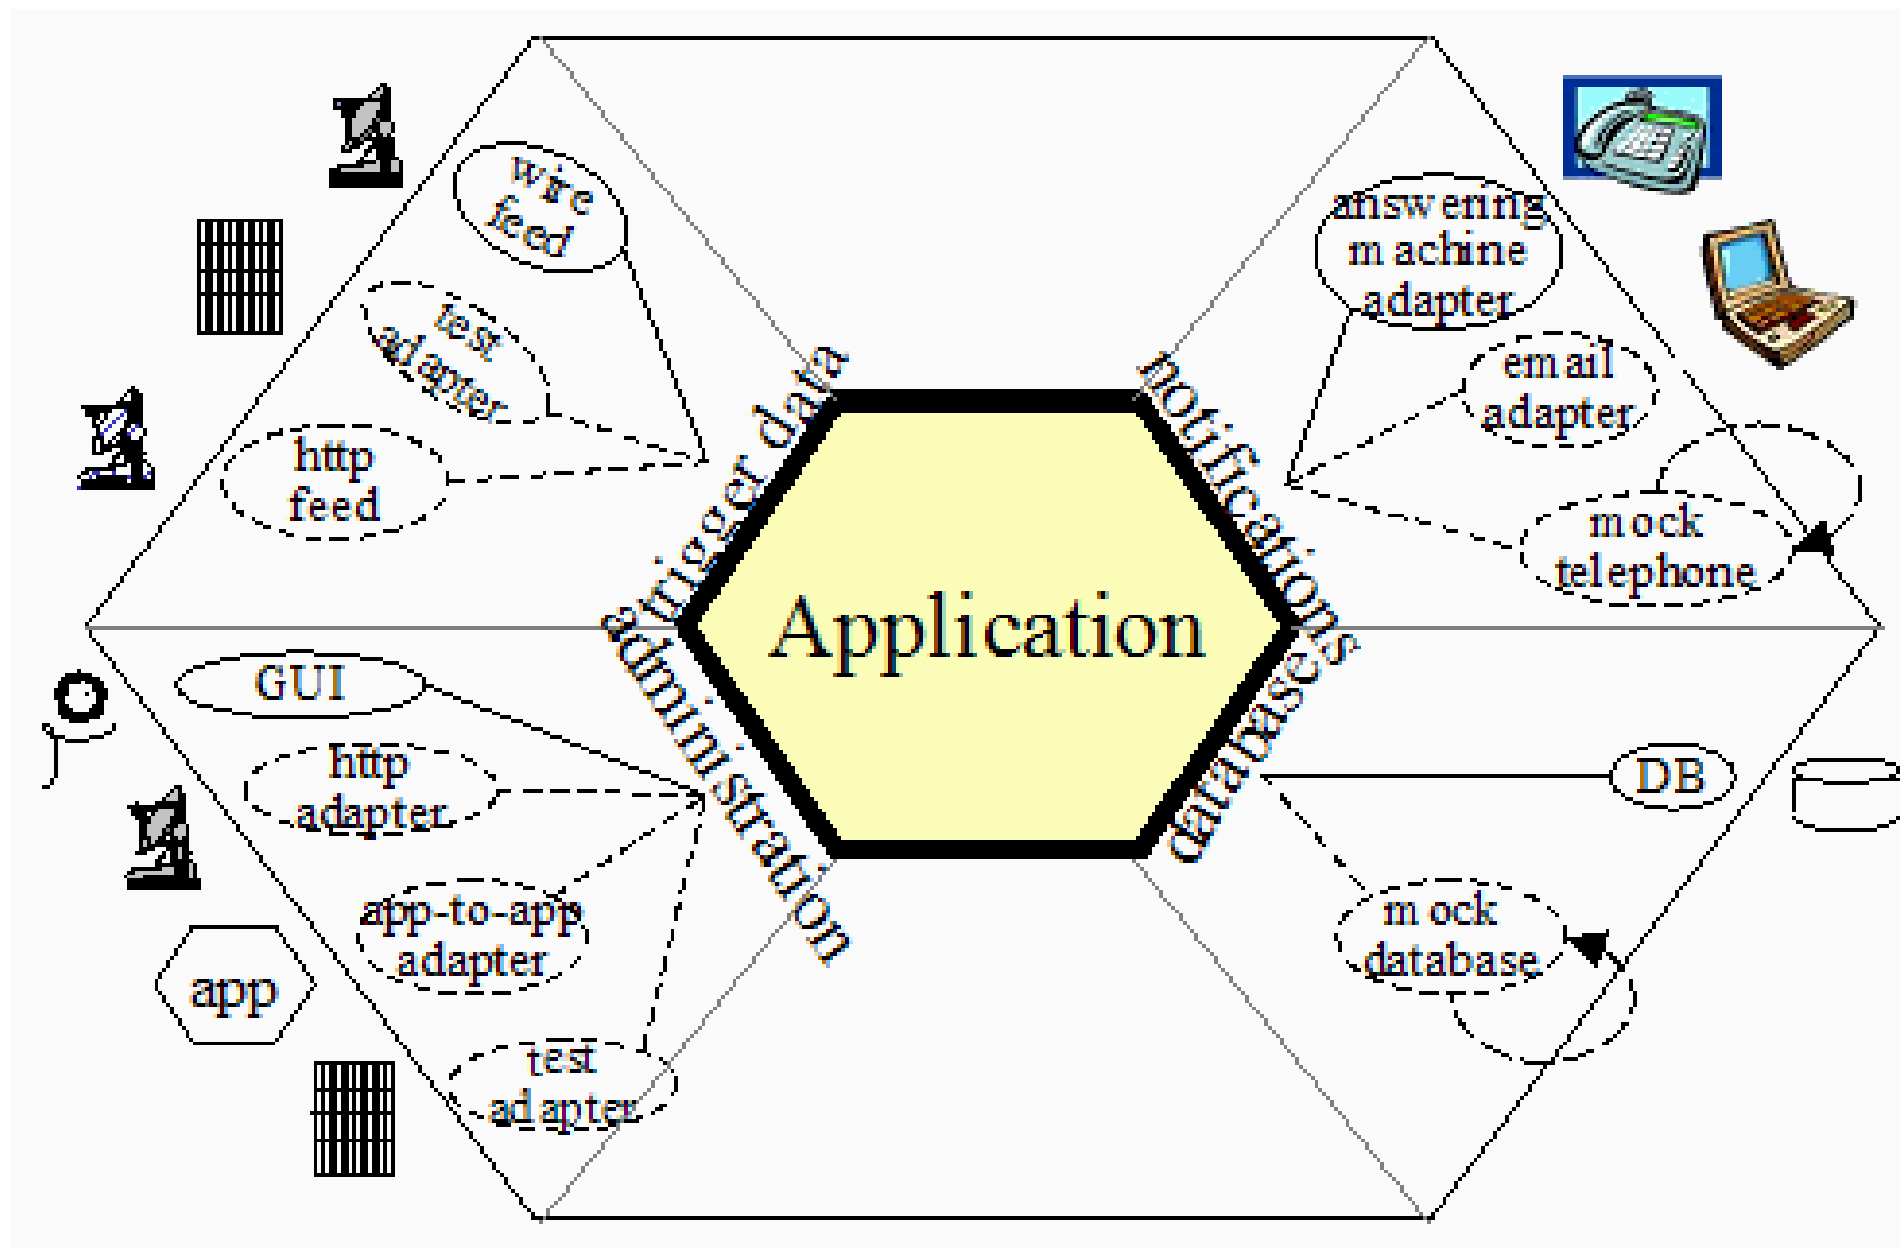

# Ports

Ports with their provided implementations (Adapters).

PORT	ADAPTERS
HTTP Server	Jetty, Servlet
Templates	Pebble
Serialization Formats	JSON, YAML
Settings	Environment, Files, Resources

# **Microservices Patterns**

# **Event Sourcing**



The basic idea of Event Sourcing is to store every change in the state of an application as events instead of only storing the current state. The current state can be constructed by applying all past events.

Unlike the traditional approach with a relational database, event sourcing does not persist the current state of a record, but instead stores the individual changes as a series of deltas that led to the current state over time.

The procedure is similar to the way a bank manages an account, for example. The bank does not save the current balance. Instead, it records the deposits and withdrawals that occur over time. The current balance can then be calculated from this data:

+500	(deposit)
+200	(deposit)
-300	(withdraw)
---	
= 400	(balance)

## **Optimizing performance**

A replay becomes more and more complex as the number of events that need to be replayed increases.

At first glance, the use of event sourcing seems to lead to read accesses becoming increasingly slow.

Since events are always only added at the end of the existing list and existing events are never changed, a replay calculated once will always produce the very same result for a certain point in time.

We can take advantage of this situation by saving the currently calculated state as a so-called **snapshot**.

The entire history does not always have to be played back all along the way.

Usually it is sufficient to start from the last snapshot and only look at the events that have been saved since then.

- **Event Sourcing** is a technique for reliably updating state and publishing events that overcomes limitations of other solutions.
- The design concepts for an event-driven architecture, using event sourcing, align well with microservices architecture patterns.
- Snapshots can improve performance when querying aggregates by combining all events up to a certain point in time.
- Event sourcing can create challenges for queries, but these are overcome by following CQRS guidelines and materialized views.
- Event sourcing and CQRS do not require any specific tools or software, and many frameworks exist which can fill in some of the low-level functionality.

**How does Event  
Sourcing work?**

# Saving objects

---

- Create an event for every state change of the object:




- Persist this stream of events, preserving event order


# Restoring objects

---

Subsequently apply the events from the respective `EventStream` to a "blank" object instance

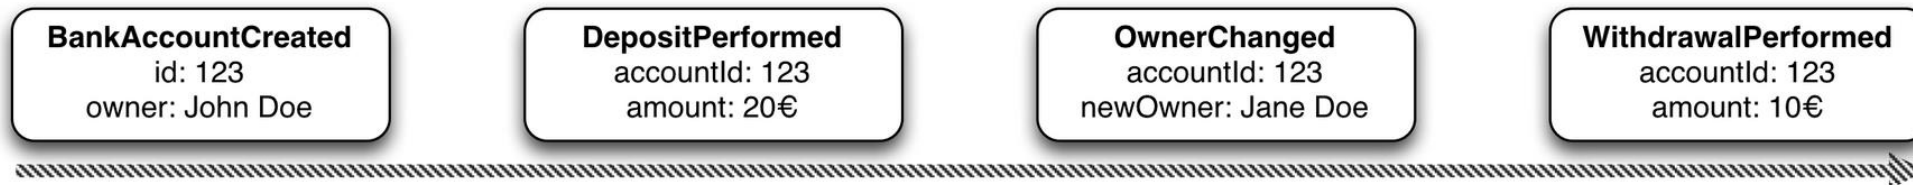



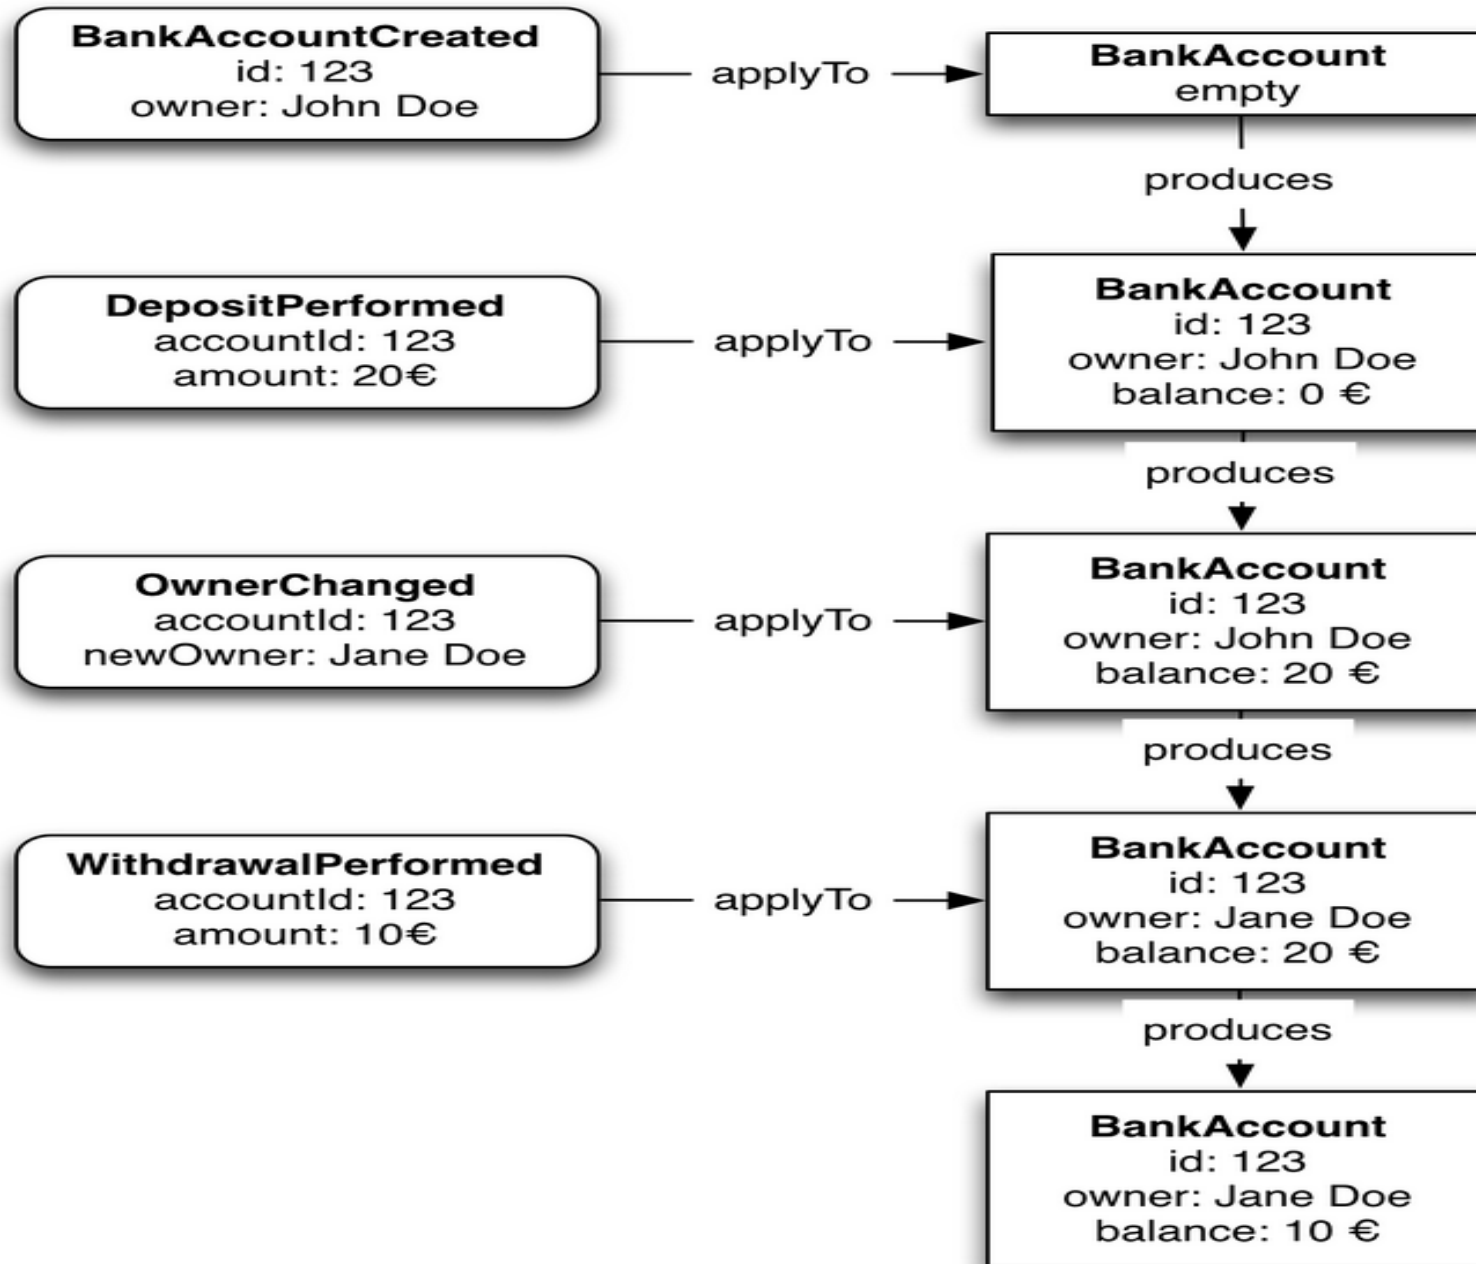

## **Benefits and Drawbacks of Event Sourcing**

A major benefit of event sourcing is that it reliably publishes events whenever the state of an aggregate changes. It is a good foundation for an event-driven microservices architecture.

Also, because each event can record the identity of the user that made the change, event sourcing provides an audit log that is guaranteed to be accurate.

Another benefit of event sourcing is that it stores the entire history of each aggregate

The main drawback of event sourcing is that querying the event store can be challenging.


`SELECT * FROM CUSTOMER WHERE CREDIT_LIMIT < ?  
AND c.CREATION_DATE > ?`. There isn't a column containing the credit limit. Instead, we must use a more complex and potentially inefficient query that has a nested `SELECT` to compute the credit limit by folding events that set the initial credit and adjust it.

## **Implementing Queries Using CQRS**

A good way to implement queries is to use an architectural pattern known as Command Query Responsibility Segregation (CQRS). CQRS, as the name suggests, splits the application into two parts.

The first part is the command-side, which handles commands (e.g. HTTP POSTs, PUTs, and DELETEs) to create, update and delete aggregates. These aggregates are, of course, implemented using event sourcing.

The second part of the application is the query side, which handles queries (e.g. HTTP GETs) by querying one or more materialized views of the aggregates. The query side keeps the views synchronized with the aggregates by subscribing to events published by the command side.

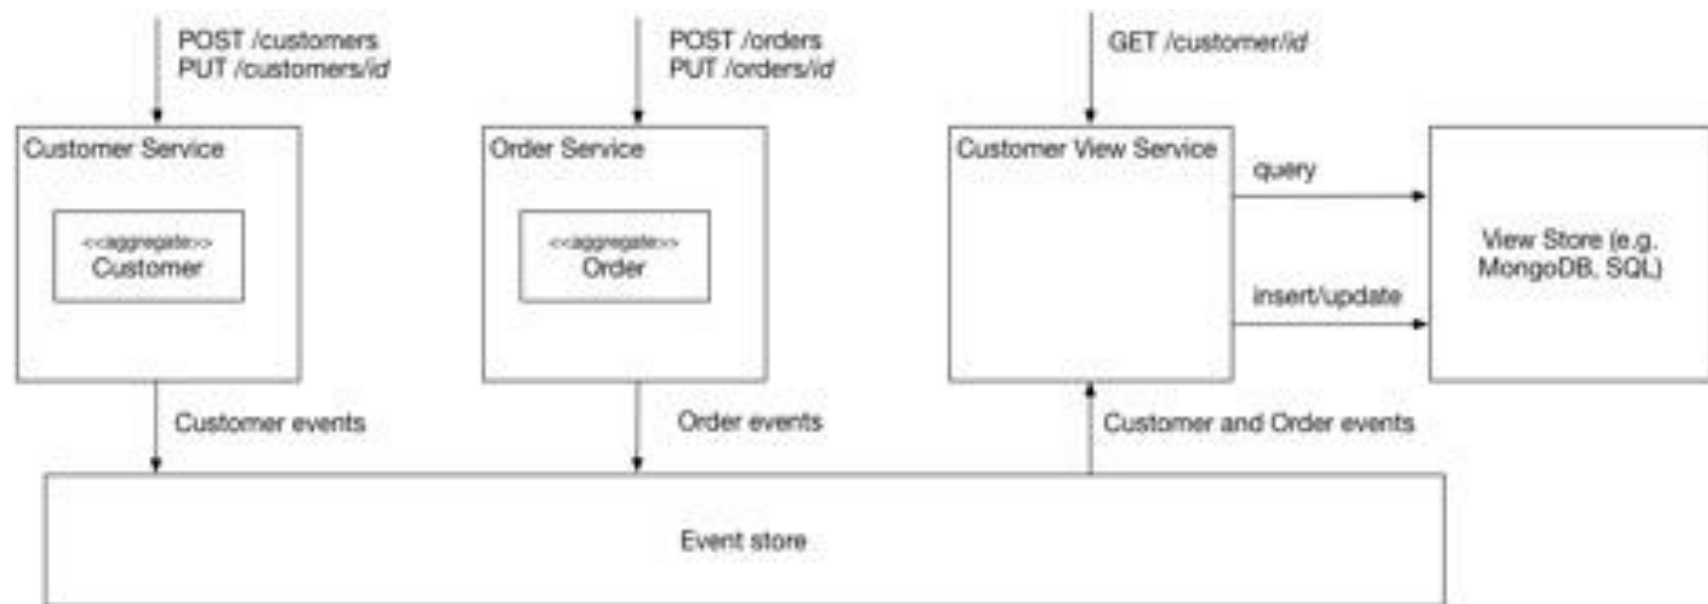

The Customer View Service subscribes to the Customer and Order events published by the command-side services.

It updates a view store that is implemented using MongoDB. The service maintains a MongoDB collection of documents, one per customer.

Each document has attributes for the customer details. It also has an attribute that stores the customer's recent orders. This collection supports a variety of queries

**Pattern: Database Server per service**




## **Context**


Let's imagine you are developing an online store application using the Microservice architecture pattern.

Most services need to persist data in some kind of database.

For example, the Order Service stores information about orders and the Customer Service stores information about customers.



Order Service API




Order  
Service



ORDER table

ID	CUSTOMER_ID	STATUS	TOTAL	...
4567	234	ACCEPTED	84044.30	...



Customer service API



Customer  
Service



CUSTOMER table

ID	CREDIT_LIMIT	...
234	100000	...

## **Problem**

What's the database architecture in a microservices application?

## **Forces**

Services must be loosely coupled so that they can be developed, deployed and scaled independently



Some business transactions must enforce invariants that span multiple services. For example, the Place Order use case must verify that a new Order will not exceed the customer's credit limit. Other business transactions, must update data owned by multiple services.

Some business transactions need to query data that is owned by multiple services. For example, the View Available Credit use case must query the Customer to find the creditLimit and Orders to calculate the total amount of the open orders.

Some queries must join data that is owned by multiple services. For example, finding customers in a particular region and their recent orders requires a join between customers and orders.

Different services have different data storage requirements. For some services, a relational database is the best choice. Other services might need a NoSQL database such as MongoDB, which is good at storing complex, unstructured data, or Neo4J, which is designed to efficiently store and query graph data.

**Solution :** Keep each microservice's persistent data private to that service and accessible only via its API.

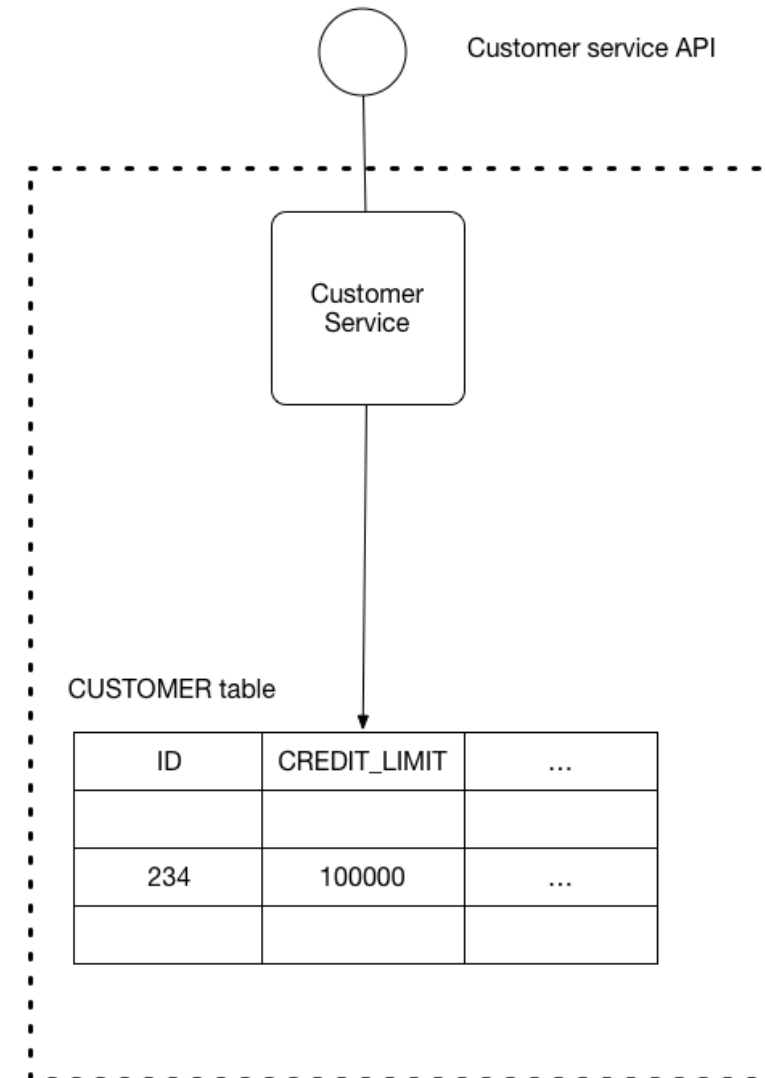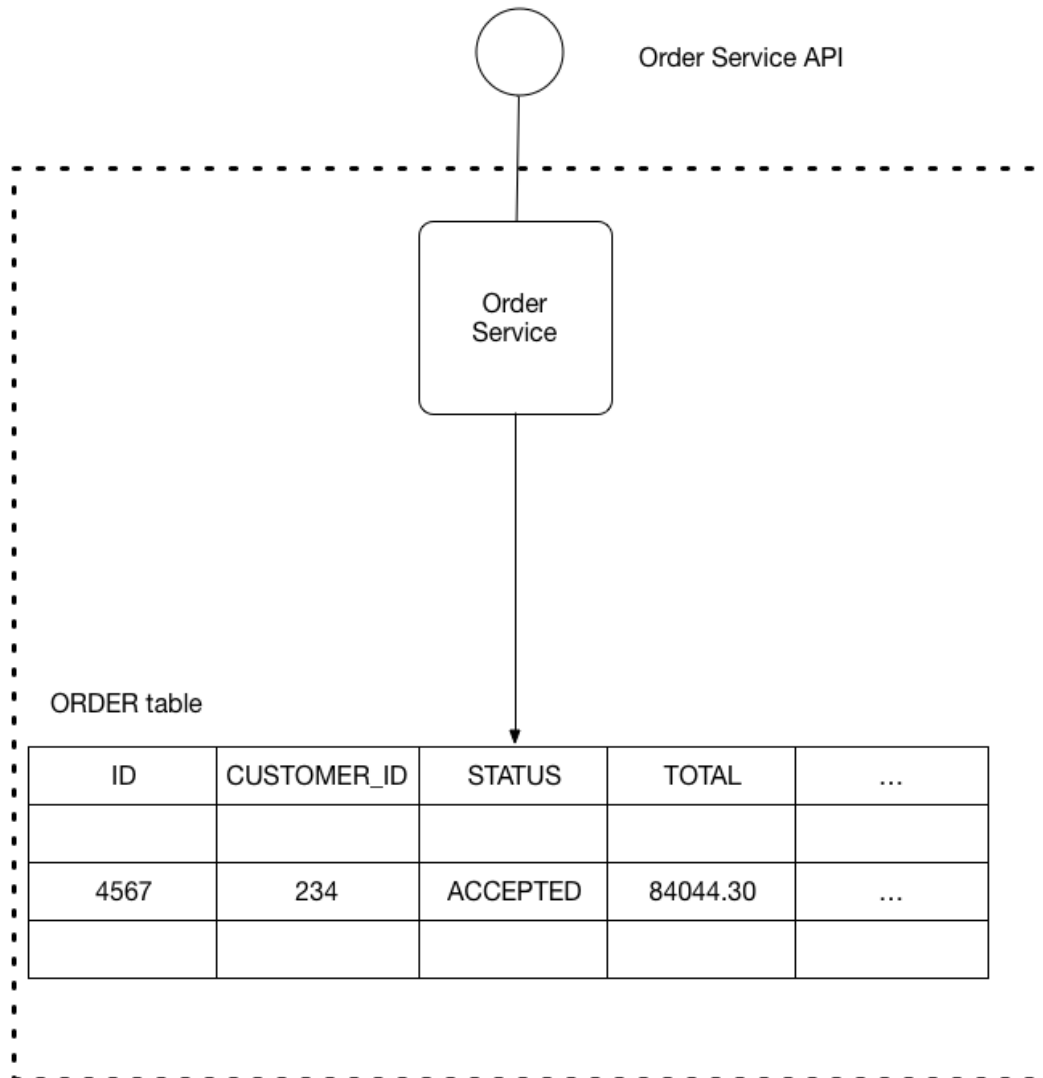

There are a few different ways to keep a service's persistent data private. You do not need to provision a database server for each service. For example, if you are using a relational database then the options are:

**Private-tables-per-service** – each service owns a set of tables that must only be accessed by that service

**Schema-per-service** – each service has a database schema that's private to that service

**Database-server-per-service** – each service has it's own database server.

## **Resulting context**

Using a Database-server-per-service has the following benefits:

Helps ensure that the services are loosely coupled. Changes to one service's database does not impact any other services.

Each service can use the type of database that is best suited to its needs. For example, a service that does text searches could use ElasticSearch. A service that manipulates a social graph could use Neo4j.

Using a Database-server-per-service has the following drawbacks:

Implementing business transactions that span multiple services is not straightforward. Distributed transactions are best avoided. Moreover, many modern (NoSQL) databases don't support them.

The best solution is to use the Saga pattern. Services publish events when they update data. Other services subscribe to events and update their data in response.

Implementing queries that join data that is now in multiple databases is challenging.



There are various solutions:

**API Composition** - the application performs the join rather than the database. For example, a service (or the API gateway) could retrieve a customer and their orders by first retrieving the customer from the customer service and then querying the order service to return the customer's most recent orders.

**Command Query Responsibility Segregation (CQRS)** - maintain one or more materialized views that contain data from multiple services. The views are kept by services that subscribe to events that each services publishes when it updates its data.

For example, the online store could implement a query that finds customers in a particular region and their recent orders by maintaining a view that joins customers and orders. The view is updated by a service that subscribes to customer and order events.

three frameworks that presently support saga processing, namely Narayana LRA, Axon framework and Eventuate.io.

## Narayana LRA

Narayana Long Running Actions is a specification developed by the Narayana team in the collaboration with the Eclipse MicroProfile initiative. The main focus is to introduce an API for coordinating long running activities with the assurance of the globally consistent outcome and without any locking mechanisms.

[<https://github.com/eclipse/microprofile-sandbox/tree/master/proposals/0009-LRA>]

## Axon framework

Axon framework is Java based framework for building scalable and highly performant applications. Axon is based on the Command Query Responsibility Segregation (CQRS) pattern. The main motion is the event processing which includes the separated Command bus for updates and the Event bus for queries.

[<http://www.axonframework.org/>]

## Eventuate.io

Eventuate is a platform that provides an event-driven programming model that focus on solving distributed data management in microservices architectures. Similarly to the Axon, it is based upon CQRS principles. The framework stores events in the MySQL database and it distributes them through the Apache Kafka platform.

[<http://eventuate.io>]

# **SAGA Pattern**

Saga Pattern is a direct result of Database-per-service pattern.

In Database-per-service pattern, each service has its own database. In other words, each service is responsible only for its own data.

This leads to a tricky situation.

Some business transactions require data from multiple services. Such transactions may also need to update or process data across services. Therefore, a mechanism to handle data consistency across multiple services is required.


This situation or use-case forms the basis of the Saga Pattern.

**Axon Framework** is a microservices framework that makes it easy to build distributed systems. It provides great support for Spring Boot.

**Axon** works on the concept of commands and events.

**Commands** are user-initiated actions that can change the state of your aggregate.

**Events** are the actual changing of that state.

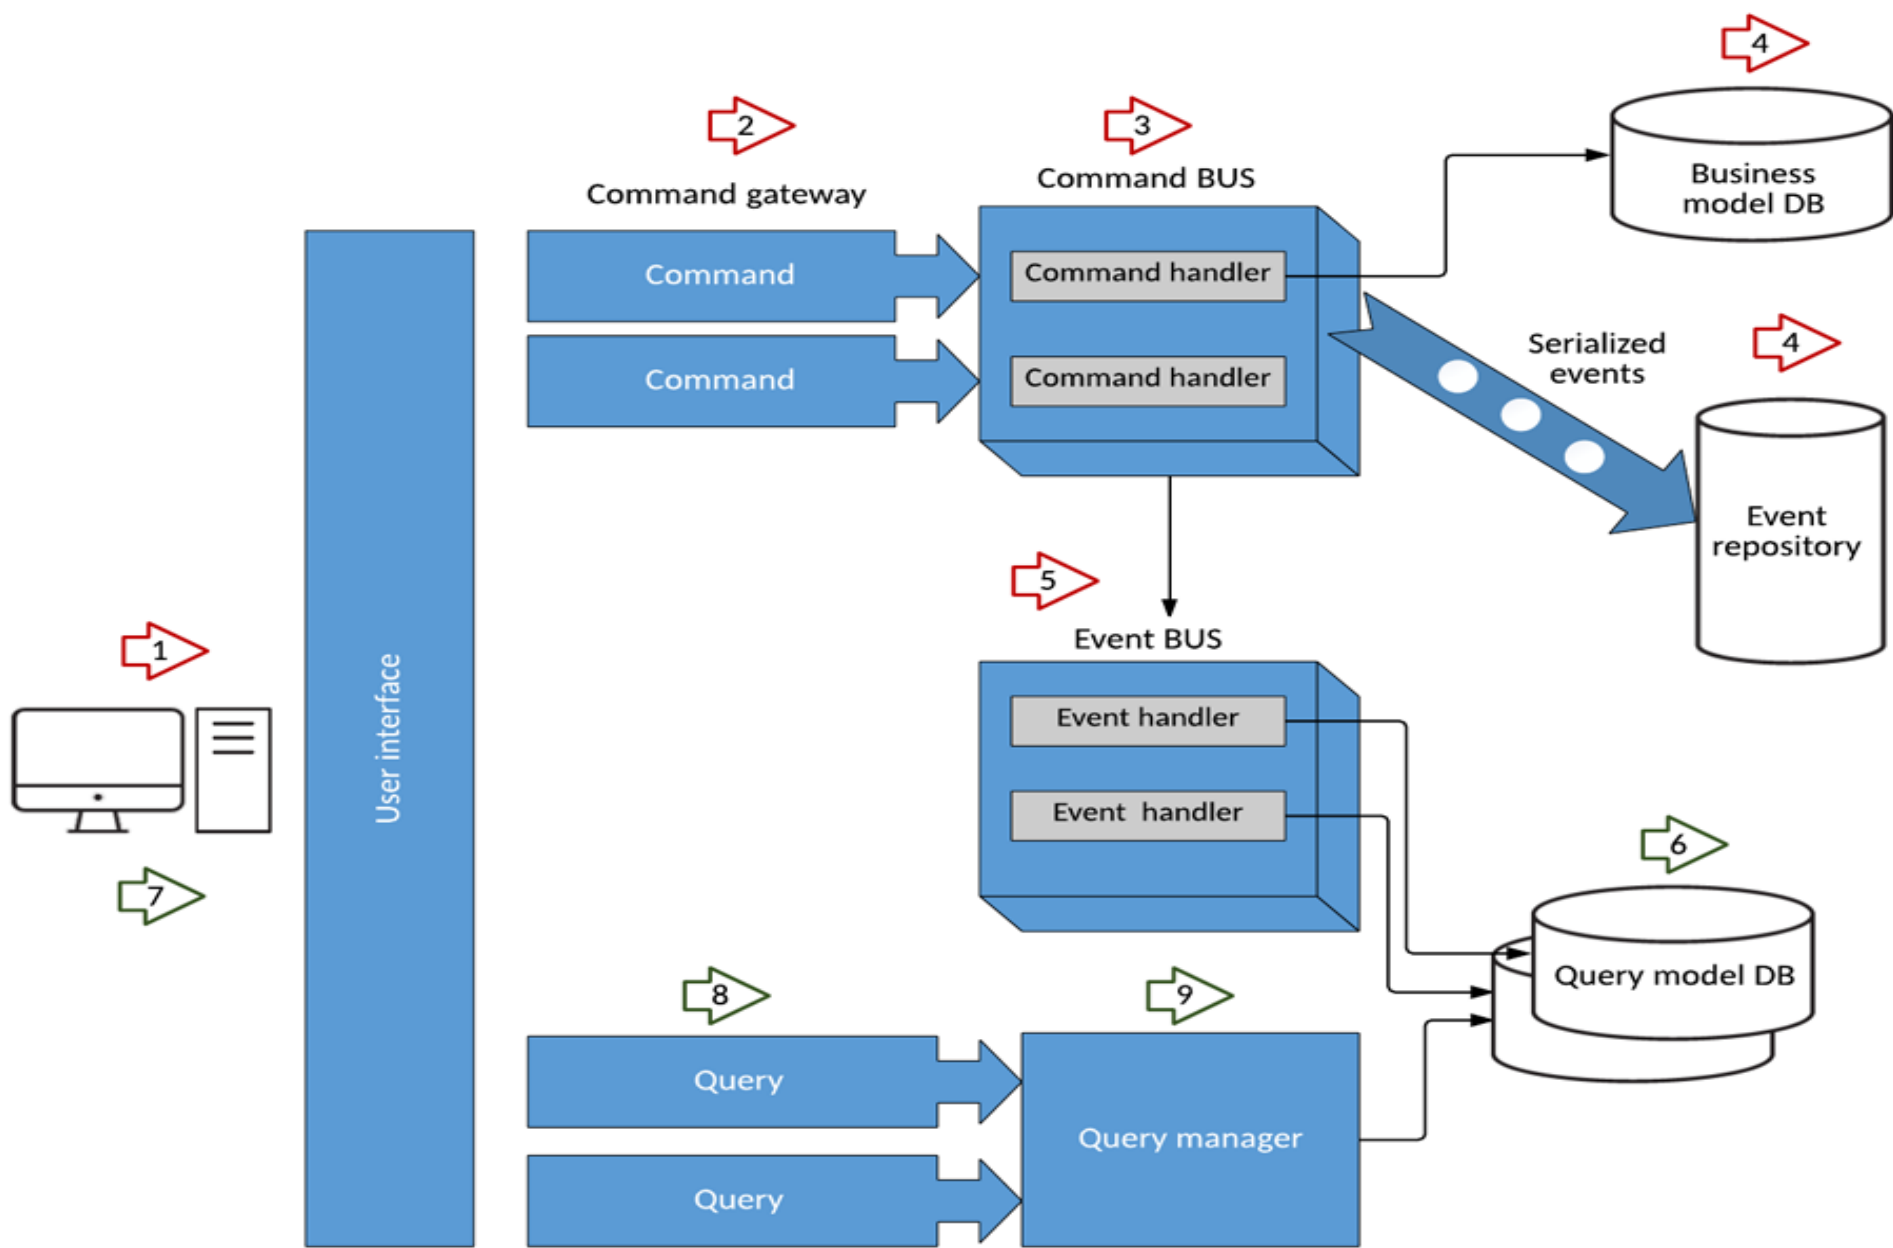

The **TargetAggregateIdentifier** annotation tells Axon that the annotated field is an id of a given aggregate to which the command should be targeted.



## **Defining the Saga Pattern**

Saga Pattern proposes implementing distributed transactions in the form of Sagas.

A Saga is nothing but a sequence of local transactions. These local transactions are occurring at the service level. Whenever a local transaction occurs, it publishes a message or an event. Such an event is responsible for triggering the next transaction in the Saga.

But then, you might ask what happens when a single transaction in the Saga sequence fails?


In that case, the Saga executes a series of compensating transactions. These transactions basically undo the changes made by the preceding transactions.

## **Types of Saga**

There are basically two types of Saga. In other words, there are two ways in which you can implement the Saga Pattern.

**Choreography-Based Saga** - In this type of Saga Implementation, each service publishes one or more domain events. These domain events trigger local transactions in other microservices.

## CHOREOGRAPHY BASED SAGA

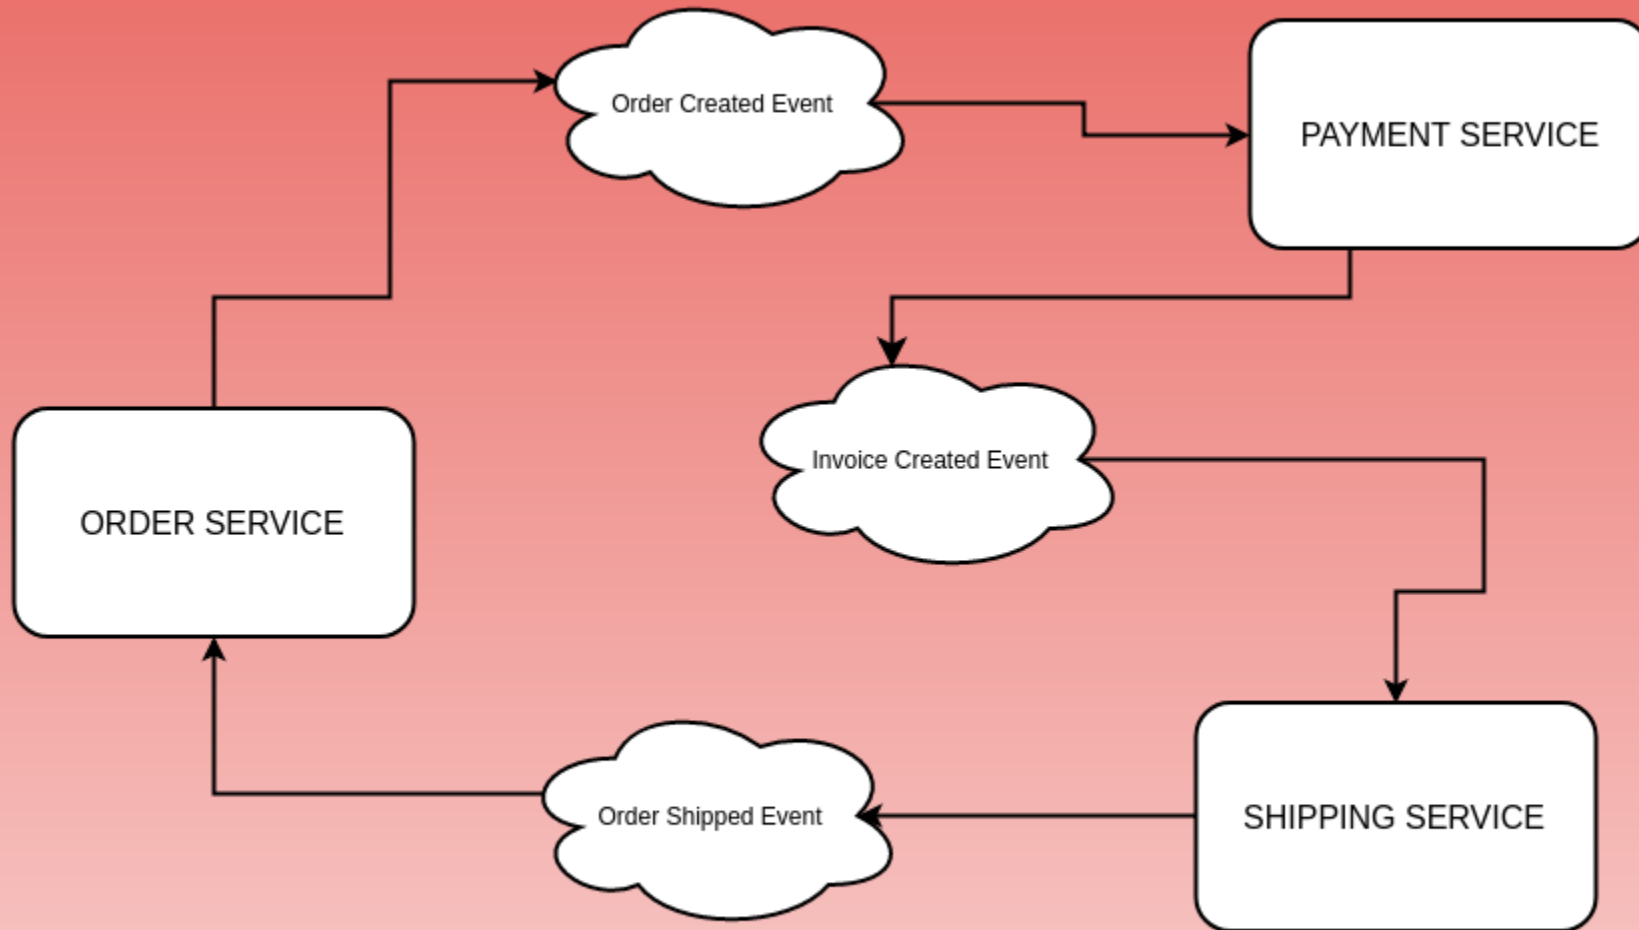


Let's understand what is happening in the above example.

- ❑ **Order Service** is responsible for creating an **Order**. It also publishes an event for the same.
- ❑ The **Payment Service** listens to that event and creates an **Invoice**.
- ❑ When the **Invoice** is created, the **Shipping Service** creates the shipment.
- ❑ When the **Order** is shipped, the **Order Service** updates the status of the **Order**.

## **Orchestration-Based Saga**

In Orchestration-Based Saga, there is an orchestrator. An orchestrator can also be thought of as a manager that directs the participant services to execute local transactions.

## ORCHESTRATION BASED SAGA

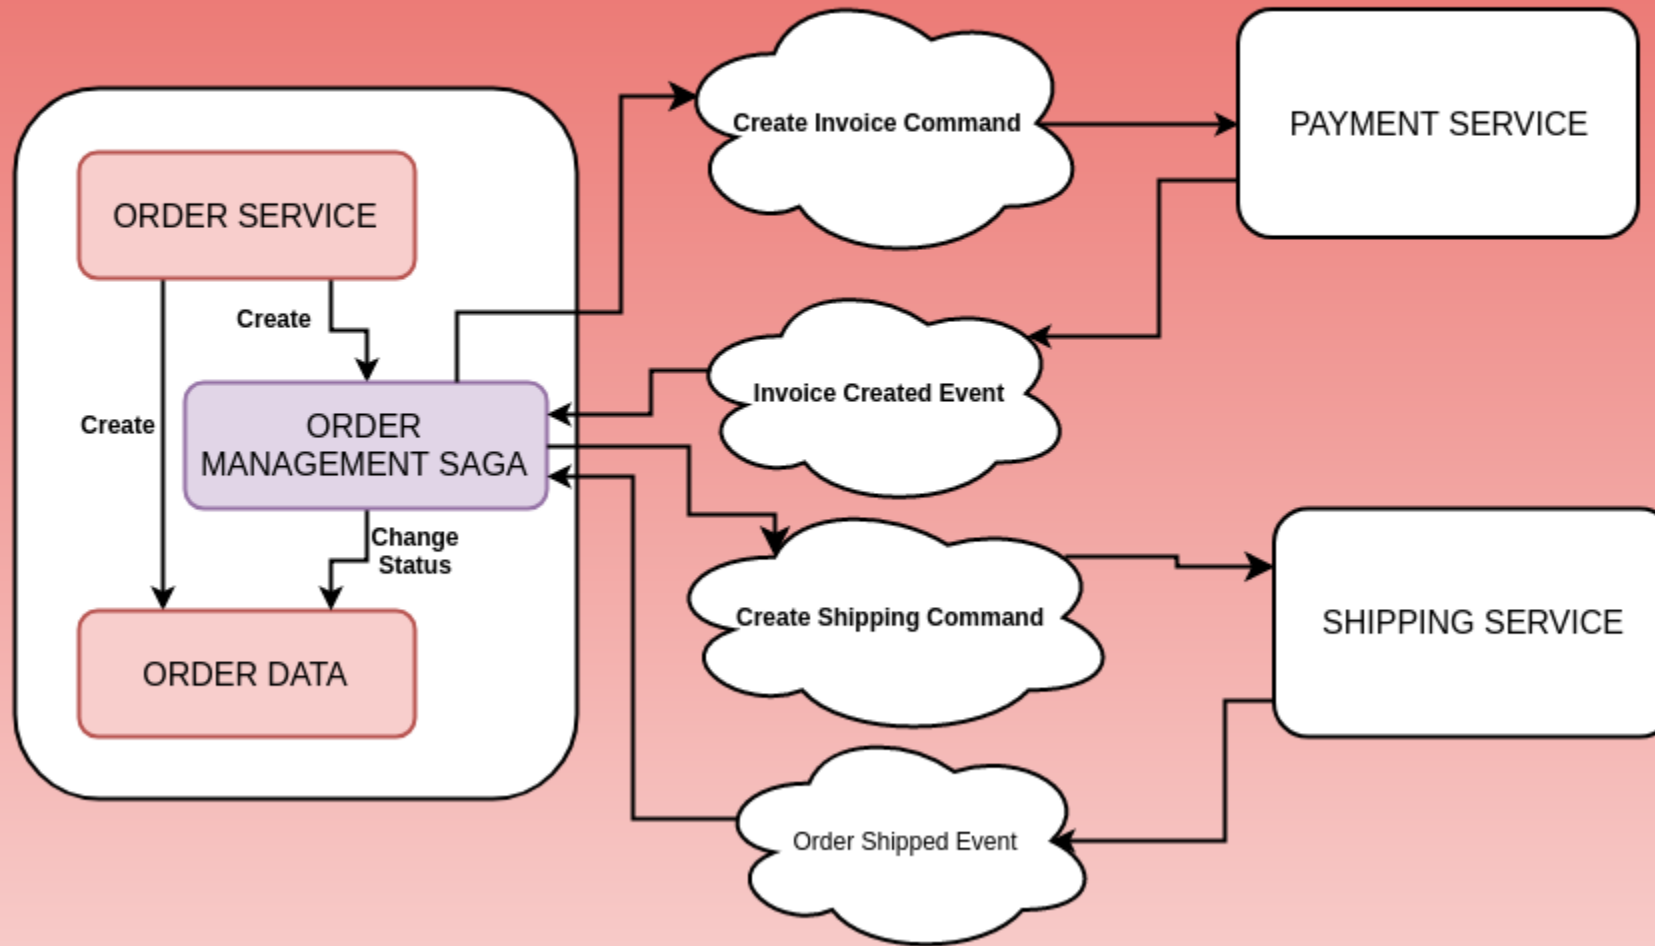

Let's understand what's happening in this approach:

- ❑ **Order Service** creates an **Order**. Then, it also creates the Order Management Saga.
- ❑ The **Order Management Saga** sends a **Create Invoice Command** to the **Payment Service**.
- ❑ The **Payment Service** creates the **Invoice** and responds back to the **Order Management Saga**. Note that these responses can be totally asynchronous and message-driven as well.
- ❑ In the next step, the **Order Management Saga** issues the **Create Shipping Command** to the **Shipping Service**.
- ❑ The **Shipping Service** does the needful and creates the **Shipping**. It also replies back to the **Order Management Saga**.
- ❑ The **Order Management Saga** changes the status of the **Order** and ends the Saga's life-cycle.

## **Orchestration-Based Implementation**

The Axon Platform comprises of the core Axon Framework and also the Axon Server. The Axon Server facilitates communication between microservices.



## **Orchestration-Based Implementation**

The Axon Platform comprises of the core Axon Framework and also the Axon Server. The Axon Server facilitates communication between microservices.