


```
/home/runner/work/gaps  
-online-software/gaps  
-online-software/gondola  
-core/C++/include/events  
/hit_quality.hpp
```

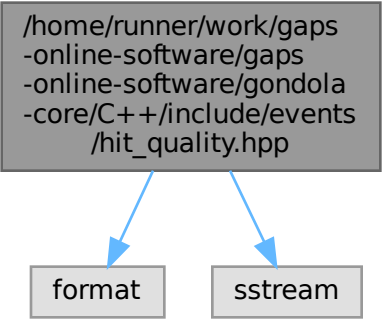

```
graph TD; A["/home/runner/work/gaps  
-online-software/gaps  
-online-software/gondola  
-core/C++/include/events  
/hit_quality.hpp"] --> B["format"]; A --> C["stringstream"]
```

The diagram illustrates a file path structure. A large gray box at the top contains the following text: `/home/runner/work/gaps`, `-online-software/gaps`, `-online-software/gondola`, `-core/C++/include/events`, and `/hit_quality.hpp`. Two blue arrows originate from the bottom of this box. The left arrow points to a smaller gray box labeled `format`. The right arrow points to another smaller gray box labeled `stringstream`.

`format`

`stringstream`