




Google  Extended





Pick your Poison?



Agent-Ready Websites with WebMCP

Felix Jumason

Software Engineer @Liquid | Regional Lead @Cursor

X-@blackie_360

Github-Blackiie360



\$WHOAMI

- Build cool shit in Telcos
- Create amazing Experience at Cursor Africa
- I am Batman



The Problem: Agents Are Guessing



Today, most agents “use” websites like humans — badly.

- Click buttons, parse DOM, OCR screenshots
- Fragile when markup changes, SPAs hydrate, or UI state is hidden
- Slow, expensive, and error-prone for multi-step flows



What Is WebMCP?



Web model Context Protocol-a proposed web standard for agent-ready sites

- Co-developed by Google & Microsoft (W3C community group)
- Lets a live webpage publish structured tools the browser/agent can discover and call
- Replaces guesswork with an explicit contract: names, descriptions, JSON schemas, handlers

Build it



Two Ways to Expose WebMCP Tools

Imperative API

JavaScript Programmatic Control

☒ **Best for:** SPAs, Dynamic contexts, Complex apps

registerTool()
Adds a single tool without affecting others

provideContext()
Replaces entire tool set at once

unregisterTool()
Removes one specific tool by name

clearContext()
Removes all registered tools at once

`window.navigator.modelContext`

VS

Declarative API

HTML Attribute Annotations

☒ **Best for:** Existing forms, Quick adoption, Static pages

toolname
Names the tool exposed by the form

tooldescription
Natural language description for agent

toolautosubmit
Allows agent to submit without user click

toolparamtitle / desc
Override field labels in JSON schema

`<form toolname="my_tool" ...>`

The Agent COntract.

Every WebMCP tool gives agents three things:


1. Discovery — “What can I do on this page?” (checkout, filter_results, buildMySchedule)
2. JSON Schemas — Typed inputs/outputs; fewer hallucinations
3. Shared state — Tool results reflect what the user actually sees after the action

Annotations matter: e.g. readOnlyHint: true tells the agent a tool won't mutate UI.





Architecture

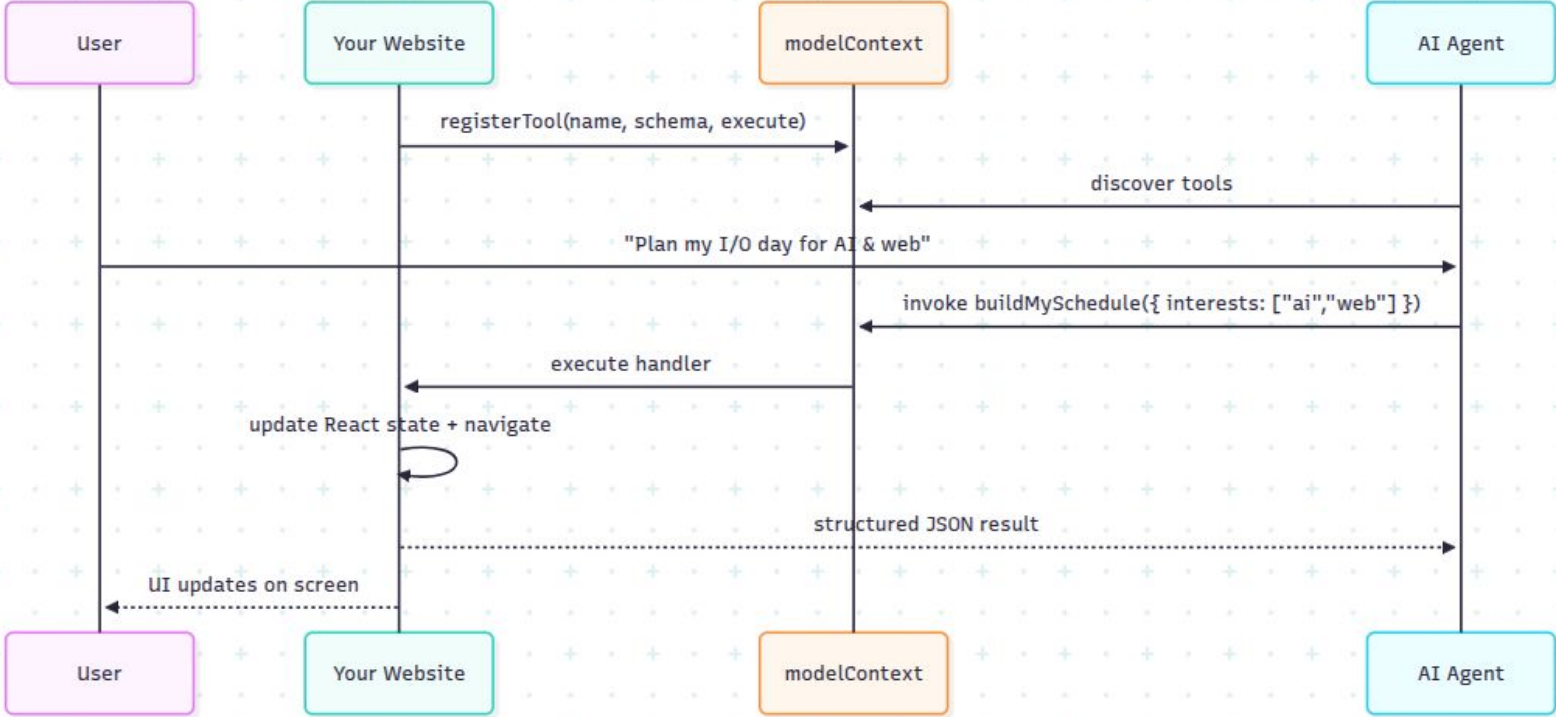

Implementation Pattern

a

ts webmcp.ts Lines 547-562

```
export function registerEventTools() {  
  const modelContext = document.modelContext || navigator.modelContext  
  
  if (!modelContext || toolsState.controller) return  
  
  toolsState.controller = new AbortController()  
  const options = { signal: toolsState.controller.signal }  
  
  modelContext.registerTool(listSpeakersTool, options)  
  modelContext.registerTool(listSessionsAndShowTool, options)  
  // ...  
}
```


a

Agent invocation:

```
{  
  "tool": "search_sessions",  
  "arguments": {  
    "query": "WebMCP",  
    "room": "Main Hall"  
  }  
}
```

DEMO



DEMO



Whats next ?

References



Chrome WebMCP Overview

developer.chrome.com/docs/ai/webmcp



WebMCP Declarative API

developer.chrome.com/docs/ai/webmcp/declarative-api



WebMCP Security & Best Practices

developer.chrome.com/docs/ai/webmcp/secure-tools



Lighthouse Audits

developer.chrome.com/docs/lighthouse/agentive-browsing

Chrome Labs WebMCP

developer.chrome.com/docs/ai/webmcp-tools



Chrome Labs WebCP Tools Repo

developer.com/GoogleLighthouse/WebMCP/webmcp-tools

Shout out



Bye !!!

