THM LAB COMPLETION REPORT

Content Discovery

Name: Muhammad Afnan K O

Focus: WAPT

Platform: TryHackMe.com

1. Objective — What was the task about?

The main objective of this lab was to learn different ways of finding hidden contents on a website. This lab is focused on three main approaches which are manual discovery, OSINT, and using Gobuster to enumerate directories and files. Also it includes checking robots.txt and sitemap.xml pages of a website.

2. Concept/Understanding — What did you learn?

I understood that a website can contain many pages, directories, and files that are not directly visible from the main webpage. These resources can sometimes be discovered by manually checking different URLs, using information available from public sources, or by using automated enumeration tools. This lab tells about how to discover the hidden pages in a website using appropriate tools and techniques.

3. Practical Work — What did you perform?

I did completed the lab by using the tools which I learned from the lab and discovered hidden pages from normal users , pages like robots.txt , sitemap.xml. Also I performed Bruteforce on the website using Gobuster with a common directory wordfile which showed some files and secret area.


4. Tools Used — Tools used during the task.

- Gobuster
- Curl
- Search engine for directory traversal


5. Evidence — Relevant screenshots and results.

Screenshots of the completed TryHackMe rooms, practical exercises, and relevant results can be added below as evidence of the work completed.


1.Screenshot of room completion:-

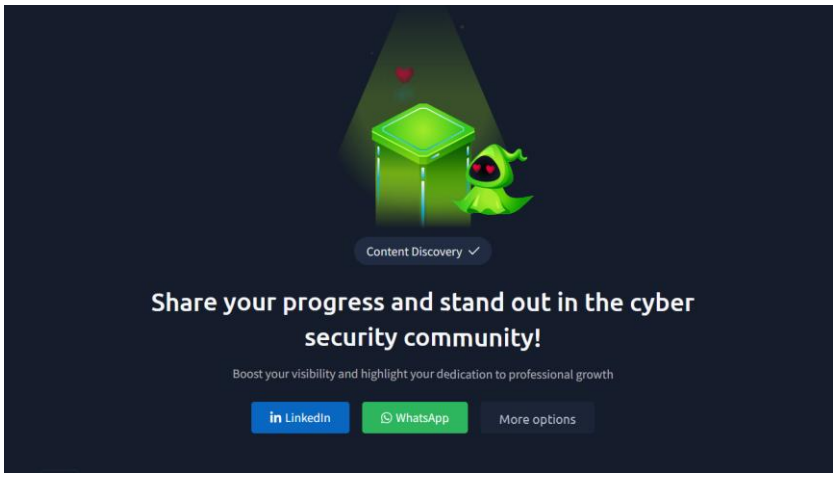

2.Screenshot of robots.txt page:-

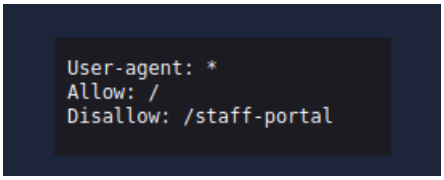

3.Screenshot of sitemap.xml page:-

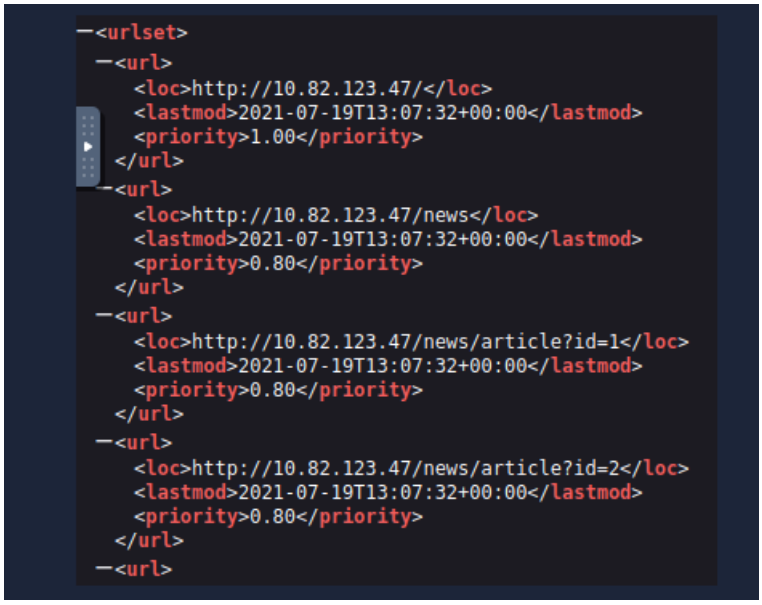

4.Screenshot of curl command to find flags In header:-

```
root@tryhackme:~# curl http://MACHINE_IP -v
*   Trying MACHINE_IP:80...
* TCP_NODELAY set
* Connected to MACHINE_IP (MACHINE_IP) port 80 (#0)
> GET / HTTP/1.1
> Host: MACHINE_IP
> User-Agent: curl/7.68.0
> Accept: */*
>
* Mark bundle as not supporting multiuse
< HTTP/1.1 200 OK
< Server: nginx/1.18.0 (Ubuntu)
< Date: Mon, 04 May 2026 10:39:13 GMT
< Content-Type: text/html; charset=UTF-8
< Transfer-Encoding: chunked
< Connection: keep-alive
< X-FLAG: [REDACTED]
< X-FLAG: [REDACTED]
< X-Powered-By: THM-Framework
<
```

5.Screenshot of directory Bruteforcing using Gobuster :-

```
root@ip-10-82-112-63:~# gobuster dir -u http://MACHINE_IP -w /usr/share/wordlists/SecLists/Discovery/Web-Content/common.txt
===============================================================
Gobuster v3.6
by OJ Reeves (@TheColonial) & Christian Mehlmauer (@firefart)
===============================================================
[+] Url:                     http://MACHINE_IP
[+] Method:                  GET
[+] Threads:                 10
[+] Wordlist:                /usr/share/wordlists/SecLists/Discovery/Web-Content/common.txt
[+] Negative Status codes:   404
[+] User Agent:              gobuster/3.6
[+] Timeout:                 10s
===============================================================
Starting gobuster in directory enumeration mode
===============================================================
/assets               (Status: 301) [Size: 178] [--> http://10.82.123.47/assets/]
/contact              (Status: 200) [Size: 3108]
/customers            (Status: 302) [Size: 0] [--> /customers/login]
/development.log      (Status: 200) [Size: 27]
/monthly              (Status: 200) [Size: 28]
/news                 (Status: 200) [Size: 2538]
/private              (Status: 301) [Size: 178] [--> http://10.82.123.47/private/]
/robots.txt           (Status: 200) [Size: 46]
/sitemap.xml          (Status: 200) [Size: 1383]
Progress: 4655 / 4656 (99.98%)
===============================================================
Finished
===============================================================
```

6. Result — What did you achieve or discover?

I successfully completed the Content Discovery lab and gained practical experience in finding hidden web content using different approaches. I was able to understand how manual techniques, OSINT, and Gobuster can be used together to discover additional information and resources on a website. This lab also helped me to understand how the actual burteforcing and finding hidden directories in a websites are found.

7. Key Learnings — What did you learn from the task?

- Understood the directories which has in all websites which give details of hidden pages like robots.txt and sitemap.xml
- Curl is CLI tool which can be used to send http request in a command linbe interface and give responses in text format.
- Directory bruteforcing is used to get the directories which are in the website which is known and unknown.
- Gobuster can be used to bruteforce directories and subdomains.

Conclusion

This Content Discovery lab gave me practical experience with different methods of discovering web content. By working with manual techniques, OSINT, and Gobuster, I gained a better understanding of how penetration testers can identify resources that may not be visible from a website's main pages. The lab also helped strengthen my basic web enumeration skills.