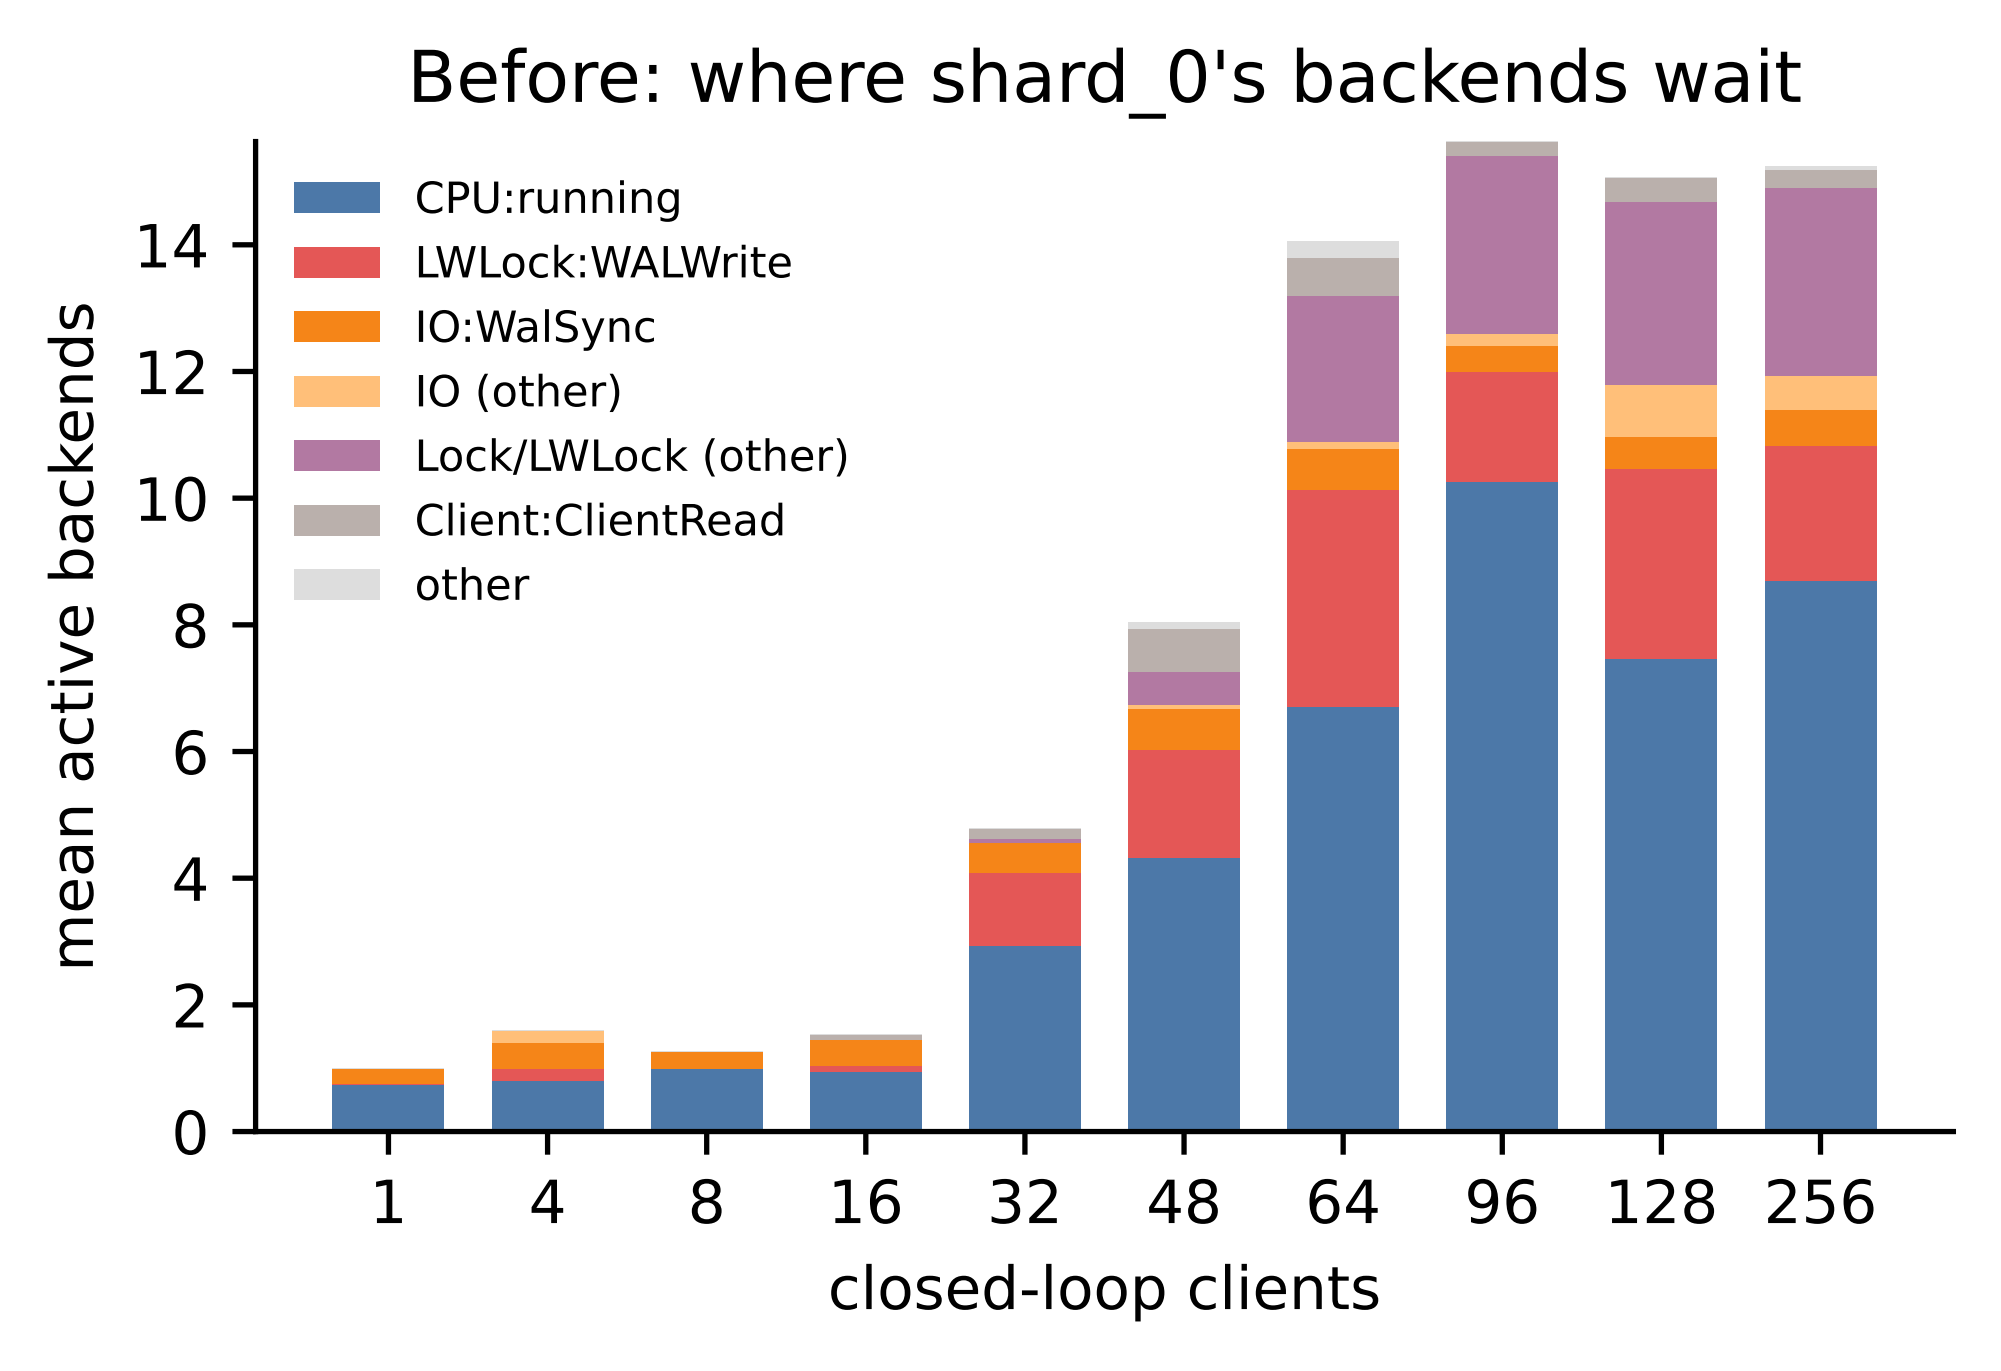
Before: where shard_0's backends wait
CPU:running
LWLock:WALWrite
IO:WalSync
IO (other)
Lock/LWLock (other)
Client:ClientRead
other
mean active backends
0
2
4
6
8
10
12
14
1
4
8
16
32
48
64
96
128
256
closed-loop clients