API-VOLLEYBALL (1.0.1)

support: https://dashboard.api-football.com | URL: https://api-sports.io

Introduction

Welcome to Api-Volleyball! You can use our API to access all API endpoints, which can get information about Volleyball Leagues & Cups.

We have language bindings in C, C#, cURL, Dart, Go, Java, Javascript, NodeJs, Objective-c, OCaml, Php, PowerShell, Python, Ruby, Shell and Swift! You can view code examples in the dark area to the right, and you can switch the programming language of the examples with the tabs in the top right.

Authentication

We uses API keys to allow access to the API. You can register a new API key in rapidapi or directly on our dashboard.

The accounts on **RapidAPI** and on our **Dashboard** are dissociated. Each of these registration methods has its own **URL** and **API-KEY**. You must therefore adapt your scripts according to your subscription by adapting the URL and your API-KEY.

RAPIDAPI: https://api-volleyball.p.rapidapi.com/

API-SPORTS: https://v1.volleyball.api-sports.io/

Our API expects for the API key to be included in all API requests to the server in a header that looks like the following:

Make sure to replace XXXXXXXXXXXXXXXXXXXXXXX with your API key.

REQUESTS HEADERS & CORS

The API is configured to work only with **GET** requests and allows only the headers listed below:

- x-rapidapi-host
- x-rapidapi-key
- x-apisports-key

If you make non-GET requests or add headers that are not in the list, you will receive an error from the API.

Some frameworks (especially in JS, nodeJS..) automatically add extra headers, you have to make sure to remove them in order to get a response from the API.

RAPIDAPI Account

All information related to your subscription are available on the rapidApi developer dashboard.

The RapidAPI developer dashboard is where you can see all of your apps, locate API keys, view analytics, and manage billing settings.

To access the dashboard, simply login to RapidAPI and select 'My Apps' in the top-right menu. Alternatively, you can head directly to https://rapidapi.com/developer/dashboard.

In the main dashboard, you will see account-wide analytics and account information. To get more detailed information, you can select tabs on the left-hand side of the screen.

App Specific Analytics

Using the RapidAPI dashboard, you can also view analytics specific to each app in your account. To do so, switch over to the 'Analytics' tab of your application in the dashboard.

On the top of the page, you'll be able to see a chart with all the calls being made to all the APIs your app is connected to. You'll also be able to see a log with all the request data. You are also able to filter these analytics to only show certain APIs within the app.

In each graph, you can view the following metrics:

- API Calls : how many requests are being made
- Error rates: how many requests are error some
- Latency: how long (on average) requests take to execute

You may change the time period you're looking at by clicking the calendar icon and choosing a time range.

Headers sent as response

When consuming our API, you will always receive the following headers appended to the response:

- server: The current version of the API proxy used by RapidAPI.
- x-ratelimit-requests-limit: The number of requests the plan you are currently subscribed to allows you to make, before incurring overages.

- <u>x-ratelimit-requests-remaining</u>: The number of requests remaining before you reach the limit of requests your application is allowed to make, before experiencing overage charges.
- X-RapidAPI-Proxy-Response: This header is set to true when the RapidAPI proxy generates the response, (i.e. the response is not generated from our servers)

API-SPORTS Account

If you decided to subscribe directly on our site, you have a dashboard at your disposal at the following url: dashboard

It allows you to:

- To follow your consumption in real time
- · Manage your subscription and change it if necessary
- · Check the status of our servers
- Test all endpoints without writing a line of code.

You can also consult all this information directly through the API by calling the endpoint status.

This call does not count against the daily quota.

```
get("https://v1.volleyball.api-sports.io/status");
// response
    "get": "status",
    "parameters": [],
    "errors": [],
    "results": 1,
    "response": {
        "account": {
            "firstname": "xxxx",
            "lastname": "XXXXXXX",
            "email": "xxx@xxx.com"
        "subscription": {
            "plan": "Free",
            "end": "2020-04-10T23:24:27+00:00",
            "active": true
        "requests": {
            "current": 12,
            "limit day": 100
```




Headers sent as response


When consuming our API, you will always receive the following headers appended to the response:

- x-ratelimit-requests-limit: The number of requests allocated per day according to your subscription.
- x-ratelimit-requests-remaining: The number of remaining requests per day according to your subscription.
- X-RateLimit-Limit: Maximum number of API calls per minute.
- X-RateLimit-Remaining: Number of API calls remaining before reaching the limit per minute.


Dashboard

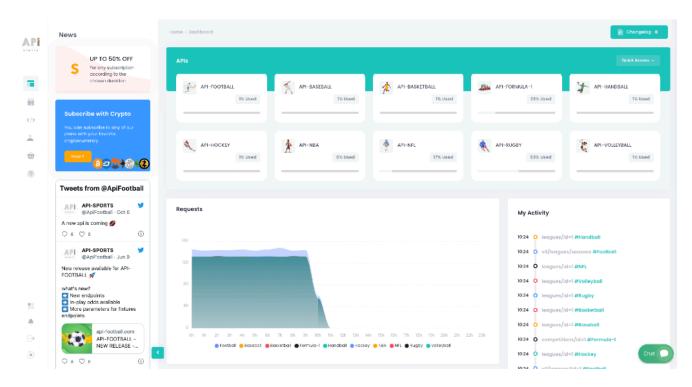


Requests

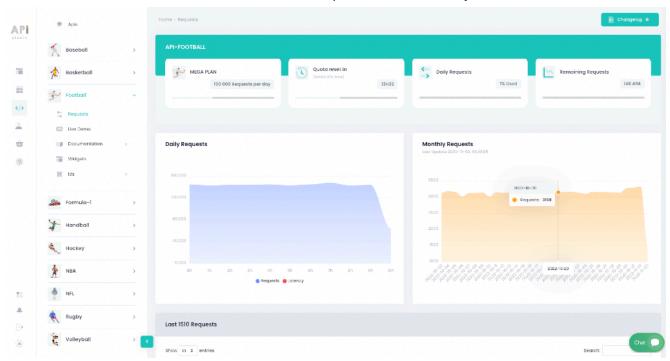

Live tester

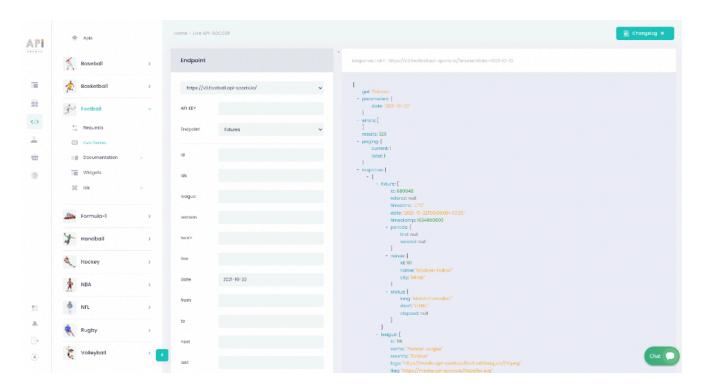

Architecture

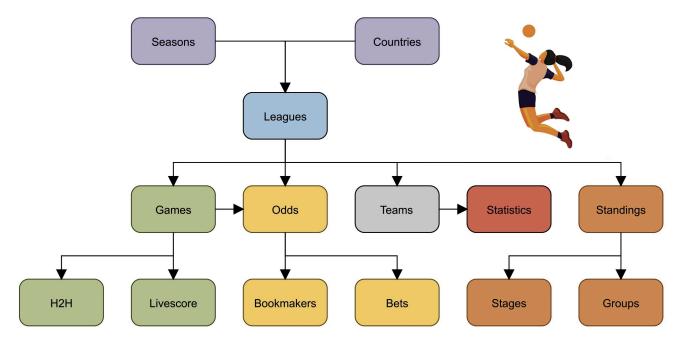

Logos / Images

Calls to logos/images do not count towards your daily quota and are provided for free. However these calls are subject to a **rate per second & minute**, it is recommended to save this data on your side in order not to slow down or impact the user experience of your application or website. For this you can use **CDNs** such as bunny.net.

We have a tutorial available here, which explains how to set up your own media system with **BunnyCDN**.

Logos, images and trademarks delivered through the API are provided solely for identification and descriptive purposes (e.g., identifying leagues, teams, players or venues). We does not own any of these visual assets, and no intellectual property rights are claimed over them. Some images or data may be subject to intellectual property or trademark rights held by third parties (including but not limited to leagues, federations, or clubs). The use of such content in your applications, websites, or products may require additional authorization or licensing from the respective rights holders. You are fully responsible for ensuring that your usage of any logos, images, or branded content complies with applicable laws in your country or the countries where your services are made available. We are not affiliated with, sponsored by, or endorsed by any sports league, federation, or brand featured in the data provided.

Sample Scripts

Here are some examples of how the API is used in the main development languages.

You have to replace <code>{endpoint}</code> by the real name of the endpoint you want to call, like <code>leagues</code> or <code>games</code> for example. In all the sample scripts we will use the <code>leagues</code> endpoint as example.

C

libcurl

C#

RestSharp

```
var client = new RestClient("https://v1.volleyball.api-sports.io/leagues");
client.Timeout = -1;
var request = new RestRequest(Method.GET);
request.AddHeader("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXxXxXxXxX;");
request.AddHeader("x-rapidapi-host", "v1.volleyball.api-sports.io");
IRestResponse response = client.Execute(request);
Console.WriteLine(response.Content);
```

cURL

Curl

Dart

http

```
var headers = {
    'x-rapidapi-key': 'XxXxXxXxXxXxXxXxXxXx,
    'x-rapidapi-host': 'v1.volleyball.api-sports.io'
```

```
var request = http.Request('GET', Uri.parse('https://v1.volleyball.api-sports.io/l
request.headers.addAll(headers);

http.StreamedResponse response = await request.send();

if (response.statusCode == 200) {
   print(await response.stream.bytesToString());
}
else {
   print(response.reasonPhrase);
}
```

Go

←

Native

```
res, err := client.Do(req)
if err != nil {
    fmt.Println(err)
    return

}
defer res.Body.Close()

body, err := ioutil.ReadAll(res.Body)
if err != nil {
    fmt.Println(err)
    return

}
fmt.Println(string(body))
}
```

Java

OkHttp

```
var myHeaders = new Headers();
myHeaders.append("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXxXxXx");
myHeaders.append("x-rapidapi-host", "v1.volleyball.api-sports.io");

var requestOptions = {
    method: 'GET',
    headers: myHeaders,
    redirect: 'follow'
};
```

Unirest

Javascript

Fetch

```
var myHeaders = new Headers();
myHeaders.append("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXxXxXx");
myHeaders.append("x-rapidapi-host", "v1.volleyball.api-sports.io");

var requestOptions = {
  method: 'GET',
  headers: myHeaders,
  redirect: 'follow'
};

fetch("https://v1.volleyball.api-sports.io/leagues", requestOptions)
  .then(response => response.text())
  .then(result => console.log(result))
  .catch(error => console.log('error', error));
```

jQuery

```
var settings = {
    "url": "https://v1.volleyball.api-sports.io/leagues",
    "method": "GET",
    "timeout": 0,
    "headers": {
        "x-rapidapi-key": "XxXxXxXxXxXxXxXxXxXxXx,
        "x-rapidapi-host": "v1.volleyball.api-sports.io"
        },
    };

$.ajax(settings).done(function (response) {
        console.log(response);
});
```

XHR

```
var xhr = new XMLHttpRequest();
xhr.withCredentials = true;
```

```
xhr.addEventListener("readystatechange", function() {
   if(this.readyState === 4) {
      console.log(this.responseText);
   }
});

xhr.open("GET", "https://v1.volleyball.api-sports.io/leagues");
xhr.setRequestHeader("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXxXxXxX;);
xhr.setRequestHeader("x-rapidapi-host", "v1.volleyball.api-sports.io");
xhr.send();
```

NodeJs

Axios

```
var axios = require('axios');

var config = {
    method: 'get',
    url: 'https://vl.volleyball.api-sports.io/leagues',
    headers: {
        'x-rapidapi-key': 'XxXxxXxXxXxXxXxXxXxXx,
        'x-rapidapi-host': 'vl.volleyball.api-sports.io'
    }
};

axios(config)
.then(function (response) {
    console.log(JSON.stringify(response.data));
})
.catch(function (error) {
    console.log(error);
});
```

Native

```
var https = require('follow-redirects').https;
var fs = require('fs');

var options = {
```

```
'method': 'GET',
  'hostname': 'v1.volleyball.api-sports.io',
 'path': '/leagues',
  'headers': {
   'x-rapidapi-key': 'XxXxXxXxXxXxXxXxXxXxXxXx,
   'x-rapidapi-host': 'v1.volleyball.api-sports.io'
 'maxRedirects': 20
var req = https.request(options, function (res) {
var chunks = [];
 res.on("data", function (chunk) {
  chunks.push(chunk);
 res.on("end", function (chunk) {
var body = Buffer.concat(chunks);
   console.log(body.toString());
 res.on("error", function (error) {
req.end();
```

Requests

```
var request = require('request');
var options = {
    'method': 'GET',
    'url': 'https://v1.volleyball.api-sports.io/leagues',
    'headers': {
        'x-rapidapi-key': 'XxXxXxXxXxXxXxXxXxXxX,
        'x-rapidapi-host': 'v1.volleyball.api-sports.io'
    }
};
request(options, function (error, response) {
    if (error) throw new Error(error);
    console.log(response.body);
});
```

Unirest

```
var unirest = require('unirest');
var req = unirest('GET', 'https://v1.volleyball.api-sports.io/leagues')
    .headers({
        'x-rapidapi-key': 'XxXxXxXxXxXxXxXxXxXxXx,
        'x-rapidapi-host': 'v1.volleyball.api-sports.io'
      })
      .end(function (res) {
      if (res.error) throw new Error(res.error);
      console.log(res.raw_body);
    });
```

Objective-c

NSURLSession

```
#import <Foundation/Foundation.h>
dispatch semaphore t sema = dispatch semaphore create(0);
NSMutableURLRequest *request = [NSMutableURLRequest requestWithURL: [NSURL URLWithS
 cachePolicy: NSURLRequestUseProtocolCachePolicy
 timeoutInterval:10.0];
NSDictionary *headers = @{
 @"x-rapidapi-key": @"XxXxXxXxXxXxXxXxXxXxXxXx,
 @"x-rapidapi-host": @"v1.volleyball.api-sports.io"
[request setAllHTTPHeaderFields:headers];
[request setHTTPMethod:@"GET"];
NSURLSession *session = [NSURLSession sharedSession];
NSURLSessionDataTask *dataTask = [session dataTaskWithRequest:request
completionHandler:^(NSData *data, NSURLResponse *response, NSError *error) {
 if (error)
   NSLog(@"%@", error);
   dispatch semaphore signal (sema);
   NSHTTPURLResponse *httpResponse = (NSHTTPURLResponse *) response;
   NSError *parseError = nil;
   NSDictionary *responseDictionary = [NSJSONSerialization JSONObjectWithData:dat
   NSLog(@"%@",responseDictionary);
```

OCaml

Cohttp

Php

cURL

Request2

```
<?php
require once 'HTTP/Request2.php';
$request = new HTTP Request2();
$request->setUrl('https://v1.volleyball.api-sports.io/leagues');
$request->setMethod(HTTP Request2::METHOD GET);
$request->setConfig(array(
 'follow redirects' => TRUE
$request->setHeader(array(
  'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXx,
 'x-rapidapi-host' => 'v1.volleyball.api-sports.io'
try {
  $response = $request->send();
 if ($response->getStatus() == 200) {
   echo $response->getBody();
 else {
   echo 'Unexpected HTTP status: ' . $response->getStatus() . ' ' .
    $response->getReasonPhrase();
catch (HTTP Request2 Exception $e) {
  echo 'Error: ' . $e->getMessage();
```

Http

PowerShell

RestMethod

```
$headers = New-Object "System.Collections.Generic.Dictionary[[String],[String]]"
$headers.Add("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXxXxXxXxXxX

$headers.Add("x-rapidapi-host", "v1.volleyball.api-sports.io")

$response = Invoke-RestMethod 'https://v1.volleyball.api-sports.io/leagues' -Metho
$response | ConvertTo-Json
```

Python

http.client

```
conn.request("GET", "/leagues", headers=headers)

res = conn.getresponse()
data = res.read()

print(data.decode("utf-8"))
```

Requests

```
payload={}
headers = {
    'x-rapidapi-key': 'XxXxXxXxXxXxXxXxXxXxx,
    'x-rapidapi-host': 'v1.volleyball.api-sports.io'
}

response = requests.request("GET", url, headers=headers, data=payload)

print(response.text)
```

Ruby

Net::HTTP

```
response = http.request(request)
puts response.read_body
```

Shell

Httpie

```
http --follow --timeout 3600 GET 'https://v1.volleyball.api-sports.io/leagues' \
x-rapidapi-key:'XxXxXxXxXxXxXxXxXxXxXx\
x-rapidapi-host:'v1.volleyball.api-sports.io'
```

wget

```
wget --no-check-certificate --quiet \
    --method GET \
    --timeout=0 \
    --header 'x-rapidapi-key: XxXxXxXxXxXxXxXxXxXxXx
    \
    --header 'x-rapidapi-host: v1.volleyball.api-sports.io' \
    'https://v1.volleyball.api-sports.io/leagues'
```

Swift

URLSession

```
request.addValue("v1.volleyball.api-sports.io", forHTTPHeaderField: "x-rapidapi-ho
request.httpMethod = "GET"

let task = URLSession.shared.dataTask(with: request) { data, response, error in
    guard let data = data else {
        print(String(describing: error))
        semaphore.signal()
        return
        }
        print(String(data: data, encoding: .utf8)!)
        semaphore.signal()
}

task.resume()
semaphore.wait()
```

CDN

Optimizing Sports Websites with BunnyCDN

BunnyCDN is a Content Delivery Network *(CDN)* that delivers a global content distribution experience. With strategically positioned servers, BunnyCDN ensures swift and reliable delivery of static content, optimizing website performance with features like intelligent image optimization, sophisticated caching, and advanced security measures.

Unlocking Media Delivery Excellence with BunnyCDN:

- Quick Configuration: Set up your media CDN in just 5 minutes. Define cache times, customize your domain it's that simple.
- **Global Accessibility:** Leverage BunnyCDN's expansive server network for swift and dependable content delivery worldwide.
- **Customized Configuration:** Tailor caching, define cache times, and implement CORS headers to create an efficient and seamless user experience.
- **Own Your Domain:** Personalize your media delivery with your domain, enhancing your brand's online presence.

- **Robust Security:** BunnyCDN integrates advanced security features, guaranteeing a secure environment for delivering your content.
- **Responsive Performance:** Experience responsive performance without the need for prior media downloads. Discover the capabilities of BunnyCDN for optimized media delivery.

A tutorial is available here on our blog to help you configure it.

Databases Solutions

Enhance Your Data Management with Aiven

Integrating databases into your application can greatly enhance data management and storage. If you're looking for high-performing, flexible, and secure database solutions, we recommend checking out Aiven.

Aiven is a cloud platform that offers a range of managed database services, including relational databases, NoSQL databases, streaming data processing systems, and much more. Their offerings include PostgreSQL, MySQL, Cassandra, Redis, Kafka, and many other databases, all with simplified management, high availability, and advanced security.

Moreover, **Aiven** provides a free tier to get started, along with testing credits to explore their offerings. This opportunity allows you to evaluate their platform and determine if it meets your needs.

One particularly attractive feature of **Aiven** is that they work with multiple cloud providers, including Google Cloud, Amazon Web Services (AWS), Microsoft Azure, DigitalOcean, and more. This means you have the flexibility to choose the best cloud infrastructure for your project.

In terms of reliability, **Aiven** is committed to providing a **99.99**% Service Level Agreement (SLA), ensuring continuous and highly available service.

- To test their services, visit this page.
- If you're a developer, explore their DEV center for technical information.
- Check out Aiven's documentation for detailed information on their services and features.

By integrating **Aiven** with our API, you can efficiently store, manage, and analyze your data while taking advantage of their cloud database solutions' flexibility and scalability.

Real-Time Data Management with Firebase

When you're looking for a real-time data management solution for your application, Firebase's Realtime Database is a powerful choice. Explore how Firebase can enhance real-time data management for your application.

Firebase's Realtime Database offers a cloud-based real-time database that synchronizes data in real-time across users and devices. This makes it an ideal choice for applications that require instant data updates.

Why Choose Firebase's Realtime Database?

- **Real-Time Data:** Firebase allows you to store real-time data, meaning that updates are instantly propagated to all connected users.
- **Easy Synchronization:** Data is automatically synchronized across all devices, providing a consistent and real-time user experience.
- Built-In Security: Firebase offers flexible security rules to control data access and ensure privacy.
- **Simplified Integration:** Firebase's Realtime Database easily integrates with other Firebase services, simplifying backend management.

Helpful Links:

- Explore Firebase's Realtime Database: Discover the features and advantages of Firebase's Realtime Database for efficient real-time data management.
- Firebase's Realtime Database Documentation: Refer to the comprehensive documentation for Firebase's Realtime Database for a smooth integration.

A tutorial describing each step is available on our blog here.

Widgets

Our widgets are completely **free** and work with all our plans including the free plan.

To integrate the widgets to your site you just have to <u>copy/paste</u> the code provided and fill in the tags needed for the widget to work properly. If you integrate several widgets on the same page a single theme will be applied for all widgets. Also you will only have to integrate the **script** tag once.

For all widgets the following tags are needed:

data-host: v1.volleyball.api-sports.io or api-volleyball.p.rapidapi.com depending on whether you have subscribed with us or RapidApi.

data-key: Indicate your API-KEY obtained on our Dashboard or on RapidApi.

data-theme: If you leave the field empty, the **default** theme will be applied, otherwise the possible values are **grey** or **dark**. It is also possible to indicate **false** which will not display any theme and lets you customize the widget with your own css.

data-show-errors: By default **false**, used for debugging, with a value of **true** it allows to display the errors.

Widgets use the requests associated with your account and therefore they will stop working if your daily limit is reached. You can track all requests made directly in the dashboard.

Security:

When using these widgets it is important to be aware that your API-KEY will be visible to the users of your site, it is possible to protect yourself from this by allowing only the desired domains in our dashboard. This way no one else can use your API-KEY for you. If you have already set up your widget and have not activated this option, you can reset your API-KEY and activate this option after.

Debugging:

If the widget does not display the requested information, it is possible to set the data-show-errors tag to **true** to display error messages directly in the widget and in the console. This can be due to several things like: (Non-exhaustive list)

- · You have reached your daily number of requests
- Tags are incorrectly filled in
- Your API-KEY is incorrect

Tutorials:

- HOW CUSTOM API-FOOTBALL WIDGETS
- HOW TO CHANGE WIDGET ATTRIBUTES DYNAMICALLY

Changelog:

2.0.3

Starting version with widgets Games and Standings

Sources:

All the sources to make your own CSS can be downloaded here:


• 2.0.3 files

Games

Display the list of matches grouped by competition according to the parameters used.

The matches are automatically updated according to the selected frequency data-refresh.

You can find all the leagues ids on our Dashboard.

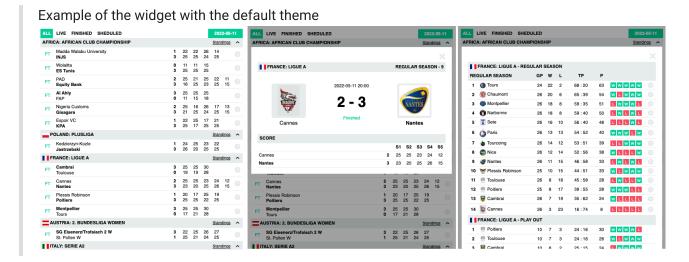

QUERY PARAMETERS

data-host required	<pre>string Enum: "v1.volleyball.api-sports.io" "api- volleyball.p.rapidapi.com"</pre>
data-key required	string Your Api Key
data-refresh	integer >15 Number in seconds corresponding to the desired data update frequency. If you indicate 0 or leave this field empty the data will not be updated automatically
data-date	stringYYYY-MM-DD Fill in the desired date. If empty the current date is automatically applied
data-league	integer Fill in the desired league id
data-season	integer = 4 characters YYYY Fill in the desired season

```
data-theme
                          string
                          If you leave the field empty, the default theme will be applied, otherwise
                          the possible values are grey or dark
data-show-toolbar
                          string
                          Enum: true false
                          Displays the toolbar allowing to change the view between the current,
                          finished or upcoming fixtures and to change the date
data-show-logos
                          string
                          Enum: true false
                          If true display teams logos
data-modal-game
                          string
                          Enum: true false
                          If true allows to load a modal containing all the details of the fixture
data-modal-standings
                          string
                          Enum: true false
                          If true allows to load a modal containing the standings
data-modal-show-logos
                         string
                          Enum: true false
                          If true display teams logos and players images in the modal
data-show-errors
                          string
                          Enum: true false
                          By default false, used for debugging, with a value of true it allows to
                          display the errors
```

GET /widgets/Games

Request samples

Html

Сору


```
<div id="wg-api-volleyball-games"
    data-host="v1.volleyball.api-sports.io"
    data-key="Your-Api-Key-Here"</pre>
```

```
data-date=""
     data-league=""
     data-season=""
     data-theme=""
     data-refresh="15"
     data-show-toolbar="true"
     data-show-errors="false"
     data-show-logos="true"
     data-modal-game="true"
     data-modal-standings="true"
     data-modal-show-logos="true">
</div>
<script
    type="module"
    src="https://widgets.api-sports.io/2.0.3/widgets.js">
</script>
```

Standings

Display the ranking of a competition according to the parameters used.

You can find all the leagues ids on our Dashboard.

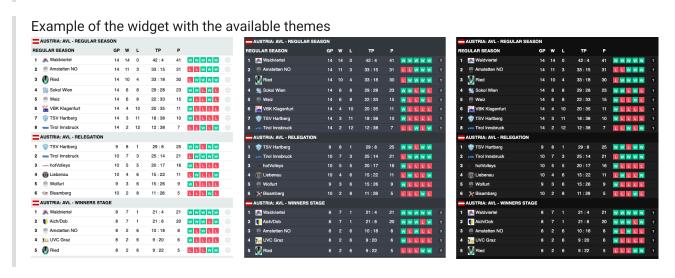

OUERY PARAMETERS

```
data-host
required

Enum: "v1.volleyball.api-sports.io" "api-
volleyball.p.rapidapi.com"
```

```
data-key
                     string
required
                     Your Api Key
data-league
                     integer
                     Fill in the desired league id
data-season
                     integer = 4 characters YYYY
required
                     Fill in the desired season
data-theme
                     string
                     If you leave the field empty, the default theme will be applied, otherwise the
                      possible values are grey or dark
data-show-errors
                     string
                     Enum: true false
                     By default false, used for debugging, with a value of true it allows to
                      display the errors
data-show-logos
                     string
                     Enum: true false
                     If true display teams logos
```

GET /widgets/standings

Request samples

Html

Сору

```
<div id="wg-api-volleyball-standings"
    data-host="v1.volleyball.api-sports.io"
    data-key="Your-Api-Key-Here"
    data-league="13"
    data-season="2021"
    data-theme=""
    data-show-errors="false"
    data-show-logos="true"
    class="wg_loader">
</div>
</cript</pre>
```

```
type="module"
src="https://widgets.api-sports.io/2.0.3/widgets.js">
</script>
```

Timezone

timezone

Get the list of available timezone to be used in the games endpoint.

This endpoint does not require any parameters.

HEADER PARAMETERS

x-rapidapi-key required

string

Your RapidAPI Key

Responses

> 200 OK

GET /timezone

Request samples

Php

Python

Node

JavaScript

Curl

Ruby

Response samples

200

```
Content type application/json
```

```
"get": "timezone",
   "parameters": [ ],
   "errors": [ ],
   "results": 425,
- "response": [
        "Africa/Abidjan",
        "Africa/Accra",
        "Africa/Addis_Ababa",
        "Africa/Algiers",
        "Africa/Asmara",
        "Africa/Bamako"
]
```

Copy Expand all Collapse all

Seasons

seasons

All seasons are only **4-digit keys**, so for a league whose season is 2018-2019 the season in the API will be 2018.

All seasons can be used in other endpoints as filters.

This endpoint does not require any parameters.

HEADER PARAMETERS

x-rapidapi-key required

string

Your RapidAPI Key

Responses

> 200 OK

GET /seasons

Request samples

Php Python Node JavaScript

Ruby

Curl

Copy

```
$client = new http\Client;
$request = new http\Client\Request;
```

Response samples

200

```
Content type application/json
```

```
"get": "seasons",
  "parameters": [ ],
  "errors": [ ],
  "results": 11,
- "response": [
      2011,
      2012,
      2013,
      2014,
      2015,
      2016,
      2017,
      2018,
      2019,
      2020,
      2021
```

Copy Expand all Collapse all

Countries

countries

Get the list of available countries.

The name, id and code fields can be used in other endpoints as filters.

All the parameters of this endpoint can be used together.

QUERY PARAMETERS

id	integer	
	The id of the country	
name	string	
	The name of the country	
code	string = 2 characters	
	The code of the country	
search	string >= 3 characters	
HEADER PARAMETERS		
x-rapidapi-key required	string Your RapidAPI Key	

Responses

> 200 OK

GET /countries

Request samples

 Php
 Python
 Node
 JavaScript
 Curl
 Ruby
 Use Cases

Response samples

200

```
Content type
```

application/json

```
{
    "get": "countries",
    "parameters": [ ],
    "errors": [ ],
    "results": 51,
```

Copy Expand all Collapse all

- "response": [+ { ... },

```
+ { ... },
+ { ... },
+ { ... },
+ { ... },
+ { ... },
+ { ... },
+ { ... },
+ { ... },
```

Leagues

leagues

Get the list of available leagues and cups.

The league id are unique in the API and leagues keep it across all seasons

You can find all the leagues ids on our Dashboard.

Most of the parameters of this endpoint can be used together.

QUERY PARAMETERS

id	integer The id of the league
name	string The name of the league
country_id	integer The id of the country

```
country
                        string
                        The name of the country
   type
                        string
                        Enum: "league" "cup"
                        The type of the league
   season
                        integer = 4 characters
                        The season of the league
   search
                        string >= 3 characters
HEADER PARAMETERS
   x-rapidapi-key
                        string
   required
                        You rapidAPI Key
```

Responses

> 200 OK

GET /leagues

Request samples

 Php
 Python
 Node
 JavaScript
 Curl
 Ruby
 Use Cases

Сору

```
$client->enqueue($request)->send();
$response = $client->getResponse();
echo $response->getBody();
```

Response samples

200

Content type application/json

Copy Expand all Collapse all

Teams

teams

Get data about teams.

The team id are **unique** in the API and teams keep it among all the leagues/cups in which they participate.

You can find all the leagues ids on our Dashboard.

This endpoint requires at least one parameter.

	DV	$D \wedge D$	$\Lambda \Lambda \Lambda$	\Box T	EDC
QUE	I ZI	PAR	ΑIVI		ヒベシ

Q 0 = 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
id	integer
	The id of the team
name	string
	The name of the team
country_id	integer
	The id of the country
country	string
	The name of the country
league	integer
	The id of the league
season	integer = 4 characters
	The season of the league
search	string >= 3 characters
HEADER PARAMETERS	
TIE/OERT / NO WIETERO	
x-rapidapi-key	string
required	Your RapidAPI Key

Responses

> 200 OK

GET /teams

Request samples

Php

Python

Node

JavaScript

Curl

Ruby

Use Cases

Сору

Response samples

200

Content type application/json

Copy Expand all Collapse all

```
7/20/25, 9:19 PM
```

```
{
    "get": "teams",
    "parameters": {
        "id": "119"
    },
    "errors": [ ],
    "results": 1,
    "response": [
        + { ... }
    ]
}
```

teams/statistics

QUERY PARAMETERS

league required	integer The id of the league
season required	string = 4 characters The season of the league
team required	integer The id of the team
date	stringYYYY-MM-DD A date limit
HEADER PARAMETERS	
x-rapidapi-key required	string Your RapidAPI Key

Responses

> 200 OK

```
GET /teams/statistics
```

Request samples

 Php
 Python
 Node
 JavaScript
 Curl
 Ruby
 Use Cases

Response samples

200

Content type application/json

Copy Expand all Collapse al

```
{
    "get": "teams",
    "parameters": {
        "league": "1",
        "season": "2019",
        "team": "1"
    },
    "errors": [ ],
    "results": 5,
    "response": {
        + "country": { ... },
        + "league": { ... },
        + "games": { ... },
        + "goals": { ... },
}
```

Standings

standings

Get the standings for a league.

Return a table of one or more rankings according to the league / cup. Some competitions have several rankings in a year, regular season, pre season etc...

To know the list of available stages or groups you have to use the endpoint standings/stages or standings/groups

Standings are updated every hours

QUERY PARAMETERS

league required	integer The id of the league
season required	integer = 4 characters The season of the league
team	integer The id of the team
stage	string A valid stage
group	string A valid group
HEADER PARAMETERS	
x-rapidapi-key required	string Your RapidAPI Key

Responses

> 200 OK

GET /standings

Request samples

Php Python Node JavaScript Curl Ruby Use Cases

Сору

```
$client = new http\Client;
$request = new http\Client\Request;

$request->setRequestUrl('https://v1.volleyball.api-sports.io/standings');
$request->setRequestMethod('GET');
$request->setQuery(new http\QueryString(array());
```

Response samples

Content type

200

```
application/json

{
    "get": "standings",
    "parameters": {
        "league": "3",
        "season": "2021"
    },
    "errors": [ ],
    "results": 2,
    - "response": [
        + [ ... ],
        + [ ... ]
}
```

Copy Expand all Collapse all

standings/stages

Get the list of available stages for a league to be used in the standings endpoint.

QUERY PARAMETERS

league required	integer The id of the league
season required	string = 4 characters The season of the league
HEADER PARAMETERS	
x-rapidapi-key required	string Your RapidAPI Key

Responses

> 200 OK

GET /standings/stages

Request samples

Php Python Node JavaScript Curl Ruby

```
echo $response->getBody();
```

Response samples

Content type

200

```
application/json

{
    "get": "standings",
    "parameters": {
        "league": "3",
        "season": "2021"
    },
    "errors": [ ],
    "results": 2,
    "response": [
        "Liga Women - First stage",
```

"Liga Women - Second stage"

Copy Expand all Collapse all

standings/groups

Get the list of available groups for a league to be used in the standings endpoint.

QUERY PARAMETERS

```
league
required
The id of the league

season
required
The season of the league
```

HEADER PARAMETERS

```
x-rapidapi-key
required
```

string

Your RapidAPI Key

Responses

> 200 OK

GET /standings/groups

Request samples

 Php
 Python
 Node
 JavaScript
 Curl
 Ruby

Response samples

200

Content type application/json

Copy Expand all Collapse all

```
"get": "standings",
- "parameters": {
        "league": "3",
        "season": "2021"
    },
    "errors": [ ],
    "results": 4,
- "response": [
        "Group 1",
        "Group 2",
        "Group 3",
        "Group 4"
]
```

Games

games

For all requests to games you can add the query parameter <u>timezone</u> to your request in order to retrieve the list of games in the time zone of your choice like *"Europe/London"*

To know the list of available time zones you have to use the endpoint timezone.

Available status

- NS: Not Started
- S1 : Set 1 (In Play)
- S2: Set 2 (In Play)
- S3: Set 3 (In Play)
- S4: Set 4 (In Play)
- S5: Set 5 (In Play)
- AW : Awarded
- POST: Postponed

CANC : CancelledINTR : InterruptedABD : Abandoned

• FT: Finished (Game Finished)

Games are updated every 15 seconds

This endpoint requires at least one parameter.

QUERY PARAMETERS

id	integer
	The id of the game
date	string
	A valid date
league	integer
	The id of the league
season	integer = 4 characters
	The season of the league
team	integer
	The id of the team
timezone	string
	A valid timezone
HEADER PARAMETERS	
x-rapidapi-key	string
required	Your RapidAPI Key

Responses

> 200 OK

GET /games

Request samples

 Php
 Python
 Node
 JavaScript
 Curl
 Ruby
 Use Cases

Сору

Response samples

200

Content type application/json

{
 "get": "games",
 "parameters": {
 "id": "8279"
 },
 "errors": [],

"results": 1,

Copy Expand all Collapse all

games/h2h

Get heads to heads between two teams.

QUERY PARAMETERS

h2h required	stringid-id The ids of the teams
date	stringYYYY-MM-DD A valid date
league	integer The id of the league
season	integer = 4 characters The season of the league
timezone	string A valid timezone
HEADER PARAMETERS	
x-rapidapi-key required	string Your RapidAPI Key

Responses

> 200 OK

GET /games/h2h

Request samples

 Php
 Python
 Node
 JavaScript
 Curl
 Ruby
 Use Cases

Сору

Response samples

200

```
Content type
```

application/json

```
{
    "get": "games",
- "parameters": {
        "h2h": "829-835"
    },
    "errors": [ ],
    "results": 2,
```

Copy Expand all Collapse all

Odds

odds

Get odds from games or leagues.

We provide pre-match odds between 1 and 7 days before the game.

We keep a 7-day history (The availability of odds may vary according to the leagues, seasons, games and bookmakers)

Odds are updated once a day

QUERY PARAMETERS

league	integer
	The id of the league
season	integer = 4 characters
	The season of the league
game	integer
	The id of the game
bookmaker	integer
	The id of the bookmaker
bet	integer
	The id of the bet

```
x-rapidapi-key string
required Your RapidAPI Key
```

Responses

> 200 OK

GET /odds

Request samples

 Php
 Python
 Node
 JavaScript
 Curl
 Ruby
 Use Cases

Response samples

Сору

200

```
Content type application/json
```

Copy Expand all Collapse all

odds/bets

Get all available bets.

All bets id can be used in endpoint odds as filters

QUERY PARAMETERS

id integer

The id of the bet

search string >= 3 characters

The name of the bet

HEADER PARAMETERS

x-rapidapi-key required

string

Your RapidAPI Key

Responses

> 200 OK

GET /odds/bets

Request samples

Php Python Node JavaScript Curl Ruby Use Cases

Response samples

200

```
Content type
application/json

Copy Expand all

{
    "get": "odds",
    "parameters": [],
    "errors": [],
```

"results": 31,

Copy

Collapse all

```
- "response": [
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... }
```

odds/bookmakers

Get all available bookmakers.

All bookmakers id can be used in endpoint odds as filters.

QUERY PARAMETERS

id integer

The id of the bookmaker

search string >= 3 characters

The name of the bookmaker

HEADER PARAMETERS

x-rapidapi-key required

string

Your RapidAPI Key

Responses

> 200 OK

GET /odds/bookmakers

Request samples

Php

Python

Node

JavaScript

Curl

Ruby

Use Cases

Сору

```
$response = $client->getResponse();
echo $response->getBody();
```

Response samples

200

Content type application/json

```
"get": "odds",
  "parameters": [ ],
  "errors": [ ],
  "results": 19,
- "response": [
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... }
```

Copy Expand all Collapse all