

# API-AFL (1.2.4)

support: <https://dashboard.api-football.com> | URL: <https://api-sports.io>

## Introduction

Welcome to Api-AFL! You can use our API to access all API endpoints, which can get information about AFL (Australian Football League).

We have language bindings in C, C#, cURL, Dart, Go, Java, Javascript, NodeJs, Objective-c, OCaml, Php, PowerShell, Python, Ruby, Shell and Swift! You can view code examples in the dark area to the right, and you can switch the programming language of the examples with the tabs in the top right.

## Authentication

We use API keys to allow access to the API. You can register a new API key in [rapidapi](#) or directly on our [dashboard](#).

The accounts on **RapidAPI** and on our **Dashboard** are dissociated. Each of these registration methods has its own **URL** and **API-KEY**. You must therefore adapt your scripts according to your subscription by adapting the URL and your API-KEY.

**RAPIDAPI** : <https://api-afl.p.rapidapi.com/>

**API-SPORTS** : <https://v1.afl.api-sports.io/>

Our API expects for the API key to be included in all API requests to the server in a header that looks like the following:

Make sure to replace `XXXXXXXXXXXXXXXXXXXXXXXXXXXX` with your API key.

### REQUESTS HEADERS & CORS

The API is configured to work only with **GET** requests and allows only the headers listed below:

- `x-rapidapi-host`
- `x-rapidapi-key`
- `x-apisports-key`

If you make non-GET requests or add headers that are not in the list, you will receive an error from the API.

Some frameworks (*especially in JS, nodeJS..*) automatically add extra headers, you have to make sure to remove them in order to get a response from the API.

## RAPIDAPI Account

All information related to your subscription are available on the rapidApi developer dashboard.

The RapidAPI developer dashboard is where you can see all of your apps, locate API keys, view analytics, and manage billing settings.

To access the dashboard, simply login to RapidAPI and select 'My Apps' in the top-right menu. Alternatively, you can head directly to <https://rapidapi.com/developer/dashboard>.

In the main dashboard, you will see account-wide analytics and account information. To get more detailed information, you can select tabs on the left-hand side of the screen.

### App Specific Analytics

Using the RapidAPI dashboard, you can also view analytics specific to each app in your account. To do so, switch over to the 'Analytics' tab of your application in the dashboard.

On the top of the page, you'll be able to see a chart with all the calls being made to all the APIs your app is connected to. You'll also be able to see a log with all the request data. You are also able to filter these analytics to only show certain APIs within the app.

In each graph, you can view the following metrics:

- `API Calls`: how many requests are being made
- `Error rates`: how many requests are error some
- `Latency`: how long (on average) requests take to execute

You may change the time period you're looking at by clicking the calendar icon and choosing a time range.

### Headers sent as response

When consuming our API, you will always receive the following headers appended to the response:

- `server`: The current version of the API proxy used by RapidAPI.
- `x-ratelimit-requests-limit`: The number of requests the plan you are currently subscribed to allows you to make, before incurring overages.

- `x-ratelimit-requests-remaining`: The number of requests remaining before you reach the limit of requests your application is allowed to make, before experiencing overage charges.
- `X-RapidAPI-Proxy-Response`: This header is set to true when the RapidAPI proxy generates the response, (i.e. the response is not generated from our servers)

## API-SPORTS Account

If you decided to subscribe directly on our site, you have a dashboard at your disposal at the following url: [dashboard](#)

It allows you to:

- To follow your consumption in real time
- Manage your subscription and change it if necessary
- Check the status of our servers
- Test all endpoints without writing a line of code.

You can also consult all this information directly through the API by calling the endpoint `status`.

This call does not count against the daily quota.

```
get("https://v1.afl.api-sports.io/status");

// response
{
  "get": "status",
  "parameters": [],
  "errors": [],
  "results": 1,
  "response": {
    "account": {
      "firstname": "xxxx",
      "lastname": "XXXXXX",
      "email": "xxx@xxx.com"
    },
    "subscription": {
      "plan": "Free",
      "end": "2020-04-10T23:24:27+00:00",
      "active": true
    },
    "requests": {
      "current": 12,
      "limit_day": 100
    }
  }
}
```

```

}
}


```

## Headers sent as response


When consuming our API, you will always receive the following headers appended to the response:

- `x-ratelimit-requests-limit`: The number of requests allocated per day according to your subscription.
- `x-ratelimit-requests-remaining`: The number of remaining requests per day according to your subscription.
- `X-RateLimit-Limit`: Maximum number of API calls per minute.
- `X-RateLimit-Remaining`: Number of API calls remaining before reaching the limit per minute.


## Dashboard

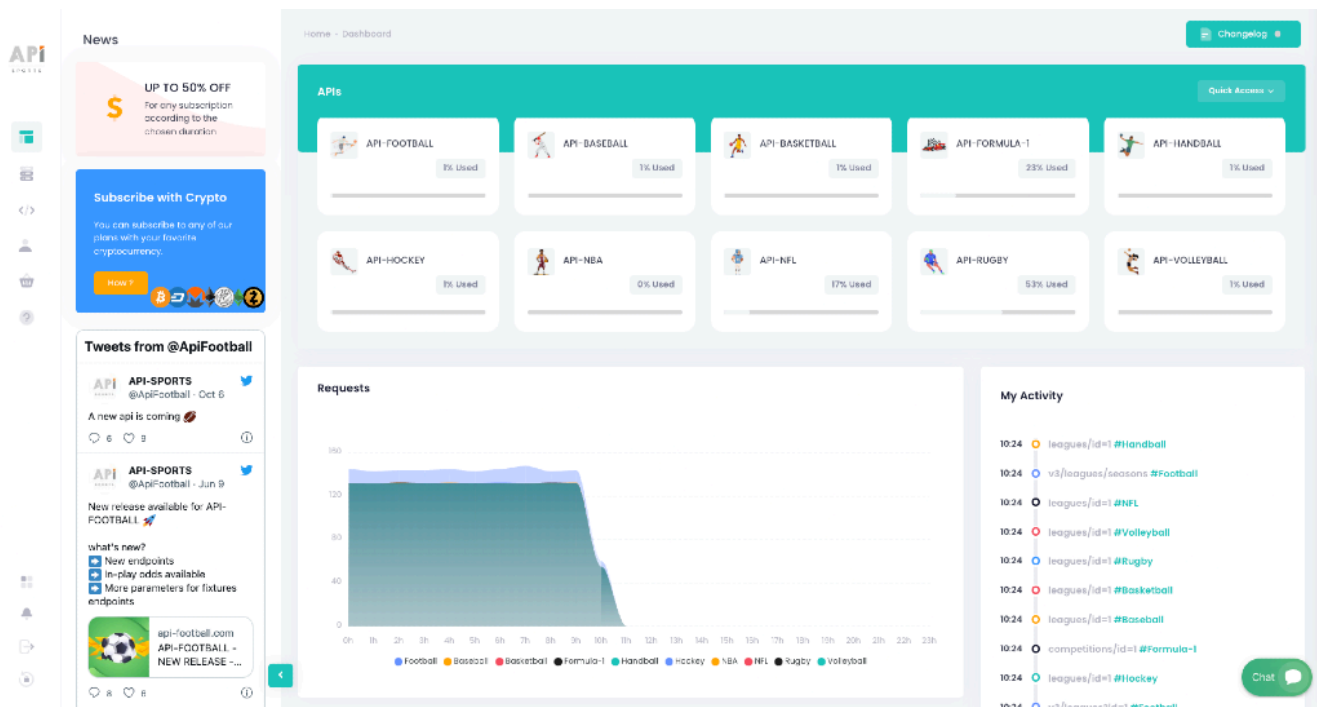


## Requests

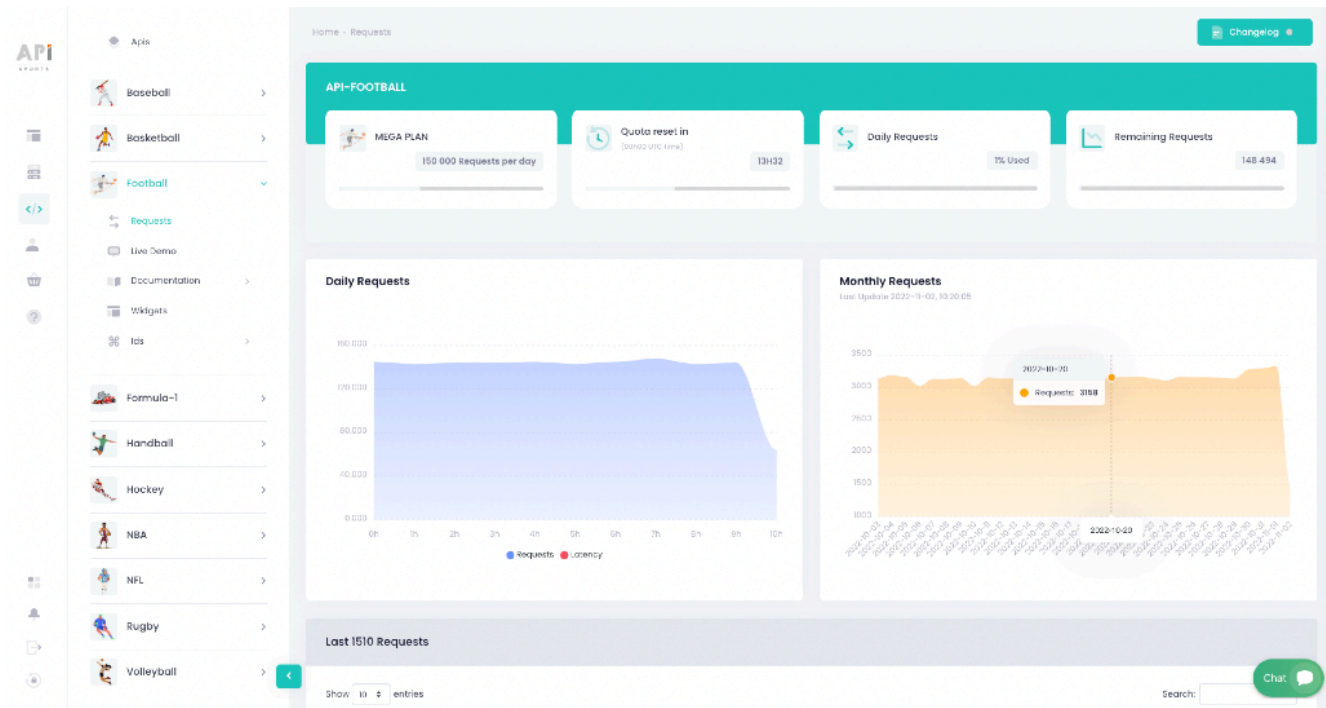

## Live tester

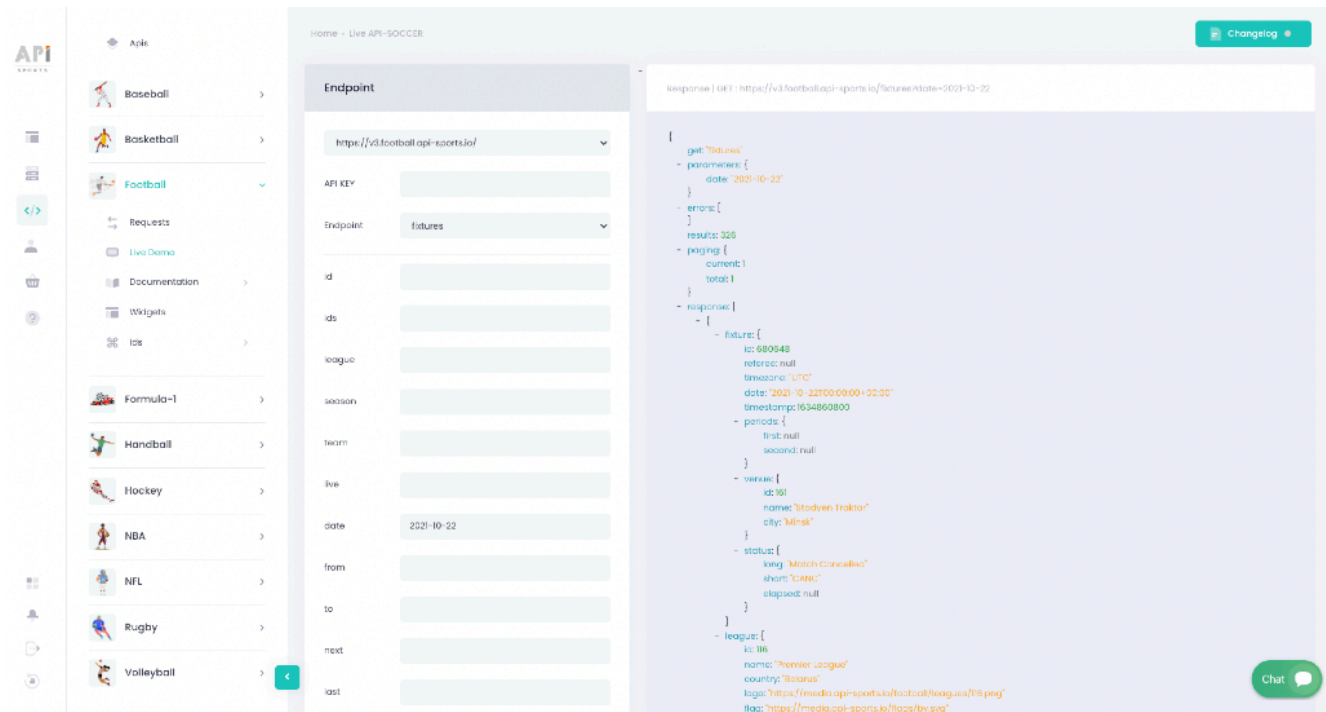

## Architecture

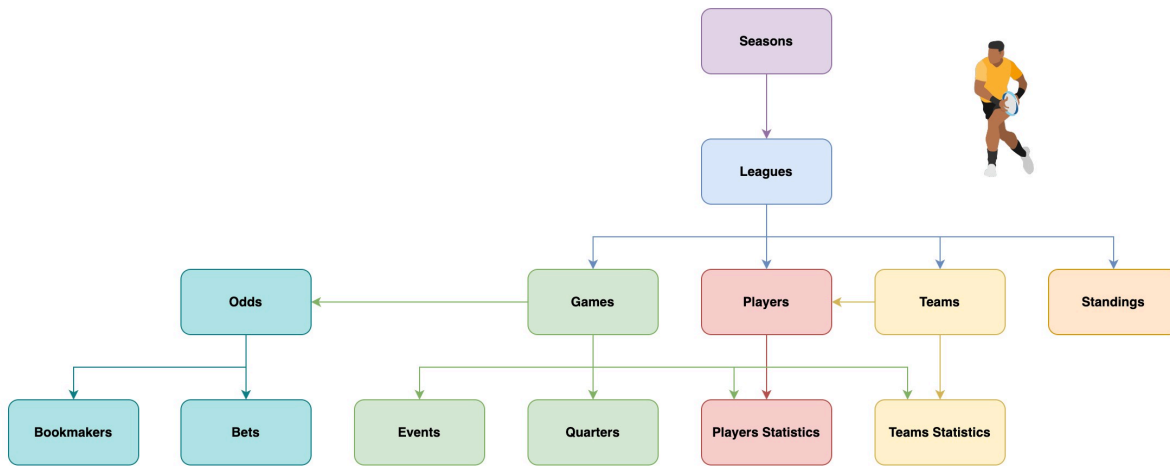

## Logos / Images

Calls to logos/images do not count towards your daily quota and are provided for free. However these calls are subject to a **rate per second & minute**, it is recommended to save this data on your side in order not to slow down or impact the user experience of your application or website. For this you can use **CDNs** such as [bunny.net](https://bunny.net).

We have a tutorial available [here](#), which explains how to set up your own media system with **BunnyCDN**.

Logos, images and trademarks delivered through the API are provided solely for identification and descriptive purposes (e.g., identifying leagues, teams, players or venues). We does not own any of these visual assets, and no intellectual property rights are claimed over them. Some images or data may be subject to intellectual property or trademark rights held by third parties (including but not limited to leagues, federations, or clubs). The use of such content in your applications, websites, or products may require additional authorization or licensing from the respective rights holders. You are fully responsible for ensuring that your usage of any logos, images, or branded content complies with applicable laws in your country or the countries where your services are made available. We are not affiliated with, sponsored by, or endorsed by any sports league, federation, or brand featured in the data provided.

## Sample Scripts

Here are some examples of how the API is used in the main development languages.

You have to replace `{endpoint}` by the real name of the endpoint you want to call, like `leagues` or `teams` for example. In all the sample scripts we will use the `leagues` endpoint as example.

Also you will have to replace `XXXXXXXXXXXXXXXXXXXXXXXXXXXX` with your API-KEY provided in the [dashboard](#) or on [rapidapi](#).

## C

`libcurl`

```
CURL *curl;
CURLcode res;
curl = curl_easy_init();
if(curl) {
    curl_easy_setopt(curl, CURLOPT_CUSTOMREQUEST, "GET");
    curl_easy_setopt(curl, CURLOPT_URL, "https://v1.afl.api-sports.io/leagues");
    curl_easy_setopt(curl, CURLOPT_FOLLOWLOCATION, 1L);
    curl_easy_setopt(curl, CURLOPT_DEFAULT_PROTOCOL, "https");
    struct curl_slist *headers = NULL;
    headers = curl_slist_append(headers, "x-rapidapi-key: XXXXXXXXXXXXXXXXXXXXXXXX");
    headers = curl_slist_append(headers, "x-rapidapi-host: v1.afl.api-sports.io");
    curl_easy_setopt(curl, CURLOPT_HTTPHEADER, headers);
    res = curl_easy_perform(curl);
}
curl_easy_cleanup(curl);
```

## C#

`RestSharp`

```
var client = new RestClient("https://v1.afl.api-sports.io/leagues");
client.Timeout = -1;
var request = new RestRequest(Method.GET);
request.AddHeader("x-rapidapi-key", "XXXXXXXXXXXXXXXXXXXXXXXXXXXX");
request.AddHeader("x-rapidapi-host", "v1.afl.api-sports.io");
```

```
IRestResponse response = client.Execute(request);  
Console.WriteLine(response.Content);
```

## cURL

Curl

```
curl --request GET \  
  --url https://v1.afl.api-sports.io/leagues \  
  --header 'x-rapidapi-host: v1.afl.api-sports.io' \  
  --header 'x-rapidapi-key: XXXXXXXXXXXXXXXXXXXX'
```

## Dart

http

```
var headers = {  
  'x-rapidapi-key': 'XXXXXXXXXXXXXXXXXXXXXXXX',  
  'x-rapidapi-host': 'v1.afl.api-sports.io'  
};  
var request = http.Request('GET', Uri.parse('https://v1.afl.api-sports.io/leagues'))  
  
request.headers.addAll(headers);  
  
http.StreamedResponse response = await request.send();  
  
if (response.statusCode == 200) {  
  print(await response.stream.bytesToString());  
}  
else {  
  print(response.reasonPhrase);  
}
```



# Go

## Native

```
package main

import (
    "fmt"
    "net/http"
    "io/ioutil"
)

func main() {

    url := "https://v1.afl.api-sports.io/leagues"
    method := "GET"

    client := &http.Client {
    }
    req, err := http.NewRequest(method, url, nil)

    if err != nil {
        fmt.Println(err)
        return
    }
    req.Header.Add("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXxXxXxXx")
    req.Header.Add("x-rapidapi-host", "v1.afl.api-sports.io")

    res, err := client.Do(req)
    if err != nil {
        fmt.Println(err)
        return
    }
    defer res.Body.Close()

    body, err := ioutil.ReadAll(res.Body)
    if err != nil {
        fmt.Println(err)
        return
    }
    fmt.Println(string(body))
}
```

# Java

## OkHttp

```
var myHeaders = new Headers();  
myHeaders.append("x-rapidapi-key", "XXXXXXXXXXXXXXXXXXXXXXXXXXXX");  
myHeaders.append("x-rapidapi-host", "v1.afl.api-sports.io");  
  
var requestOptions = {  
  method: 'GET',  
  headers: myHeaders,  
  redirect: 'follow'  
};
```

## Unirest

```
Unirest.setTimeouts(0, 0);  
HttpResponse<String> response = Unirest.get("https://v1.afl.api-sports.io/leagues"  
  .header("x-rapidapi-key", "XXXXXXXXXXXXXXXXXXXXXXXXXXXX")  
  .header("x-rapidapi-host", "v1.afl.api-sports.io")  
  .asString());
```

# Javascript

## Fetch

```
var myHeaders = new Headers();  
myHeaders.append("x-rapidapi-key", "XXXXXXXXXXXXXXXXXXXXXXXXXXXX");  
myHeaders.append("x-rapidapi-host", "v1.afl.api-sports.io");  
  
var requestOptions = {  
  method: 'GET',  
  headers: myHeaders,
```

```
    redirect: 'follow'
  };

  fetch("https://v1.afl.api-sports.io/leagues", requestOptions)
    .then(response => response.text())
    .then(result => console.log(result))
    .catch(error => console.log('error', error));
```

### jQuery

```
var settings = {
  "url": "https://v1.afl.api-sports.io/leagues",
  "method": "GET",
  "timeout": 0,
  "headers": {
    "x-rapidapi-key": "XxXxXxXxXxXxXxXxXxXxXxXx",
    "x-rapidapi-host": "v1.afl.api-sports.io"
  },
};

$.ajax(settings).done(function (response) {
  console.log(response);
});
```

### XHR

```
var xhr = new XMLHttpRequest();
xhr.withCredentials = true;

xhr.addEventListener("readystatechange", function() {
  if(this.readyState === 4) {
    console.log(this.responseText);
  }
});

xhr.open("GET", "https://v1.afl.api-sports.io/leagues");
xhr.setRequestHeader("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXxXxXx");
xhr.setRequestHeader("x-rapidapi-host", "v1.afl.api-sports.io");

xhr.send();
```

# NodeJs

## Axios

```
var axios = require('axios');

var config = {
  method: 'get',
  url: 'https://v1.afl.api-sports.io/leagues',
  headers: {
    'x-rapidapi-key': 'XXXXXXXXXXXXXXXXXXXXXXXXX',
    'x-rapidapi-host': 'v1.afl.api-sports.io'
  }
};

axios(config)
  .then(function (response) {
    console.log(JSON.stringify(response.data));
  })
  .catch(function (error) {
    console.log(error);
  });
```

## Native

```
var https = require('follow-redirects').https;
var fs = require('fs');

var options = {
  'method': 'GET',
  'hostname': 'v1.afl.api-sports.io',
  'path': '/leagues',
  'headers': {
    'x-rapidapi-key': 'XXXXXXXXXXXXXXXXXXXXXXXXX',
    'x-rapidapi-host': 'v1.afl.api-sports.io'
  },
  'maxRedirects': 20
};

var req = https.request(options, function (res) {
  var chunks = [];
```

```
res.on("data", function (chunk) {  
  chunks.push(chunk);  
});  
  
res.on("end", function (chunk) {  
  var body = Buffer.concat(chunks);  
  console.log(body.toString());  
});  
  
res.on("error", function (error) {  
  console.error(error);  
});  
});  
  
req.end();
```

### Requests

```
var request = require('request');  
var options = {  
  'method': 'GET',  
  'url': 'https://v1.afl.api-sports.io/leagues',  
  'headers': {  
    'x-rapidapi-key': 'XxXxXxXxXxXxXxXxXxXxXxXx',  
    'x-rapidapi-host': 'v1.afl.api-sports.io'  
  }  
};  
request(options, function (error, response) {  
  if (error) throw new Error(error);  
  console.log(response.body);  
});
```

### Unirest

```
var unirest = require('unirest');  
var req = unirest('GET', 'https://v1.afl.api-sports.io/leagues')  
  .headers({  
    'x-rapidapi-key': 'XxXxXxXxXxXxXxXxXxXxXxXx',  
    'x-rapidapi-host': 'v1.afl.api-sports.io'  
  })  
  .end(function (res) {  
    if (res.error) throw new Error(res.error);  
    console.log(res.raw_body);  
  });
```

# Objective-c

## NSURLSession

```
#import <Foundation/Foundation.h>

dispatch_semaphore_t sema = dispatch_semaphore_create(0);

NSMutableURLRequest *request = [NSMutableURLRequest requestWithURL:[NSURL URLWithString:
    cachePolicy:NSURLRequestUseProtocolCachePolicy
    timeoutInterval:10.0];
NSDictionary *headers = @{
    @"x-rapidapi-key": @"XXXXXXXXXXXXXXXXXXXXXXXXXXXX",
    @"x-rapidapi-host": @"v1.afl.api-sports.io"
};

[request setAllHTTPHeaderFields:headers];

[request setHTTPMethod:@"GET"];

NSURLSession *session = [NSURLSession sharedSession];
NSURLSessionDataTask *dataTask = [session dataTaskWithRequest:request
    completionHandler:^(NSData *data, NSURLResponse *response, NSError *error) {
    if (error) {
        NSLog(@"%@", error);
        dispatch_semaphore_signal(sema);
    } else {
        NSHTTPURLResponse *httpResponse = (NSHTTPURLResponse *) response;
        NSError *parseError = nil;
        NSDictionary *responseDictionary = [NSJSONSerialization JSONObjectWithData:data
            error:&parseError];
        NSLog(@"%@", responseDictionary);
        dispatch_semaphore_signal(sema);
    }
}];

[dataTask resume];
dispatch_semaphore_wait(sema, DISPATCH_TIME_FOREVER);
```

Cohttp

# Php

```
$curl = curl_init();

curl_setopt_array($curl, array(
    CURLOPT_URL => 'https://v1.afl.api-sports.io/leagues',
    CURLOPT_RETURNTRANSFER => true,
    CURLOPT_ENCODING => '',
    CURLOPT_MAXREDIRS => 10,
    CURLOPT_TIMEOUT => 0,
    CURLOPT_FOLLOWLOCATION => true,
    CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
    CURLOPT_CUSTOMREQUEST => 'GET',
));
```

```

CURLOPT_HTTPHEADER => array(
    'x-rapidapi-key: XXXXXXXXXXXXXXXXXXXX',
    'x-rapidapi-host: v1.afl.api-sports.io'
),
));

$response = curl_exec($curl);

curl_close($curl);
echo $response;

```

### Request2

```

<?php
require_once 'HTTP/Request2.php';
$request = new HTTP_Request2();
$request->setUrl('https://v1.afl.api-sports.io/leagues');
$request->setMethod(HTTP_Request2::METHOD_GET);
$request->setConfig(array(
    'follow_redirects' => TRUE
));
$request->setHeader(array(
    'x-rapidapi-key' => 'XXXXXXXXXXXXXXXXXXXXXXXX',
    'x-rapidapi-host' => 'v1.afl.api-sports.io'
));
try {
    $response = $request->send();
    if ($response->getStatus() == 200) {
        echo $response->getBody();
    }
    else {
        echo 'Unexpected HTTP status: ' . $response->getStatus() . ' ' .
            $response->getReasonPhrase();
    }
}
catch(HTTP_Request2_Exception $e) {
    echo 'Error: ' . $e->getMessage();
}

```

### Http

```

$client = new http\Client;
$request = new http\Client\Request;
$request->setRequestUrl('https://v1.afl.api-sports.io/leagues');
$request->setRequestMethod('GET');
$request->setHeaders(array(

```



```
'x-rapidapi-host' => 'v1.afl.api-sports.io',  
'x-rapidapi-key' => 'XxXxXxXxXxXxXxXxXxXxXxXxXx'  
));  
$client->enqueue($request)->send();  
$response = $client->getResponse();  
echo $response->getBody();
```

## PowerShell

RestMethod

```
$headers = New-Object "System.Collections.Generic.Dictionary[[String],[String]]"  
$headers.Add("x-rapidapi-key", "XxXxXxXxXxXxXxXxXxXxXxXxXx")  
$headers.Add("x-rapidapi-host", "v1.afl.api-sports.io")  
  
$response = Invoke-RestMethod 'https://v1.afl.api-sports.io/leagues' -Method 'GET'  
$response | ConvertTo-Json
```

## Python

http.client

```
import http.client  
  
conn = http.client.HTTPSConnection("v1.afl.api-sports.io")  
  
headers = {  
    'x-rapidapi-host': "v1.afl.api-sports.io",  
    'x-rapidapi-key': "XxXxXxXxXxXxXxXxXxXxXxXxXx"  
}  
  
conn.request("GET", "/leagues", headers=headers)  
  
res = conn.getresponse()  
data = res.read()
```

```
print(data.decode("utf-8"))
```

### Requests

```
url = "https://v1.afl.api-sports.io/leagues"

payload={}
headers = {
    'x-rapidapi-key': 'XxXxXxXxXxXxXxXxXxXxXxXx',
    'x-rapidapi-host': 'v1.afl.api-sports.io'
}

response = requests.request("GET", url, headers=headers, data=payload)

print(response.text)
```

## Ruby

### Net::HTTP

```
require 'uri'
require 'net/http'
require 'openssl'

url = URI("https://v1.afl.api-sports.io/leagues")

http = Net::HTTP.new(url.host, url.port)
http.use_ssl = true
http.verify_mode = OpenSSL::SSL::VERIFY_NONE

request = Net::HTTP::Get.new(url)
request["x-rapidapi-host"] = 'v1.afl.api-sports.io'
request["x-rapidapi-key"] = 'XxXxXxXxXxXxXxXxXxXxXxXx'

response = http.request(request)
puts response.read_body
```

# Shell

## Httpie

```
http --follow --timeout 3600 GET 'https://v1.afl.api-sports.io/leagues' \  
  x-rapidapi-key: 'XXXXXXXXXXXXXXXXXXXXXXXXX' \  
  x-rapidapi-host: 'v1.afl.api-sports.io'
```

## wget

```
wget --no-check-certificate --quiet \  
  --method GET \  
  --timeout=0 \  
  --header 'x-rapidapi-key: XXXXXXXXXXXXXXXXXXXXXXXX' \  
  --header 'x-rapidapi-host: v1.afl.api-sports.io' \  
  'https://v1.afl.api-sports.io/leagues'
```

# Swift

## URLSession

```
import Foundation  
#if canImport(FoundationNetworking)  
import FoundationNetworking  
#endif  
  
var semaphore = DispatchSemaphore (value: 0)  
  
var request = URLRequest(url: URL(string: "https://v1.afl.api-sports.io/leagues")!  
request.addValue("XXXXXXXXXXXXXXXXXXXXXXXXX", forHTTPHeaderField: "x-rapidapi-key")  
request.addValue("v1.afl.api-sports.io", forHTTPHeaderField: "x-rapidapi-host")  
  
request.httpMethod = "GET"
```

```
let task = URLSession.shared.dataTask(with: request) { data, response, error in
    guard let data = data else {
        print(String(describing: error))
        semaphore.signal()
        return
    }
    print(String(data: data, encoding: .utf8)!)
    semaphore.signal()
}

task.resume()
semaphore.wait()
```

## Databases Solutions

### Enhance Your Data Management with Aiven

Integrating databases into your application can greatly enhance data management and storage. If you're looking for high-performing, flexible, and secure database solutions, we recommend checking out [Aiven](#).

**Aiven** is a cloud platform that offers a range of managed database services, including relational databases, NoSQL databases, streaming data processing systems, and much more. Their offerings include [PostgreSQL](#), [MySQL](#), [Cassandra](#), [Redis](#), [Kafka](#), and many other databases, all with simplified management, high availability, and advanced security.

Moreover, **Aiven** provides a free tier to get started, along with testing credits to explore their offerings. This opportunity allows you to evaluate their platform and determine if it meets your needs.

One particularly attractive feature of **Aiven** is that they work with multiple cloud providers, including [Google Cloud](#), [Amazon Web Services \(AWS\)](#), [Microsoft Azure](#), [DigitalOcean](#), and more. This means you have the flexibility to choose the best cloud infrastructure for your project.

In terms of reliability, **Aiven** is committed to providing a **99.99%** Service Level Agreement (SLA), ensuring continuous and highly available service.

- To test their services, visit [this page](#).

- If you're a developer, explore their [DEV center](#) for technical information.
- Check out [Aiven's documentation](#) for detailed information on their services and features.

By integrating **Aiven** with our API, you can efficiently store, manage, and analyze your data while taking advantage of their cloud database solutions' flexibility and scalability.

## Real-Time Data Management with Firebase

When you're looking for a real-time data management solution for your application, [Firebase's Realtime Database](#) is a powerful choice. Explore how Firebase can enhance real-time data management for your application.

[Firebase's Realtime Database](#) offers a cloud-based real-time database that synchronizes data in real-time across users and devices. This makes it an ideal choice for applications that require instant data updates.

### Why Choose Firebase's Realtime Database?

- **Real-Time Data:** Firebase allows you to store real-time data, meaning that updates are instantly propagated to all connected users.
- **Easy Synchronization:** Data is automatically synchronized across all devices, providing a consistent and real-time user experience.
- **Built-In Security:** Firebase offers flexible security rules to control data access and ensure privacy.
- **Simplified Integration:** Firebase's Realtime Database easily integrates with other Firebase services, simplifying backend management.

### Helpful Links:

- [Explore Firebase's Realtime Database](#): Discover the features and advantages of Firebase's Realtime Database for efficient real-time data management.
- [Firebase's Realtime Database Documentation](#): Refer to the comprehensive documentation for Firebase's Realtime Database for a smooth integration.

A tutorial describing each step is available on our blog [here](#).

## Timezone

# timezone

Get the list of available timezone to be used in the `games` and `odds` endpoint.

**Parameters:** This endpoint does not require any parameters.

## HEADER PARAMETERS

---

x-rapidapi-key required	string Your RapidAPI Key
----------------------------	-----------------------------

---

## Responses

> 200 OK

GET /timezone

## Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Copy](#)

```
$curl = curl_init();

curl_setopt_array($curl, array(
  CURLOPT_URL => 'https://v1.afl.api-sports.io/timezone',
  CURLOPT_RETURNTRANSFER => true,
  CURLOPT_ENCODING => '',
  CURLOPT_MAXREDIRS => 10,
  CURLOPT_TIMEOUT => 0,
  CURLOPT_FOLLOWLOCATION => true,
  CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
  CURLOPT_CUSTOMREQUEST => 'GET',
  CURLOPT_HTTPHEADER => array(
    'x-beta-api-sports-key: XxXxXxXxXxXxXxXxXxXxXxXx',
```

```
'x-rapidapi-host: v1.afl.api-sports.io'
),
));

$response = curl_exec($curl);

curl_close($curl);
echo $response;
```

Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{
  "get": "timezone",
  "parameters": [ ],
  "errors": [ ],
  "results": 425,
  - "response": [
    "Africa/Abidjan",
    "Africa/Accra",
    "Africa/Addis_Ababa",
    "Africa/Algiers",
    "Africa/Asmara",
    "Africa/Bamako",
    "Africa/Bangui",
    "Africa/Banjul",
    "Africa/Bissau",
    "Africa/Blantyre",
    "Africa/Brazzaville",
    "Africa/Bujumbura"
  ]
}
```

# Seasons

## seasons

Return the list of all available seasons.

All seasons are only **4-digit keys**, so for a league whose season is `2022-2023` the season in the API will be `2022`.

All `seasons` can be used in other endpoints as parameter.

**Parameters:** This endpoint does not require any parameters.

### HEADER PARAMETERS

---

<code>x-rapidapi-key</code> <code>required</code>	string Your RapidAPI Key
--	-----------------------------

---

## Responses

> 200 OK

GET /seasons

### Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Copy](#)



```
$curl = curl_init();

curl_setopt_array($curl, array(
  CURLOPT_URL => 'https://v1.afl.api-sports.io/seasons',
  CURLOPT_RETURNTRANSFER => true,
  CURLOPT_ENCODING => '',
  CURLOPT_MAXREDIRS => 10,
  CURLOPT_TIMEOUT => 0,
  CURLOPT_FOLLOWLOCATION => true,
  CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
  CURLOPT_CUSTOMREQUEST => 'GET',
  CURLOPT_HTTPHEADER => array(
    'x-beta-api-sports-key: XXXXXXXXXXXXXXXXXXXX',
    'x-rapidapi-host: v1.afl.api-sports.io'
  ),
));

$response = curl_exec($curl);

curl_close($curl);
echo $response;
```

## Response samples

**200**

### Content type

application/json

Copy

Expand all

Collapse all

```
{
  "get": "seasons",
  "parameters": [ ],
  "errors": [ ],
  "results": 13,
```

```
- "response": [  
  2011,  
  2012,  
  2013,  
  2014,  
  2015,  
  2016,  
  2017,  
  2018,  
  2019,  
  2020,  
  2021,  
  2022,  
  2023  
]
```

---

## Leagues

### leagues

Get the list of available leagues.

The league `id` are **unique** in the API and leagues keep it across all `seasons`

You can find all the leagues ids on our [Dashboard](#).

**Parameters:** Most of the parameters of this endpoint can be used together.

#### QUERY PARAMETERS

---

<code>id</code>	integer The id of the league
-----------------	---------------------------------

<code>season</code>	integer
---------------------	---------

current	Default: "YYYY"
	The season of the league
	any
	Enum: "true" "false"
	The state of the league
timezone	string
	A valid timezone

HEADER PARAMETERS

x-rapidapi-key required	string
	You rapidAPI Key

Responses

> 200 OK

GET /leagues

Request samples

- Php
- Python
- Node
- JavaScript
- Curl
- Ruby
- Use Cases

Copy

```
$curl = curl_init();

curl_setopt_array($curl, array(
    CURLOPT_URL => 'https://v1.afl.api-sports.io/leagues',
    CURLOPT_RETURNTRANSFER => true,
    CURLOPT_ENCODING => '',
    CURLOPT_MAXREDIRS => 10,
    CURLOPT_TIMEOUT => 0,
    CURLOPT_FOLLOWLOCATION => true,
    CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
    CURLOPT_CUSTOMREQUEST => 'GET',
    CURLOPT_HTTPHEADER => array(
```

```
'x-beta-api-sports-key: XXXXXXXXXXXXXXXXXXXX',  
'x-rapidapi-host: v1.afl.api-sports.io'  
),  
));  
  
$response = curl_exec($curl);  
  
curl_close($curl);  
echo $response;
```

## Response samples

200

### Content type

application/json

Copy Expand all Collapse all

```
{  
  "get": "leagues",  
  "parameters": [ ],  
  "errors": [ ],  
  "results": 13,  
  - "response": [  
    + { ... },  
    + { ... },  
    + { ... },  
    + { ... },  
    + { ... },  
    + { ... },  
    + { ... },  
    + { ... },  
    + { ... },  
    + { ... },  
    + { ... },  
    + { ... },  
    + { ... },  
    + { ... },  
    + { ... }  
  ]  
}
```

# Teams

## teams

Return a list of available teams.

The team `id` are **unique** in the API.

You can find all the teams ids on our [Dashboard](#).

**Parameters:** You can call this endpoint without any parameters to get the complete list.

This endpoint is updated every day

### QUERY PARAMETERS

id	integer The id of the team
name	string The name of the team
league	integer The id of the league   Requires the field season
season	integer Default: <code>"YYYY"</code> The season of the league   Requires the field League`
search	string <code>&gt;= 3 characters</code> The name of the team

### HEADER PARAMETERS

x-rapidapi-key <b>required</b>	string Your RapidAPI Key
-----------------------------------	-----------------------------

## Responses

> 200 OK

GET /teams

### Request samples

Php

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```
$curl = curl_init();

curl_setopt_array($curl, array(
  CURLOPT_URL => 'https://v1.afl.api-sports.io/teams',
  CURLOPT_RETURNTRANSFER => true,
  CURLOPT_ENCODING => '',
  CURLOPT_MAXREDIRS => 10,
  CURLOPT_TIMEOUT => 0,
  CURLOPT_FOLLOWLOCATION => true,
  CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
  CURLOPT_CUSTOMREQUEST => 'GET',
  CURLOPT_HTTPHEADER => array(
    'x-beta-api-sports-key: XXXXXXXXXXXXXXXXXXXXXXXX',
    'x-rapidapi-host: v1.afl.api-sports.io'
  ),
));

$response = curl_exec($curl);

curl_close($curl);
echo $response;
```

### Response samples

200

Content type

application/json

```
{
  "get": "teams",
  "parameters": [ ],
  "errors": [ ],
  "results": 18,
  - "response": [
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... },
    + { ... }
  ]
}
```

---

## statistics

Return teams statistics for a given season.

**Parameters:** This endpoint requires at least theses parameters : id, season.

 This endpoint is updated every day

### QUERY PARAMETERS

---





```
    ),  
  ));  
  
$response = curl_exec($curl);  
  
curl_close($curl);  
echo $response;
```

## Response samples

200

### Content type

application/json

Copy

Expand all

Collapse all

```
{  
  "get": "teams/statistics",  
  - "parameters": {  
    "id": "1",  
    "season": "2023"  
  },  
  "errors": [ ],  
  "results": 1,  
  - "response": [  
    + { ... }  
  ]  
}
```

# Players

## players

Return a list of available players.

The player `id` are **unique** in the API and keep it among all the competitions in which they participate.

**Parameters:** This endpoint requires at least one of theses parameters : id, team, name, search.

This endpoint is updated every day

QUERY PARAMETERS

id	integer The id of the player
name	string The name of the player
team	integer The id of the team   Requires the field Season
season	integer Default: <code>"YYYY"</code> The season of the league   Requires the field Team
search	string <code>&gt;= 3 characters</code> The name of the player

HEADER PARAMETERS

x-rapidapi-key <i>required</i>	string Your RapidAPI Key
-----------------------------------	-----------------------------

Responses

> 200 OK

GET /players

Request samples

Php

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```
$curl = curl_init();

curl_setopt_array($curl, array(
    CURLOPT_URL => 'https://v1.afl.api-sports.io/players?season=2023&team=1',
    CURLOPT_RETURNTRANSFER => true,
    CURLOPT_ENCODING => '',
    CURLOPT_MAXREDIRS => 10,
    CURLOPT_TIMEOUT => 0,
    CURLOPT_FOLLOWLOCATION => true,
    CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
    CURLOPT_CUSTOMREQUEST => 'GET',
    CURLOPT_HTTPHEADER => array(
        'x-beta-api-sports-key: XXXXXXXXXXXXXXXXXXXXXXXX',
        'x-rapidapi-host: v1.afl.api-sports.io'
    ),
));

$response = curl_exec($curl);

curl_close($curl);
echo $response;
```

## Response samples

200

### Content type

application/json

Copy

Expand all

Collapse all

```
{
  "get": "players",
  "parameters": {
    "season": "2023",
    "team": "1"
  },
  "errors": [ ],
  "results": 37,
```



## statistics

Return the statistics of a player for a given season.

**Parameters:** This endpoint requires at least theses parameters : id, season.

This endpoint is updated every day

### QUERY PARAMETERS

id	integer The id of the player
season	integer Default: "YYYY" A valid season

### HEADER PARAMETERS

x-rapidapi-key required	string Your RapidAPI Key
----------------------------	-----------------------------

## Responses

> 200 OK

GET /players/statistics

### Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Use Cases](#)[Copy](#)

```
$curl = curl_init();
```

## Response samples

```
application/json
```

38/61

# Games

## games

Return the list of games according to the given parameters.

For all requests to games you can add the query parameter `timezone` to your request in order to retrieve the list of games in the timezone of your choice like *"Europe/London"*. In case the timezone is not recognized, empty or is not part of the endpoint `timezone` list, the `UTC` value will be applied by default.

To know the list of available timezones you have to use the endpoint `timezone`.

### Available Status

- NS : Not Started
- Q1 : 1st Quarter
- Q2 : 2nd Quarter
- Q3 : 3rd Quarter
- Q4 : 4th Quarter
- QT : Quarter Time
- ER : End Of Regulation
- FT : Full Time
- HT : Half Time
- CANC : Cancelled (Game cancelled and not rescheduled)
- PST : Postponed (Game postponed and waiting for a new Game date)

**Parameters:** This endpoint requires at least one of these parameters : id, date, league, season, team.

This endpoint is updated every 30 seconds

### QUERY PARAMETERS

id	integer The id of the game
----	-------------------------------

date	string Default: <code>"YYYY-MM-DD"</code> A valid date
------	--

league	integer The id of the league   Requires the field Season
season	integer Default: "YYYY" The season of the league   Requires the field League.
team	integer The id of the team   Requires the field Season
timezone	string A valid timezone

HEADER PARAMETERS

x-rapidapi-key required	string Your RapidAPI Key
----------------------------	-----------------------------

Responses

> 200 OK

GET /games

Request samples

- Php
- Python
- Node
- JavaScript
- Curl
- Ruby
- Use Cases

Copy

```
$curl = curl_init();

curl_setopt_array($curl, array(
    CURLOPT_URL => 'https://v1.afl.api-sports.io/games?date=2022-09-01',
    CURLOPT_RETURNTRANSFER => true,
    CURLOPT_ENCODING => '',
    CURLOPT_MAXREDIRS => 10,
    CURLOPT_TIMEOUT => 0,
```



```
CURLOPT_FOLLOWLOCATION => true,
CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
CURLOPT_CUSTOMREQUEST => 'GET',
CURLOPT_HTTPHEADER => array(
    'x-beta-api-sports-key: XXXXXXXXXXXXXXXXXXXXXXXX',
    'x-rapidapi-host: v1.afl.api-sports.io'
),
));

$response = curl_exec($curl);

curl_close($curl);
echo $response;
```

## Response samples

200

### Content type

application/json

Copy

Expand all

Collapse all

```
{
  "get": "games",
  - "parameters": {
    "date": "2022-09-01"
  },
  "errors": [ ],
  "results": 1,
  - "response": [
    + { ... }
  ]
}
```

## quarters

Return team scores by quarter for on or several games `id`.

**Parameters:** This endpoint requires at least one of theses parameters : id, ids, date.

This endpoint is updated every 30 seconds

QUERY PARAMETERS

id	integer The id of the game
ids	stringMaximum of 10 games ids Value: "id-id-id" One or more games ids
date	string Default: "YYYY-MM-DD" A valid date
timezone	string A valid timezone

HEADER PARAMETERS

x-rapidapi-key required	string Your RapidAPI Key
----------------------------	-----------------------------

Responses

> 200 OK

GET /games/quarters

Request samples

- Php
- Python
- Node
- JavaScript
- Curl
- Ruby
- Use Cases

Copy

```
$curl = curl_init();

curl_setopt_array($curl, array(
```

```
CURLOPT_URL => 'https://v1.afl.api-sports.io/games/quarters?id=2515',
CURLOPT_RETURNTRANSFER => true,
CURLOPT_ENCODING => '',
CURLOPT_MAXREDIRS => 10,
CURLOPT_TIMEOUT => 0,
CURLOPT_FOLLOWLOCATION => true,
CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
CURLOPT_CUSTOMREQUEST => 'GET',
CURLOPT_HTTPHEADER => array(
    'x-beta-api-sports-key: XxXxXxXxXxXxXxXxXxXxXxXxXx',
    'x-rapidapi-host: v1.afl.api-sports.io'
),
));

$response = curl_exec($curl);

curl_close($curl);
echo $response;
```

## Response samples

200

### Content type

application/json

Copy Expand all Collapse all

```
{
  "get": "games/quarters",
  - "parameters": {
    "id": "2515"
  },
  "errors": [ ],
  "results": 1,
  - "response": [
    + { ... }
  ]
}
```

---

## events

Return the list of events for one or several games `id`.

**Parameters:** This endpoint requires at least one of theses parameters : id, ids, date.

This endpoint is updated every 30 seconds

QUERY PARAMETERS

id	integer The id of the game
ids	stringMaximum of 10 games ids Value: "id-id-id" One or more games ids
date	string Default: "YYYY-MM-DD" A valid date
timezone	string A valid timezone

HEADER PARAMETERS

x-rapidapi-key required	string Your RapidAPI Key
----------------------------	-----------------------------

Responses

> 200 OK

GET /games/events

Request samples

- Php
- Python
- Node
- JavaScript
- Curl
- Ruby
- Use Cases

[Copy](#)

```
$curl = curl_init();

curl_setopt_array($curl, array(
  CURLOPT_URL => 'https://v1.afl.api-sports.io/games/events?id=2515',
  CURLOPT_RETURNTRANSFER => true,
  CURLOPT_ENCODING => '',
  CURLOPT_MAXREDIRS => 10,
  CURLOPT_TIMEOUT => 0,
  CURLOPT_FOLLOWLOCATION => true,
  CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
  CURLOPT_CUSTOMREQUEST => 'GET',
  CURLOPT_HTTPHEADER => array(
    'x-beta-api-sports-key: XxXxXxXxXxXxXxXxXxXxXxXxXx',
    'x-rapidapi-host: v1.afl.api-sports.io'
  ),
));

$response = curl_exec($curl);

curl_close($curl);
echo $response;
```

## Response samples

**200****Content type**

application/json

[Copy](#)[Expand all](#)[Collapse all](#)

```
{
  "get": "games/events",
  - "parameters": {
    "id": "2515"
  },
  "errors": [ ],
  "results": 1,
  - "response": [
    + { ... }
  ]
}
```

## teams statistics

Return teams statistics for one or several games `id`.

**Parameters:** This endpoint requires at least one of theses parameters : id, ids, date.

This endpoint is updated every 30 seconds

### QUERY PARAMETERS

id	integer The id of the game
ids	stringMaximum of 10 games ids Value: "id-id-id" One or more games ids
date	string Default: "YYYY-MM-DD" A valid date
timezone	string A valid timezone

### HEADER PARAMETERS

x-rapidapi-key required	string Your RapidAPI Key
----------------------------	-----------------------------

## Responses

> 200 OK

```
GET    /games/statistics/teams
```

## Request samples

## Php

## Python

Node

## JavaScript

## Curl

## Ruby

## Use Cases

Copy

```
$curl = curl_init();

curl_setopt_array($curl, array(
    CURLOPT_URL => 'https://v1.afl.api-sports.io/games/statistics/teams?id=2515',
    CURLOPT_RETURNTRANSFER => true,
    CURLOPT_ENCODING => '',
    CURLOPT_MAXREDIRS => 10,
    CURLOPT_TIMEOUT => 0,
    CURLOPT_FOLLOWLOCATION => true,
    CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
    CURLOPT_CUSTOMREQUEST => 'GET',
    CURLOPT_HTTPHEADER => array(
        'x-beta-api-sports-key: XxXxXxXxXxXxXxXxXxXxXxXxXx',
        'x-rapidapi-host: v1.afl.api-sports.io'
    ),
));

$response = curl_exec($curl);

curl_close($curl);
echo $response;
```

## Response samples

200

Content type

application/json

Copy Expand all Collapse all

```
{
  "get": "games/statistics/teams",
  - "parameters": {
    "id": "2515"
  },
  "errors": [ ],
  "results": 1,
  - "response": [
    + { ... }
  ]
}
```

# players statistics

Return players statistics for one or several games `id`.

**Parameters:** This endpoint requires at least one of theses parameters : id, ids, date.

This endpoint is updated every 30 seconds

## QUERY PARAMETERS

id	integer The id of the game
ids	stringMaximum of 10 games ids Value: "id-id-id" One or more games ids
date	string Default: "YYYY-MM-DD" A valid date
timezone	string A valid timezone



## HEADER PARAMETERS

x-rapidapi-key required	string Your RapidAPI Key
----------------------------	-----------------------------

## Responses

&gt; 200 OK

GET /games/statistics/players

## Request samples

Php

Python

Node

JavaScript

Curl

Ruby

Use Cases

Copy

```
$curl = curl_init();

curl_setopt_array($curl, array(
  CURLOPT_URL => 'https://v1.afl.api-sports.io/games/statistics/players?id=2515',
  CURLOPT_RETURNTRANSFER => true,
  CURLOPT_ENCODING => '',
  CURLOPT_MAXREDIRS => 10,
  CURLOPT_TIMEOUT => 0,
  CURLOPT_FOLLOWLOCATION => true,
  CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
  CURLOPT_CUSTOMREQUEST => 'GET',
  CURLOPT_HTTPHEADER => array(
    'x-beta-api-sports-key: XXXXXXXXXXXXXXXXXXXX',
    'x-rapidapi-host: v1.afl.api-sports.io'
  ),
));

$response = curl_exec($curl);
```

```
curl_close($curl);  
echo $response;
```

## Response samples

**200**

### Content type

application/json

Copy

Expand all

Collapse all

```
{  
  "get": "games/statistics/players",  
  - "parameters": {  
    "id": "2515"  
  },  
  "errors": [ ],  
  "results": 1,  
  - "response": [  
    + { ... }  
  ]  
}
```

# Standings

## standings

Return the standings of a competition in relation to a given season.

**Parameters:** This endpoint requires at least two parameters `league` and `season`.

This endpoint is updated every hour

### QUERY PARAMETERS

league required	integer The id of the league
season required	integer Default: "YYYY" The season of the league
team	integer The id of the team   Requires the field season

HEADER PARAMETERS

x-rapidapi-key required	string Your RapidAPI Key
----------------------------	-----------------------------

Responses

> 200 OK

GET /standings

Request samples

- Php
- Python
- Node
- JavaScript
- Curl
- Ruby
- Use Cases

Copy

```
$curl = curl_init();

curl_setopt_array($curl, array(
    CURLOPT_URL => 'https://v1.afl.api-sports.io/standings?season=2023&league=1',
    CURLOPT_RETURNTRANSFER => true,
    CURLOPT_ENCODING => '',
    CURLOPT_MAXREDIRS => 10,
    CURLOPT_TIMEOUT => 0,
    CURLOPT_FOLLOWLOCATION => true,
    CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
    CURLOPT_CUSTOMREQUEST => 'GET',
));
```

```
CURLOPT_HTTPHEADER => array(  
    'x-beta-api-sports-key: XXXXXXXXXXXXXXXXXXXXXXXX',  
    'x-rapidapi-host: v1.afl.api-sports.io'  
) ,  
));  
  
$response = curl_exec($curl);  
  
curl_close($curl);  
echo $response;
```

## Response samples

200

### Content type

application/json

Copy

Expand all

Collapse all

```
{  
  "get": "standings",  
  - "parameters": {  
    "season": "2023",  
    "league": "1"  
  },  
  "errors": [ ],  
  "results": 18,
```

## odds

We provide pre-match odds between 1 and 7 days before the game.

**Parameters:** This endpoint requires at least one of theses parameters : game.

Odds are updated four times a day

QUERY PARAMETERS

game required	integer The id of the game
bookmaker	integer The id of the bookmaker
bet	integer The id of the bet

HEADER PARAMETERS

x-rapidapi-key required	string Your RapidAPI Key
----------------------------	-----------------------------

Responses

> 200 OK

GET /odds

Request samples

- Php
- Python
- Node
- JavaScript
- Curl
- Ruby
- Use Cases

Copy

```
$curl = curl_init();

curl_setopt_array($curl, array(
  CURLOPT_URL => 'https://v1.afl.api-sports.io/odds?game=2742&bookmaker=1',
  CURLOPT_RETURNTRANSFER => true,
  CURLOPT_ENCODING => '',
  CURLOPT_MAXREDIRS => 10,
  CURLOPT_TIMEOUT => 0,
  CURLOPT_FOLLOWLOCATION => true,
  CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
```

```
CURLOPT_CUSTOMREQUEST => 'GET',
CURLOPT_HTTPHEADER => array(
    'x-beta-api-sports-key: XxXxXxXxXxXxXxXxXxXxXxXxXx',
    'x-rapidapi-host: v1.afl.api-sports.io'
),
));

$response = curl_exec($curl);

curl_close($curl);
echo $response;
```

## Response samples

200

### Content type

application/json

Copy

Expand all

Collapse all

```
{
  "get": "odds",
  - "parameters": {
    "game": "2742",
    "bookmaker": "1"
  },
  "errors": [ ],
  "results": 1,
  - "response": [
    + { ... }
  ]
}
```

## bets

Return the list of available bets for odds.

All bets `id` can be used in endpoint `odds` as filters

**Parameters:** You can call this endpoint without any parameters to get the complete list.

QUERY PARAMETERS

id	integer The id of the bet
search	string <span>&gt;= 3 characters</span> The name of the bet

HEADER PARAMETERS

x-rapidapi-key <span>required</span>	string Your RapidAPI Key
---	-----------------------------

Responses

> 200 OK

GET /odds/bets

Request samples

- Php
- Python
- Node
- JavaScript
- Curl
- Ruby
- Use Cases

Copy

```
$curl = curl_init();

curl_setopt_array($curl, array(
    CURLOPT_URL => 'https://v1.afl.api-sports.io/odds/bets',
    CURLOPT_RETURNTRANSFER => true,
    CURLOPT_ENCODING => '',
    CURLOPT_MAXREDIRS => 10,
    CURLOPT_TIMEOUT => 0,
    CURLOPT_FOLLOWLOCATION => true,
    CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
    CURLOPT_CUSTOMREQUEST => 'GET',
    CURLOPT_HTTPHEADER => array(
        'x-beta-api-sports-key: XXXXXXXXXXXXXXXXXXXXXXXX',
    )
));
```



```
'x-rapidapi-host: v1.afl.api-sports.io'
),
));

$response = curl_exec($curl);

curl_close($curl);
echo $response;
```

## Response samples

200

### Content type

application/json

Copy

Expand all

Collapse all

```
{
  "get": "odds/bets",
  "parameters": [ ],
  "errors": [ ],
  "results": 39,
```

}

## bookmakers

Return the list of available bookmakers for odds.

All bookmakers `id` can be used in endpoint `odds` as filters.

**Parameters:** You can call this endpoint without any parameters to get the complete list.

### QUERY PARAMETERS

id	integer The id of the bookmaker
search	string <code>&gt;= 3 characters</code> The name of the bookmaker

### HEADER PARAMETERS

x-rapidapi-key <i>required</i>	string Your RapidAPI Key
-----------------------------------	-----------------------------

## Responses

> 200 OK

GET /odds/bookmakers

### Request samples

[Php](#)[Python](#)[Node](#)[JavaScript](#)[Curl](#)[Ruby](#)[Use Cases](#)[Copy](#)

```
$curl = curl_init();

curl_setopt_array($curl, array(
  CURLOPT_URL => 'https://v1.afl.api-sports.io/odds/bookmakers',
  CURLOPT_RETURNTRANSFER => true,
  CURLOPT_ENCODING => '',
  CURLOPT_MAXREDIRS => 10,
  CURLOPT_TIMEOUT => 0,
  CURLOPT_FOLLOWLOCATION => true,
  CURLOPT_HTTP_VERSION => CURL_HTTP_VERSION_1_1,
  CURLOPT_CUSTOMREQUEST => 'GET',
  CURLOPT_HTTPHEADER => array(
    'x-beta-api-sports-key: XXXXXXXXXXXXXXXXXXXX',
    'x-rapidapi-host: v1.afl.api-sports.io'
  ),
));

$response = curl_exec($curl);

curl_close($curl);
echo $response;
```

## Response samples

**200**

### Content type

application/json

Copy

Expand all

Collapse all

```
{
  "get": "odds/bookmakers",
  "parameters": [ ],
  "errors": [ ],
  "results": 14,
```

[illegible]